



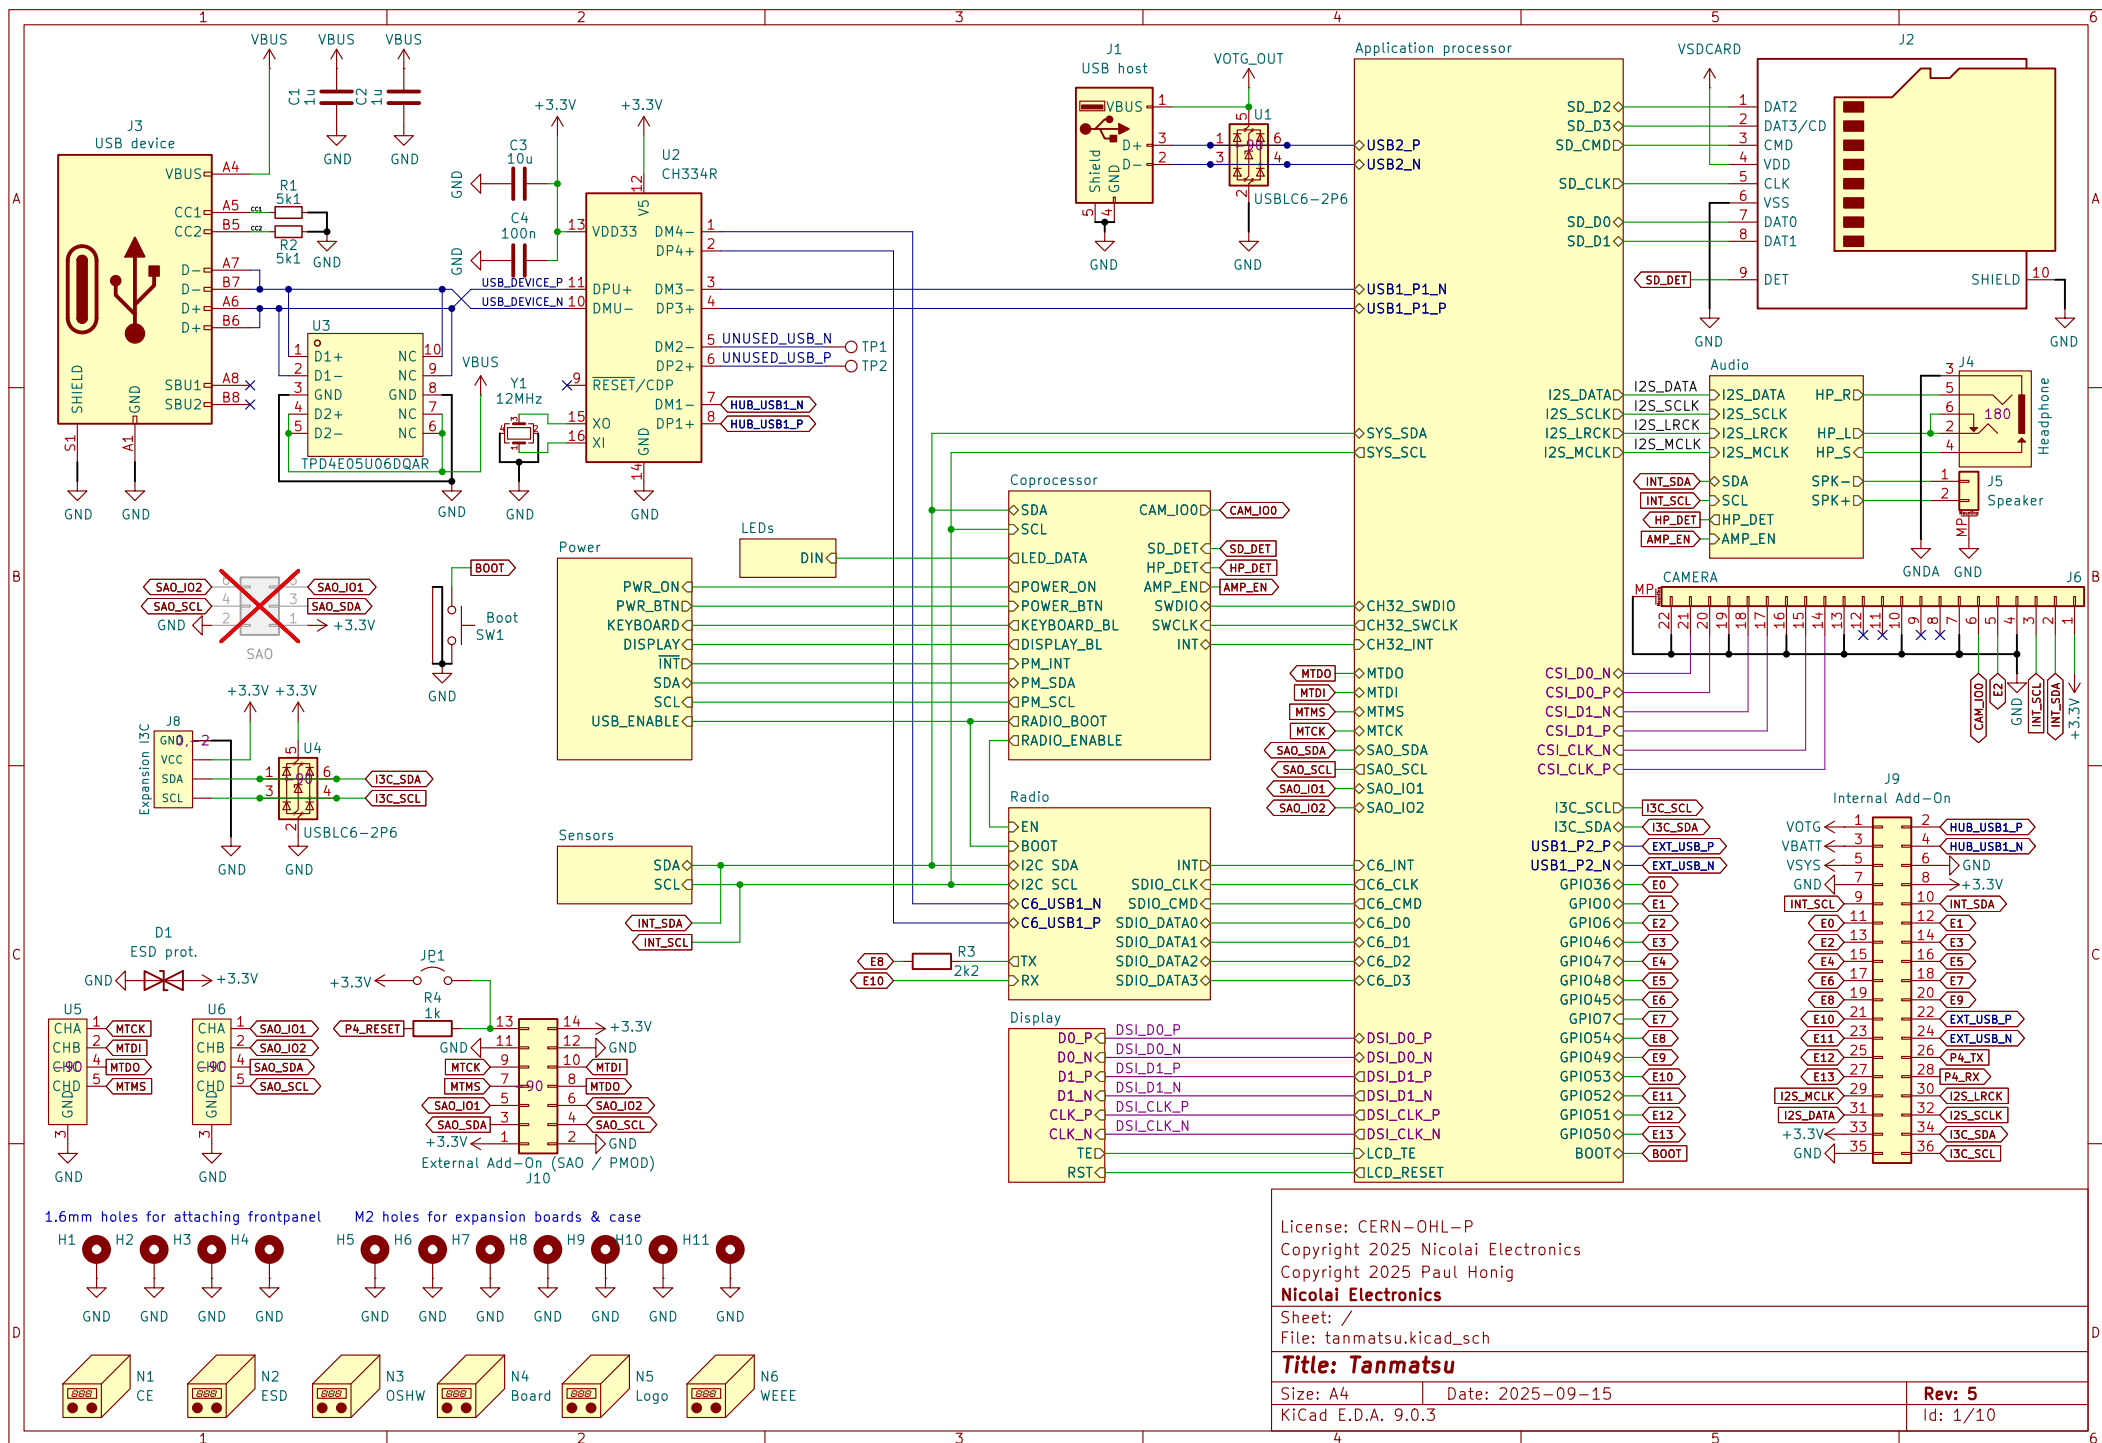

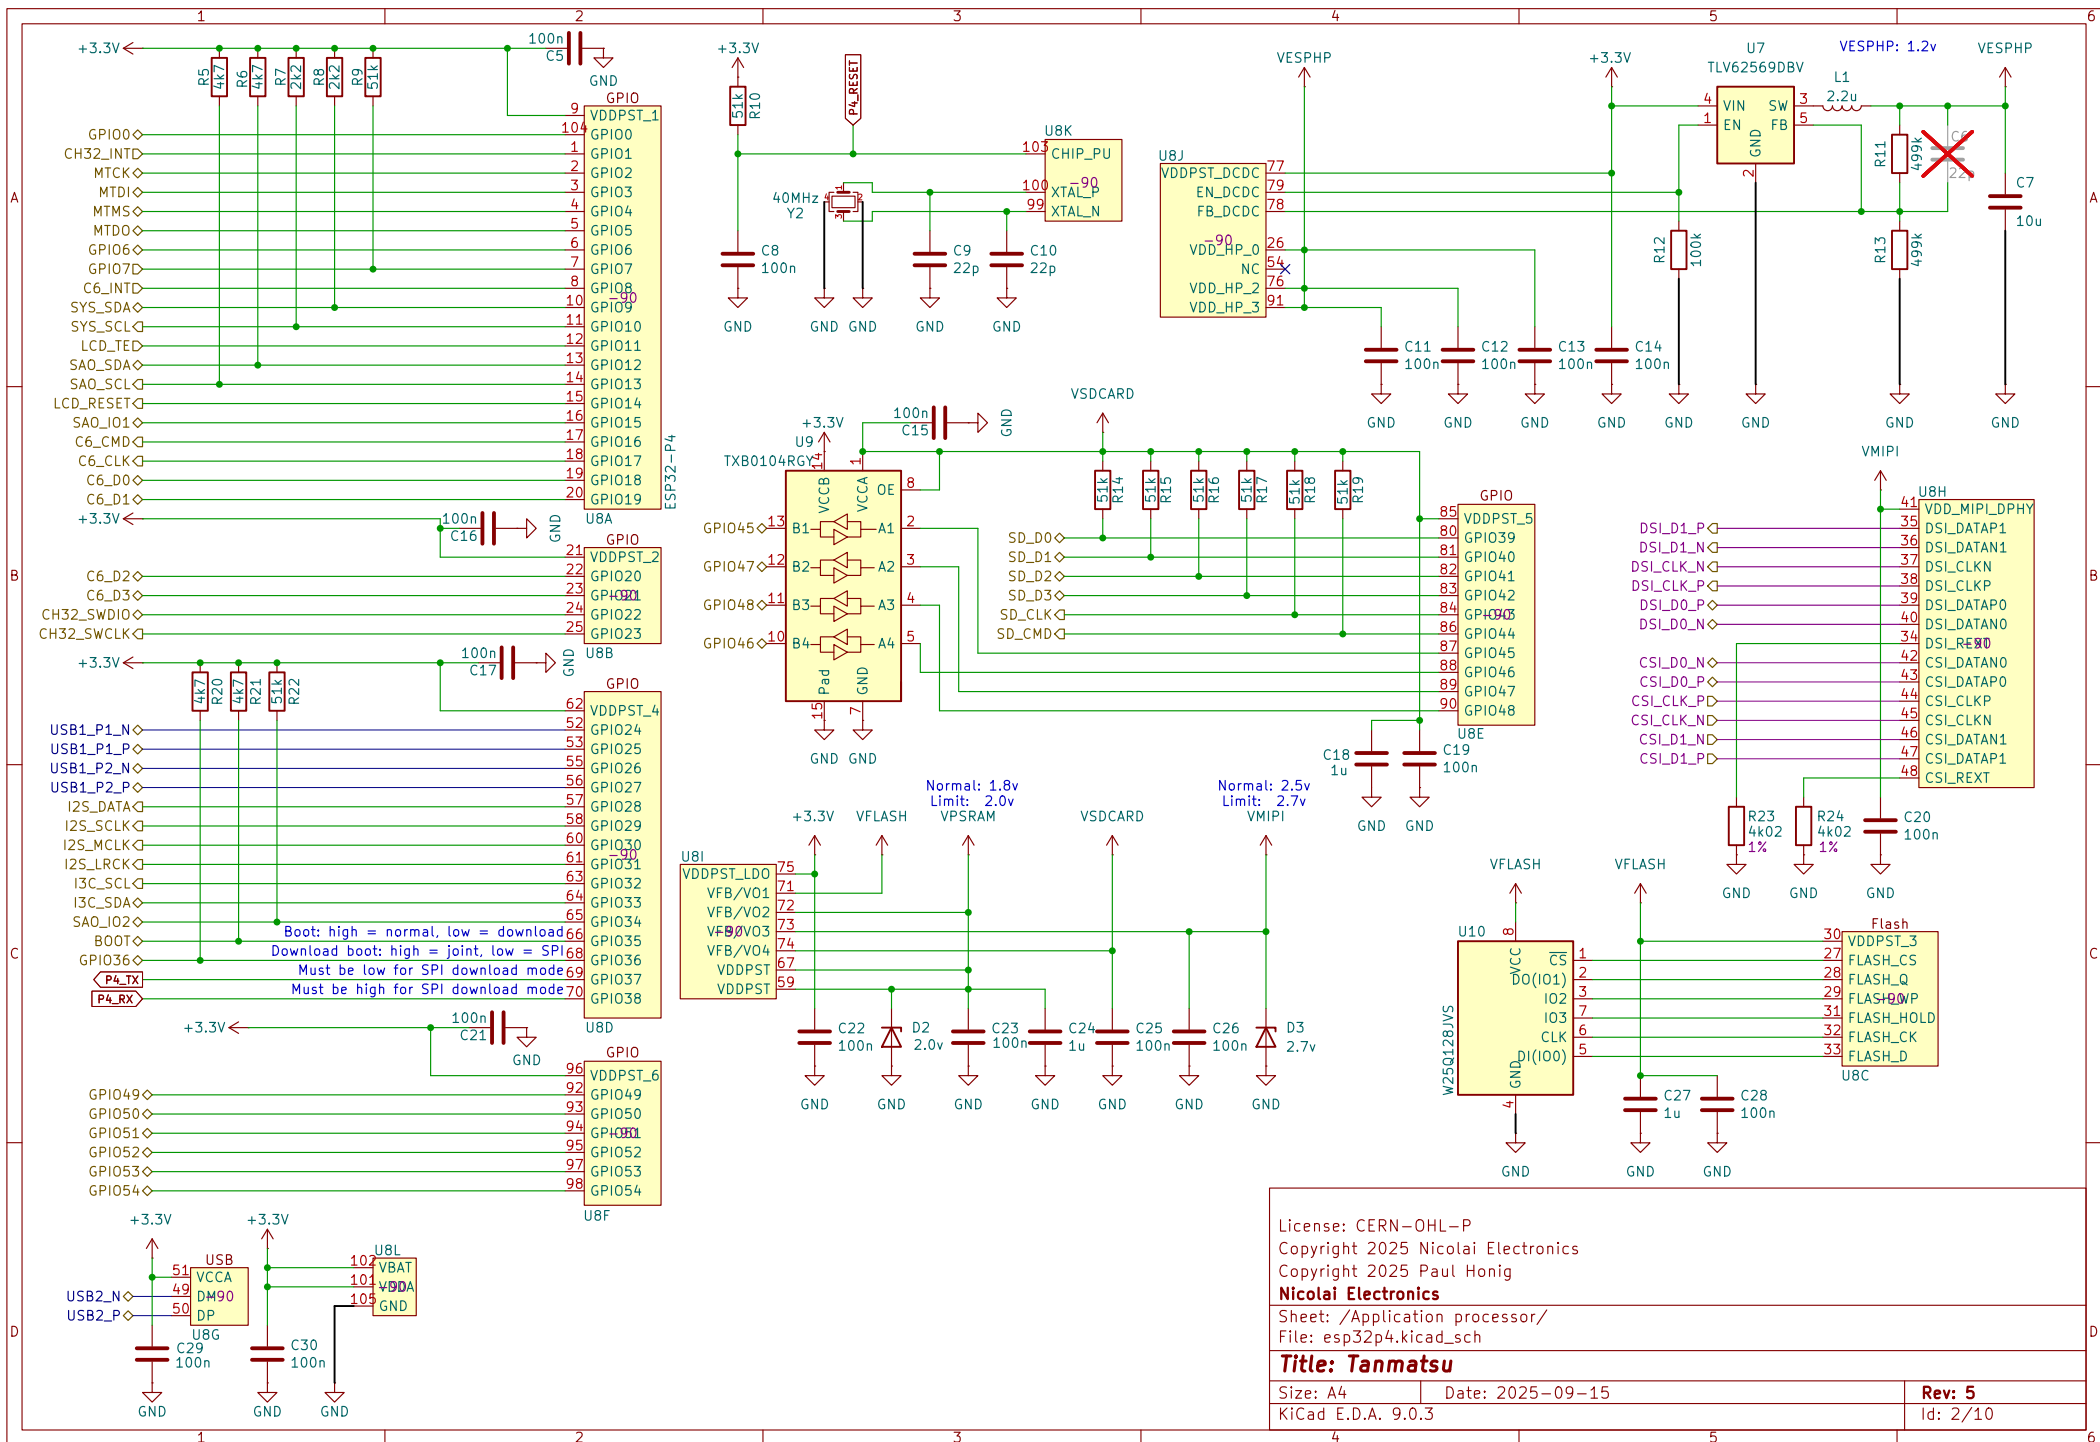

License: CERN-OHL-P
 Copyright 2025 Nicolai Electronics
 Copyright 2025 Paul Honig

Nicolai Electronics

Sheet: /Application processor/
 File: esp32p4.kicad_sch


Title: Tanmatsu


Size: A4 Date: 2025-09-15

KiCad E.D.A. 9.0.3


Rev: 5

Id: 2/10

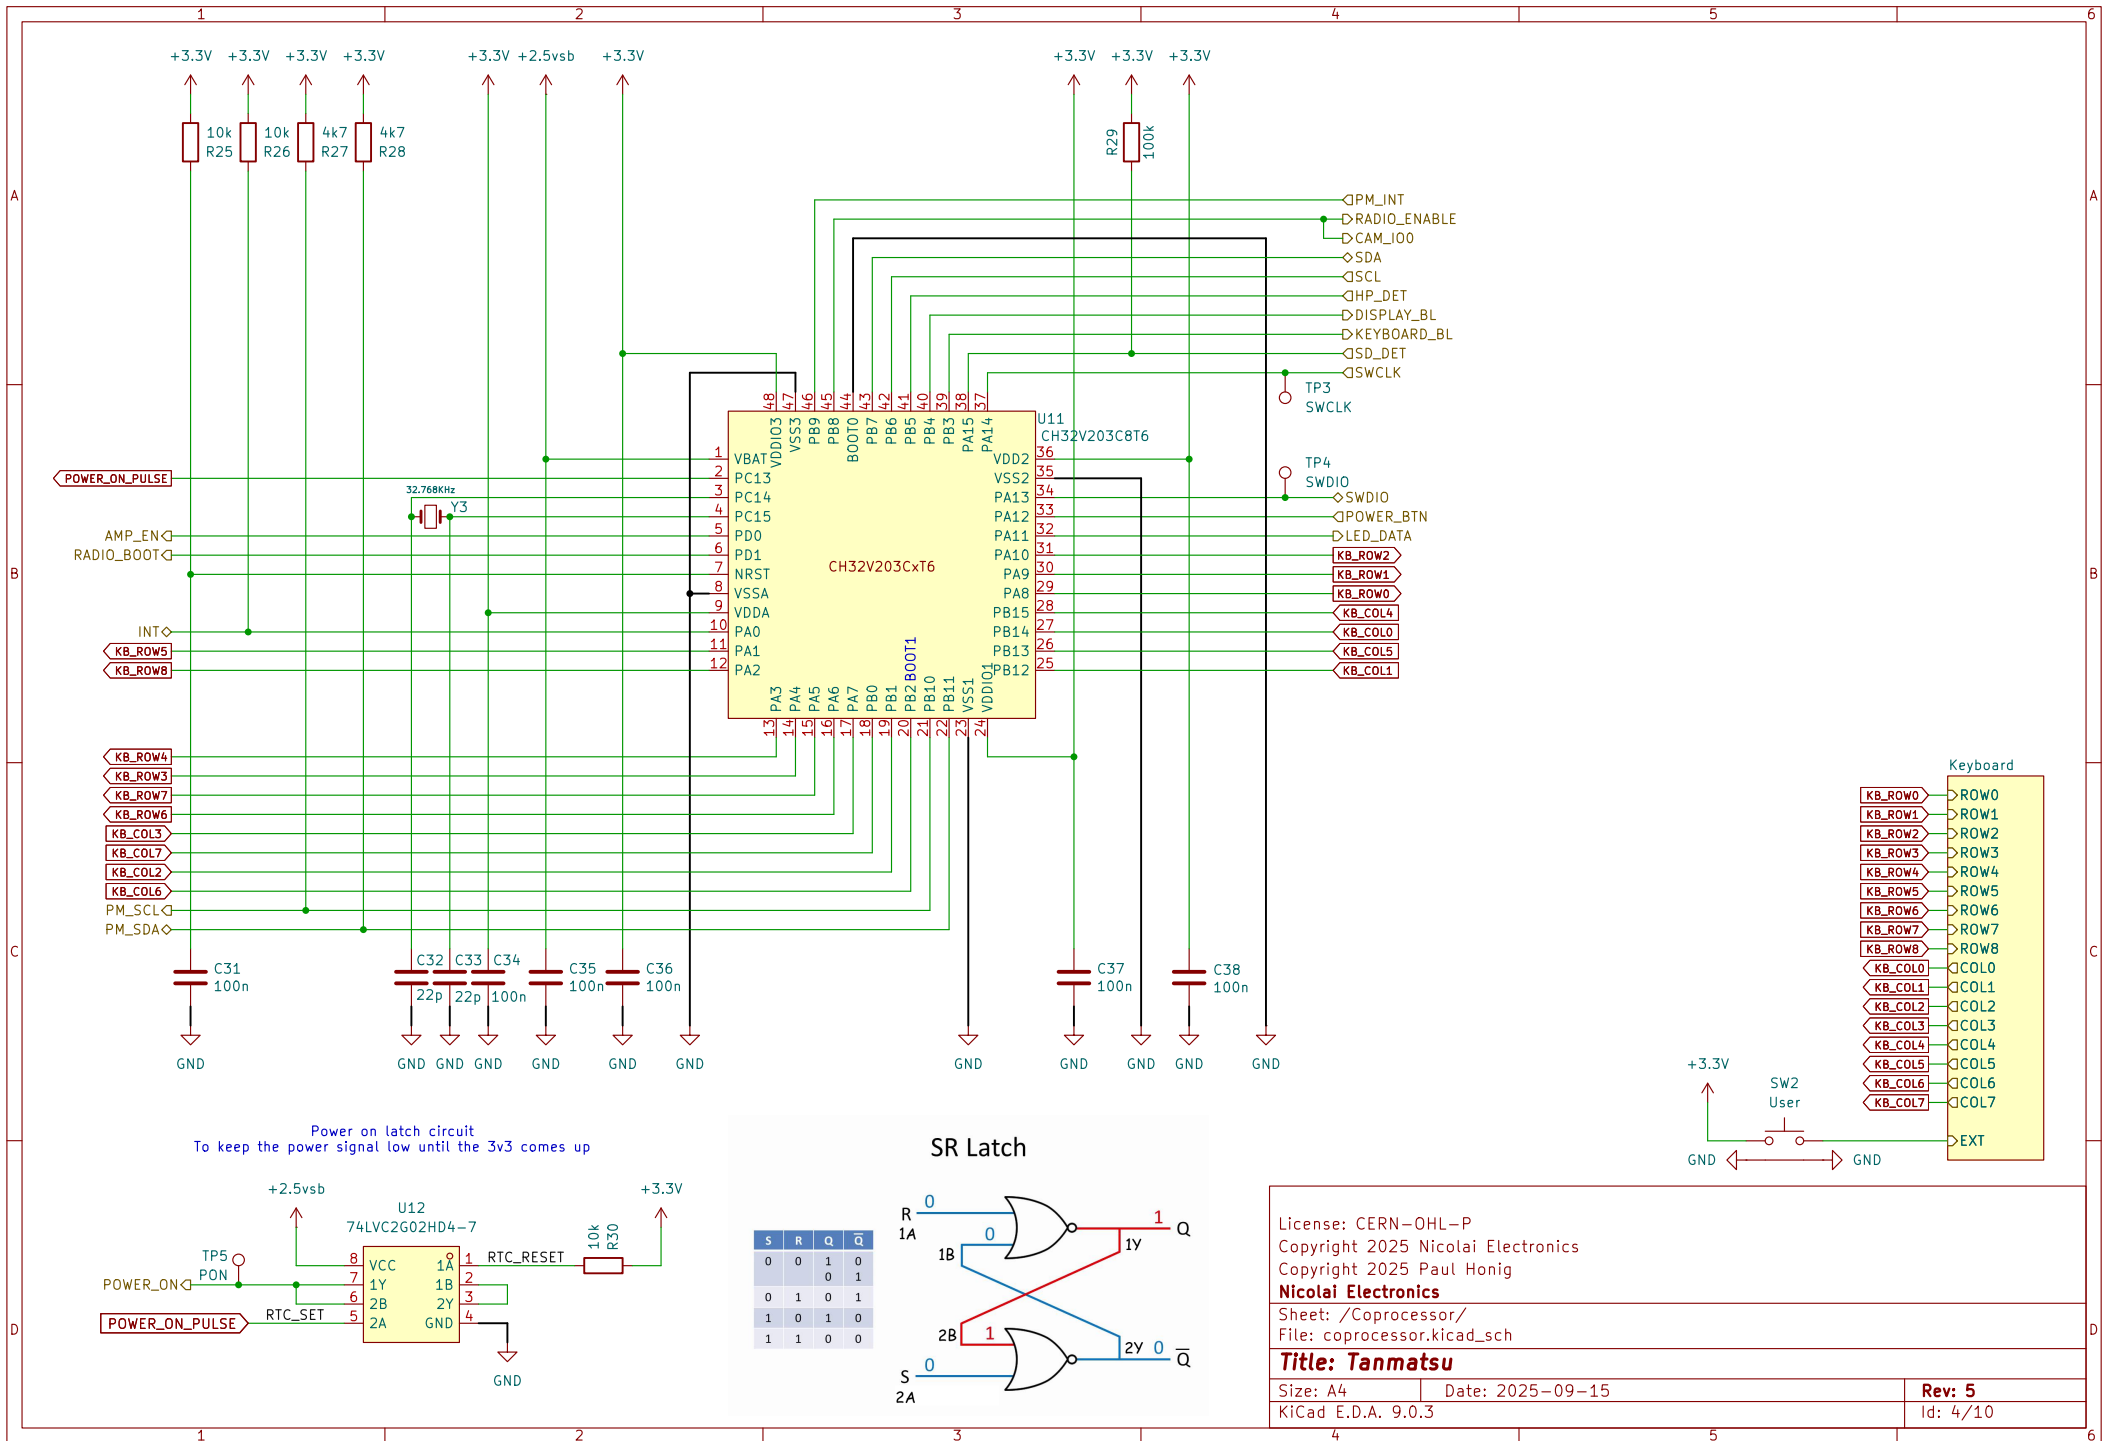

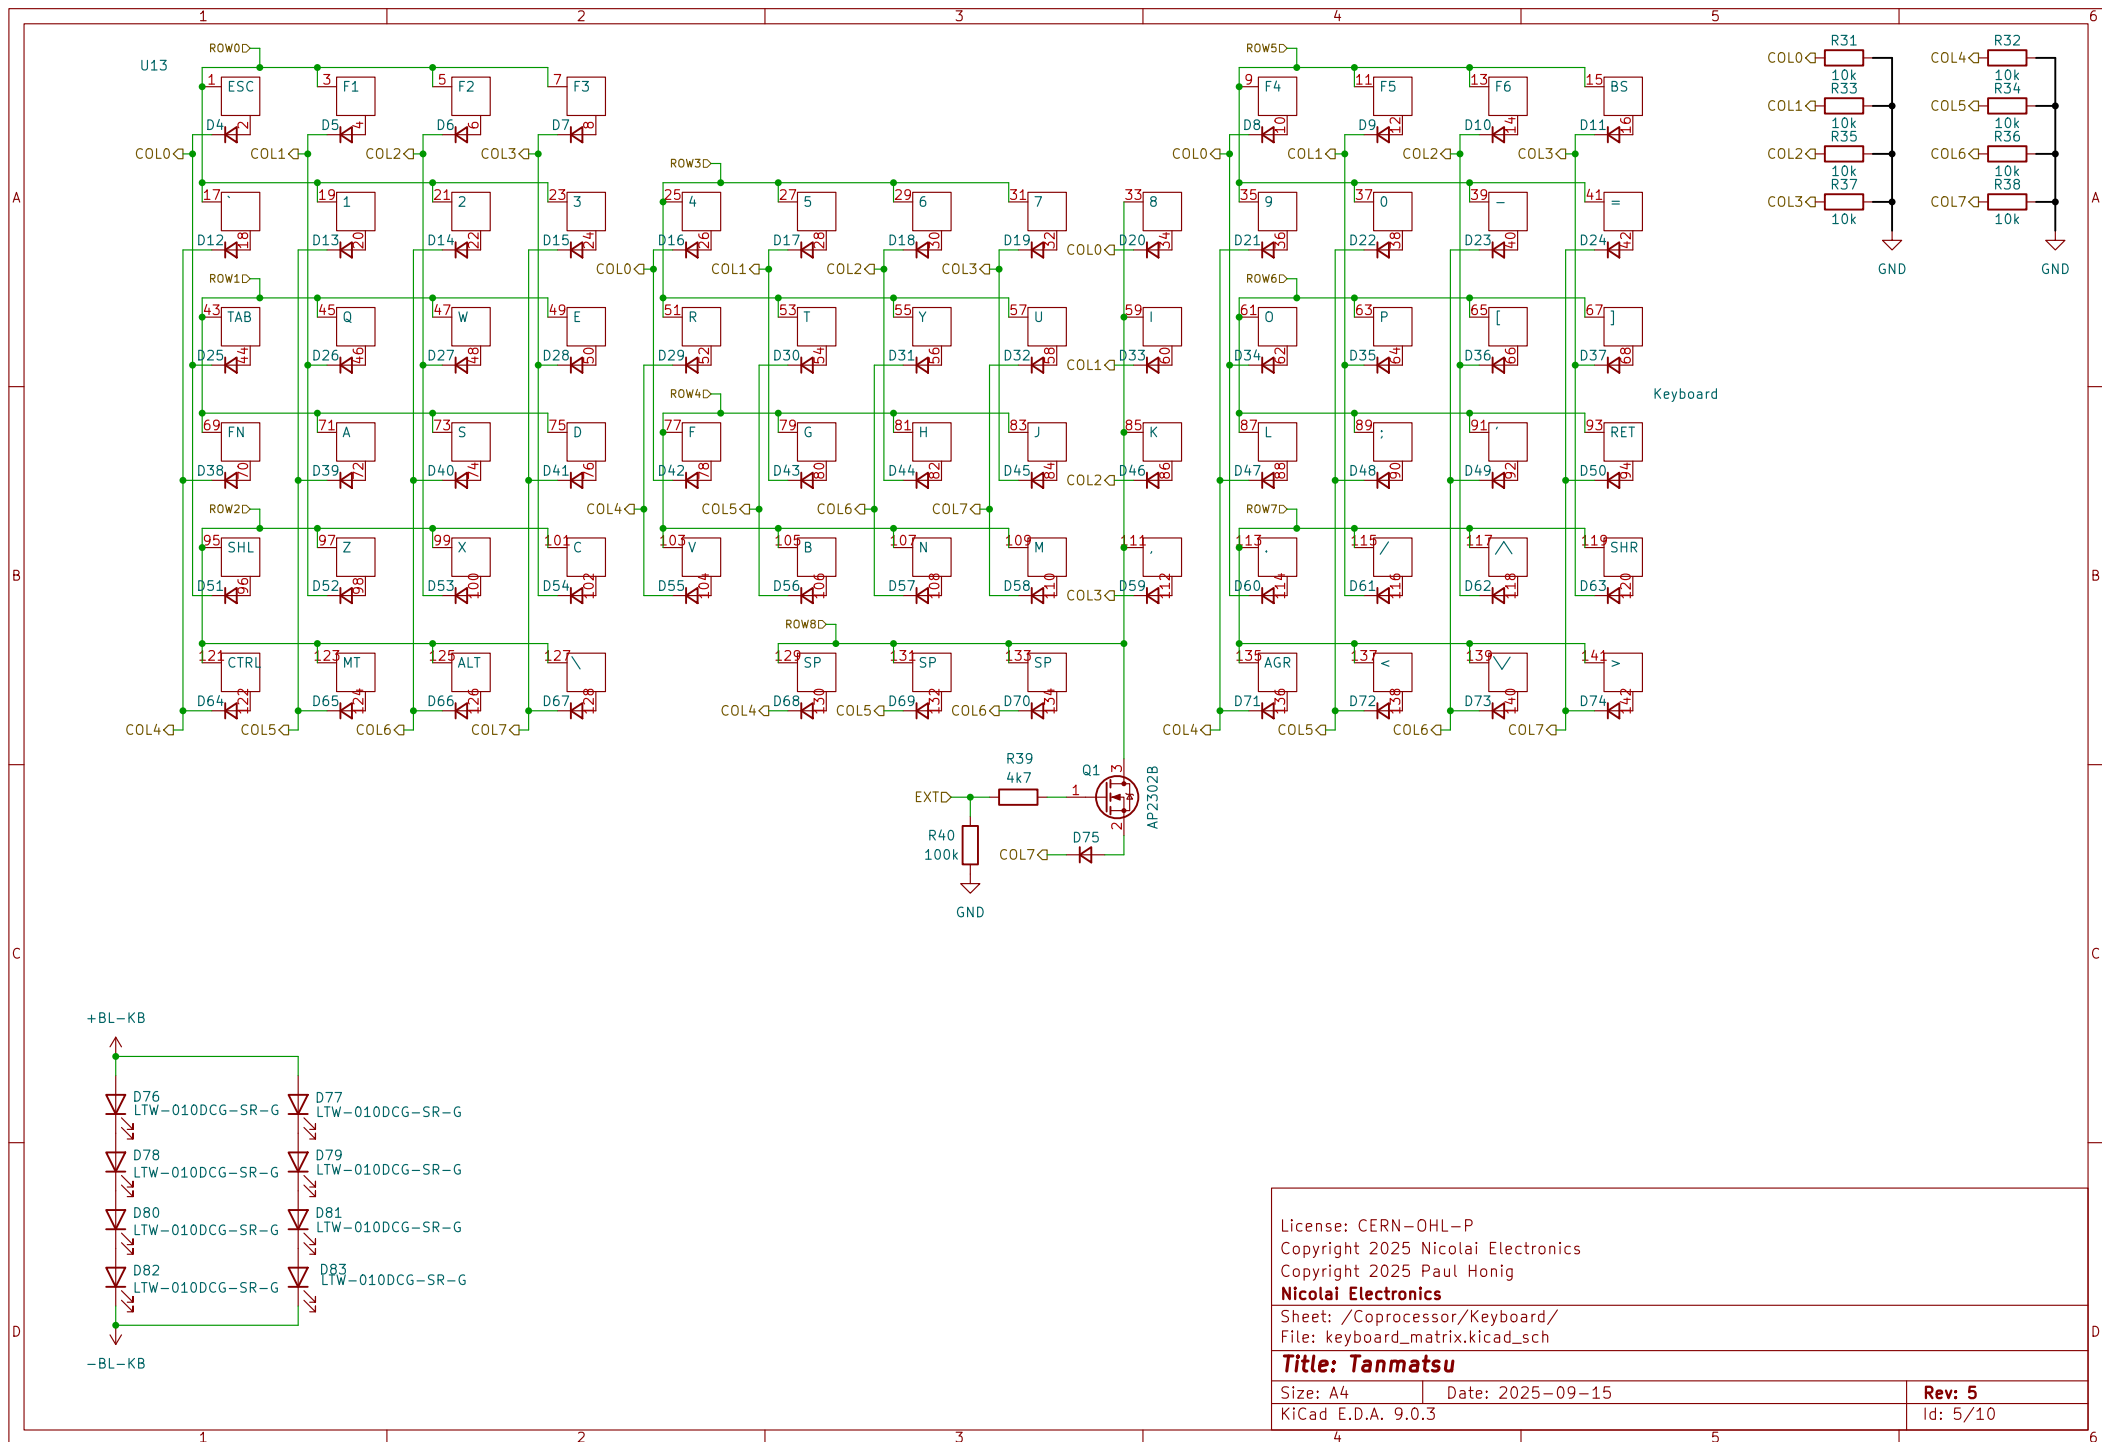

PMIC

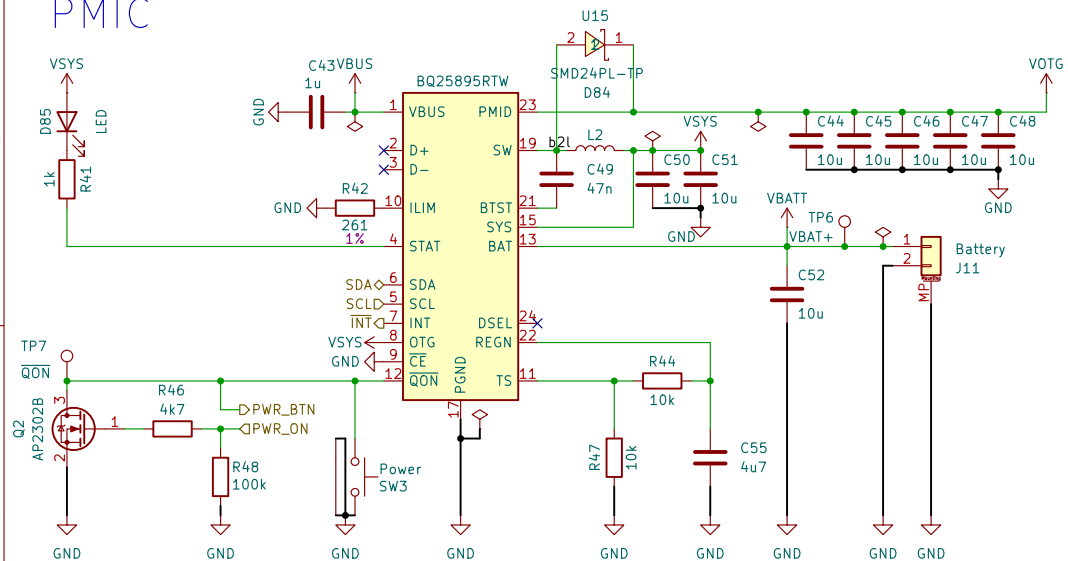

Watch out with the I2C bus of this device, wrong configuration can be dangerous.


VBUS is the voltage coming from the input USB-C port. This voltage can be 5 up to 14 volts.

VOTG is 5V generated from VBAT or VBUS depending on the power source of the system.


VBATT is connected to the rechargeable battery.

VSYS is an unregulated 3.5 to 4.5V output used to power the DC-DC converters for the rest of the components.


3.3v DC/DC

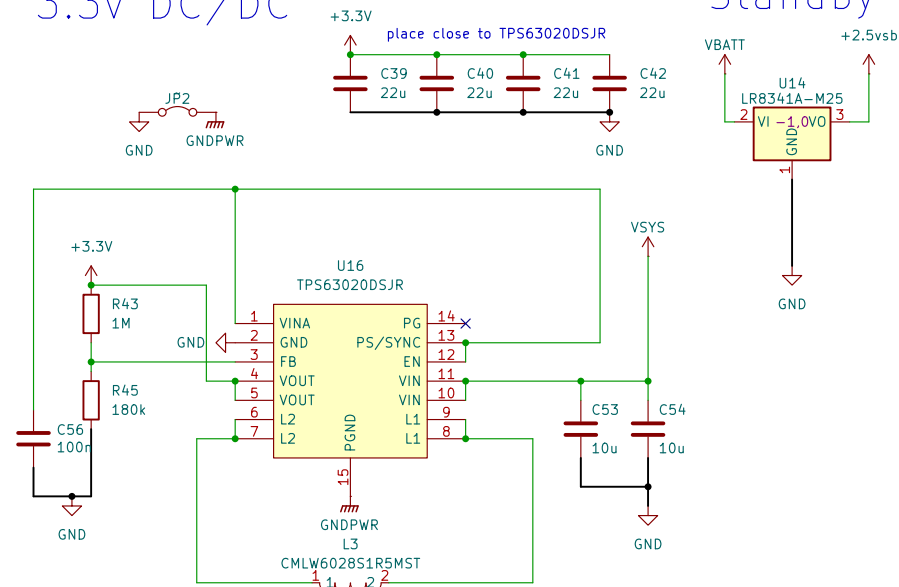


Display backlight DC/DC

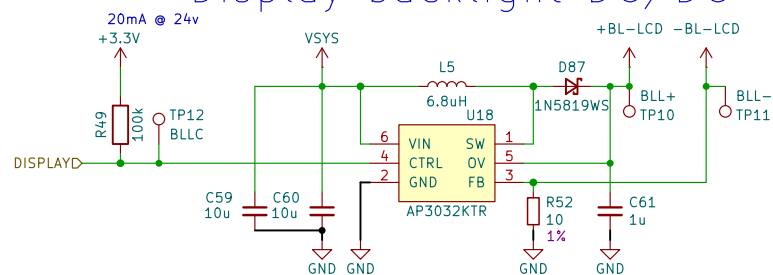

Keyboard backlight DC/DC

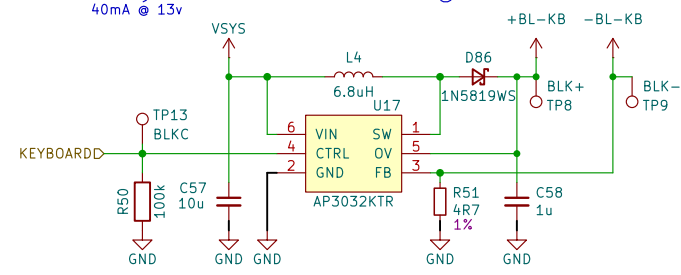

Switched power for USB-A port

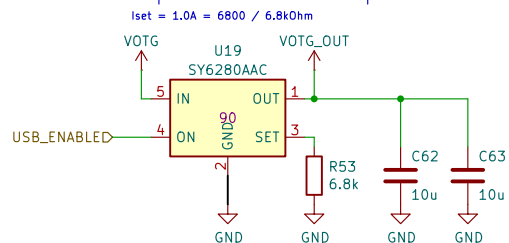

License: CERN-OHL-P
Copyright 2025 Nicolai Electronics
Copyright 2025 Paul Honig

Nicolai Electronics

Sheet: /Power/

File: power.kicad_sch


Title: Tanmatsu


Size: A4 Date: 2025-09-15


KiCad E.D.A. 9.0.3

Rev: 5

Id: 6/10

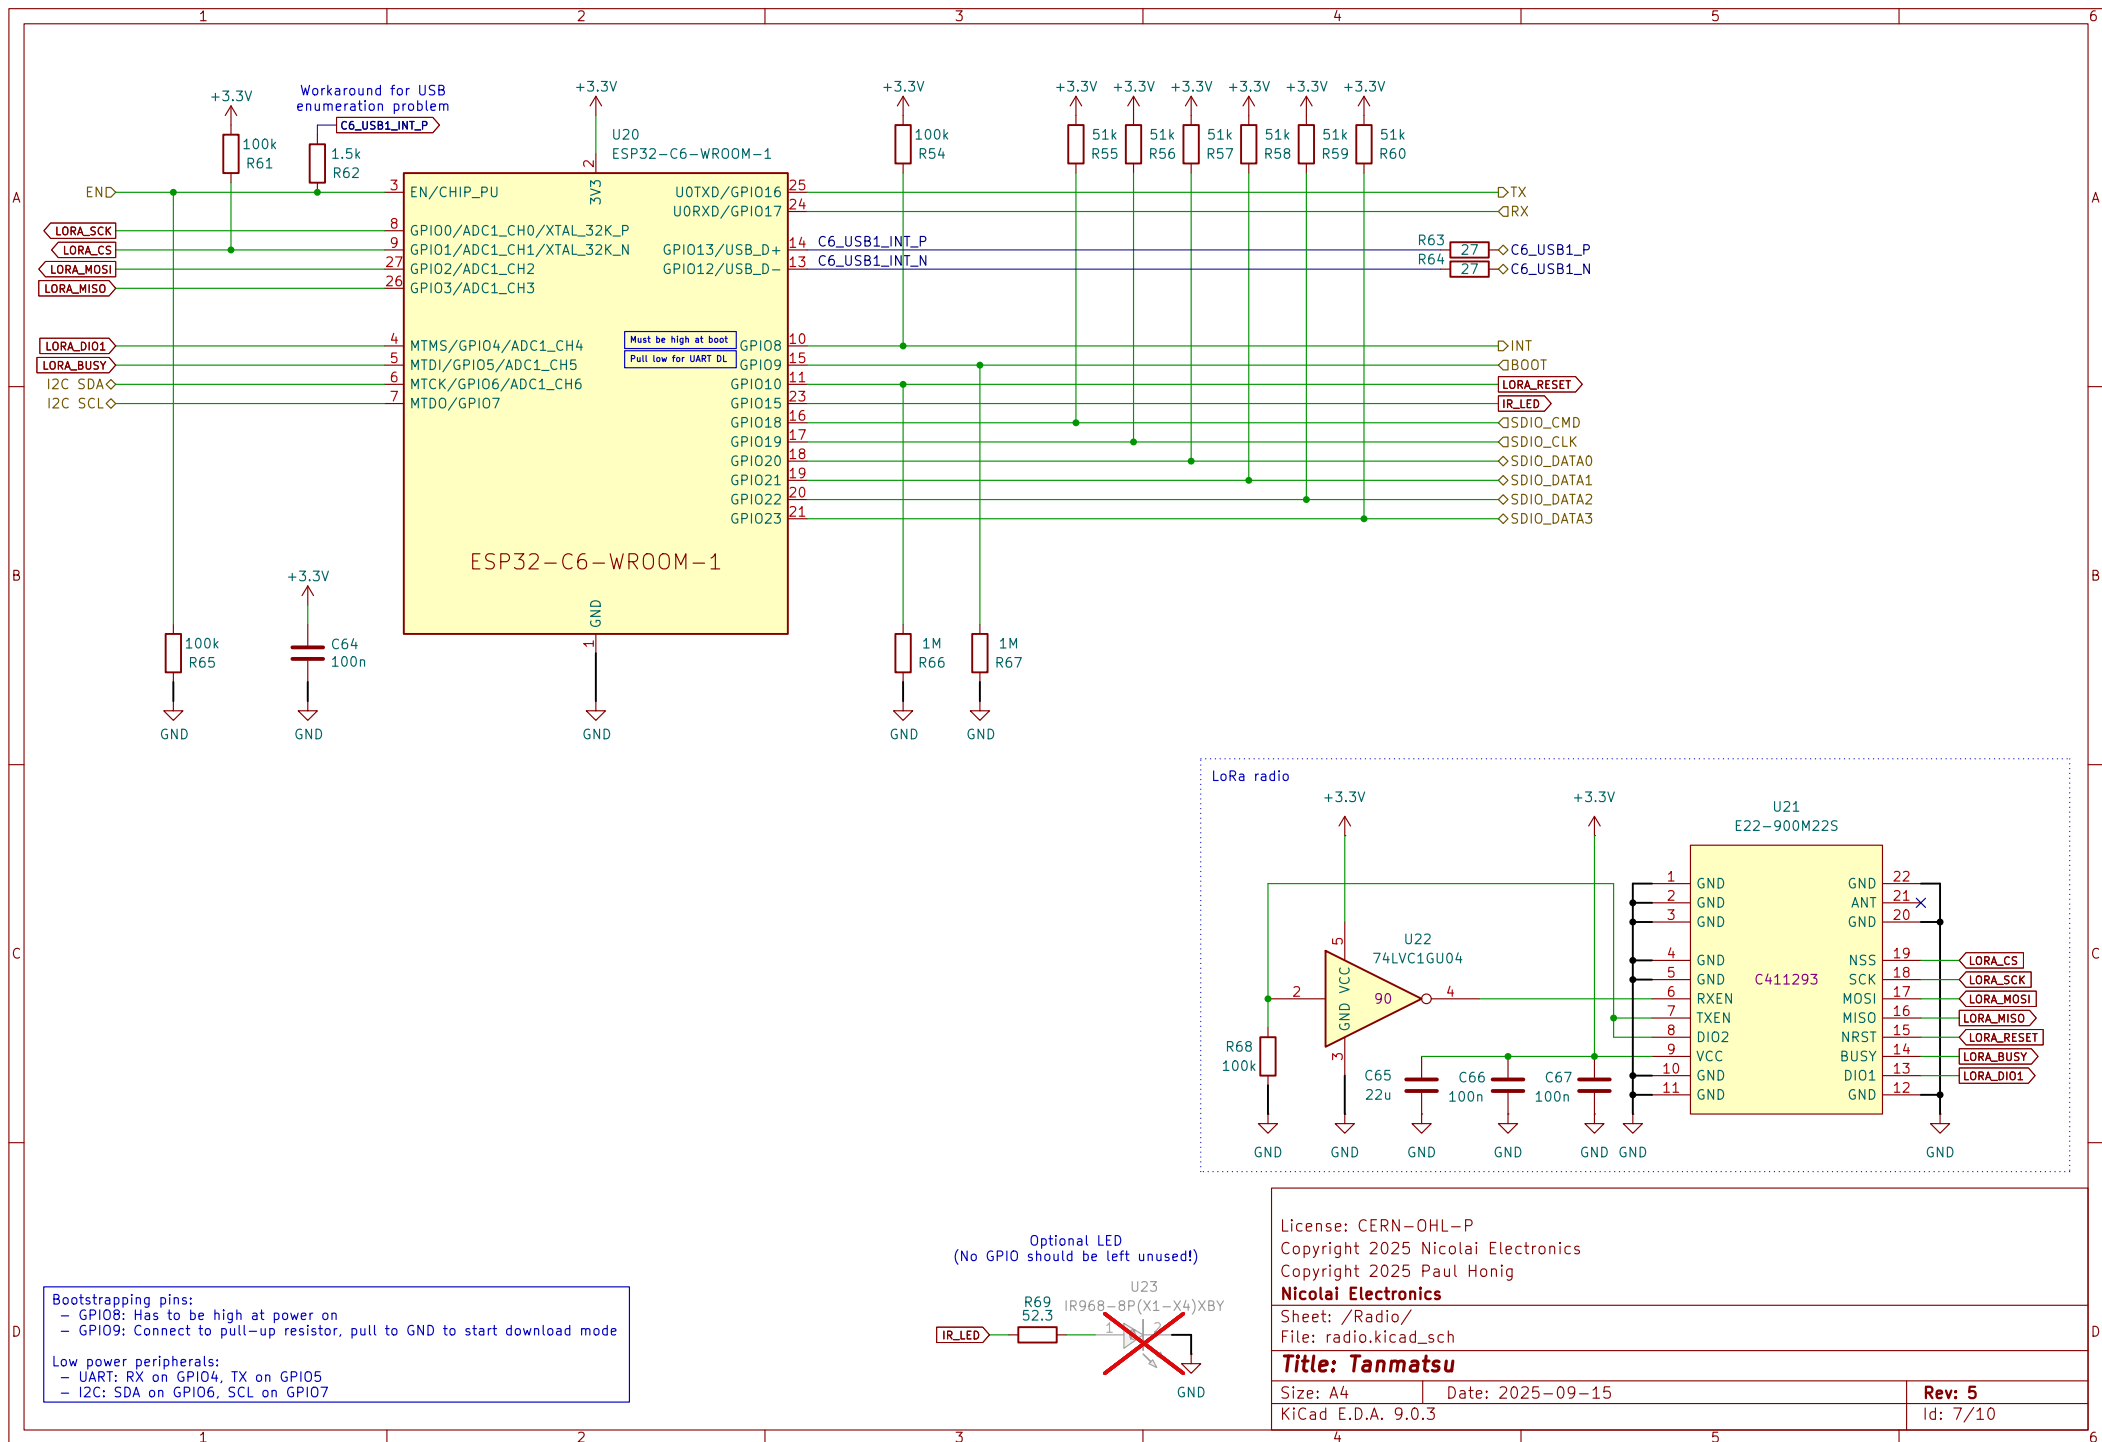

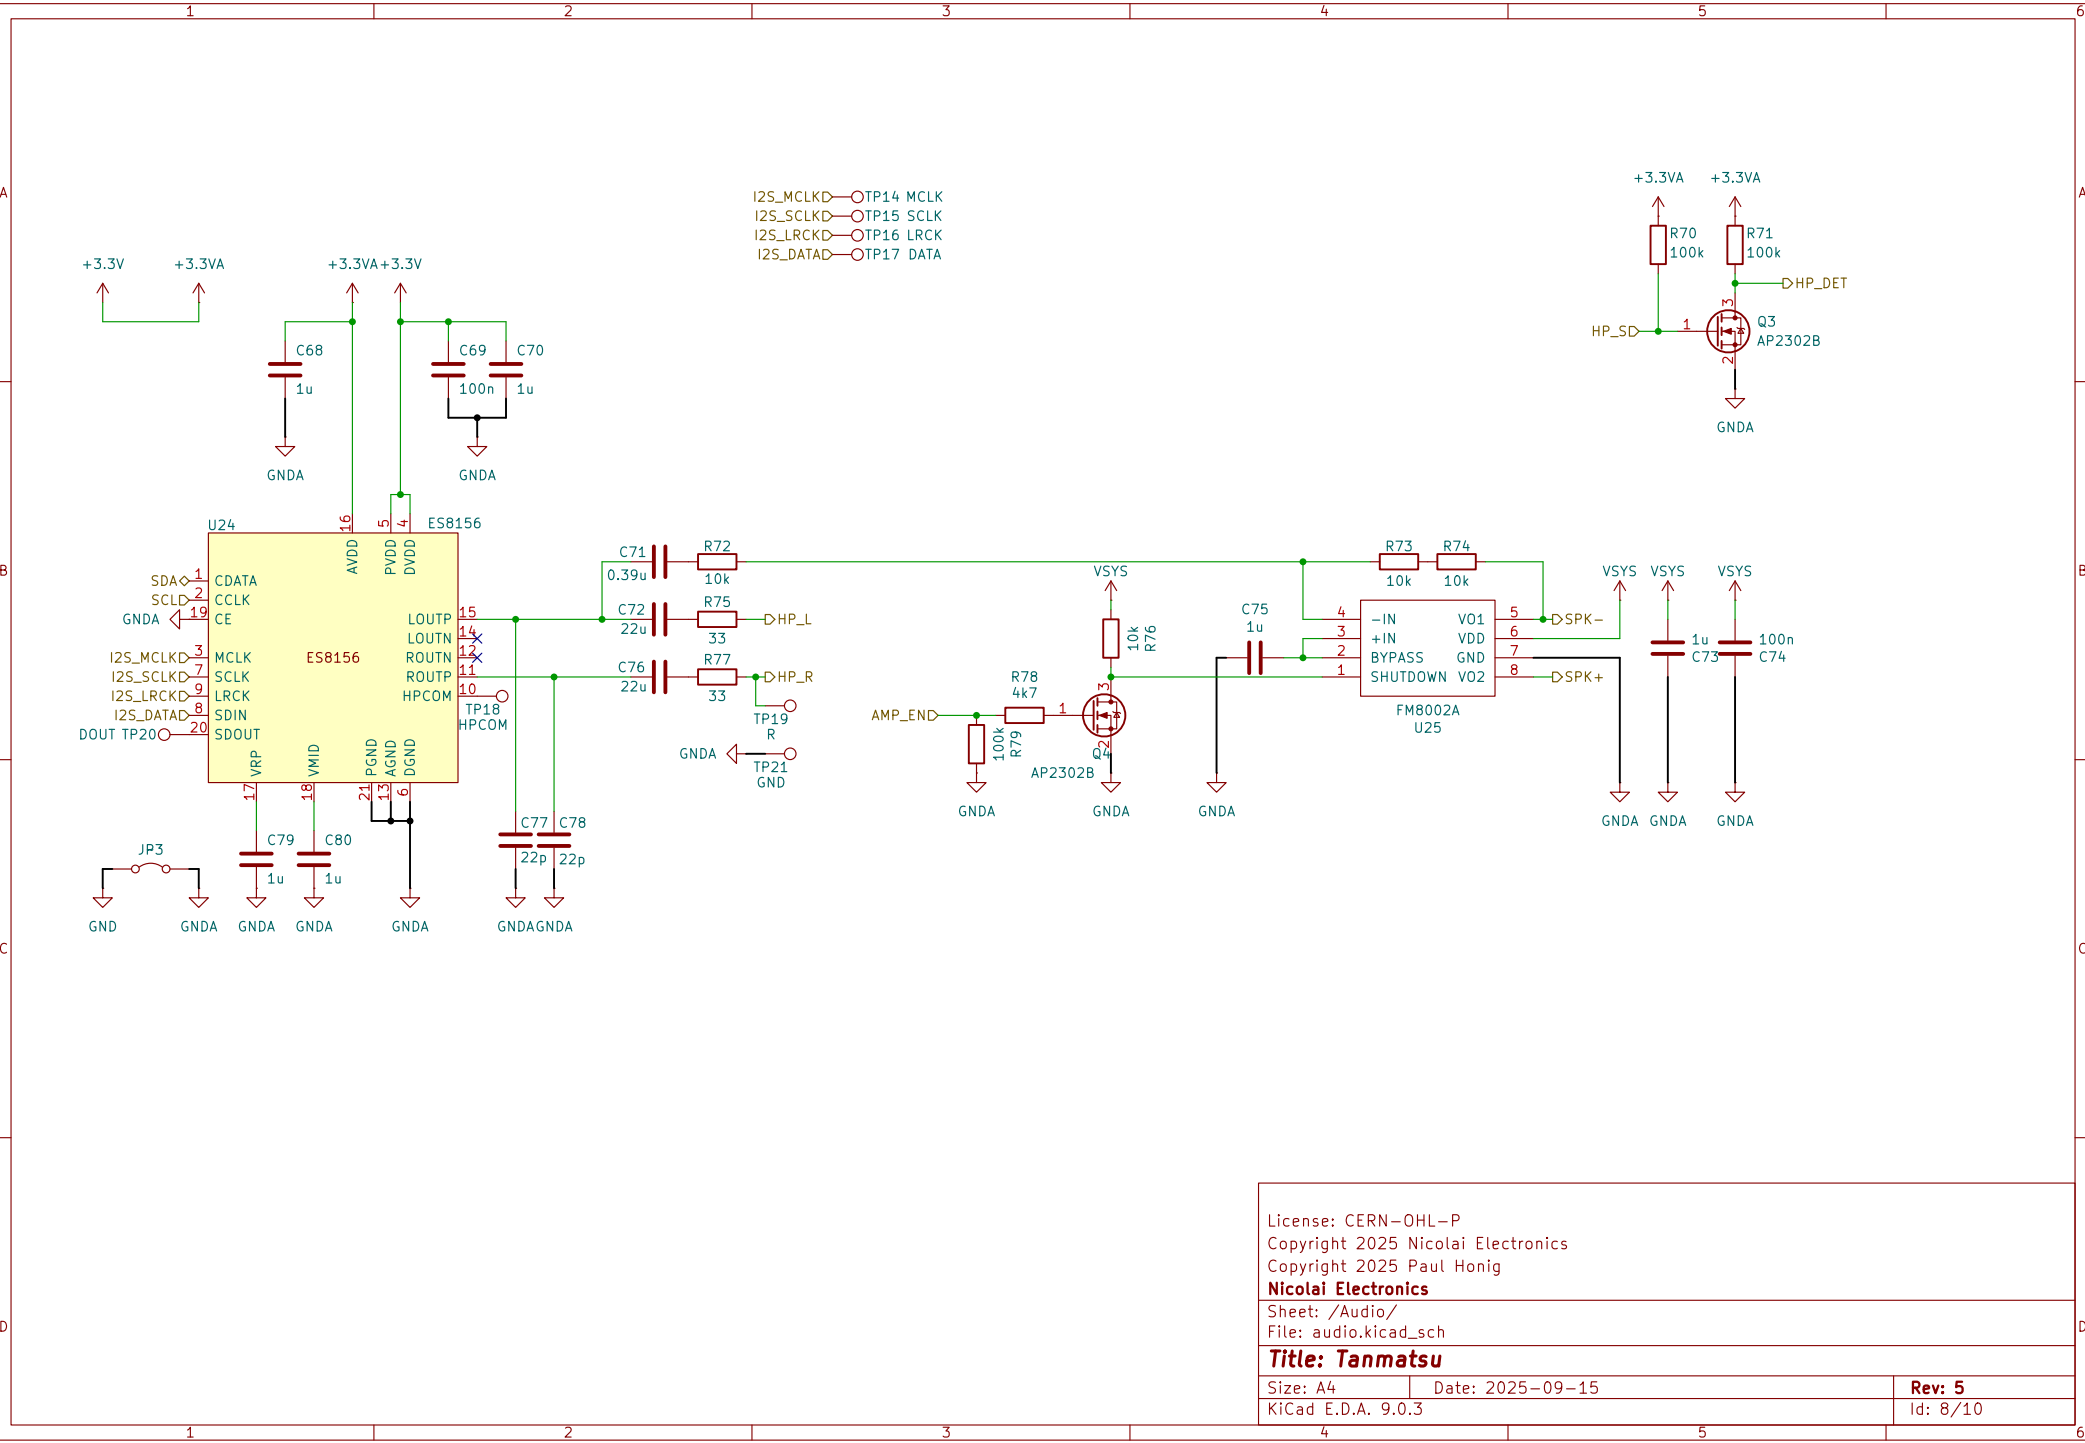

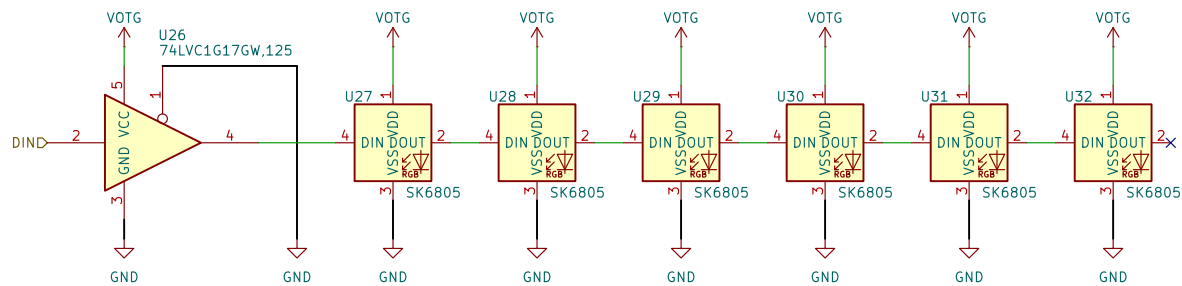

License: CERN-OHL-P
Copyright 2025 Nicolai Electronics
Copyright 2025 Paul Honig

Nicolai Electronics

Sheet: /LEDs/
File: leds.kicad_sch

Title: Tanmatsu

Size: A4 Date: 2025-09-15


KiCad E.D.A. 9.0.3

Rev: 5

Id: 9/10

In the display datasheet:
start, top left 1 down to 12
then, right bottom up 13 to 24.

So some mapping needs to be done here, if another footprint is inserted here.

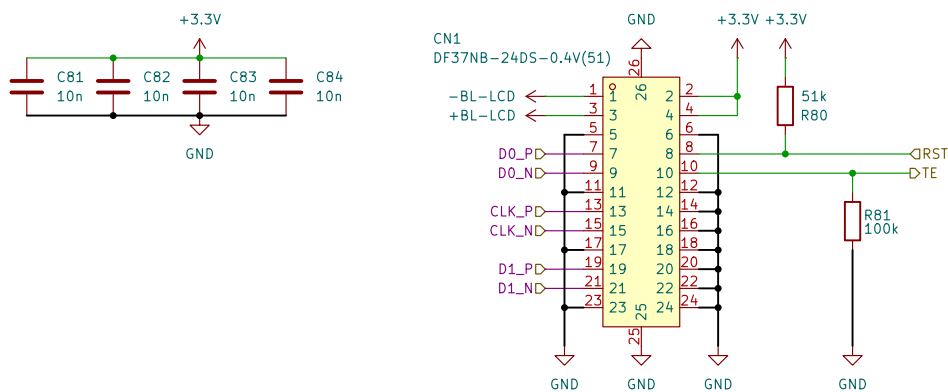

Sheet: /Display/
File: display.kicad_sch

Title: Tanmatsu

Size: A4 | Date: 2025-09-15

Rev: 5

KiCad E.D.A. 9.0.3

Id: 10/10

