Voltage Transducer LV 25-P

For the electronic measurement of currents: DC, AC, pulsed..., with galvanic isolation between the primary circuit and the secondary circuit.

16084

I_{PN} = 10 mA
V_{PN} = 10 .. 500 V



Electrical data

I_{PN}	Primary nominal current rms		10		mA
I_{PM}	Primary current, measuring range		0 .. ± 14		mA
R_M	Measuring resistance		$R_{M\,min}$	$R_{M\,max}$	
	with ± 12 V	@ ± 10 mA $_{max}$	30	190	Ω
		@ ± 14 mA $_{max}$	30	100	Ω
	with ± 15 V	@ ± 10 mA $_{max}$	100	350	Ω
		@ ± 14 mA $_{max}$	100	190	Ω
I_{SN}	Secondary nominal current rms		25		mA
K_N	Conversion ratio		2500 : 1000		
V_C	Supply voltage (± 5 %)		± 12 .. 15		V
I_C	Current consumption		10 (@ ± 15 V) + I_S		mA

Accuracy - Dynamic performance data

X_G	Overall accuracy @ I_{PN}, T_A = 25°C	@ ± 12 .. 15 V	± 0.9		%
		@ ± 15 V (± 5 %)	± 0.8		%
ε_L	Linearity error		< 0.2		%
			Typ	Max	
I_O	Offset current @ I_P = 0, T_A = 25°C			± 0.15	mA
I_{OT}	Temperature variation of I_O	0°C .. + 25°C	± 0.06	± 0.25	mA
		+ 25°C .. + 70°C	± 0.10	± 0.35	mA
t_r	Response time [1] to 90 % of I_{PN} step		40		µs

General data

T_A	Ambient operating temperature		0 .. + 70	°C
T_S	Ambient storage temperature		- 25 .. + 85	°C
R_P	Primary coil resistance	@ T_A = 70°C	250	Ω
R_S	Secondary coil resistance	@ T_A = 70°C	110	Ω
m	Mass		22	g
	Standard		EN 50178: 1997	

Note: [1] R_1 = 25 kΩ (L/R constant, produced by the resistance and inductance of the primary circuit).

Features

- Closed loop (compensated) current transducer using the Hall effect
- Isolated plastic case recognized according to UL 94-V0.

Principle of use

- For voltage measurements, a current proportional to the measured voltage must be passed through an external resistor R_1 which is selected by the user and installed in series with the primary circuit of the transducer.

Advantages

- Excellent accuracy
- Very good linearity
- Low thermal drift
- Low response time
- High bandwidth
- High immunity to external interference
- Low disturbance in common mode.

Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Power supplies for welding applications.

Application domain

- Industrial.

Voltage Transducer LV 25-P

Isolation characteristics

V_d	Rms voltage for AC insulation test, 50 Hz, 1 min	2.5 [1)]	kV
$\hat{V}_w$	Impulse withstand voltage 1.2/50 µs	16	kV
		Min	
dCp	Creepage distance	19.5	mm
dCl	Clearance	19.5	mm
CTI	Comparative Tracking Index (group IIIa)	175	

Note: [1)] Between primary and secondary.

Applications examples

According to EN 50178 and IEC 61010-1 standards and following conditions:

- Over voltage category OV 3
- Pollution degree PD2
- Non-uniform field

	EN 50178	IEC 61010-1
dCp, dCl, $\hat{V}_w$	Rated insulation voltage	Nominal voltage
Basic insulation	1600 V	1600 V
Reinforced insulation	800 V	800 V

Safety

This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.

Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply).
Ignoring this warning can lead to injury and/or cause serious damage.
This transducer is a build-in device, whose conducting parts must be inaccessible after installation.
A protective housing or additional shield could be used.
Main supply must be able to be disconnected.

Dimensions LV 25-P (in mm)

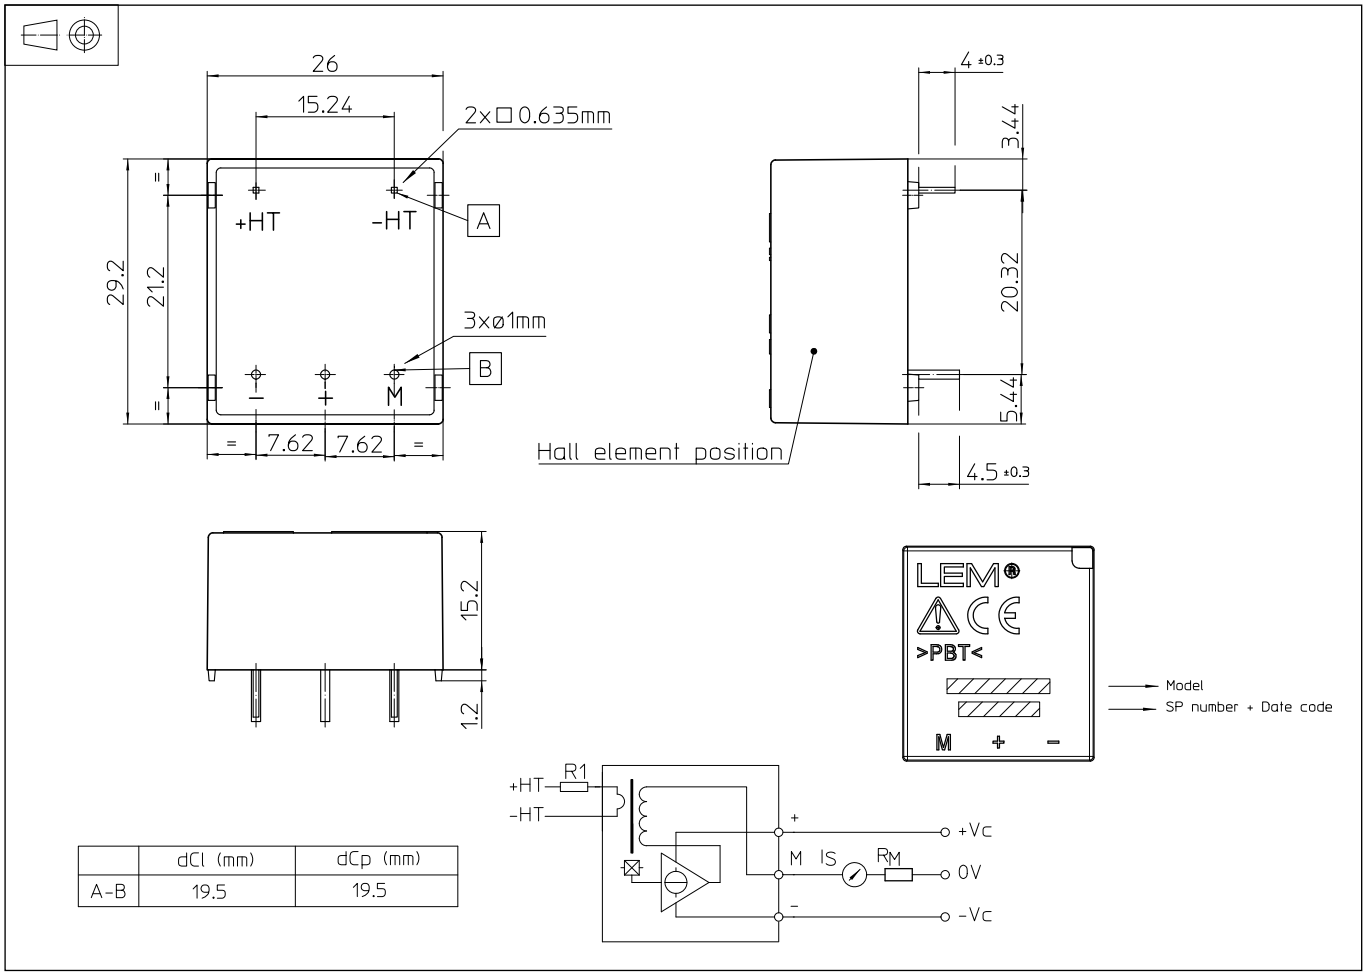

	dCl (mm)	dCp (mm)
A-B	19.5	19.5

Mechanical characteristics

- General tolerance ± 0.2 mm
- Fastening & connection of primary 2 pins
  0.635 × 0.635 mm
- Fastening & connection of secondary 3 pins Ø 1 mm
- Recommended PCB hole Ø 1.2 mm

Remarks

- $\mathbf{I}_S$ is positive when $\mathbf{V}_P$ is applied on terminal + HT.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.

Instructions for use of the voltage transducer model LV 25-P

Primary resistor $\mathbf{R}_1$: the transducer's optimum accuracy is obtained at the nominal primary current. As far as possible, $\mathbf{R}_1$ should be calculated so that the nominal voltage to be measured corresponds to a primary current of 10 mA.

Example: Voltage to be measured $\mathbf{V}_{PN}$ = 250 V a) $\mathbf{R}_1$ = 25 kΩ / 2.5 W, $\mathbf{I}_P$ = 10 mA Accuracy = ± 0.9 % of $\mathbf{V}_{PN}$ (@ $\mathbf{T}_A$= + 25°C)
b) $\mathbf{R}_1$ = 50 kΩ / 1.25 W, $\mathbf{I}_P$ = 5 mA Accuracy = ± 1.5 % of $\mathbf{V}_{PN}$ (@ $\mathbf{T}_A$= + 25°C)

Operating range (recommended): taking into account the resistance of the primary windings (which must remain low compared to $\mathbf{R}_1$, in order to keep thermal deviation as low as possible) and the isolation, this transducer is suitable for measuring nominal voltages from 10 to 500 V.