High Value Added

Media changer

Up to three media rolls can be set on the feeding side, saving space and work.

Loadable three of your commonly-use media into the Media changer and turn the handle to switch the media easily. It is usable safely and efficiently.
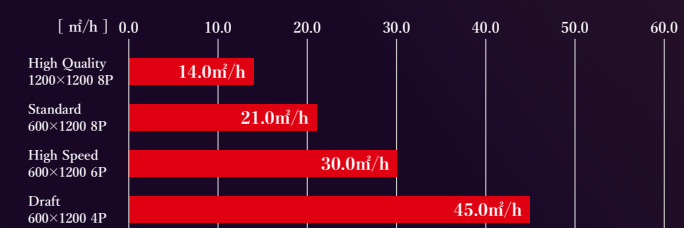
XY slitter

Improves post-processing efficiency and supports labor-saving and work-saving!

Inline sheet-fed cutting is possible.
Possible to cut even after lamination by reading a dedicated cropmark to cut.
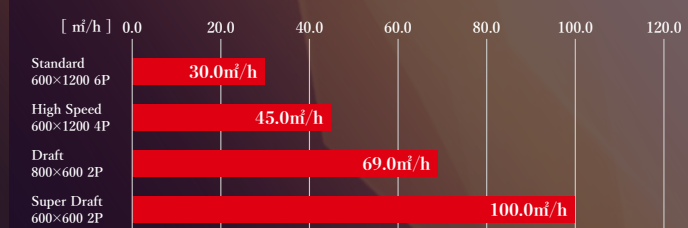Dramatically shortens works to greatly improve the efficiency of post-processing

High productivity

4C PVC

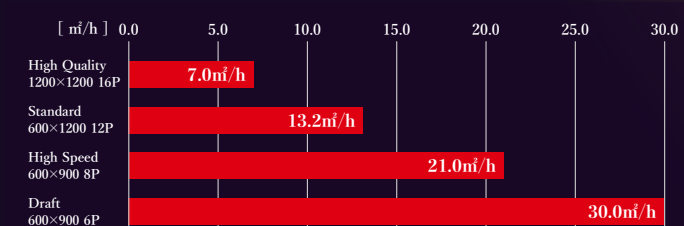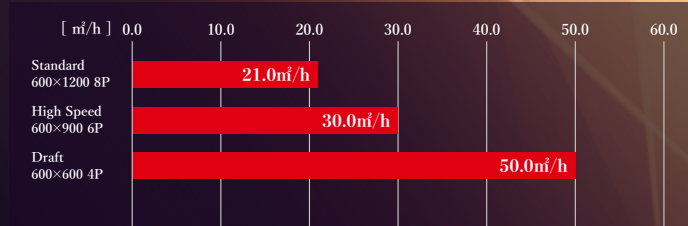[㎡/h] 0.0　10.0　20.0　30.0　40.0　50.0　60.0

High Quality 1200×1200 8P	14.0㎡/h
Standard 600×1200 8P	21.0㎡/h
High Speed 600×1200 6P	30.0㎡/h
Draft 600×1200 4P	45.0㎡/h

4C Tarpaulin

[㎡/h] 0.0　20.0　40.0　60.0　80.0　100.0　120.0

Standard 600×1200 6P	30.0㎡/h
High Speed 600×1200 4P	45.0㎡/h
Draft 800×600 2P	69.0㎡/h
Super Draft 600×600 2P	100.0㎡/h

8C/6C PVC

[㎡/h] 0.0　5.0　10.0　15.0　20.0　25.0　30.0

High Quality 1200×1200 16P	7.0㎡/h
Standard 600×1200 12P	13.2㎡/h
High Speed 600×900 8P	21.0㎡/h
Draft 600×900 6P	30.0㎡/h

8C/6C Tarpaulin

[㎡/h] 0.0　10.0　20.0　30.0　40.0　50.0　60.0

Standard 600×1200 8P	21.0㎡/h
High Speed 600×900 6P	30.0㎡/h
Draft 600×600 4P	50.0㎡/h

Print & Cut

1,600mm width — CJV330-160　1,300mm width — CJV330-130

4C
8C
6C＋W

■Specifications

Item		JV330-130	JV330-160	CJV330-130	CJV330-160
Print head		On-demand piezo head (2 staggered printheads)			
Print resolution		600 / 800 / 900 / 1200 dpi			
Head gap		3 levels by manual (2.0 mm / 2.5 mm / 3.0 mm)			
Ink	Type	SS21 / BS4			
	Color	SS21：C, M, Y, K, Lc, Lm, Lk, Or, W　BS4：C, M, Y, K			
	Capacity	2L ink pack (SS21 White：500 ml Ink pack only)			
Ink circulation		Circulation in damper MCTv2			
Max.Printable width		1,360 mm (53.5 in)	1,610 mm (63.4 in)	1,360 mm (53.5 in)	1,610 mm (63.4 in)
Media	Max. Width	1,370 mm (53.9 in)	1,620 mm (63.8 in)	1,370 mm (53.9 in)	1,620 mm (63.8 in)
	Outer dia.	Φ250 mm or less			
	Max. Load capacity	Max.3 rolls (with the Media changer)			
	Weight	One roll: 45 kg (99.2 lb.) or less / Three rolls total: 90 kg (198.4 lb.) or less			
	Core dia.	2 / 3 inch			
Cut function	Cut speed / acceleration	—	—	Speed:Max.300 mm/s　Acceleration:Max. 0.5G	
	Cut pressure	—	—	10～450gf	
	Cutter response times	—	—	10 times /sec	
	Repetition accuracy	—	—	±0.2 mm (Excluding expansion and contraction of film due to temperature)	
Interface		Ethernet 1000 BASE-T(Recommended) / USB 2.0 Hi-speed			
Power		Main unit : Single phase AC100 - 120V±10% 12A / AC200 - 240V±10% 6A　50/60 Hz ±1Hz x 2 pcs.			
Power consumption		Max.1,440W or less ×2 / Min.4.5W or less (Sleep mode)			
Operational environment		Temperature : 20 - 30 degC (68 - 86 degF)　Humidity : 35 - 65% Rh (Non condensing)			
		Guaranteed accuracy temperature : 20 - 25 degC (68 - 77 degF)			
		Dust level : 0.15 mg/m3 or less (Equivalent to general office)			
Dimensions(WxDxH)		2,920 mm × 1,215 mm × 1,305 mm (115.0 × 47.8 x 51.4 in)	3,170 mm × 1,215mm × 1,305 mm (124.8 x 47.8 x 51.4 in)	2,920 mm × 1,215 mm × 1,305 mm (115.0 × 47.8 x 51.4 in)	3,170 mm × 1,215 mm × 1,305 mm (124.8 x 47.8 x 51.4 in)
Weight		358 kg (789.2 lb)	368 kg (811.3 lb)	363 kg (800.3 lb)	373 kg (822.3 lb)

■Supplies

Item	Color	Item code	Remark
SS21 GREENGUARD Gold Certified ink	Cyan	SPC-0588C	2L ink pack
	Magenta	SPC-0588M	
	Yellow	SPC-0588Y	
	Black	SPC-0588K	
	Light Cyan	SPC-0588LC	
	Light Magenta	SPC-0588LM	
	Orange	SPC-0588OR	
	Light Black	SPC-0588LK	
	White	SS21-W-50	500ml ink pack
BS4	Cyan	BS4-C-2L	2L ink pack
	Magenta	BS4-M-2L	
	Yellow	BS4-Y-2L	
	Black	BS4-K-2L	
MS Cleaning Cartridge		SPC-294	220ml ink cartridge
Cloth wiper kit		SPC-0905	

■XY slitter

Item		Note	
X slit	Cut width from media edge	Minimum cut width from media edge：25 mm	Excluding impact of media skew
	Cut accuracy	Cut length 2 m：±2 mmor below / Cut length 30 m：±5 mmor below	
Y slit	Cutting position	15 mm from the crop mark in the feed direction / Cutting width：Data width＋5 mm on both ends	
	Cut accuracy	±2 mm or below	
Media set position		Right or Center reference	
Settable media width		Max.1,620 mm	
Cuttable print data size	Maximum width	1,560 mm	
	Minimum	A4vertical（210 mm x 297 mm）	
	Minimum distance between data	X：25 mm　Y：51 mm	

■Option

Item	Item code	Remark
X cutter unit	OPT-J0532	Additional X cutter

■Installation space

	JV330-130	CJV330-130	JV330-160	CJV330-160
Width	3,920 mm (154.3 in) or above		4,170 mm (164.2 in) or above	
Depth	4,050 mm (159.4 in) or above			

Give your creativity a Glow up

330 Series

JV330-160/130
CJV330-160/130
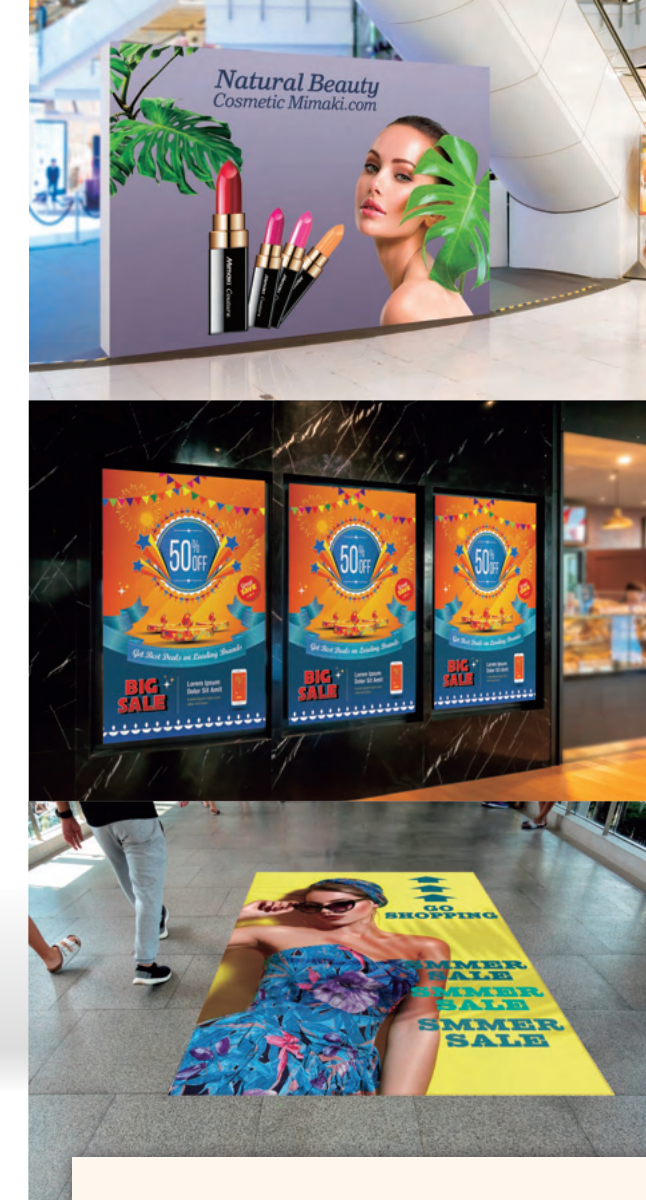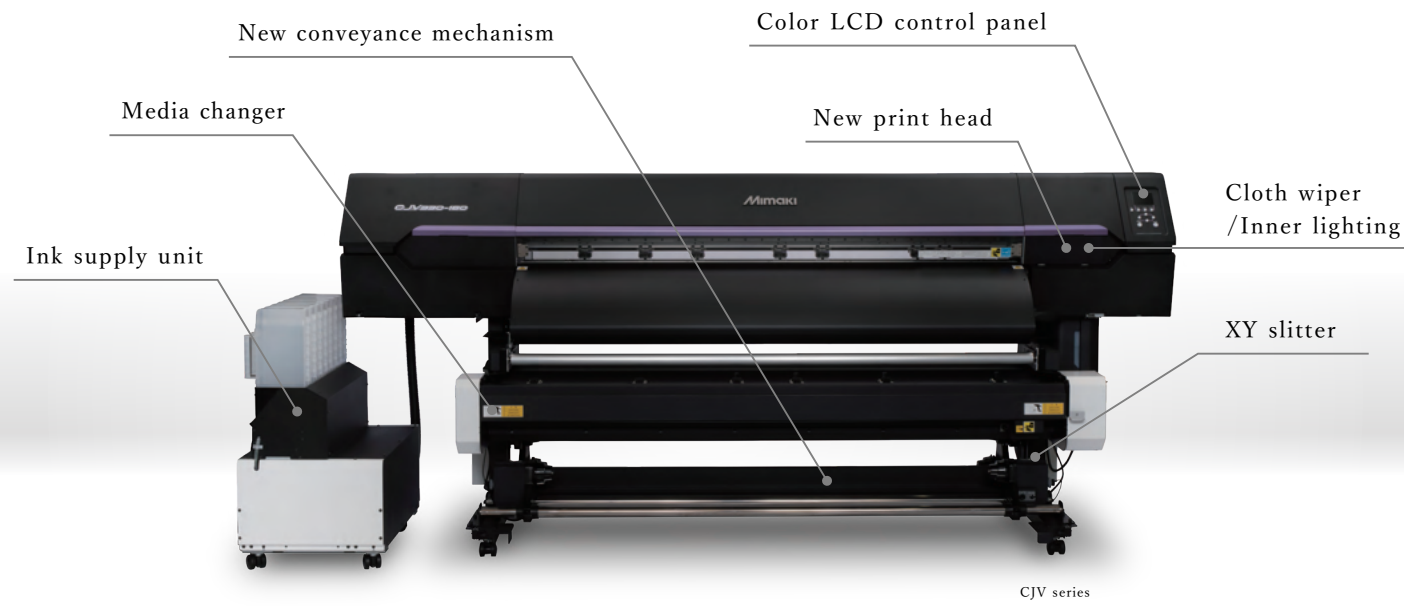
High quality
×
High productivity

Fine-tuned expression of photo with a minimum 3pl ink dot

New input profile Deep Color Natural for natural skin expression

High productivity in standard mode
(8 color ink set: 13.2 ㎡/h 4 color ink set:21.0 ㎡/h)

Vivid expression of solid color without any unevenness

The quality of superb print images will ensure your firm business activities.

Give your creativity a Glow up

High quality and high productivity with unimaginable added value and unparalleled ease of use...
The 330 series of the new generation have been designed and developed from the ground up with a casing to
pursue image quality and productivity befitting a flagship model and new values that assist in saving work.

Flagship models of inkjet printer/Print & Cut product
with a number of industry-first advanced design features

New conveyance mechanism

Color LCD control panel

Media changer

New print head

Cloth wiper /Inner lighting

Ink supply unit

XY slitter

CJV series

High quality

Drop Technology MWDT

Mimaki Weaving Dot Technology

Control of ink firing during printing for more accurate drop placement

By optimizing the firing order and combination of nozzles to minimize the effects of individual head differences and stagger adjustment on prints, it produces smooth photographic expressions and vivid deep colors.
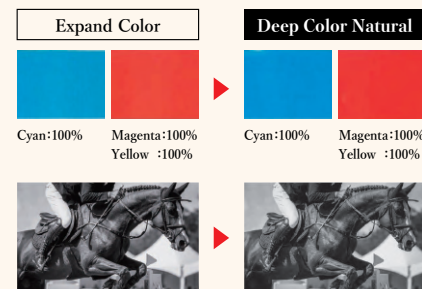
Vivid expression of deep color without any unevenness

Conventional drop ▶▶▶ MWDT
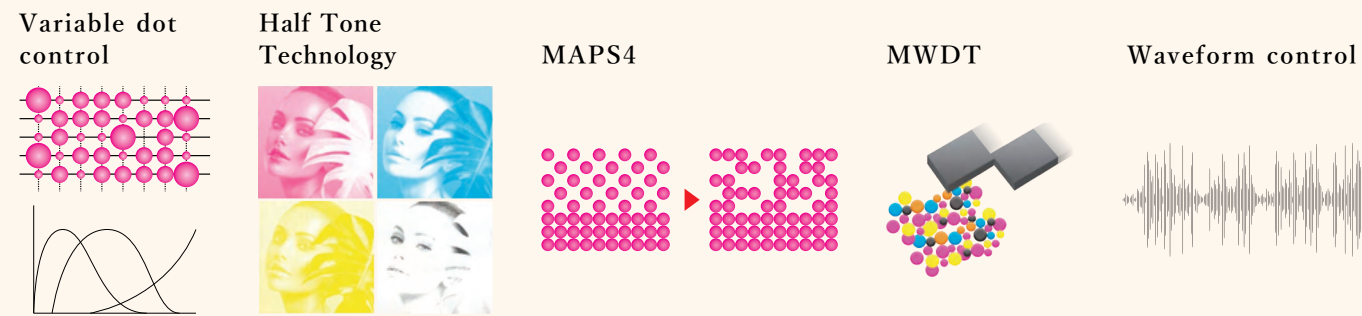
Input profile Deep Color Natural

It is an easy-to-use input profile that pursues the expression of saturation and neutral gray, which are important for sign-making but difficult to achieve at the same time. It is possible to deliver well-fired cyan and deep red, natural and smooth skin tones and gray tones that are often required in sign application as color reproduction.

Point 1 : Well-fired solid color
Point 2 : Deep red expression
Point 3 : Refined neutral gray

Expand Color
Cyan:100%   Magenta:100% Yellow :100%

Deep Color Natural
Cyan:100%   Magenta:100% Yellow :100%

Print

1,600mm width
JV330-160

1,300mm width
JV330-130

4C
8C
6C + W

Mimaki Imaging Technology

The five components of Mimaki's Imaging Technology for producing high quality print enables
the smooth tone expression with suppression of graininess and the banding reduction.

Variable dot control

Half Tone Technology

MAPS4

MWDT

Waveform control

Technology to support stable operation

DAS (Dot Adjustment System)

The printer automatically adjusts and optimizes the dot position and feed volume, which affect print quality, as the media and printing conditions change.
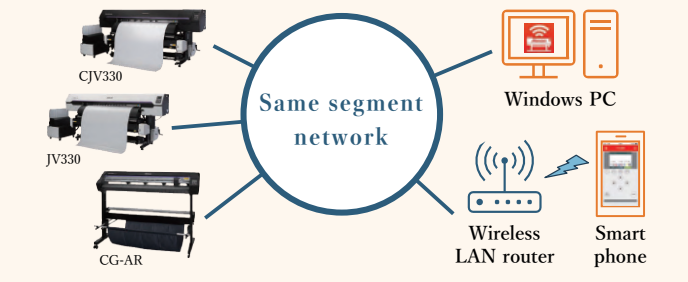
NCU (Nozzle Check Unit)
NRS (Nozzle Recovery System)

The sensor automatically detects the condition of the nozzle and cleans it. If the nozzle is still loose, another nozzle is used and printing continues without slowing down.

Natural Beauty
Cosmetic Mimaki.com

Mimaki
"Don't spend time beating on a wall, hoping to transform it into a door."

MRA (Mimaki Remote Access)

An application that allows remote monitoring of status and panel operation of machine

Ink types, heaters and notification alerts are listed to be able to remotely operate like an actual machine's panel

CJV330
JV330
CG-AR

Same segment network

Windows PC
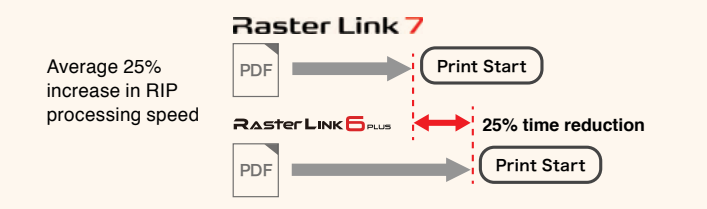Wireless LAN router
Smart phone

Raster Link 7

Improves reproducibility of special effects (such as transparency) of PDF data

Reduces PDF data RIP processing time by an average of 25%

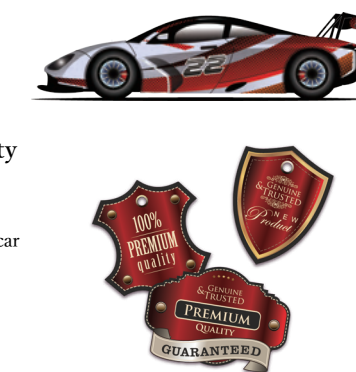Prints out the variable data by the Variable print function

Enhanced favorite settings and pop-up log display

Average 25% increase in RIP processing speed

Raster Link 7
PDF → Print Start

Raster Link 6 PLUS
PDF → Print Start

25% time reduction

Print & Cut

Eco-solvent inkjet printer of
high image quality × high productivity
with added cutting function

CJV330-130/160, perfect model for label, sticker, and car wrapping film making with just one model
Design and idea you want can be created immediately.

CJV330-160/130