



OsdagBridge

Open Source Software for Steel Girder Bridge Design

Design Report

Project Name	OsdagBridge Enhanced Report
Project Location	Mumbai
Author / Designer	OsdagBridge Team
Reviewer	
Organization	IIT Bombay FOSSEE
Client Name and Organization	IIT Bombay FOSSEE
Job Number	JOB-2026-001
Date	2026-08-15
Report Version	

Table of Contents

Executive Summary	2
Project Overview	2
Key Design Outcomes Summary	3
Design Assumptions and Limitations	3
1 Project Information	4
1.1 Project and Design Team Details	4
1.2 Applicable Codes and Standards	4
2 Input Parameters	5
2.1 Basic Inputs (User-Defined)	5
2.2 Additional Inputs	6
3 Loads and Load Combinations	11
4 Analysis Results	15
5 Design Checks	19
5.1 Plate Girder Design	19
5.2 Deck Slab Design	33
5.3 Cross Bracing Design	38
5.4 End Diaphragm Design	41
5.5 Overall Design Check Summary	43
6 Drawings and Visualizations	46
6.1 Bridge Configuration and Layout	46
6.2 Plate Girder — Detailed Views	46
6.3 Cross Bracing Detail	46
6.4 End Diaphragm Detail	47
7 Material Take-off & Quantity Summary	48
7.1 Material Quantity Visualizations	49
8 Standards & Assumptions	50
8.1 Design Standards	50
8.2 Analysis and Design Assumptions of This Version	51
8.3 Known Limitations of This Version	53
References	54

Executive Summary

This section provides a concise summary of the bridge design, key inputs, governing loads, and final design outcomes.

Project Overview

Bridge Type	Highway Bridge
Design Standard	IRC 5, IRC 6, IRC 22, IRC 24, IS 800
Span	24.0 m
Carriageway Width	7.5 m
No. of Girders	4
Girder Spacing	2.1
Deck Thickness	250.0
Overall Design Status	Fail (Fatigue Normal Stress, Int.Stiff: Leg H_ limit, Fatigue Shear Stress)
Governing Check	Fatigue Normal Stress
Overall Utilization Ratio (max)	1.97 (Girder)

[PLACEHOLDER: Figure 1 – Overall Bridge Plan]

Figure 1 – Overall Bridge Plan

[*PLACEHOLDER: Figure 2 – Typical Cross-Section (with girder, deck, barriers, footpath)*]

Figure 2 – Typical Cross-Section (with girder, deck, barriers, footpath)

[*PLACEHOLDER: Figure 3 – 3D View of Bridge Superstructure*]

Figure 3 – 3D View of Bridge Superstructure

Table 1 – Final Bridge Geometry (after optimization)

	G1	G2	G3	G4
Member ID	G1M1	G2M1	G3M1	G4M1
Section Designation	1340 x 410 x 18 x 410 x 18	1340 x 410 x 18 x 410 x 18	1340 x 410 x 18 x 410 x 18	1340 x 410 x 18 x 410 x 18
Governing Check	Fatigue Normal Stress	Fatigue Normal Stress	Fatigue Normal Stress	Fatigue Normal Stress
Utilization Ratio	1.97 (Girder)	1.97 (Girder)	1.97 (Girder)	1.97 (Girder)

Note: Utilization ratio (UR) = demand / capacity. A value < 1.0 indicates a passing check.

Key Design Outcomes Summary

Girder design pass
Cross bracing design pass
End Diaphragm design pass
Deck design pass

Design Assumptions and Limitations

- Additional inputs not provided by the user were assumed by software per IRC/IS code defaults or practical consideration.
- Grillage analysis was performed using OSPGrillage assuming simply supported I-girders.
- Substructure and foundation design are not included in this report.
- Splice connections and bearings are not designed in this version.

1 Project Information

This section records all project metadata as entered by the designer.

1.1 Project and Design Team Details

Project Name	OsdagBridge Enhanced Report
Project Location	Mumbai
Designer	OsdagBridge Team
Reviewer	
Organization	IIT Bombay FOSSEE
Client	IIT Bombay FOSSEE
Software Version	OsdagBridge

1.2 Applicable Codes and Standards

- Indian Roads Congress (IRC) 5: General Features of Design
- Indian Roads Congress (IRC) 6: Loads and Load Combinations
- Indian Roads Congress (IRC) 22: Composite Construction (Limit State Design)
- Indian Roads Congress (IRC) 24: Steel Road Bridges (Limit State Method)
- Indian Roads Congress (IRC) 112: Concrete Road Bridges (deck design)
- Indian Roads Congress Special Publication (IRC SP) 114: Seismic Design of Road Bridges
- Indian Standard (IS) 800: General Construction in Steel
- Indian Standard (IS) 2062: Hot Rolled Structural Steel Specification
- Indian Standard (IS) 6006: Steel Bearings

2 Input Parameters

This section documents all inputs provided to OsdagBridge. User-provided inputs are clearly distinguished from software-assumed defaults. Where the user did not supply a value, the software has applied the IRC/IS code default or an empirical guideline; these are annotated with an asterisk (*).

2.1 Basic Inputs (User-Defined)

Note: These inputs are mandatory and were provided by the user.

Table 2.1: Project Location

parameter	value
Project Location	Mumbai
Latitude / Longitude	,
Seismic Zone (IRC 6)	
Basic Wind Speed (IRC 6)	
Shade Temp. Max / Min (IRC 6)	°C / °C

Table 2.2: Bridge Geometry

parameter	value
Type of Structure	Highway Bridge
Span (m)	24.0 m
Carriageway Width (m)	7.5 m
Include Median	
Footpath	
Skew Angle (degrees)	(IRC 24 Cl. 504.8 limit: $\pm 15^\circ$)

Table 2.3: Material Selection

parameter	value
Girder Steel Grade (IS 2062)	E 250 (Fe 410 W) B
Cross Bracing Steel Grade	E 250 (Fe 410 W) B
End Diaphragm Steel Grade	E 250 (Fe 410 W) B
Concrete Deck Grade (IRC 22)	M 40

* Software default value

2.2 Additional Inputs

Where the user has modified additional inputs, those values are reported here. Where no modification was made, the software default is shown.

Table 2.4: Typical Section Details

parameter	value
Overall Bridge Width (m)	8.4
No. of Girders	4
Girder Spacing (m)	2.1 m
Deck Overhang Width (m)	1.05 m
Deck Thickness (mm)	250.0 mm
Footpath Width (m)	0.0 m (IRC 5 Cl. 104.3.6 min: 1.5 m)
No. of Traffic Lanes	(per IRC 5 Cl. 104.3.1)

Table 2.5: Components Details

parameter	value
Crash Barrier Type	IRC 5 - RCC Crash Barrier
Crash Barrier Load (kN/m)	7.557
Railing Type	IRC 5 - RCC Railing
Railing Load (kN/m)	1.4715
Wearing Course Material	Concrete
Wearing Course Thickness (mm)	50.0 mm

Table 2.6: Girder General Information

Girder	Member ID	Design Mode	Girder Type	Girder Symmetry
G1	G1M1	Optimized	Welded	Girder Symmetric
G2	G2M1	Optimized	Welded	Girder Symmetric
G3	G3M1	Optimized	Welded	Girder Symmetric
G4	G4M1	Optimized	Welded	Girder Symmetric

Table 2.7: Girder Section Dimensions

Girder	Total Depth, D (mm)	Web, t_w (mm)	Top Flange (b_{tf} , t_{tf}) mm	Bottom Flange (b_{bf} , t_{bf}) mm
G1	1.34 mm	0.008 mm	0.41 mm, 0.018 mm	0.41 mm, 0.018 mm
G2	1.34 mm	0.008 mm	0.41 mm, 0.018 mm	0.41 mm, 0.018 mm
G3	1.34 mm	0.008 mm	0.41 mm, 0.018 mm	0.41 mm, 0.018 mm
G4	1.34 mm	0.008 mm	0.41 mm, 0.018 mm	0.41 mm, 0.018 mm

Table 2.8: Girder Restraint and Stiffener Details

Girder	Torsional / Warping Restraint	Web Philosophy	Intermediate Stiffeners	Longitudinal Stiffeners	Bearing Stiffener
G1	Fully Restrained, Both Flanges Restrained	Thin Web with ITS	Yes; Spacing: 1955 mm; Thickness: 10 mm	No	No.: 4; Spacing: 100 mm; Thickness: 10 mm
G2	Fully Restrained, Both Flanges Restrained	Thin Web with ITS	Yes; Spacing: 1955 mm; Thickness: 10 mm	No	No.: 4; Spacing: 100 mm; Thickness: 10 mm
G3	Fully Restrained, Both Flanges Restrained	Thin Web with ITS	Yes; Spacing: 1955 mm; Thickness: 10 mm	No	No.: 4; Spacing: 100 mm; Thickness: 10 mm
G4	Fully Restrained, Both Flanges Restrained	Thin Web with ITS	Yes; Spacing: 1955 mm; Thickness: 10 mm	No	No.: 4; Spacing: 100 mm; Thickness: 10 mm

Table 2.9: Member Properties: Cross Bracing Details

Location	Member IDs	Type of Bracing	Bracing Section	Spacing (m)
G1 to G2	B1M1 to B1M1	X-Bracing	IS 100 x 100 x 10	12.0 m
G2 to G3	B2M1 to B2M1	X-Bracing	IS 100 x 100 x 10	12.0 m
G3 to G4	B3M1 to B3M1	X-Bracing	IS 100 x 100 x 10	12.0 m

Table 2.10: Member Properties: End Diaphragm Details

Location	Member IDs	Type of Bracing	Bracing Section
G1 to G2	E1M1 to E1M2	Cross Bracing	IS 100 x 100 x 10
G2 to G3	E2M1 to E2M2	Cross Bracing	IS 100 x 100 x 10
G3 to G4	E3M1 to E3M2	Cross Bracing	IS 100 x 100 x 10

Table 2.11: Shear Connector Details

parameter	value
Stud Diameter (mm)	20.0 mm
Stud Height (mm)	100.0 mm
Stud f_y (MPa)	385.0 MPa
Stud f_u (MPa)	495.0 MPa
No. of Studs per Section	2

Note: All values are per IRC 22 Table 1 unless user-modified.

Table 2.12: Partial Safety Factors

parameter	value
γ_{M0} (Yielding / Buckling)	1.1
γ_{M1} (Ultimate Stress)	1.25
γ_C (Concrete, Basic)	1.5
γ_s (Reinforcement)	1.15
γ_v (Shear Connectors)	1.25
γ_{fft} (Fatigue Load)	1.0
γ_{Mft} (Fatigue Strength)	1.35

3 Loads and Load Combinations

This section summarizes all environmental, gravity, vehicle live loads, footway live loads, and design load combinations applied to the bridge per IRC 6:2017.

Table 3.1: Dead Load — Self Weight

Parameter	Value
Steel Self-Weight Applied	
Concrete Deck Weight	
Self-Weight Factor	1.0

Table 3.2: Dead Load for Surfacing (DW)

Parameter	Value
Wearing Course Load	Concrete x 50.0
Additional SIDL (Crash Barrier)	7.557 kN/m per barrier
Railing Load	1.4715 kN/m

Table 3.3: Vehicle Live Loads (LL) — IRC:6-2017

Vehicle Class	Max Axle/Track (kN)	Impact Factor	Braking Force (kN)	Code Reference
Class A	114.0	1.240	1066295.99	IRC:6-2017 Cl. 204.1
Class 70R (Wheeled)	170.0	1.100	1066295.99	IRC:6-2017 Cl. 204.2
Class 70R (Tracked)	350.0 (Track)	1.100	1066295.99	IRC:6-2017 Cl. 204.2
Class AA (Wheeled)	200.0	1.100	1066295.99	IRC:6-2017 Cl. 204.3
Class AA (Tracked)	350.0 (Track)	1.100	1066295.99	IRC:6-2017 Cl. 204.3
Class SV	400.0	1.000	1066295.99	IRC:6-2017 Annex A

Vehicle Live Loads (LL) — IRC:6-2017 — Continued

Vehicle Class	Max Axle/Track (kN)	Impact Factor	Braking Force (kN)	Code Reference
Class 70R (Bogie)	200.0	1.100	1066295.99	IRC:6-2017 Cl. 204.2
Class Fatigue	114.0	1.000	N/A	IRC:6-2017 Cl. 204.4

Table 3.4: Footway Pedestrian Live Loads

Parameter	Value	Unit	Code Reference
Footpath Pressure Intensity	4.905	kN/m ²	IRC:6-2017 Cl. 206.1 (Auto)
Effective Footpath Width	0.00	m	IRC:6-2017 Cl. 206.1
Total Footpath Linear Load	0.000	kN/m	Computed (Intensity × Width)

Table 3.5: Wind Load (WL) — per IRC 6

Parameter	Value
Basic Wind Speed, V _b	[from Project Location]
Terrain Type	Plain Terrain
Average Exposed Height, H (m)	10 m
Hourly Mean Wind Speed, V _z	
Hourly Wind Pressure, P _z	
Transverse Wind Force	
Longitudinal Wind Force	
Vertical Wind Force	

Table 3.6: Earthquake Load (EL) — per IRC 6

Parameter	Value
Seismic Zone	[from Project Location]
Zone Factor, Z	
Importance Factor, I	1.0
Type of Soil	Type I – Rocky or Hard
Sa/g	
Horizontal Seismic Coefficient, Ah	
Vertical Seismic Coefficient, Av	

Table 3.7: Temperature Load (TL) — per IRC 6

Parameter	Value
Maximum Shade Temperature	°C
Minimum Shade Temperature	°C
Effective Bridge Temp. Range	to °C
Temperature Rise / Fall for Design	+ °C / – °C

Load Combinations — Continued

Combination ID	Load Cases
----------------	------------

Table 3.8: Load Combinations

Combination ID	Load Cases
ULS-01	DL(1.35/1.00) + SIDL(1.75/1.00) + LL(1.50) + WL(0.90) + TL(0.90)
ULS-02	DL(1.35/1.00) + SIDL(1.75/1.00) + LL(1.15) + WL(1.50) + TL(0.90)
ULS-03	DL(1.35/1.00) + SIDL(1.75/1.00) + LL(1.15) + WL(0.90) + TL(1.50)
ULS-04	DL(1.00/1.00) + SIDL(1.00/1.00) + LL(0.75) + TL(0.50) + VC(1.00)
ULS-05	DL(1.00/1.00) + SIDL(1.00/1.00) + LL(0.75) + TL(0.50) + BI(1.00)
ULS-06	DL(1.00/1.00) + SIDL(1.00/1.00) + LL(0.75) + TL(0.50) + FB(1.00)
ULS-07	DL(1.35/1.00) + SIDL(1.75/1.00) + LL(0.20) + TL(0.50) + EQ(1.50)
ULS-08	DL(1.35/1.00) + SIDL(1.75/1.00) + LL(0.20) + TL(0.50) + EQ(0.75)
SLS-01	DL(1.00) + SIDL(1.20/1.00) + LL(1.00) + WL(0.60) + TL(0.60)
SLS-02	DL(1.00) + SIDL(1.20/1.00) + LL(0.75) + WL(1.00) + TL(0.60)
SLS-03	DL(1.00) + SIDL(1.20/1.00) + LL(0.75) + WL(0.60) + TL(1.00)
SLS-04	DL(1.00) + SIDL(1.20/1.00) + LL(0.75) + WL(0.50) + TL(0.50)
SLS-05	DL(1.00) + SIDL(1.20/1.00) + LL(0.20) + WL(0.60) + TL(0.50)
SLS-06	DL(1.00) + SIDL(1.20/1.00) + LL(0.20) + WL(0.50) + TL(0.60)
SLS-07	DL(1.00) + SIDL(1.20/1.00) + LL(0.00) + WL(0.00) + TL(0.50)

Note: All IRC 6 load combinations are auto-generated by OsdagBridge. User-defined custom combinations, if any, are appended.

4 Analysis Results

A grillage model was used for structural analysis. The deck is idealized as a grid of elastic beam elements — longitudinal members represent the composite steel girders with effective slab, and transverse members represent the slab or cross frames. This section summarizes the critical output from that analysis.

Table 4.1: Summary of Maximum Demands

Load	Bending Moment			Shear Force			Reaction at Supports	
	Max (kNm)	Girder	Loc. (m)	Max (kN)	Girder	Loc. (m)	Left	Right
WL Uplift	70.967	G1	12.000	14.569	G1	22.500	50.863	-50.863
ACCIDENTAL_3: 1.0DL + 1.0DW + 0.75LL	1521.324	G2	12.000	303.895	G1	0.000	-1048.617	888.606
ACCIDENTAL_1: 1.0DL + 1.0DW + 0.75LL	1521.324	G2	12.000	303.895	G1	0.000	-1048.617	888.606
SLS_FREQUENT_6: 1.0DL + 1.0DW + 0.2LL + 0.5WL	1450.556	G2	12.000	289.326	G1	0.000	-997.754	837.743
SLS_FREQUENT_4: 1.0DL + 1.0DW + 0.75LL + 0.5WL	1450.556	G2	12.000	289.326	G1	0.000	-997.754	837.743
1.0 DW	122.909	G1	12.000	25.781	G1	0.000	-89.244	89.244
SLS_RARE_3: 1.0DL + 1.2DW + 0.75LL + 0.6WL	1450.556	G2	12.000	289.326	G1	0.000	-997.754	837.743
EQ_Z	0.000	—	—	0.000	—	—	0.000	-0.000
1.5 EQ (c)	118.309	G1	12.000	24.287	G1	22.500	84.793	-84.793
SEISMIC_4: 1.0DL + 1.0DW + 0.2LL + 0.75EL	1442.673	G2	12.000	287.703	G1	0.000	-992.089	832.077
SLS_FREQUENT_2: 1.0DL + 1.2DW + 0.2LL + 0.6WL	1450.556	G2	12.000	289.326	G1	0.000	-997.754	837.743
SLS_FREQUENT_5: 1.0DL + 1.0DW + 0.2LL + 0.6WL	1450.556	G2	12.000	289.326	G1	0.000	-997.754	837.743

Load	Bending Moment			Shear Force			Reaction at Supports	
	Max (kNm)	Girder	Loc. (m)	Max (kN)	Girder	Loc. (m)	Left	Right
SEISMIC_1: 1.35DL + 1.75DW + 0.2LL + 1.5EL	1442.673	G2	12.000	287.703	G1	0.000	-992.089	832.077
DD	640.149	G1	12.000	134.275	G1	22.500	-464.811	464.811
Envelope SLS	1450.556	G2	12.000	289.326	G1	0.000	-997.754	837.743
BASIC_1: 1.35DL + 1.75DW + 1.5LL + 0.9WL	1450.556	G2	12.000	289.326	G1	0.000	-997.754	837.743
BASIC_4: 1.0DL + 1.0DW + 1.5LL + 0.9WL	1450.556	G2	12.000	289.326	G1	0.000	-997.754	837.743
1.5 EQ (b)	35.493	G1	12.000	7.286	G1	0.000	25.438	-25.438
SLS_QP_2: 1.0DL + 1.0DW	847.995	G1	12.000	177.372	G1	22.500	-615.029	615.029
EQ_Y	78.872	G1	12.000	16.191	G1	22.500	56.529	-56.529
SW	84.937	G1	12.000	17.316	G1	22.500	-60.975	60.975
1.5 EQ (a)	35.493	G1	12.000	7.286	G1	0.000	25.438	-25.438
EQ_X	0.000	—	—	0.000	—	—	0.000	-0.000
1.0 DL + 1.0 LL	1398.756	G2	12.000	278.114	G1	0.000	-959.374	799.362
BASIC_5: 1.0DL + 1.0DW + 1.15LL + 1.5WL	1450.556	G2	12.000	289.326	G1	0.000	-997.754	837.743
SLS_FREQUENT_1: 1.0DL + 1.2DW + 0.75LL + 0.5WL	1450.556	G2	12.000	289.326	G1	0.000	-997.754	837.743
1.0 DL	725.086	G1	12.000	151.591	G1	22.500	-525.785	525.785
SEISMIC_2: 1.35DL + 1.75DW + 0.2LL + 0.75EL	1442.673	G2	12.000	287.703	G1	0.000	-992.089	832.077
Crash barrier load	103.845	G2	12.000	22.907	G1	22.500	-68.082	72.673
SLS_RARE_1: 1.0DL + 1.2DW + 1.0LL + 0.6WL	1450.556	G2	12.000	289.326	G1	0.000	-997.754	837.743

Load	Bending Moment			Shear Force			Reaction at Supports	
	Max (kNm)	Girder	Loc. (m)	Max (kN)	Girder	Loc. (m)	Left	Right
SLS.RARE.2: 1.0DL + 1.2DW + 0.75LL + 1.0WL	1450.556	G2	12.000	289.326	G1	0.000	-997.754	837.743
SEISMIC.3: 1.0DL + 1.0DW + 0.2LL + 1.5EL	1442.673	G2	12.000	287.703	G1	0.000	-992.089	832.077
SLS.RARE.4: 1.0DL + 1.0DW + 1.0LL + 0.6WL	1450.556	G2	12.000	289.326	G1	0.000	-997.754	837.743
SLS.QP.1: 1.0DL + 1.2DW	847.995	G1	12.000	177.372	G1	0.000	-615.029	615.029
WL Longitudinal	0.000	—	—	0.000	—	—	-0.000	0.000
SLS.FREQUENT.3: 1.0DL + 1.2DW + 0.2LL + 0.5WL	1450.556	G2	12.000	289.326	G1	0.000	-997.754	837.743
ACCIDENTAL.2: 1.0DL + 1.0DW + 0.75LL	1521.324	G2	12.000	303.895	G1	0.000	-1048.617	888.606
Envelope ULS	1521.324	G2	12.000	303.895	G1	0.000	-1048.617	888.606
SLS.RARE.6: 1.0DL + 1.0DW + 0.75LL + 0.6WL	1450.556	G2	12.000	289.326	G1	0.000	-997.754	837.743
1.0 WL	70.967	G1	12.000	14.569	G1	22.500	50.863	-50.863
SLS.RARE.5: 1.0DL + 1.0DW + 0.75LL + 1.0WL	1450.556	G2	12.000	289.326	G1	0.000	-997.754	837.743
BASIC.2: 1.35DL + 1.75DW + 1.15LL + 1.5WL	1450.556	G2	12.000	289.326	G1	0.000	-997.754	837.743
BASIC.6: 1.0DL + 1.0DW + 1.15LL + 0.9WL	1450.556	G2	12.000	289.326	G1	0.000	-997.754	837.743
WL Transverse	0.000	—	—	0.000	—	—	-0.000	0.000
BASIC.3: 1.35DL + 1.75DW + 1.15LL + 0.9WL	1450.556	G2	12.000	289.326	G1	0.000	-997.754	837.743

Table 4.2: Reactions at Supports

Load Case	Left Support (kN)	Right Support (kN)

Table 4.3: Deflection Summary (Live Load & Total Load)

parameter	value
Deflection due to Live Load, δ_{LL}	26.152 mm
Allowable Live Load Deflection (Δ_{allow})	L/800 = 30.0 mm
Live Load Deflection Check Status	PASS
Deflection due to Total Load, δ_{total}	55.883 mm
Allowable Total Deflection (Δ_{allow})	L/600 = 40.0 mm
Total Load Deflection Check Status	FAIL

[PLACEHOLDER: Bending Moment Envelope (Envelope ULS): Max/min BM along span. X-axis: distance from left support (m). Y-axis: Bending Moment (kN-m).]
[PLACEHOLDER: Vertical Deflection D_y (1.0 LL): Maximum deflection along span. Load Case: 1.0 LL, Combination: D_y . Nodes shown. Isometric view.]

[PLACEHOLDER: Vertical Deflection D_y (1.0 LL): Maximum deflection along span. Load Case: 1.0 LL, Combination: D_y . Nodes shown. Isometric view.]
--

5 Design Checks

This section presents all structural design checks performed by OsdagBridge. For each member, the demand from the governing load combination, the code-based capacity, and the utilization ratio are tabulated. All checks reference IS 800:2007 and IRC 22:2014 unless stated otherwise.

5.1 Plate Girder Design

Table 5.1: Girder Section Properties (Final Optimized / User-selected)

Girder	Property	Value
	Depth, D (mm)	1340.0
	Top Flange Width, b_f (mm)	410.0
	Bottom Flange Width, b_f (mm)	410.0
	Top Flange Thickness, t_f (mm)	18.0
	Bottom Flange Thickness, t_f (mm)	18.0
	Web Thickness, t_w (mm)	8.0
	Gross Area, A (cm ²)	251.92
	Moment of Inertia, I_z (cm ⁴)	792758.08
	Elastic Section Modulus, Z_{ez} (cm ³)	11832.21
	Plastic Section Modulus, Z_{pz} (cm ³)	13157.19
	Effective Slab Width, b_{eff} (mm)	2100.0
	Transformed Composite I_z (cm ⁴)	2000048.17
	Depth to Plastic Neutral Axis (mm)	190.7
G2	Depth, D (mm)	1340.0
	Top Flange Width, b_f (mm)	410.0
	Bottom Flange Width, b_f (mm)	410.0
	Top Flange Thickness, t_f (mm)	18.0
	Bottom Flange Thickness, t_f (mm)	18.0

	Web Thickness, t_w (mm)	8.0
	Gross Area, A (cm ²)	251.92
	Moment of Inertia, I_z (cm ⁴)	792758.08
	Elastic Section Modulus, Z_{ez} (cm ³)	11832.21
	Plastic Section Modulus, Z_{pz} (cm ³)	13157.19
	Effective Slab Width, b_{eff} (mm)	2100.0
	Transformed Composite I_z (cm ⁴)	2000048.17
	Depth to Plastic Neutral Axis (mm)	190.7
	Depth, D (mm)	1340.0
	Top Flange Width, b_f (mm)	410.0
	Bottom Flange Width, b_f (mm)	410.0
	Top Flange Thickness, t_f (mm)	18.0
	Bottom Flange Thickness, t_f (mm)	18.0
	Web Thickness, t_w (mm)	8.0
	Gross Area, A (cm ²)	251.92
	Moment of Inertia, I_z (cm ⁴)	792758.08
	Elastic Section Modulus, Z_{ez} (cm ³)	11832.21
	Plastic Section Modulus, Z_{pz} (cm ³)	13157.19
	Effective Slab Width, b_{eff} (mm)	2100.0
	Transformed Composite I_z (cm ⁴)	2000048.17
	Depth to Plastic Neutral Axis (mm)	190.7
	Depth, D (mm)	1340.0
	Top Flange Width, b_f (mm)	410.0
	Bottom Flange Width, b_f (mm)	410.0
	Top Flange Thickness, t_f (mm)	18.0
	Bottom Flange Thickness, t_f (mm)	18.0

	Web Thickness, t_w (mm)	8.0
	Gross Area, A (cm ²)	251.92
	Moment of Inertia, I_z (cm ⁴)	792758.08
	Elastic Section Modulus, Z_{ez} (cm ³)	11832.21
	Plastic Section Modulus, Z_{pz} (cm ³)	13157.19
	Effective Slab Width, b_{eff} (mm)	2100.0
	Transformed Composite I_z (cm ⁴)	2000048.17
	Depth to Plastic Neutral Axis (mm)	190.7

Table 5.2: Girder Section Classification

	Element	Slenderness Ratio	Class Limit	Classification
	Top Flange	11.17	13.6	Semi-Compact
	Web	163.0	126.0	Slender
	Overall Section	—	—	Slender
	Top Flange	11.17	13.6	Semi-Compact
	Web	163.0	126.0	Slender
	Overall Section	—	—	Slender
	Top Flange	11.17	13.6	Semi-Compact
	Web	163.0	126.0	Slender
	Overall Section	—	—	Slender
	Top Flange	11.17	13.6	Semi-Compact
	Web	163.0	126.0	Slender
	Overall Section	—	—	Slender

Note: IS 800:2007 Table 2

Table 5.3: Moment Capacity Check

	Parameter	Formula	Value	Status
G1	Applied Moment, M_u	Governing LC (ULS)	1521.32 kN-m	—
	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	4830.57 kN-m	—
	Utilization Ratio, M_u/M_d	M_u/M_d	0.31	PASS
G2	Applied Moment, M_u	Governing LC (ULS)	1521.32 kN-m	—
	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	4830.57 kN-m	—
	Utilization Ratio, M_u/M_d	M_u/M_d	0.31	PASS
G3	Applied Moment, M_u	Governing LC (ULS)	1521.32 kN-m	—
	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	4830.57 kN-m	—
	Utilization Ratio, M_u/M_d	M_u/M_d	0.31	PASS
G4	Applied Moment, M_u	Governing LC (ULS)	1521.32 kN-m	—
	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	4830.57 kN-m	—
	Utilization Ratio, M_u/M_d	M_u/M_d	0.31	PASS

Note: IRC 22 Cl. 603.3.1, IS 800 Cl. 8.2.1

Table 5.4: Shear Capacity Check

	Parameter	Formula	Value	Status
	Applied Shear, V_u	Governing LC (ULS)	225.34 kN	—
	Shear Area, A_v	$d_w \times t_w$	10432.0 mm ²	—
	Panel Aspect Ratio, c/d	—	1.499	—
	Shear Buckling Coefficient, k_v	IS 800 Cl. 8.4.2.2	7.13	—
	Web Slenderness, λ_w	$\sqrt{f_{yw}/(\sqrt{3} \tau_{cr})}$	1.725	—
	Design Shear Stress, τ_b	IRC 22 Cl. 603.3.3.2	48.51 MPa	—
	Shear Buckling Resistance, V_{cr}	$A_v \times \tau_b$	460.01 kN	—
	Utilization Ratio, V_u/V_d	V_u/V_d	0.49	PASS
	Applied Shear, V_u	Governing LC (ULS)	225.34 kN	—
	Shear Area, A_v	$d_w \times t_w$	10432.0 mm ²	—
	Panel Aspect Ratio, c/d	—	1.499	—
	Shear Buckling Coefficient, k_v	IS 800 Cl. 8.4.2.2	7.13	—
	Web Slenderness, λ_w	$\sqrt{f_{yw}/(\sqrt{3} \tau_{cr})}$	1.725	—
	Design Shear Stress, τ_b	IRC 22 Cl. 603.3.3.2	48.51 MPa	—
	Shear Buckling Resistance, V_{cr}	$A_v \times \tau_b$	460.01 kN	—
	Utilization Ratio, V_u/V_d	V_u/V_d	0.49	PASS
	Applied Shear, V_u	Governing LC (ULS)	225.34 kN	—
	Shear Area, A_v	$d_w \times t_w$	10432.0 mm ²	—

	Panel Aspect Ratio, c/d	—	1.499	—
	Shear Buckling Coefficient, k_v	IS 800 Cl. 8.4.2.2	7.13	—
	Web Slenderness, λ_w	$\sqrt{f_{yw}/(\sqrt{3}\tau_{cr})}$	1.725	—
	Design Shear Stress, τ_b	IRC 22 Cl. 603.3.3.2	48.51 MPa	—
	Shear Buckling Resistance, V_{cr}	$A_v \times \tau_b$	460.01 kN	—
	Utilization Ratio, V_u/V_d	V_u/V_d	0.49	PASS
	Applied Shear, V_u	Governing LC (ULS)	225.34 kN	—
	Shear Area, A_v	$d_w \times t_w$	10432.0 mm ²	—
	Panel Aspect Ratio, c/d	—	1.499	—
	Shear Buckling Coefficient, k_v	IS 800 Cl. 8.4.2.2	7.13	—
	Web Slenderness, λ_w	$\sqrt{f_{yw}/(\sqrt{3}\tau_{cr})}$	1.725	—
	Design Shear Stress, τ_b	IRC 22 Cl. 603.3.3.2	48.51 MPa	—
	Shear Buckling Resistance, V_{cr}	$A_v \times \tau_b$	460.01 kN	—
	Utilization Ratio, V_u/V_d	V_u/V_d	0.49	PASS

Note: IS 800 Cl. 8.4, IRC 22 Cl. 603.3.3.2

Table 5.5: Interaction Checks (M-V and M-N)

	Check	Condition	Value	Status
~1	High Shear Condition?	$V_u > 0.6 V_d$	No	—
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	4830.57 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.32	PASS
	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.31 = 0.318$	0.318	PASS
~2	High Shear Condition?	$V_u > 0.6 V_d$	No	—
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	4830.57 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.32	PASS
	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.31 = 0.318$	0.318	PASS
~3	High Shear Condition?	$V_u > 0.6 V_d$	No	—
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	4830.57 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.32	PASS
	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.31 = 0.318$	0.318	PASS
~4	High Shear Condition?	$V_u > 0.6 V_d$	No	—
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	4830.57 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.32	PASS
	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.31 = 0.318$	0.318	PASS
~5	High Shear Condition?	$V_u > 0.6 V_d$	No	—
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	4830.57 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.32	PASS
	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.31 = 0.318$	0.318	PASS

	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.31 = 0.318$	0.318	PASS
--	--	-----------------------	-------	------

Note: IRC 22 Cl. 603.3.3.3

Table 5.6: Lateral Torsional Buckling Check – Construction Stage

	Parameter	Formula	Value	Status
	Elastic Critical Moment, M_{cr}	IRC 22 Cl. 603.3.3.1	30084.69 kN-m	—
	Non-dim. Slenderness, $\bar{\lambda}_{LT}$	$\sqrt{M_p/M_{cr}}$	0.314	—
	LTB Reduction Factor, χ_{LT}	IS 800 Cl. 8.2.2	1.0	—
	LTB Resistance, M_b	$\chi_{LT} M_p/\gamma_{m0}$	2990.27 kN-m	—
	$M_u \leq M_b$	M_u/M_b	0.24	PASS
	Elastic Critical Moment, M_{cr}	IRC 22 Cl. 603.3.3.1	30084.69 kN-m	—
	Non-dim. Slenderness, $\bar{\lambda}_{LT}$	$\sqrt{M_p/M_{cr}}$	0.314	—
	LTB Reduction Factor, χ_{LT}	IS 800 Cl. 8.2.2	1.0	—
	LTB Resistance, M_b	$\chi_{LT} M_p/\gamma_{m0}$	2990.27 kN-m	—
	$M_u \leq M_b$	M_u/M_b	0.24	PASS
	Elastic Critical Moment, M_{cr}	IRC 22 Cl. 603.3.3.1	30084.69 kN-m	—
	Non-dim. Slenderness, $\bar{\lambda}_{LT}$	$\sqrt{M_p/M_{cr}}$	0.314	—
	LTB Reduction Factor, χ_{LT}	IS 800 Cl. 8.2.2	1.0	—
	LTB Resistance, M_b	$\chi_{LT} M_p/\gamma_{m0}$	2990.27 kN-m	—
	$M_u \leq M_b$	M_u/M_b	0.24	PASS

Elastic Critical Moment, M_{cr}	IRC 22 Cl. 603.3.3.1	30084.69 kN-m	—
Non-dim. Slenderness, $\bar{\lambda}_{LT}$	$\sqrt{M_p/M_{cr}}$	0.314	—
LTB Reduction Factor, χ_{LT}	IS 800 Cl. 8.2.2	1.0	—
LTB Resistance, M_b	$\chi_{LT} M_p / \gamma_{m0}$	2990.27 kN-m	—
$M_u \leq M_b$	M_u / M_b	0.24	PASS

Note: IRC 22 Cl. 603.3.3.1, IS 800 Cl. 8.2.2

Table 5.7: Stiffener Design Summary

Shear Buckling Design Method	post_critical
Intermediate Stiffener Thickness (mm)	14.4
Intermediate Stiffener Spacing (mm)	
End Panel Stiffener Thickness (mm)	1.7
No. of End Panel Stiffeners	4
Longitudinal Stiffeners	None
Shear Buckling Design Method	post_critical
Intermediate Stiffener Thickness (mm)	14.4
Intermediate Stiffener Spacing (mm)	
End Panel Stiffener Thickness (mm)	1.7
No. of End Panel Stiffeners	4
Longitudinal Stiffeners	None
Shear Buckling Design Method	post_critical
Intermediate Stiffener Thickness (mm)	14.4

	Intermediate Stiffener Spacing (mm)	1.7
	End Panel Stiffener Thickness (mm)	
	No. of End Panel Stiffeners	4
	Longitudinal Stiffeners	None
	Shear Buckling Design Method	post_critical
	Intermediate Stiffener Thickness (mm)	14.4
	Intermediate Stiffener Spacing (mm)	
	End Panel Stiffener Thickness (mm)	1.7
	No. of End Panel Stiffeners	4
	Longitudinal Stiffeners	None

Table 5.8: End Panel Stiffener Checks

	Check	Required	Provided	Status
~	Web Buckling Resistance	303.89 kN	134083.23 kN	PASS
	Local Crushing Resistance	303.89 kN	352.98 kN	PASS
	Bearing Capacity	303.89 kN	1818.18 kN	PASS
	Column Buckling Resistance	303.89 kN	1490.91 kN	PASS
~	Web Buckling Resistance	303.89 kN	134083.23 kN	PASS
	Local Crushing Resistance	303.89 kN	352.98 kN	PASS
	Bearing Capacity	303.89 kN	1818.18 kN	PASS
	Column Buckling Resistance	303.89 kN	1490.91 kN	PASS
~	Web Buckling Resistance	303.89 kN	134083.23 kN	PASS
	Local Crushing Resistance	303.89 kN	352.98 kN	PASS
	Bearing Capacity	303.89 kN	1818.18 kN	PASS
	Column Buckling Resistance	303.89 kN	1490.91 kN	PASS
~	Web Buckling Resistance	303.89 kN	134083.23 kN	PASS
	Local Crushing Resistance	303.89 kN	352.98 kN	PASS
	Bearing Capacity	303.89 kN	1818.18 kN	PASS
	Column Buckling Resistance	303.89 kN	1490.91 kN	PASS

Note: IS 800 Cl. 8.4.2.2

Table 5.9: Serviceability – Deflection Checks

	Check	Allowable	Actual	Status
G1	Live Load Deflection, δ_{LL} (mm)	$L/800 = 30.0$ mm	25.780	PASS
	Total Load Deflection, δ_{total} (mm)	$L/600 = 40.0$ mm	55.404	FAIL
G2	Live Load Deflection, δ_{LL} (mm)	$L/800 = 30.0$ mm	26.152	PASS
	Total Load Deflection, δ_{total} (mm)	$L/600 = 40.0$ mm	55.883	FAIL
G3	Live Load Deflection, δ_{LL} (mm)	$L/800 = 30.0$ mm	26.152	PASS
	Total Load Deflection, δ_{total} (mm)	$L/600 = 40.0$ mm	55.883	FAIL
G4	Live Load Deflection, δ_{LL} (mm)	$L/800 = 30.0$ mm	25.780	PASS
	Total Load Deflection, δ_{total} (mm)	$L/600 = 40.0$ mm	55.404	FAIL

Note: IRC 22 Cl. 604.3.2

Table 5.10: Serviceability – Maximum Stress Limitation

	Element	Allowable Stress	Actual Stress	Status
G1	Structural Steel ($0.9 f_y$)	225.00 MPa	97.71 MPa	PASS
G2	Structural Steel ($0.9 f_y$)	225.00 MPa	97.71 MPa	PASS
G3	Structural Steel ($0.9 f_y$)	225.00 MPa	97.71 MPa	PASS
G4	Structural Steel ($0.9 f_y$)	225.00 MPa	97.71 MPa	PASS

Table 5.11: Serviceability – Fatigue Assessment

	Stress Range, $\Delta\sigma$ (MPa)	Fatigue Limit, f_{fd} (MPa)	Utilization Ratio	Status
G1	179.54 MPa	92.49 MPa	1.94	FAIL
G2	180.91 MPa	92.49 MPa	1.96	FAIL
G3	181.98 MPa	92.49 MPa	1.97	FAIL
G4	181.98 MPa	92.49 MPa	1.97	FAIL

Note: IRC 22 Cl. 605 — governing of normal and shear fatigue (worst by DCR). Capacity reduction factor μ_r applied where plate thickness ≥ 25 mm.

Table 5.12: Girder Design Summary (DCR / Utilization Ratio)

Girder	Controlling LC / Combination	Controlling Check	Demand	Capacity	UR	Status
G1	SLS.FREQUENT_1: 1.0DL + 1.2DW + 0.75LL + 0.5WL	Fatigue Normal Stress	179.54 MPa	92.49 MPa	1.941	FAIL
G2	SLS.FREQUENT_1: 1.0DL + 1.2DW + 0.75LL + 0.5WL	Fatigue Normal Stress	180.91 MPa	92.49 MPa	1.956	FAIL
G3	SLS.FREQUENT_1: 1.0DL + 1.2DW + 0.75LL + 0.5WL	Fatigue Normal Stress	181.98 MPa	92.49 MPa	1.968	FAIL
G4	SLS.FREQUENT_1: 1.0DL + 1.2DW + 0.75LL + 0.5WL	Fatigue Normal Stress	181.98 MPa	92.49 MPa	1.968	FAIL

Note: UR = Demand / Capacity. A value ≤ 1.0 indicates a passing check. The controlling check is the criterion with the highest UR for each girder, with the real load case/combination that drives it.

Table 5.13: Shear Connector Capacity

Parameter	Formula	Value	Reference
Design Resistance, Q_u	$Q_u = \min(Q_{u,s}, Q_{u,c})$ $Q_{u,s} = \frac{0.8 f_u (\pi d^2 / 4)}{\gamma_v}$ $Q_{u,c} = \frac{0.29 \alpha d^2 \sqrt{f_{ck} E_{cm}}}{\gamma_v}$	95.36 kN	IRC 22 Cl. 606.3.1 (Eq. 6.1)
Fatigue Shear Resistance, Q_r	IRC 22 Table 8 ($\phi d, N_{sc}$)	25.00 kN	IRC 22 Cl. 606.3.2 (Table 8)

Table 5.14: Shear Connector Spacing

Criterion	Governing Spacing	Actual Spacing Provided	Status
ULS Shear (SL1)	2685.5 mm	396.8 mm	PASS
Full Composite (SL2)	396.8 mm	396.8 mm	PASS
SLS Fatigue (SR)	703.5 mm	396.8 mm	PASS
Max Spacing Limit (IRC 22)	400.0 mm	396.8 mm	PASS

Note: IRC 22 Cl. 606.4, 606.9. Governing spacing = $\min(S_{L1}, S_{L2}, S_R)$.

Table 5.15: Transverse Shear and Detailing Checks

Check	Value	Status
Longitudinal Shear per unit length, V_L	71.02 kN/m	—
Transverse Shear Capacity of Slab, V_{Rd}	999.28 kN/m	—
Transverse Shear Check	$V_L/V_{Rd} = 0.07$	PASS
Min. Transverse Reinforcement, $A_{st,min}$	Required $0.35 \text{ cm}^2/\text{m}$, Provided $12.26 \text{ cm}^2/\text{m}$	PASS
Stud Diameter $\leq 2t_f$	$d = 20.0 \text{ mm} \leq 2t_f = 36.0 \text{ mm}$	PASS
Stud Edge Distance	Provided 145.0 mm (req. $\geq 25.0 \text{ mm}$)	PASS

Note: IRC 22 Cl. 606.6, 606.10.

5.2 Deck Slab Design

The reinforced concrete deck slab is designed per IRC 112:2011 (flexure, shear, crack width) and IRC 22:2014 (composite construction). Wheel loads are distributed using Pigeaud's method. The deck is checked for flexure in the transverse and longitudinal directions, punching shear, one-way (beam) shear, crack width, and reinforcement detailing.

Table 5.16: Deck Slab — Loading and Geometry

Effective Span of Deck Slab, l_{eff}	2100 mm (girder spacing, c/c)
Deck Thickness, t_s	250.0 mm
Clear Cover (IRC 112 Cl. 15.2)	Top 50 / Bottom 50 mm
Concrete Grade (IRC 112 Cl. 6.4)	M 40 ($f_{ck} = 40.0$ MPa, $f_{ctm} = 3.5$ MPa)
Reinforcement Grade (IRC 112 Cl. 6.2)	Fe 500 ($f_y = 500$ MPa)
Dead Load per Unit Area, w_{DL}	6.13 kN/m ² (slab self-weight)
IRC 6 Wheel Load (Class A / 70R)	83.4 kN
Tyre Contact Width (IRC 6 Annex A)	300 mm (transverse)
Impact Factor (IRC 6 Cl. 208.2)	1.100
Governing Live Load Case	Class70R(W)

Table 5.17: Deck Slab — Flexure Check: Interior Panel (Pigeaud's Method)

Location	Parameter	Formula / Reference	Value	Status
	Transverse BM (DL), $M_{T,DL}$	$w_{DL} l_{eff}^2/10$	2.70 kN-m/m	—
	Transverse BM (LL), $M_{T,LL}$	Effective width (IRC 112 B3.1)	25.63 kN-m/m	—
	Total Design BM, $M_{u,sag}$	1.35 DL + 1.50 LL	45.94 kN-m/m	—
	Effective depth, d	$t_s - c_{nom} - \phi/2$	194.0 mm	—
	Moment Capacity, M_{Rd}	IRC 112 Cl. 12.2	52.23 kN-m/m	PASS
At Support ($M_{u,hog}$)	Total Design BM, $M_{u,hog}$	1.35 DL + 1.50 LL (at support)	34.46 kN-m/m	—
	Required Top Steel, $A_{st,top}$	$M_u/(0.87 f_y d)$	569 mm ² /m	—
	Moment Capacity, M_{Rd}	IRC 112 Cl. 12.2	47.09 kN-m/m	PASS

Note: IRC 112 Cl. 12.2. Distribution (longitudinal) reinforcement designed for 20% of main steel moment (IRC 21 Cl. 305.18).

Table 5.18: Deck Slab — Cantilever Overhang Flexure Check

Parameter	Formula	Value	Status
Overhang Length, l_{oh}	—	1.05 m	—
Crash Barrier Load Moment	IRC 6 Cl. 206.4	7.50 kN-m/m	—
Dead Load Moment	$w_{DL} l_{oh}^2/2 + \text{railing}$	4.92 kN-m/m	—
Live Load Moment (eccentric wheel)	Wheel load $\times$ arm	50.71 kN-m/m	—
Total Hogging Moment, $M_{u,oh}$	1.35 DL + 1.50 (LL + CB)	101.57 kN-m/m	—
Moment Capacity (top steel), $M_{Rd,oh}$	IRC 112 Cl. 12.2	108.27 kN-m/m	PASS

Note: IRC 6 Cl. 206.4 crash barrier loads applied at kerb face; IRC 112 Cl. 12.2 flexure.

Table 5.19: Deck Slab — Punching Shear Check (IRC 112 Cl. 10.4.6)

Parameter	Formula / Reference	Value	Status
Design Wheel Load (ULS), V_{Ed}	$\gamma_Q (1 + IF) P_w$	137.6 kN	—
Tyre Contact Area	$a \times b$ (IRC 6 Annex A)	300×150 mm	—
Loaded Area at mid-depth, b_0	$c_1 \times c_2$ (incl. WC dispersion)	400×250 mm	—
Control Perimeter, u_1	$2(c_1 + c_2) + 4\pi d$	3738 mm	—
Punching Shear Stress, v_{Ed}	$V_{Ed}/(u_1 d)$	0.190 MPa	—
Punching Resistance, $v_{Rd,c}$	IRC 112 Eq. 10.1	0.555 MPa	—
Punching Shear Check	$v_{Ed} \leq v_{Rd,c}$	0.34	PASS

Note: Punching shear reinforcement not typically required for deck slabs with $d \geq 200$ mm and adequate longitudinal reinforcement.

Table 5.20: Crack Width Check (Deck Slab)

Parameter	Value / Reference
Min. Reinforcement for Crack Control, $A_{s,min}$	353 mm ² /m [IRC 112 Cl. 16.5.1]
Provided Reinforcement (bottom)	$\phi 12$ @ 175 mm c/c (646 mm ² /m)
Max. Permissible Crack Width	0.30 mm
Calculated Crack Width, w_k (governing)	0.1977 mm
Crack Width Check	PASS

Table 5.21: One-Way (Beam) Shear Check (Deck Slab)

Parameter	Formula / Reference	Value	Status
Design Shear per unit width, V_{Ed}	$\gamma_{DL}V_{DL} + \gamma_{LL}(1+IF)V_{LL}$	89.24 kN/m	—
Effective depth, d	$t_s - c_{nom} - \phi/2$	194.0 mm	—
Size factor, k	$1 + \sqrt{200/d} \leq 2.0$	2.000	—
Long. reinforcement ratio, ρ_l	$A_{sl}/(b_w d) \leq 0.02$	0.0033	—
Shear resistance (no stirrups), $V_{Rd,c}$	$v_{Rd,c} b_w d$ (Cl. 10.3.2)	107.58 kN/m	—
One-Way Shear Check	$V_{Ed} \leq V_{Rd,c}$	0.83	PASS

Note: IRC 112 Cl. 10.3.2. Shear reinforcement not provided in deck slabs; capacity relies on concrete and main reinforcement.

Table 5.22: Reinforcement Detailing Summary (Deck Slab)

Parameter	Required / Limit	Provided	Status
Main Reinforcement — Bottom (Transverse)			
Required Area, $A_{st,req}$ (mm ² /m)	596 mm ² /m	646 mm ² /m	PASS
Bar Diameter × Spacing	$\phi \geq 10$ mm (IRC 112)	$\phi 12$ @ 175 mm c/c	—
Min. Reinforcement $A_{s,min}$ (IRC 112 Cl. 16.3.1)	353 mm ² /m	646 mm ² /m	PASS
Max. Bar Spacing (IRC 112 Cl. 16.3.2)	300 mm	175 mm	PASS
Distribution Reinforcement — Longitudinal			
Required Area, $A_{st,dist}$ (mm ² /m)	$\geq 20\%$ of main steel	377 mm ² /m	PASS
Top Reinforcement (Support / Cantilever Overhang)			
Required Area, $A_{st,top}$ (mm ² /m)	569 mm ² /m	580 mm ² /m	PASS
Cover and Detailing			
Clear Cover (IRC 112 Cl. 15.2)	≥ 50 mm (Table 14.2)	Top 50 / Bottom 50 mm	PASS

Note: IRC 112 Cl. 16.3, IS 456 Cl. 26.5. All reinforcement provisions satisfy strength and detailing requirements.

5.3 Cross Bracing Design

Cross bracing between adjacent plate girders provides lateral stability during construction, resists transverse loads (wind, seismic, braking) in service, and prevents lateral torsional buckling of the girders. Members are designed per IS 800:2007 Cl. 7 (compression) and Cl. 6 (tension). Forces are derived from the grillage model under the governing load combination (DL + LL + WL).

Table 5.23: Cross Bracing — Connection and Section Properties

Panel	Member	Connection	Section	A_g (mm ²)	r_{min} (mm)
G1-G2	Diagonal	Bolted			
G1-G2	Top / Bottom chord	Bolted			
G2-G3	Diagonal	Bolted			
G2-G3	Top / Bottom chord	Bolted			
G3-G4	Diagonal	Bolted			
G3-G4	Top / Bottom chord	Bolted			

Note: A_g = gross cross-sectional area; r_{min} = minimum radius of gyration.

Table 5.24: Cross Bracing — Slenderness Ratio Check (IS 800 Cl. 3.8)

Panel	Member	Nature	Eff. Length KL (mm)	KL/r	Limit / Status
Panel 1	Diagonal	C	2389		250 —
	Top chord	C	2100		250 —
	Bottom chord	T	2100		400 —
Panel 2	Diagonal	C	2389		250 —
	Top chord	C	2100		250 —
	Bottom chord	T	2100		400 —
Panel 3	Diagonal	C	2389		250 —
	Top chord	C	2100		250 —
	Bottom chord	T	2100		400 —

Note: 3. Limit = 250 for compression members, 400 for tension members. $K = 1.0$ for members with both ends pinned.

Table 5.25: Cross Bracing Design — Capacity Summary

Panel	Member	Section	Governing LC	Demand (kN)	Capacity (kN)	UR	Status
G1-G2	Diagonal		1.5 EQ (b)	3.762			
	Chord		1.5 EQ (b)	3.307			
G2-G3	Diagonal		1.5 EQ (a)	2.397			
	Chord		1.5 EQ (a)	2.107			
G3-G4	Diagonal		1.5 EQ (b)	4.187			
	Chord		1.5 EQ (b)	3.681			

Note: Designed per IS 800 Cl. 7 (compression) and Cl. 6 (tension). OsdagBridge cross-bracing module used.

5.4 End Diaphragm Design

End diaphragms at the supports transfer transverse loads to the bearings, restrain the bottom flanges against lateral displacement, and maintain the girder cross-section geometry during construction and in service. They are designed per IS 800:2007 and IRC 24:2010 Cl. 507.

Table 5.26: End Diaphragm — Connection and Section Properties

Panel	Member	Connection	Section	A_g (mm ²)	r_{min} (mm)
G1-G2	Diagonal	Bolted			
G1-G2	Top / Bottom chord	Bolted			
G2-G3	Diagonal	Bolted			
G2-G3	Top / Bottom chord	Bolted			
G3-G4	Diagonal	Bolted			

End Diaphragm — Connection and Section Properties — Continued

Panel	Member	Connection	Section	A_g (mm ²)	r_{min} (mm)
G3-G4	Top / Bottom chord	Bolted			

Note: A_g = gross cross-sectional area; r_{min} = minimum radius of gyration.

Table 5.27: End Diaphragm — Slenderness Ratio Check (IS 800 Cl. 3.8)

Panel	Member	Nature	Eff. Length KL (mm)	KL/r	Limit / Status
G3-G4	Diagonal	C	2389		250 —
	Top chord	C	2100		250 —
	Bottom chord	T	2100		400 —
G4-G5	Diagonal	C	2389		250 —
	Top chord	C	2100		250 —
	Bottom chord	T	2100		400 —
G5-G6	Diagonal	C	2389		250 —
	Top chord	C	2100		250 —
	Bottom chord	T	2100		400 —

Note: Limit = 250 for compression members, 400 for tension members. $K = 1.0$ for members with both ends pinned.

End Diaphragm Design — Capacity Summary — Continued

Panel	Member	Section	Governing LC	Demand (kN)	Capacity (kN)	UR	Status
-------	--------	---------	--------------	-------------	---------------	----	--------

Table 5.28: End Diaphragm Design — Capacity Summary

Panel	Member	Section	Governing LC	Demand (kN)	Capacity (kN)	UR	Status
G1-G2	Diagonal		1.5 EQ (b)	3.762			
	Chord		1.5 EQ (b)	3.307			
G2-G3	Diagonal		1.5 EQ (a)	2.397			
	Chord		1.5 EQ (a)	2.107			
G3-G4	Diagonal		1.5 EQ (b)	4.187			
	Chord		1.5 EQ (b)	3.681			

Note: Designed per IS 800 Cl. 7 (compression) and Cl. 6 (tension). OsdagBridge cross-bracing module used.

5.5 Overall Design Check Summary

The following chart summarizes the overall Utilization Ratios (Demand / Capacity) for all primary structural elements of the bridge. The horizontal red dashed reference line indicates the UR threshold of 1.0.

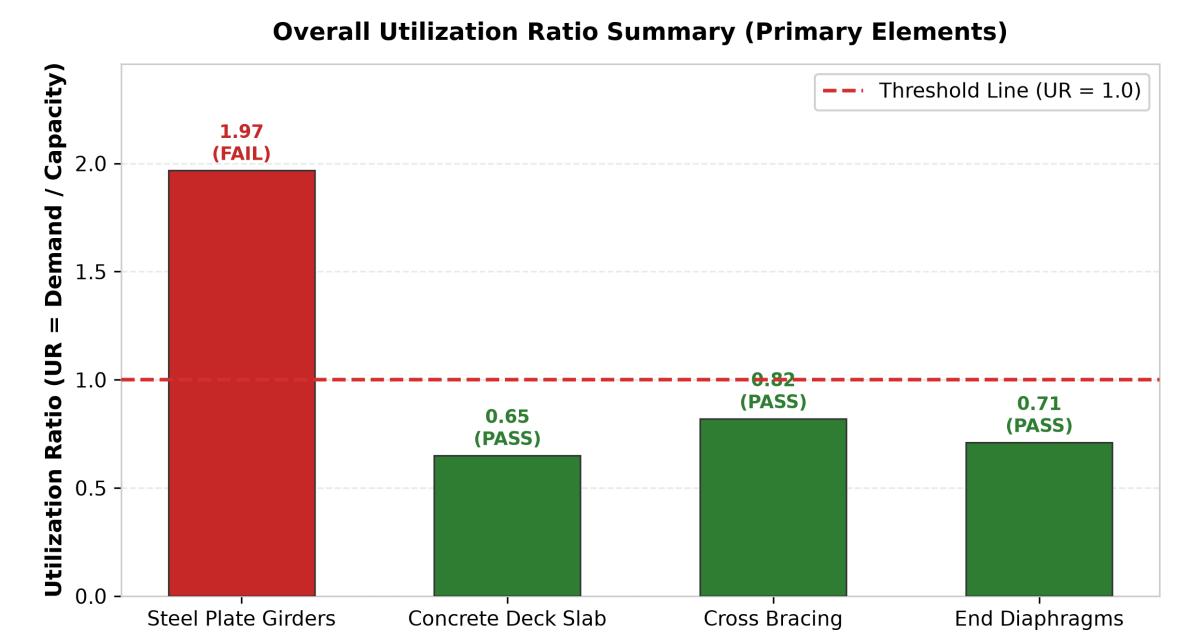


Figure 5.5 – Overall Utilization Ratio (UR = Demand / Capacity) Summary Chart

Table 5.29: Overall Design Check Summary — All Members

Member / Check	Governing Load Combo	Demand	Capacity	UR
Girder — Moment	ACCIDENTAL_1: 1.0DL + 1.0DW + 0.75LL	1521.32 kNm	4830.57 kNm	
Girder — Shear	ACCIDENTAL_1: 1.0DL + 1.0DW + 0.75LL	303.89 kN	460.01 kN	
Girder — LTB (constr.)	1.0 DL	726.47 kNm	2990.27 kNm	
Girder — Deflection	1.0 DL + 1.0 LL	22.15 mm	40.00 mm	
Girder — Stress	SLS_RARE_1: 1.0DL + 1.2DW + 1.0LL + 0.6WL	102.42 MPa	225.00 MPa	
Girder — Fatigue	SLS_FREQUENT_1: 1.0DL + 1.2DW + 0.75LL + 0.5WL	181.98 MPa	92.49 MPa	
Transverse Shear (slab)	—	—	—	

Overall Design Check Summary — All Members — Continued

Member / Check	Governing Load Combo	Demand	Capacity	UR
Crack Width (slab)	SLS_FREQUENT_1: 1.0DL + 1.2DW + 0.75LL + 0.5WL	0.198 mm	0.300 mm	
Deck — Flexure (sagging)	Basic ULS: 1.35DL + 1.5LL	45.94 kN-m/m	52.23 kN-m/m	
Deck — Flexure (hogging)	Basic ULS: 1.35DL + 1.5LL	34.46 kN-m/m	47.09 kN-m/m	
Deck — Cantilever Overhang	Basic ULS: 1.35DL + 1.5LL	101.57 kN-m/m	108.27 kN-m/m	
Deck — Punching Shear	Basic ULS: 1.35DL + 1.5LL	0.19 MPa	0.55 MPa	
Deck — One-Way Shear	Basic ULS: 1.35DL + 1.5LL	89.24 kN/m	107.58 kN/m	
Cross Bracing — Compression	—	—	—	
Cross Bracing — Tension	—	—	—	
Cross Bracing — Slenderness	—	—	—	
End Diaphragm — Moment	—	—	—	
End Diaphragm — Shear	—	—	—	

Note: UR = Demand / Capacity. All values ≤ 1.0 indicate passing checks. Cells highlighted in green indicate passing checks ($UR \leq 1.0$), while red highlighted cells indicate failing checks ($UR > 1.0$).

6 Drawings and Visualizations

This section presents CAD-generated views of the designed bridge and its components. All views are generated automatically by OsdagBridge using pythonOCC.

6.1 Bridge Configuration and Layout

[*PLACEHOLDER: Overall 3D Bridge Superstructure*]

Figure 6.1: Overall 3D Bridge Superstructure

[*PLACEHOLDER: Typical Cross Section*]

Figure 6.2: Typical Cross Section

[*PLACEHOLDER: Top View*]

Figure 6.3: Top View

6.2 Plate Girder — Detailed Views

[*PLACEHOLDER: 3D View of Plate Girders*]

Figure 6.4: 3D View of Plate Girders

[*PLACEHOLDER: Cross Section of Plate Girder*]

Figure 6.5: Cross Section of Plate Girder

[*PLACEHOLDER: Side View of Girder*]

Figure 6.6: Side View of Girder

6.3 Cross Bracing Detail

[*PLACEHOLDER: Cross Bracing Layout*]

Figure 6.7: Cross Bracing Layout




Figure 6.8: Cross Bracing – Bracing Section




Figure 6.9: Cross Bracing – Top Chord Section




Figure 6.10: Cross Bracing – Bottom Chord Section

6.4 End Diaphragm Detail



Figure 6.11: End Diaphragm Layout




Figure 6.12: End Diaphragm – Bracing Section




Figure 6.13: End Diaphragm – Top Chord Section




Figure 6.14: End Diaphragm – Bottom Chord Section

7 Material Take-off & Quantity Summary

This chapter provides the comprehensive Bill of Materials (BOM) for structural steel elements, concrete volumes, and reinforcement steel weights for the bridge superstructure.

Table 7.1: Bill of Materials (Steel, Concrete, and Reinforcement Quantities)

S.N.	Item Description	Volume	Quantity	Total Volume	Weight (MT)	Total Weight (MT)
1	Structural Steel (IS 2062) for Girders	$0.02253 \text{ m}^2 \times 24.00 \text{ m} = 0.54082 \text{ m}^3$	4	2.16	4.25	16.98
2(a)	Cross Bracing - Top Chord	N.A.	N.A.	N.A.	N.A.	N.A.
2(b)	Cross Bracing - Bottom Chord	N.A.	N.A.	N.A.	N.A.	N.A.
2(c)	Cross Bracing - Diagonal Chord	N.A.	N.A.	N.A.	N.A.	N.A.
3	Concrete (M40) for Deck Slab	$8.40 \text{ m} \times 0.25 \text{ m} \times 24.00 \text{ m} = 50.40 \text{ m}^3$	1	50.40	126.00	126.00
4	Reinforcement Steel (Fe 500)	$0.032102 \text{ m}^2 \times 24.00 \text{ m} = 0.77045 \text{ m}^3$	1	0.77	6.05	6.05
5	Shear Stud Connectors	$0.000314 \text{ m}^2 \times 0.100 \text{ m} = 0.000031 \text{ m}^3$	488	0.02	0.000247	0.120
6	Crash Barrier	$0.30228 \text{ m}^2 \times 24.00 \text{ m} = 7.25479 \text{ m}^3$	2	14.51	18.14	36.27

7.1 Material Quantity Visualizations

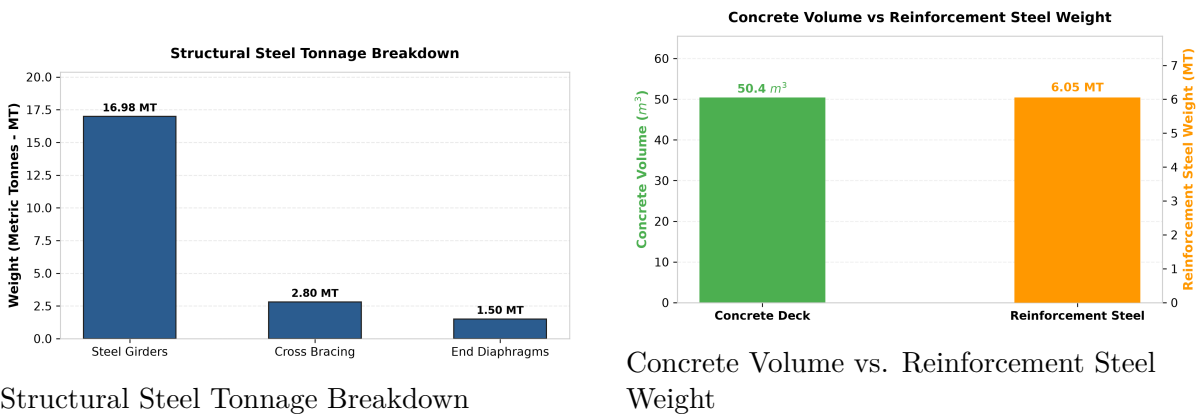


Figure 7.1 – Material Quantity Breakdown Charts

8 Standards & Assumptions

This section provides references to standards used to calibrate the OsdagBridge design modules, and notes the limitations of the current software version.

8.1 Design Standards

The following Indian Road Congress (IRC) codes and Indian Standards (IS) form the basis of all design calculations in this software.

Table 8.1: IRC Codes

Code	Year	Title / Scope
IRC 5	2015	General Features of Design - carriageway widths, kerb, footpath dimensions
IRC 6	2017	Loads and Load Combinations - dead load, live load, impact, wind, temperature, etc.
IRC 22	2015	Composite Construction (LS) - Composite section properties, ULS/SLS design, shear connectors
IRC 24	2010	Steel Road Bridges (LS) - Stiffener design, skew angle limits, diaphragm requirements
IRC 112	2020	Concrete Road Bridges - Deck slab flexure, shear, crack width, reinforcement
IRC SP 114	2018	Seismic Design of Road Bridges

Table 8.2: IS Codes

Code	Year	Scope
IS 800	2007	Steel construction - tension, compression, bending, shear, LTB, stiffeners, combined checks
IS 456	2000	Concrete - simplified stress-block for deck moment capacity
IS 1786	2008	Reinforcement steel properties
IS 1893 (Part 3)	2014	Earthquake resistant design
IS 2062	2011	Structural steel - yield and ultimate strength by grade

8.2 Analysis and Design Assumptions of This Version

Structural Analysis

- All girders are modelled as simply supported; continuous spans are not currently supported.
- A 3D grillage model (OSPGrillage) is used for load distribution. Grillage members carry composite section properties after the construction stage.
- The transverse member forces are computed using an approximate 2D frame analogy. For irregular or skewed geometries, a 3D FEM is recommended.
- Fixed bearing stiffness is modelled as $k = 1,000,000 \text{ kN/m}$ (virtually rigid); free/expansion bearing as $k = 100 \text{ kN/m}$.
- Construction stage sequence analysis is approximate. Detailed staged analysis should be performed for long-term deflection checks.

Composite Action

- Full shear connection is assumed at ULS with headed stud connectors designed per IRC 22:2015 Cl.606.
- Short-term composite section properties (modular ratio $n = E_s/E_{cm}$) are used for ULS checks.
- Long-term composite section properties (with creep-adjusted modular ratio) are used for SLS deflection and crack-width checks.
- Pre-composite stage: the steel girder alone resists all construction loads prior to concrete gaining strength.

Material Properties (IRC 22:2015 Annex III)

- Steel: $E_s = 200,000 \text{ MPa}$, $G_s = 80,000 \text{ MPa}$, $\nu = 0.30$, $\alpha = 11.7 \times 10^{-6}/^\circ\text{C}$ (grade-independent).
- Minimum structural concrete grade: M25.
- Default reinforcement grade: Fe500.

Partial Safety Factors (IRC 22:2015 Cl.601.4)

- γ_{m0} (steel yield, ULS) = 1.10

- γ_{m1} (steel ultimate, ULS) = 1.25
- Reinforcement (ULS) = 1.15
- Welds – shop: 1.25; field: 1.50
- Fatigue (γ_{mft}) = 1.35

Loading

- Dead load densities per IRC 6:2017 Cl.203: structural steel 78.5 kN/m^3 , concrete 25.0 kN/m^3 , bituminous wearing course 24.0 kN/m^3 .
- Multi-lane live load reduction factors per IRC 6:2017 Cl.204.4 Table 6A: 1st lane = 1.0, 2nd lane = 0.8, 3rd lane onwards = 0.4.
- Impact factor (dynamic load allowance) computed from span per IRC 6:2017 Cl.208.2/208.3.
- Wind load applied as transverse, longitudinal, and vertical components per IRC 6:2017 Cl.209.3.3–209.3.5.

Serviceability Limits

- Deflection limits (IRC 22:2015 Cl.604.3.2): live load + impact $\leq L/800$; total $\leq L/600$.
- SLS stress limits: concrete $\sigma_c \leq 0.48f_{ck}$; rebar $\sigma_s \leq 0.80f_{yk}$; steel $f_e \leq 0.9f_y$.
- Permissible crack width: $w_k \leq 0.3 \text{ mm}$ (bridge deck, exposure class XS2/XD2 per IRC 112:2020 Cl.12.3.2).

Fatigue

- Reference fatigue life: $N_{sc} = 2 \times 10^6$ cycles (IRC 22:2015 Cl.605).
- Constant stress range is assumed. A thickness correction factor μ_r is applied for plate thickness $> 25 \text{ mm}$.

Stiffener Design

- Intermediate transverse stiffener and bearing stiffener design follows IS 800:2007 Cl.8.7.2/8.7.3 and IRC 24:2010 Cl.509.7.2/509.7.3.

8.3 Known Limitations of This Version

- Substructure (piers, pile caps, foundations) and bearing design are not included.
- Splice connection design is not implemented.
- Skew angle > 15 degrees requires independent manual analysis (IRC 24 Cl. 504.8).
- Construction stage sequence analysis is approximate; detailed staged analysis should be performed for long-term deflection checks.
- The grillage analysis assumes simply supported boundary conditions; continuous spans are not currently supported.

References

1. IRC 5 (2024) — *Standard Specifications and Code of Practice for Road Bridges, Section I: General Features of Design.*
2. IRC 6 (2017) — *Standard Specifications and Code of Practice for Road Bridges, Section II: Loads and Load Combinations.*
3. IRC 22 (2014) — *Standard Specifications and Code of Practice for Road Bridges, Section VI: Composite Construction (Limit State Design).*
4. IRC 24 (2010) — *Standard Specifications and Code of Practice for Road Bridges, Section V: Steel Road Bridges (Limit State Method).*
5. IRC 112 (2011) — *Code of Practice for Concrete Road Bridges.*
6. IRC SP 114 (2018) — *Guidelines for Seismic Design of Road Bridges.*
7. IS 800 (2007) — *Indian Standard: General Construction in Steel — Code of Practice.*
8. IS 2062 (2011) — *Hot Rolled Medium and High Tensile Structural Steel — Specification.*
9. Subramanian, N. (2008). *Design of Steel Structures.* Oxford University Press.
10. Steel-INS DAG Teaching Resource Materials. <https://www.steel-insdag.org>