



OsdagBridge

Open Source Software for Steel Girder Bridge Design

Design Report

Project Name	Verification Project
Project Location	Mumbai
Author / Designer	Antigravity
Reviewer	User
Organization	FOSSEE IITB
Client Name and Organization	Osdag Team
Job Number	12345
Date	2026-08-23
Report Version	Phase 2 Verification

Table of Contents

Executive Summary	2
Project Overview	2
Key Design Outcomes Summary	3
Design Assumptions and Limitations	3
1 Project Information	5
1.1 Project and Design Team Details	5
1.2 Applicable Codes and Standards	5
2 Input Parameters	6
2.1 Basic Inputs (User-Defined)	6
2.2 Additional Inputs	7
3 Loads and Load Combinations	14
4 Analysis Results	18
5 Design Checks	22
5.1 Plate Girder Design	22
5.2 Deck Slab Design	51
5.3 Cross Bracing Design	55
5.4 End Diaphragm Design	60
5.5 Overall Design Check Summary	64
6 Drawings and Visualizations	67
6.1 Bridge Configuration and Layout	67
6.2 Plate Girder — Detailed Views	67
6.3 Cross Bracing Detail	67
6.4 End Diaphragm Detail	68
7 Material Take-off & Quantity Summary	69
8 Standards & Assumptions	71
8.1 Design Standards	71
8.2 Analysis and Design Assumptions of This Version	72
8.3 Known Limitations of This Version	74
References	75

Executive Summary

This section provides a concise summary of the bridge design, key inputs, governing loads, and final design outcomes.

Project Overview

Bridge Type	Highway Bridge
Design Standard	IRC 5, IRC 6, IRC 22, IRC 24, IS 800
Span	30 m
Carriageway Width	7.5 m
No. of Girders	9
Girder Spacing	2.1083
Deck Thickness	250.0
Overall Design Status	Fail (Fatigue Normal Stress, Int.Stiff: Leg $\leq$ H.limit)
Governing Check	Fatigue Normal Stress
Overall Utilization Ratio (max)	1.92 (Girder)

[*PLACEHOLDER: Figure 1 – Overall Bridge Plan*]

Figure 1 – Overall Bridge Plan

[*PLACEHOLDER: Figure 2 – Typical Cross-Section (with girder, deck, barriers, footpath)*]

Figure 2 – Typical Cross-Section (with girder, deck, barriers, footpath)

[*PLACEHOLDER: Figure 3 – 3D View of Bridge Superstructure*]

Figure 3 – 3D View of Bridge Superstructure

Table 1 – Final Bridge Geometry (after optimization)

	G1	G2	G3	G4	G5	G6	G7	G8
Member ID	G1M1	G2M1	G3M1	G4M1	G5M1	G6M1	G7M1	G8M1
Section Designation	1670 x 510 x 22 x 510 x 22	1670 x 510 x 22 x 510 x 22	1670 x 510 x 22 x 510 x 22	1670 x 510 x 22 x 510 x 22	1670 x 510 x 22 x 510 x 22	1670 x 510 x 22 x 510 x 22	1670 x 510 x 22 x 510 x 22	1670 x 510 x 22 x 510 x 22
Governing Check	Fatigue Normal Stress	Fatigue Normal Stress	Fatigue Normal Stress	Fatigue Normal Stress	Fatigue Normal Stress	Fatigue Normal Stress	Fatigue Normal Stress	Fatigue Normal Stress
Utilization Ratio	1.92 (Girder)	1.92 (Girder)	1.92 (Girder)	1.92 (Girder)	1.92 (Girder)	1.92 (Girder)	1.92 (Girder)	1.92 (Girder)

Note: Utilization ratio (UR) = demand / capacity. A value < 1.0 indicates a passing check.

Key Design Outcomes Summary

- Girder design pass
- Cross bracing design pass
- End Diaphragm design pass
- Deck design pass

Design Assumptions and Limitations

- Additional inputs not provided by the user were assumed by software per IRC/IS code defaults or practical consideration.
- Grillage analysis was performed using OSPGrillage assuming simply supported I-girders.
- Substructure and foundation design are not included in this report.

- Splice connections and bearings are not designed in this version.

1 Project Information

This section records all project metadata as entered by the designer.

1.1 Project and Design Team Details

Project Name	Verification Project
Project Location	Mumbai
Designer	Antigravity
Reviewer	User
Organization	FOSSEE IITB
Client	Osdag Team
Software Version	OsdagBridge

1.2 Applicable Codes and Standards

- Indian Roads Congress (IRC) 5: General Features of Design
- Indian Roads Congress (IRC) 6: Loads and Load Combinations
- Indian Roads Congress (IRC) 22: Composite Construction (Limit State Design)
- Indian Roads Congress (IRC) 24: Steel Road Bridges (Limit State Method)
- Indian Roads Congress (IRC) 112: Concrete Road Bridges (deck design)
- Indian Roads Congress Special Publication (IRC SP) 114: Seismic Design of Road Bridges
- Indian Standard (IS) 800: General Construction in Steel
- Indian Standard (IS) 2062: Hot Rolled Structural Steel Specification
- Indian Standard (IS) 6006: Steel Bearings

2 Input Parameters

This section documents all inputs provided to OsdagBridge. User-provided inputs are clearly distinguished from software-assumed defaults. Where the user did not supply a value, the software has applied the IRC/IS code default or an empirical guideline; these are annotated with an asterisk (*).

2.1 Basic Inputs (User-Defined)

Note: These inputs are mandatory and were provided by the user.

Table 2.1: Project Location

parameter	value
Project Location	Mumbai
Latitude / Longitude	,
Seismic Zone (IRC 6)	
Basic Wind Speed (IRC 6)	
Shade Temp. Max / Min (IRC 6)	°C / °C

Table 2.2: Bridge Geometry

parameter	value
Type of Structure	Highway Bridge
Span (m)	30 m
Carriageway Width (m)	7.5 m
Include Median	Yes
Footpath	Single Side
Skew Angle (degrees)	(IRC 24 Cl. 504.8 limit: $\pm 15^\circ$)

Table 2.3: Material Selection

parameter	value
Girder Steel Grade (IS 2062)	E 350A
Cross Bracing Steel Grade	E 350A
End Diaphragm Steel Grade	E 350A
Concrete Deck Grade (IRC 22)	M40

* Software default value

2.2 Additional Inputs

Where the user has modified additional inputs, those values are reported here. Where no modification was made, the software default is shown.

Table 2.4: Typical Section Details

parameter	value
Overall Bridge Width (m)	18.974999999999998
No. of Girders	9
Girder Spacing (m)	2.1083 m
Deck Overhang Width (m)	1.0542 m
Deck Thickness (mm)	250.0 mm
Footpath Width (m)	1.5 m (IRC 5 Cl. 104.3.6 min: 1.5 m)
No. of Traffic Lanes	(per IRC 5 Cl. 104.3.1)

Table 2.5: Components Details

parameter	value
Crash Barrier Type	IRC 5 - RCC Crash Barrier
Crash Barrier Load (kN/m)	7.557
Median Type	IRC 5 - RCC Crash Barrier
Railing Type	IRC 5 - RCC Railing
Railing Load (kN/m)	1.4715
Wearing Course Material	Concrete
Wearing Course Thickness (mm)	50.0 mm

Table 2.6: Girder General Information

Girder	Member ID	Design Mode	Girder Type	Girder Symmetry
G1	G1M1	Optimized	Welded	Girder Symmetric
G2	G2M1	Optimized	Welded	Girder Symmetric
G3	G3M1	Optimized	Welded	Girder Symmetric
G4	G4M1	Optimized	Welded	Girder Symmetric
G5	G5M1	Optimized	Welded	Girder Symmetric
G6	G6M1	Optimized	Welded	Girder Symmetric
G7	G7M1	Optimized	Welded	Girder Symmetric
G8	G8M1	Optimized	Welded	Girder Symmetric
G9	G9M1	Optimized	Welded	Girder Symmetric

Table 2.7: Girder Section Dimensions

Girder	Total Depth, D (mm)	Web, t_w (mm)	Top Flange (b_{tf} , t_{tf}) mm	Bottom Flange (b_{bf} , t_{bf}) mm
G1	1.67 mm	0.01 mm	0.51 mm, 0.022 mm	0.51 mm, 0.022 mm
G2	1.67 mm	0.01 mm	0.51 mm, 0.022 mm	0.51 mm, 0.022 mm
G3	1.67 mm	0.01 mm	0.51 mm, 0.022 mm	0.51 mm, 0.022 mm
G4	1.67 mm	0.01 mm	0.51 mm, 0.022 mm	0.51 mm, 0.022 mm
G5	1.67 mm	0.01 mm	0.51 mm, 0.022 mm	0.51 mm, 0.022 mm
G6	1.67 mm	0.01 mm	0.51 mm, 0.022 mm	0.51 mm, 0.022 mm
G7	1.67 mm	0.01 mm	0.51 mm, 0.022 mm	0.51 mm, 0.022 mm
G8	1.67 mm	0.01 mm	0.51 mm, 0.022 mm	0.51 mm, 0.022 mm
G9	1.67 mm	0.01 mm	0.51 mm, 0.022 mm	0.51 mm, 0.022 mm

Table 2.8: Girder Restraint and Stiffener Details

Girder	Torsional / Warping Restraint	Web Philosophy	Intermediate Stiffeners	Longitudinal Stiffeners	Bearing Stiffener
G1	Fully Restrained, Both Flanges Restrained	Thin Web with ITS	Yes; Spacing: 2030 mm; Thickness: 10 mm	No	No.: 4; Spacing: 100 mm; Thickness: 10 mm
G2	Fully Restrained, Both Flanges Restrained	Thin Web with ITS	Yes; Spacing: 2030 mm; Thickness: 10 mm	No	No.: 4; Spacing: 100 mm; Thickness: 10 mm
G3	Fully Restrained, Both Flanges Restrained	Thin Web with ITS	Yes; Spacing: 2030 mm; Thickness: 10 mm	No	No.: 4; Spacing: 100 mm; Thickness: 10 mm
G4	Fully Restrained, Both Flanges Restrained	Thin Web with ITS	Yes; Spacing: 2030 mm; Thickness: 10 mm	No	No.: 4; Spacing: 100 mm; Thickness: 10 mm
G5	Fully Restrained, Both Flanges Restrained	Thin Web with ITS	Yes; Spacing: 2030 mm; Thickness: 10 mm	No	No.: 4; Spacing: 100 mm; Thickness: 10 mm
G6	Fully Restrained, Both Flanges Restrained	Thin Web with ITS	Yes; Spacing: 2030 mm; Thickness: 10 mm	No	No.: 4; Spacing: 100 mm; Thickness: 10 mm
G7	Fully Restrained, Both Flanges Restrained	Thin Web with ITS	Yes; Spacing: 2030 mm; Thickness: 10 mm	No	No.: 4; Spacing: 100 mm; Thickness: 10 mm

G8	Fully Re- strained, Both Flanges Restrained	Thin Web with ITS	Yes; Spac- ing: 2030 mm; Thickness: 10 mm	No	No.: 4; Spacing: 100 mm; Thickness: 10 mm
G9	Fully Re- strained, Both Flanges Restrained	Thin Web with ITS	Yes; Spac- ing: 2030 mm; Thickness: 10 mm	No	No.: 4; Spacing: 100 mm; Thickness: 10 mm

Table 2.9: Member Properties: Cross Bracing Details

Location	Member IDs	Type of Bracing	Bracing Section	Spacing (m)
G1 to G2	B1M1 to B1M1	X-Bracing	L 100 x 100x 10	15.0 m
G2 to G3	B2M1 to B2M1	X-Bracing	IS 100 x 100 x 10	15.0 m
G3 to G4	B3M1 to B3M1	X-Bracing	IS 100 x 100 x 10	15.0 m
G4 to G5	B4M1 to B4M1	X-Bracing	IS 100 x 100 x 10	15.0 m
G5 to G6	B5M1 to B5M1	X-Bracing	IS 100 x 100 x 10	15.0 m
G6 to G7	B6M1 to B6M1	X-Bracing	IS 100 x 100 x 10	15.0 m
G7 to G8	B7M1 to B7M1	X-Bracing	IS 100 x 100 x 10	15.0 m
G8 to G9	B8M1 to B8M1	X-Bracing	IS 100 x 100 x 10	15.0 m

continued on next page

continued from previous page

Location	Member IDs	Type of Bracing	Bracing Section
----------	------------	-----------------	-----------------

Table 2.10: Member Properties: End Diaphragm Details

Location	Member IDs	Type of Bracing	Bracing Section
G1 to G2	E1M1 to E1M2	Cross Bracing	L 100 x 100x 10
G2 to G3	E2M1 to E2M2	Cross Bracing	IS 100 x 100 x 10
G3 to G4	E3M1 to E3M2	Cross Bracing	IS 100 x 100 x 10
G4 to G5	E4M1 to E4M2	Cross Bracing	IS 100 x 100 x 10
G5 to G6	E5M1 to E5M2	Cross Bracing	IS 100 x 100 x 10
G6 to G7	E6M1 to E6M2	Cross Bracing	IS 100 x 100 x 10
G7 to G8	E7M1 to E7M2	Cross Bracing	IS 100 x 100 x 10
G8 to G9	E8M1 to E8M2	Cross Bracing	IS 100 x 100 x 10

Table 2.11: Shear Connector Details

parameter	value
Stud Diameter (mm)	20.0 mm
Stud Height (mm)	100.0 mm
Stud f_y (MPa)	385.0 MPa
Stud f_u (MPa)	495.0 MPa
No. of Studs per Section	2

Note: All values are per IRC 22 Table 1 unless user-modified.

Table 2.12: Partial Safety Factors

parameter	value
γ_{M0} (Yielding / Buckling)	1.1
γ_{M1} (Ultimate Stress)	1.25
γ_C (Concrete, Basic)	1.5
γ_s (Reinforcement)	1.15
γ_v (Shear Connectors)	1.25
γ_{fft} (Fatigue Load)	1.0
γ_{Mft} (Fatigue Strength)	1.35

3 Loads and Load Combinations

This section summarizes all loads applied to the bridge and the load combinations considered for analysis and design.

Table 3.1: Dead Load – Self Weight

parameter	value
Steel Self-Weight Applied	76.4 kN/m ³
Concrete Deck Weight	24.5 kN/m ³
Self-Weight Factor	1.0

Table 3.2: Dead Load for Surfacing (DW)

parameter	value
Wearing Course Load	Concrete x 50.0
Additional SIDL (Crash Barrier)	7.557 kN/m per barrier
Railing Load	1.4715 kN/m [*]

continued on next page

** Software default value*

continued from previous page

Vehicle	Total Load (kN)	Impact Factor	Braking Load		
			Considered?	Value	Eccentricity

Table 3.3: Vehicle Live Loads (LL)

Vehicle	Total Load (kN)	Impact Factor	Braking Load		
			Considered?	Value	Eccentricity
Class A	543.5	1.207	Yes	N/A	N/A
Class 70R (Wheeled)	981.0	1.100	Yes	N/A	N/A
Class 70R (Tracked)	686.8	1.100	Yes	N/A	N/A
Class AA (Wheeled)	N/A not impl.	1.100	Yes	N/A	N/A
Class AA (Tracked)	N/A not impl.	1.100	Yes	N/A	N/A
Class 70R (Bogie)	N/A not impl.	1.100	Yes	N/A	N/A
Class SV	N/A not impl.	N/A	No	—	—
Class Fatigue	N/A not impl.	N/A	No	—	—

Table 3.4: Footpath Live Load

parameter	value
Footpath Provided	As per IRC 6
Footpath Live Load Pressure	4.905 kN/m ² (IRC 6 Cl. 206.1)

Table 3.5: Wind Load (WL) — per IRC 6

parameter	value
Basic Wind Speed, V _b	[from Project Location]
Terrain Type	Plain Terrain
Average Exposed Height, H (m)	10 m

continued on next page

continued from previous page

parameter	value
Hourly Mean Wind Speed, V_z	
Hourly Wind Pressure, P_z	
Transverse Wind Force	
Longitudinal Wind Force	
Vertical Wind Force	

Table 3.6: Earthquake Load (EL) — per IRC 6

parameter	value
Seismic Zone	[from Project Location]
Zone Factor, Z	0.16
Importance Factor, I	1.0
Type of Soil	Type I – Rocky or Hard
S_a/g	2.8
Horizontal Seismic Coefficient, A_h	0.224
Vertical Seismic Coefficient, A_v	0.1493
Horizontal Seismic Force (longitudinal)	kN
Horizontal Seismic Force (transverse)	kN

Table 3.7: Temperature Load (TL) — per IRC 6

parameter	value
Maximum Shade Temperature	°C
Minimum Shade Temperature	°C
Effective Bridge Temp. Range	to °C
Temperature Rise / Fall for Design	+ °C / – °C

Table 3.8: Load Combinations

Combination ID	Load Cases
ULS-01	DL(1.35/1.00) + SIDL(1.75/1.00) + LL(1.50) + WL(0.90) + TL(0.90)
ULS-02	DL(1.35/1.00) + SIDL(1.75/1.00) + LL(1.15) + WL(1.50) + TL(0.90)
ULS-03	DL(1.35/1.00) + SIDL(1.75/1.00) + LL(1.15) + WL(0.90) + TL(1.50)
ULS-04	DL(1.00/1.00) + SIDL(1.00/1.00) + LL(0.75) + TL(0.50) + VC(1.00)
ULS-05	DL(1.00/1.00) + SIDL(1.00/1.00) + LL(0.75) + TL(0.50) + BI(1.00)
ULS-06	DL(1.00/1.00) + SIDL(1.00/1.00) + LL(0.75) + TL(0.50) + FB(1.00)
ULS-07	DL(1.35/1.00) + SIDL(1.75/1.00) + LL(0.20) + TL(0.50) + EQ(1.50)
ULS-08	DL(1.35/1.00) + SIDL(1.75/1.00) + LL(0.20) + TL(0.50) + EQ(0.75)
SLS-01	DL(1.00) + SIDL(1.20/1.00) + LL(1.00) + WL(0.60) + TL(0.60)
SLS-02	DL(1.00) + SIDL(1.20/1.00) + LL(0.75) + WL(1.00) + TL(0.60)
SLS-03	DL(1.00) + SIDL(1.20/1.00) + LL(0.75) + WL(0.60) + TL(1.00)
SLS-04	DL(1.00) + SIDL(1.20/1.00) + LL(0.75) + WL(0.50) + TL(0.50)
SLS-05	DL(1.00) + SIDL(1.20/1.00) + LL(0.20) + WL(0.60) + TL(0.50)
SLS-06	DL(1.00) + SIDL(1.20/1.00) + LL(0.20) + WL(0.50) + TL(0.60)
SLS-07	DL(1.00) + SIDL(1.20/1.00) + LL(0.00) + WL(0.00) + TL(0.50)

Note: All IRC 6 load combinations are auto-generated by OsdagBridge. User-defined custom combinations, if any, are appended.

4 Analysis Results

A grillage model was used for structural analysis. The deck is idealized as a grid of elastic beam elements — longitudinal members represent the composite steel girders with effective slab, and transverse members represent the slab or cross frames. This section summarizes the critical output from that analysis.

Table 4.1: Summary of Maximum Demands

Load Case/ Comb.	Bending Moment			Shear Force			Reaction at Supports	
	Max (kNm)	Girder	Loc. (m)	Max (kN)	Girder	Loc. (m)	Left	Right
1.0 DW	236.926	G5	15.000	37.963	G1	28.500	-286.953	286.953
SEISMIC.2: 1.35DL + 1.75DW + 0.2LL + 0.75EL	2444.389	G7	13.500	398.311	G9	0.000	-3046.597	2407.104
SLS.RARE.3: 1.0DL + 1.2DW + 0.75LL + 0.6WL	2573.986	G7	13.500	419.076	G9	0.000	-3205.360	2565.867
Footpath load	207.487	G1	15.000	38.240	G1	0.000	-87.756	87.331
SLS.QP.1: 1.0DL + 1.2DW	1901.284	G1	15.000	313.874	G1	0.000	-2177.194	2176.769
DD	1233.992	G5	15.000	197.724	G1	0.000	-1494.547	1494.547
SLS.RARE.4: 1.0DL + 1.0DW + 1.0LL + 0.6WL	2573.986	G7	13.500	419.076	G9	0.000	-3205.360	2565.867
SEISMIC.3: 1.0DL + 1.0DW + 0.2LL + 1.5EL	2444.389	G7	13.500	398.311	G9	0.000	-3046.597	2407.104
1.5 EQ (a)	120.932	G5	15.000	19.083	G1	28.500	145.898	-145.898
BASIC.2: 1.35DL + 1.75DW + 1.15LL + 1.5WL	2573.986	G7	13.500	419.076	G9	0.000	-3205.360	2565.867
SLS.RARE.6: 1.0DL + 1.0DW + 0.75LL + 0.6WL	2573.986	G7	13.500	419.076	G9	0.000	-3205.360	2565.867
1.0 WL	137.142	G5	15.000	21.641	G1	0.000	165.455	-165.455
ACCIDENTAL.2: 1.0DL + 1.0DW + 0.75LL	2709.046	G7	13.500	440.717	G9	0.000	-3370.815	2731.322
Railing load	29.576	G1	15.000	5.701	G1	28.500	-10.956	11.475

Load Case/ Comb.	Bending Moment			Shear Force			Reaction at Supports	
	Max (kNm)	Girder	Loc. (m)	Max (kN)	Girder	Loc. (m)	Left	Right
SLS_RARE_1: 1.0DL + 1.2DW + 1.0LL + 0.6WL	2573.986	G7	13.500	419.076	G9	0.000	-3205.360	2565.867
SLS_FREQUENT_4: 1.0DL + 1.0DW + 0.75LL + 0.5WL	2573.986	G7	13.500	419.076	G9	0.000	-3205.360	2565.867
SLS_FREQUENT_5: 1.0DL + 1.0DW + 0.2LL + 0.6WL	2573.986	G7	13.500	419.076	G9	0.000	-3205.360	2565.867
SLS_FREQUENT_1: 1.0DL + 1.2DW + 0.75LL + 0.5WL	2573.986	G7	13.500	419.076	G9	0.000	-3205.360	2565.867
EQ_Z	0.000	—	—	0.000	—	—	0.000	-0.000
ACCIDENTAL_1: 1.0DL + 1.0DW + 0.75LL	2709.046	G7	13.500	440.717	G9	0.000	-3370.815	2731.322
SLS_RARE_2: 1.0DL + 1.2DW + 0.75LL + 1.0WL	2573.986	G7	13.500	419.076	G9	0.000	-3205.360	2565.867
WL Transverse	0.000	—	—	0.000	—	—	0.000	-0.000
EQ_X	0.000	—	—	0.000	—	—	-0.000	0.000
1.5 EQ (b)	120.932	G5	15.000	19.083	G1	0.000	145.898	-145.898
BASIC_4: 1.0DL + 1.0DW + 1.5LL + 0.9WL	2573.986	G7	13.500	419.076	G9	0.000	-3205.360	2565.867
WL Uplift	137.142	G5	15.000	21.641	G1	0.000	165.455	-165.455
BASIC_3: 1.35DL + 1.75DW + 1.15LL + 0.9WL	2573.986	G7	13.500	419.076	G9	0.000	-3205.360	2565.867
BASIC_6: 1.0DL + 1.0DW + 1.15LL + 0.9WL	2573.986	G7	13.500	419.076	G9	0.000	-3205.360	2565.867
SLS_RARE_5: 1.0DL + 1.0DW + 0.75LL + 1.0WL	2573.986	G7	13.500	419.076	G9	0.000	-3205.360	2565.867
SW	255.206	G5	15.000	39.948	G1	0.000	-307.939	307.939

Load Case/ Comb.	Bending Moment			Shear Force			Reaction at Supports	
	Max (kNm)	Girder	Loc. (m)	Max (kN)	Girder	Loc. (m)	Left	Right
SLS_FREQUENT_6: 1.0DL + 1.0DW + 0.2LL + 0.5WL	2573.986	G7	13.500	419.076	G9	0.000	-3205.360	2565.867
Crash barrier load	107.836	G9	15.000	21.588	G9	28.500	-99.077	103.946
1.0 DL + 1.0 LL	2475.747	G7	13.500	402.754	G9	0.000	-3083.862	2444.369
WL Longitudinal	0.000	—	—	0.000	—	—	-0.000	0.000
EQ_Y	268.737	G5	15.000	42.406	G1	0.000	324.218	-324.218
SEISMIC_4: 1.0DL + 1.0DW + 0.2LL + 0.75EL	2444.389	G7	13.500	398.311	G9	0.000	-3046.597	2407.104
Envelope ULS	2709.046	G7	13.500	440.717	G9	0.000	-3370.815	2731.322
BASIC_5: 1.0DL + 1.0DW + 1.15LL + 1.5WL	2573.986	G7	13.500	419.076	G9	0.000	-3205.360	2565.867
BASIC_1: 1.35DL + 1.75DW + 1.5LL + 0.9WL	2573.986	G7	13.500	419.076	G9	0.000	-3205.360	2565.867
SLS_FREQUENT_3: 1.0DL + 1.2DW + 0.2LL + 0.5WL	2573.986	G7	13.500	419.076	G9	0.000	-3205.360	2565.867
SLS_QP_2: 1.0DL + 1.0DW	1901.284	G1	15.000	313.874	G1	0.000	-2177.194	2176.769
Envelope SLS	2573.986	G7	13.500	419.076	G9	0.000	-3205.360	2565.867
1.0 DL	1668.763	G1	15.000	275.912	G1	0.000	-1890.241	1889.816
ACCIDENTAL_3: 1.0DL + 1.0DW + 0.75LL	2709.046	G7	13.500	440.717	G9	0.000	-3370.815	2731.322
1.5 EQ (c)	403.106	G5	15.000	63.609	G1	0.000	486.327	-486.327
Median load	31.539	G9	15.000	4.838	G6	28.500	-32.244	34.052
SEISMIC_1: 1.35DL + 1.75DW + 0.2LL + 1.5EL	2444.389	G7	13.500	398.311	G9	0.000	-3046.597	2407.104
SLS_FREQUENT_2: 1.0DL + 1.2DW + 0.2LL + 0.6WL	2573.986	G7	13.500	419.076	G9	0.000	-3205.360	2565.867

Table 4.2: Reactions at Supports

Load Case	Left Support (kN)	Right Support (kN)

Table 4.3: Deflection Summary (Live Load & Total Load)

parameter	value
Deflection due to Live Load, δ_{LL}	24.594 mm
Allowable Live Load Deflection (Δ_{allow})	L/800 = 37.5 mm
Live Load Deflection Check Status	PASS
Deflection due to Total Load, δ_{total}	63.415 mm
Allowable Total Deflection (Δ_{allow})	L/600 = 50.0 mm
Total Load Deflection Check Status	FAIL

[PLACEHOLDER: Bending Moment Envelope (Envelope ULS): Max/min BM along span. X-axis: distance from left support (m). Y-axis: Bending Moment (kN-m).]
[PLACEHOLDER: Vertical Deflection D_y (1.0 LL): Maximum deflection along span. Load Case: 1.0 LL, Combination: D_y . Nodes shown. Isometric view.]

[PLACEHOLDER: Vertical Deflection D_y (1.0 LL): Maximum deflection along span. Load Case: 1.0 LL, Combination: D_y . Nodes shown. Isometric view.]
X-axis: distance from left support (m).

5 Design Checks

This section presents all structural design checks performed by OsdagBridge. For each member, the demand from the governing load combination, the code-based capacity, and the utilization ratio are tabulated. All checks reference IS 800:2007 and IRC 22:2014 unless stated otherwise.

5.1 Plate Girder Design

Table 5.1: Girder Section Properties (Final Optimized / User-selected)

Girder	Property	Value
G1	Depth, D (mm)	1670.0
	Top Flange Width, b_f (mm)	510.0
	Bottom Flange Width, b_f (mm)	510.0
	Top Flange Thickness, t_f (mm)	22.0
	Bottom Flange Thickness, t_f (mm)	22.0
	Web Thickness, t_w (mm)	10.0
	Gross Area, A (cm ²)	387.0
	Moment of Inertia, I_z (cm ⁴)	1881957.85
	Elastic Section Modulus, Z_{ez} (cm ³)	22538.42
	Plastic Section Modulus, Z_{pz} (cm ³)	25100.25
	Effective Slab Width, b_{eff} (mm)	2108.3
	Transformed Composite I_z (cm ⁴)	4218577.38
	Depth to Plastic Neutral Axis (mm)	264.7
G2	Depth, D (mm)	1670.0
	Top Flange Width, b_f (mm)	510.0
	Bottom Flange Width, b_f (mm)	510.0
	Top Flange Thickness, t_f (mm)	22.0
	Bottom Flange Thickness, t_f (mm)	22.0

G2

continued on next page

continued from previous page

Girder	Property	Value
	Web Thickness, t_w (mm)	10.0
	Gross Area, A (cm ²)	387.0
	Moment of Inertia, I_z (cm ⁴)	1881957.85
	Elastic Section Modulus, Z_{ez} (cm ³)	22538.42
	Plastic Section Modulus, Z_{pz} (cm ³)	25100.25
	Effective Slab Width, b_{eff} (mm)	2108.3
	Transformed Composite I_z (cm ⁴)	4218577.38
	Depth to Plastic Neutral Axis (mm)	264.7
G3	Depth, D (mm)	1670.0
	Top Flange Width, b_f (mm)	510.0
	Bottom Flange Width, b_f (mm)	510.0
	Top Flange Thickness, t_f (mm)	22.0
	Bottom Flange Thickness, t_f (mm)	22.0
	Web Thickness, t_w (mm)	10.0
	Gross Area, A (cm ²)	387.0
	Moment of Inertia, I_z (cm ⁴)	1881957.85
	Elastic Section Modulus, Z_{ez} (cm ³)	22538.42
	Plastic Section Modulus, Z_{pz} (cm ³)	25100.25
	Effective Slab Width, b_{eff} (mm)	2108.3
	Transformed Composite I_z (cm ⁴)	4218577.38
	Depth to Plastic Neutral Axis (mm)	264.7
	Depth, D (mm)	1670.0
	Top Flange Width, b_f (mm)	510.0
	Bottom Flange Width, b_f (mm)	510.0

continued on next page

continued from previous page

Girder	Property	Value
	Top Flange Thickness, t_f (mm)	22.0
	Bottom Flange Thickness, t_f (mm)	22.0
	Web Thickness, t_w (mm)	10.0
	Gross Area, A (cm ²)	387.0
	Moment of Inertia, I_z (cm ⁴)	1881957.85
	Elastic Section Modulus, Z_{ez} (cm ³)	22538.42
	Plastic Section Modulus, Z_{pz} (cm ³)	25100.25
	Effective Slab Width, b_{eff} (mm)	2108.3
	Transformed Composite I_z (cm ⁴)	4218577.38
	Depth to Plastic Neutral Axis (mm)	264.7
G5	Depth, D (mm)	1670.0
	Top Flange Width, b_f (mm)	510.0
	Bottom Flange Width, b_f (mm)	510.0
	Top Flange Thickness, t_f (mm)	22.0
	Bottom Flange Thickness, t_f (mm)	22.0
	Web Thickness, t_w (mm)	10.0
	Gross Area, A (cm ²)	387.0
	Moment of Inertia, I_z (cm ⁴)	1881957.85
	Elastic Section Modulus, Z_{ez} (cm ³)	22538.42
	Plastic Section Modulus, Z_{pz} (cm ³)	25100.25
	Effective Slab Width, b_{eff} (mm)	2108.3
	Transformed Composite I_z (cm ⁴)	4218577.38
	Depth to Plastic Neutral Axis (mm)	264.7
	Depth, D (mm)	1670.0

continued on next page

continued from previous page

Girder	Property	Value
	Top Flange Width, b_f (mm)	510.0
	Bottom Flange Width, b_f (mm)	510.0
	Top Flange Thickness, t_f (mm)	22.0
	Bottom Flange Thickness, t_f (mm)	22.0
	Web Thickness, t_w (mm)	10.0
	Gross Area, A (cm ²)	387.0
	Moment of Inertia, I_z (cm ⁴)	1881957.85
	Elastic Section Modulus, Z_{ez} (cm ³)	22538.42
	Plastic Section Modulus, Z_{pz} (cm ³)	25100.25
	Effective Slab Width, b_{eff} (mm)	2108.3
	Transformed Composite I_z (cm ⁴)	4218577.38
	Depth to Plastic Neutral Axis (mm)	264.7
G7	Depth, D (mm)	1670.0
	Top Flange Width, b_f (mm)	510.0
	Bottom Flange Width, b_f (mm)	510.0
	Top Flange Thickness, t_f (mm)	22.0
	Bottom Flange Thickness, t_f (mm)	22.0
	Web Thickness, t_w (mm)	10.0
	Gross Area, A (cm ²)	387.0
	Moment of Inertia, I_z (cm ⁴)	1881957.85
	Elastic Section Modulus, Z_{ez} (cm ³)	22538.42
	Plastic Section Modulus, Z_{pz} (cm ³)	25100.25
	Effective Slab Width, b_{eff} (mm)	2108.3
	Transformed Composite I_z (cm ⁴)	4218577.38

continued on next page

continued from previous page

Girder	Property	Value
	Depth to Plastic Neutral Axis (mm)	264.7
G8	Depth, D (mm)	1670.0
	Top Flange Width, b_f (mm)	510.0
	Bottom Flange Width, b_f (mm)	510.0
	Top Flange Thickness, t_f (mm)	22.0
	Bottom Flange Thickness, t_f (mm)	22.0
	Web Thickness, t_w (mm)	10.0
	Gross Area, A (cm ²)	387.0
	Moment of Inertia, I_z (cm ⁴)	1881957.85
	Elastic Section Modulus, Z_{ez} (cm ³)	22538.42
	Plastic Section Modulus, Z_{pz} (cm ³)	25100.25
	Effective Slab Width, b_{eff} (mm)	2108.3
	Transformed Composite I_z (cm ⁴)	4218577.38
	Depth to Plastic Neutral Axis (mm)	264.7
G9	Depth, D (mm)	1670.0
	Top Flange Width, b_f (mm)	510.0
	Bottom Flange Width, b_f (mm)	510.0
	Top Flange Thickness, t_f (mm)	22.0
	Bottom Flange Thickness, t_f (mm)	22.0
	Web Thickness, t_w (mm)	10.0
	Gross Area, A (cm ²)	387.0
	Moment of Inertia, I_z (cm ⁴)	1881957.85
	Elastic Section Modulus, Z_{ez} (cm ³)	22538.42
	Plastic Section Modulus, Z_{pz} (cm ³)	25100.25

continued on next page

continued from previous page

Girder	Property	Value
	Effective Slab Width, b_{eff} (mm)	2108.3
	Transformed Composite I_z (cm ⁴)	4218577.38
	Depth to Plastic Neutral Axis (mm)	264.7

Table 5.2: Girder Section Classification

	Element	Slenderness Ratio	Class Limit	Classification
G1	Top Flange	11.36	11.49	Semi-Compact
	Web	162.6	106.49	Slender
	Overall Section	—	—	Slender
G2	Top Flange	11.36	11.49	Semi-Compact
	Web	162.6	106.49	Slender
	Overall Section	—	—	Slender
G3	Top Flange	11.36	11.49	Semi-Compact
	Web	162.6	106.49	Slender
	Overall Section	—	—	Slender
G4	Top Flange	11.36	11.49	Semi-Compact
	Web	162.6	106.49	Slender
	Overall Section	—	—	Slender
G5	Top Flange	11.36	11.49	Semi-Compact
	Web	162.6	106.49	Slender
	Overall Section	—	—	Slender
G6	Top Flange	11.36	11.49	Semi-Compact
	Web	162.6	106.49	Slender

continued on next page

continued from previous page

	Element	Slenderness Ratio	Class Limit	Classification
	Overall Section	—	—	Slender
G7	Top Flange	11.36	11.49	Semi-Compact
	Web	162.6	106.49	Slender
	Overall Section	—	—	Slender
G8	Top Flange	11.36	11.49	Semi-Compact
	Web	162.6	106.49	Slender
	Overall Section	—	—	Slender
G9	Top Flange	11.36	11.49	Semi-Compact
	Web	162.6	106.49	Slender
	Overall Section	—	—	Slender

*Note: IS 800:2007 Table 2**continued on next page*

continued from previous page

	Parameter	Formula	Value	Status
--	-----------	---------	-------	--------

Table 5.3: Moment Capacity Check

	Parameter	Formula	Value	Status
G1	Applied Moment, M_u	Governing LC (ULS)	2709.05 kN-m	—
	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	11376.74 kN-m	—
	Utilization Ratio, M_u/M_d	M_u/M_d	0.24	PASS
G2	Applied Moment, M_u	Governing LC (ULS)	2709.05 kN-m	—
	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	11376.74 kN-m	—
	Utilization Ratio, M_u/M_d	M_u/M_d	0.24	PASS
G3	Applied Moment, M_u	Governing LC (ULS)	2709.05 kN-m	—
	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	11376.74 kN-m	—
	Utilization Ratio, M_u/M_d	M_u/M_d	0.24	PASS
G4	Applied Moment, M_u	Governing LC (ULS)	2709.05 kN-m	—
	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	11376.74 kN-m	—
	Utilization Ratio, M_u/M_d	M_u/M_d	0.24	PASS
G5	Applied Moment, M_u	Governing LC (ULS)	2709.05 kN-m	—
	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	11376.74 kN-m	—
	Utilization Ratio, M_u/M_d	M_u/M_d	0.24	PASS
G6	Applied Moment, M_u	Governing LC (ULS)	2709.05 kN-m	—
	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	11376.74 kN-m	—
	Utilization Ratio, M_u/M_d	M_u/M_d	0.24	PASS

G6

continued on next page

continued from previous page

	Parameter	Formula	Value	Status
	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	11376.74 kN-m	—
	Utilization Ratio, M_u/M_d	M_u/M_d	0.24	PASS
G7	Applied Moment, M_u	Governing LC (ULS)	2709.05 kN-m	—
	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	11376.74 kN-m	—
	Utilization Ratio, M_u/M_d	M_u/M_d	0.24	PASS
G8	Applied Moment, M_u	Governing LC (ULS)	2709.05 kN-m	—
	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	11376.74 kN-m	—
	Utilization Ratio, M_u/M_d	M_u/M_d	0.24	PASS
G9	Applied Moment, M_u	Governing LC (ULS)	2709.05 kN-m	—
	Design Moment Capacity, M_d	IRC 22 Cl. 603.3.1	11376.74 kN-m	—
	Utilization Ratio, M_u/M_d	M_u/M_d	0.24	PASS

Note: IRC 22 Cl. 603.3.1, IS 800 Cl. 8.2.1

continued on next page

continued from previous page

	Parameter	Formula	Value	Status
--	-----------	---------	-------	--------

Table 5.4: Shear Capacity Check

	Parameter	Formula	Value	Status
G1	Applied Shear, V_u	Governing LC (ULS)	357.33 kN	—
	Shear Area, A_v	$d_w \times t_w$	16260.0 mm ²	—
	Panel Aspect Ratio, c/d	—	1.248	—
	Shear Buckling Coefficient, k_v	IS 800 Cl. 8.4.2.2	7.916	—
	Web Slenderness, λ_w	$\sqrt{f_{yw}/(\sqrt{3}\tau_{cr})}$	1.932	—
	Design Shear Stress, τ_b	IRC 22 Cl. 603.3.3.2	54.12 MPa	—
	Shear Buckling Resistance, V_{cr}	$A_v \times \tau_b$	800.05 kN	—
	Utilization Ratio, V_u/V_d	V_u/V_d	0.45	PASS
G2	Applied Shear, V_u	Governing LC (ULS)	357.33 kN	—
	Shear Area, A_v	$d_w \times t_w$	16260.0 mm ²	—
	Panel Aspect Ratio, c/d	—	1.248	—
	Shear Buckling Coefficient, k_v	IS 800 Cl. 8.4.2.2	7.916	—
	Web Slenderness, λ_w	$\sqrt{f_{yw}/(\sqrt{3}\tau_{cr})}$	1.932	—
	Design Shear Stress, τ_b	IRC 22 Cl. 603.3.3.2	54.12 MPa	—
	Shear Buckling Resistance, V_{cr}	$A_v \times \tau_b$	800.05 kN	—
	Utilization Ratio, V_u/V_d	V_u/V_d	0.45	PASS
	Applied Shear, V_u	Governing LC (ULS)	357.33 kN	—

continued on next page

continued from previous page

	Parameter	Formula	Value	Status
	Shear Area, A_v	$d_w \times t_w$	16260.0 mm ²	—
	Panel Aspect Ratio, c/d	—	1.248	—
	Shear Buckling Coefficient, k_v	IS 800 Cl. 8.4.2.2	7.916	—
	Web Slenderness, λ_w	$\sqrt{f_{yw}/(\sqrt{3}\tau_{cr})}$	1.932	—
	Design Shear Stress, τ_b	IRC 22 Cl. 603.3.3.2	54.12 MPa	—
	Shear Buckling Resistance, V_{cr}	$A_v \times \tau_b$	800.05 kN	—
	Utilization Ratio, V_u/V_d	V_u/V_d	0.45	PASS
G4	Applied Shear, V_u	Governing LC (ULS)	357.33 kN	—
	Shear Area, A_v	$d_w \times t_w$	16260.0 mm ²	—
	Panel Aspect Ratio, c/d	—	1.248	—
	Shear Buckling Coefficient, k_v	IS 800 Cl. 8.4.2.2	7.916	—
	Web Slenderness, λ_w	$\sqrt{f_{yw}/(\sqrt{3}\tau_{cr})}$	1.932	—
	Design Shear Stress, τ_b	IRC 22 Cl. 603.3.3.2	54.12 MPa	—
	Shear Buckling Resistance, V_{cr}	$A_v \times \tau_b$	800.05 kN	—
	Utilization Ratio, V_u/V_d	V_u/V_d	0.45	PASS
G5	Applied Shear, V_u	Governing LC (ULS)	357.33 kN	—
	Shear Area, A_v	$d_w \times t_w$	16260.0 mm ²	—
	Panel Aspect Ratio, c/d	—	1.248	—

continued on next page

continued from previous page

	Parameter	Formula	Value	Status
	Shear Buckling Coefficient, k_v	IS 800 Cl. 8.4.2.2	7.916	—
	Web Slenderness, λ_w	$\sqrt{f_{yw}/(\sqrt{3}\tau_{cr})}$	1.932	—
	Design Shear Stress, τ_b	IRC 22 Cl. 603.3.3.2	54.12 MPa	—
	Shear Buckling Resistance, V_{cr}	$A_v \times \tau_b$	800.05 kN	—
	Utilization Ratio, V_u/V_d	V_u/V_d	0.45	PASS
G6	Applied Shear, V_u	Governing LC (ULS)	357.33 kN	—
	Shear Area, A_v	$d_w \times t_w$	16260.0 mm ²	—
	Panel Aspect Ratio, c/d	—	1.248	—
	Shear Buckling Coefficient, k_v	IS 800 Cl. 8.4.2.2	7.916	—
	Web Slenderness, λ_w	$\sqrt{f_{yw}/(\sqrt{3}\tau_{cr})}$	1.932	—
	Design Shear Stress, τ_b	IRC 22 Cl. 603.3.3.2	54.12 MPa	—
	Shear Buckling Resistance, V_{cr}	$A_v \times \tau_b$	800.05 kN	—
	Utilization Ratio, V_u/V_d	V_u/V_d	0.45	PASS
G7	Applied Shear, V_u	Governing LC (ULS)	357.33 kN	—
	Shear Area, A_v	$d_w \times t_w$	16260.0 mm ²	—
	Panel Aspect Ratio, c/d	—	1.248	—
	Shear Buckling Coefficient, k_v	IS 800 Cl. 8.4.2.2	7.916	—
	Web Slenderness, λ_w	$\sqrt{f_{yw}/(\sqrt{3}\tau_{cr})}$	1.932	—

continued on next page

continued from previous page

	Parameter	Formula	Value	Status
	Design Shear Stress, τ_b	IRC 22 Cl. 603.3.3.2	54.12 MPa	—
	Shear Buckling Resistance, V_{cr}	$A_v \times \tau_b$	800.05 kN	—
	Utilization Ratio, V_u/V_d	V_u/V_d	0.45	PASS
G8	Applied Shear, V_u	Governing LC (ULS)	357.33 kN	—
	Shear Area, A_v	$d_w \times t_w$	16260.0 mm ²	—
	Panel Aspect Ratio, c/d	—	1.248	—
	Shear Buckling Coefficient, k_v	IS 800 Cl. 8.4.2.2	7.916	—
	Web Slenderness, λ_w	$\sqrt{f_{yw}/(\sqrt{3}\tau_{cr})}$	1.932	—
	Design Shear Stress, τ_b	IRC 22 Cl. 603.3.3.2	54.12 MPa	—
	Shear Buckling Resistance, V_{cr}	$A_v \times \tau_b$	800.05 kN	—
	Utilization Ratio, V_u/V_d	V_u/V_d	0.45	PASS
G9	Applied Shear, V_u	Governing LC (ULS)	357.33 kN	—
	Shear Area, A_v	$d_w \times t_w$	16260.0 mm ²	—
	Panel Aspect Ratio, c/d	—	1.248	—
	Shear Buckling Coefficient, k_v	IS 800 Cl. 8.4.2.2	7.916	—
	Web Slenderness, λ_w	$\sqrt{f_{yw}/(\sqrt{3}\tau_{cr})}$	1.932	—
	Design Shear Stress, τ_b	IRC 22 Cl. 603.3.3.2	54.12 MPa	—
	Shear Buckling Resistance, V_{cr}	$A_v \times \tau_b$	800.05 kN	—

continued on next page

continued from previous page

	Parameter	Formula	Value	Status
	Utilization Ratio, V_u/V_d	V_u/V_d	0.45	PASS

*Note: IS 800 Cl. 8.4, IRC 22 Cl. 603.3.3.2***Table 5.5: Interaction Checks (M-V and M-N)**

	Check	Condition	Value	Status
G1	High Shear Condition?	$V_u > 0.6 V_d$	No	—
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	11376.74 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.24	PASS
	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.24 = 0.241$	0.241	PASS
G2	High Shear Condition?	$V_u > 0.6 V_d$	No	—
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	11376.74 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.24	PASS
	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.24 = 0.241$	0.241	PASS
G3	High Shear Condition?	$V_u > 0.6 V_d$	No	—
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	11376.74 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.24	PASS
	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.24 = 0.241$	0.241	PASS
	High Shear Condition?	$V_u > 0.6 V_d$	No	—

G4

continued on next page

continued from previous page

	Check	Condition	Value	Status
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	11376.74 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.24	PASS
	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.24 = 0.241$	0.241	PASS
G5	High Shear Condition?	$V_u > 0.6 V_d$	No	—
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	11376.74 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.24	PASS
	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.24 = 0.241$	0.241	PASS
G6	High Shear Condition?	$V_u > 0.6 V_d$	No	—
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	11376.74 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.24	PASS
	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.24 = 0.241$	0.241	PASS
G7	High Shear Condition?	$V_u > 0.6 V_d$	No	—
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	11376.74 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.24	PASS
	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.24 = 0.241$	0.241	PASS
	High Shear Condition?	$V_u > 0.6 V_d$	No	—

G8

continued on next page

continued from previous page

	Check	Condition	Value	Status
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	11376.74 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.24	PASS
	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.24 = 0.241$	0.241	PASS
G9	High Shear Condition?	$V_u > 0.6 V_d$	No	—
	Reduced Moment Capacity, M_{dv}	IRC 22 Cl. 603.3.3.3	11376.74 kN-m	—
	Interaction Check: $M_u \leq M_{dv}$	—	0.24	PASS
	Interaction Check: $N_u/N_{Rd} + M_u/M_{dv} \leq 1.0$	$0.00 + 0.24 = 0.241$	0.241	PASS

*Note: IRC 22 Cl. 603.3.3.3**continued on next page*

continued from previous page

	Parameter	Formula	Value	Status
--	-----------	---------	-------	--------

Table 5.6: Lateral Torsional Buckling Check – Construction Stage

	Parameter	Formula	Value	Status
G1	Elastic Critical Moment, M_{cr}	IRC 22 Cl. 603.3.3.1	3705.72 kN-m	—
	Non-dim. Slenderness, $\bar{\lambda}_{LT}$	$\sqrt{M_p/M_{cr}}$	1.459	—
	LTB Reduction Factor, χ_{LT}	IS 800 Cl. 8.2.2	0.328	—
	LTB Resistance, M_b	$\chi_{LT} M_p/\gamma_{m0}$	2621.07 kN-m	—
	$M_u \leq M_b$	M_u/M_b	0.57	PASS
G2	Elastic Critical Moment, M_{cr}	IRC 22 Cl. 603.3.3.1	3705.72 kN-m	—
	Non-dim. Slenderness, $\bar{\lambda}_{LT}$	$\sqrt{M_p/M_{cr}}$	1.459	—
	LTB Reduction Factor, χ_{LT}	IS 800 Cl. 8.2.2	0.328	—
	LTB Resistance, M_b	$\chi_{LT} M_p/\gamma_{m0}$	2621.07 kN-m	—
	$M_u \leq M_b$	M_u/M_b	0.57	PASS
G3	Elastic Critical Moment, M_{cr}	IRC 22 Cl. 603.3.3.1	3705.72 kN-m	—
	Non-dim. Slenderness, $\bar{\lambda}_{LT}$	$\sqrt{M_p/M_{cr}}$	1.459	—
	LTB Reduction Factor, χ_{LT}	IS 800 Cl. 8.2.2	0.328	—
	LTB Resistance, M_b	$\chi_{LT} M_p/\gamma_{m0}$	2621.07 kN-m	—
	$M_u \leq M_b$	M_u/M_b	0.57	PASS
G4	Elastic Critical Moment, M_{cr}	IRC 22 Cl. 603.3.3.1	3705.72 kN-m	—
	Non-dim. Slenderness, $\bar{\lambda}_{LT}$	$\sqrt{M_p/M_{cr}}$	1.459	—

continued on next page

continued from previous page

	Parameter	Formula	Value	Status
	LTB Reduction Factor, χ_{LT}	IS 800 Cl. 8.2.2	0.328	—
	LTB Resistance, M_b	$\chi_{LT} M_p / \gamma_{m0}$	2621.07 kN-m	—
	$M_u \leq M_b$	M_u / M_b	0.57	PASS
G5	Elastic Critical Moment, M_{cr}	IRC 22 Cl. 603.3.3.1	3705.72 kN-m	—
	Non-dim. Slenderness, $\bar{\lambda}_{LT}$	$\sqrt{M_p / M_{cr}}$	1.459	—
	LTB Reduction Factor, χ_{LT}	IS 800 Cl. 8.2.2	0.328	—
	LTB Resistance, M_b	$\chi_{LT} M_p / \gamma_{m0}$	2621.07 kN-m	—
	$M_u \leq M_b$	M_u / M_b	0.57	PASS
G6	Elastic Critical Moment, M_{cr}	IRC 22 Cl. 603.3.3.1	3705.72 kN-m	—
	Non-dim. Slenderness, $\bar{\lambda}_{LT}$	$\sqrt{M_p / M_{cr}}$	1.459	—
	LTB Reduction Factor, χ_{LT}	IS 800 Cl. 8.2.2	0.328	—
	LTB Resistance, M_b	$\chi_{LT} M_p / \gamma_{m0}$	2621.07 kN-m	—
	$M_u \leq M_b$	M_u / M_b	0.57	PASS
G7	Elastic Critical Moment, M_{cr}	IRC 22 Cl. 603.3.3.1	3705.72 kN-m	—
	Non-dim. Slenderness, $\bar{\lambda}_{LT}$	$\sqrt{M_p / M_{cr}}$	1.459	—
	LTB Reduction Factor, χ_{LT}	IS 800 Cl. 8.2.2	0.328	—
	LTB Resistance, M_b	$\chi_{LT} M_p / \gamma_{m0}$	2621.07 kN-m	—
	$M_u \leq M_b$	M_u / M_b	0.57	PASS
	Elastic Critical Moment, M_{cr}	IRC 22 Cl. 603.3.3.1	3705.72 kN-m	—

continued on next page

continued from previous page

	Parameter	Formula	Value	Status
	Non-dim. Slenderness, $\bar{\lambda}_{LT}$	$\sqrt{M_p/M_{cr}}$	1.459	—
	LTB Reduction Factor, χ_{LT}	IS 800 Cl. 8.2.2	0.328	—
	LTB Resistance, M_b	$\chi_{LT} M_p/\gamma_{m0}$	2621.07 kN-m	—
	$M_u \leq M_b$	M_u/M_b	0.57	PASS
G9	Elastic Critical Moment, M_{cr}	IRC 22 Cl. 603.3.3.1	3705.72 kN-m	—
	Non-dim. Slenderness, $\bar{\lambda}_{LT}$	$\sqrt{M_p/M_{cr}}$	1.459	—
	LTB Reduction Factor, χ_{LT}	IS 800 Cl. 8.2.2	0.328	—
	LTB Resistance, M_b	$\chi_{LT} M_p/\gamma_{m0}$	2621.07 kN-m	—
	$M_u \leq M_b$	M_u/M_b	0.57	PASS

Note: IRC 22 Cl. 603.3.3.1, IS 800 Cl. 8.2.2

continued on next page

continued from previous page

Girder	Stiffener Parameter	Value / Provision
--------	---------------------	-------------------

Table 5.7: Stiffener Design Summary

Girder	Stiffener Parameter	Value / Provision
G1	Shear Buckling Design Method	post_critical
	Intermediate Stiffener Thickness (mm)	21.1
	Intermediate Stiffener Spacing (mm)	
	End Panel Stiffener Thickness (mm)	1.7
	No. of End Panel Stiffeners	4
	Longitudinal Stiffeners	None
G2	Shear Buckling Design Method	post_critical
	Intermediate Stiffener Thickness (mm)	21.1
	Intermediate Stiffener Spacing (mm)	
	End Panel Stiffener Thickness (mm)	1.7
	No. of End Panel Stiffeners	4
	Longitudinal Stiffeners	None
G3	Shear Buckling Design Method	post_critical
	Intermediate Stiffener Thickness (mm)	21.1
	Intermediate Stiffener Spacing (mm)	
	End Panel Stiffener Thickness (mm)	1.7
	No. of End Panel Stiffeners	4
	Longitudinal Stiffeners	None

continued on next page

continued from previous page

Girder	Stiffener Parameter	Value / Provision
G4	Shear Buckling Design Method	post_critical
	Intermediate Stiffener Thickness (mm)	21.1
	Intermediate Stiffener Spacing (mm)	
	End Panel Stiffener Thickness (mm)	1.7
	No. of End Panel Stiffeners	4
	Longitudinal Stiffeners	None
G5	Shear Buckling Design Method	post_critical
	Intermediate Stiffener Thickness (mm)	21.1
	Intermediate Stiffener Spacing (mm)	
	End Panel Stiffener Thickness (mm)	1.7
	No. of End Panel Stiffeners	4
	Longitudinal Stiffeners	None
G6	Shear Buckling Design Method	post_critical
	Intermediate Stiffener Thickness (mm)	21.1
	Intermediate Stiffener Spacing (mm)	
	End Panel Stiffener Thickness (mm)	1.7
	No. of End Panel Stiffeners	4
	Longitudinal Stiffeners	None

continued on next page

continued from previous page

Girder	Stiffener Parameter	Value / Provision
G7	Shear Buckling Design Method	post_critical
	Intermediate Stiffener Thickness (mm)	21.1
	Intermediate Stiffener Spacing (mm)	
	End Panel Stiffener Thickness (mm)	1.7
	No. of End Panel Stiffeners	4
	Longitudinal Stiffeners	None
G8	Shear Buckling Design Method	post_critical
	Intermediate Stiffener Thickness (mm)	21.1
	Intermediate Stiffener Spacing (mm)	
	End Panel Stiffener Thickness (mm)	1.7
	No. of End Panel Stiffeners	4
	Longitudinal Stiffeners	None
G9	Shear Buckling Design Method	post_critical
	Intermediate Stiffener Thickness (mm)	21.1
	Intermediate Stiffener Spacing (mm)	
	End Panel Stiffener Thickness (mm)	1.7
	No. of End Panel Stiffeners	4
	Longitudinal Stiffeners	None

Table 5.8: End Panel Stiffener Checks

	Check	Required	Provided	Status
G1	Web Buckling Resistance	440.72 kN	94070.48 kN	PASS
	Local Crushing Resistance	440.72 kN	545.72 kN	PASS
	Bearing Capacity	440.72 kN	2609.09 kN	PASS
	Column Buckling Resistance	440.72 kN	2577.27 kN	PASS
G2	Web Buckling Resistance	440.72 kN	94070.48 kN	PASS
	Local Crushing Resistance	440.72 kN	545.72 kN	PASS
	Bearing Capacity	440.72 kN	2609.09 kN	PASS
	Column Buckling Resistance	440.72 kN	2577.27 kN	PASS
G3	Web Buckling Resistance	440.72 kN	94070.48 kN	PASS
	Local Crushing Resistance	440.72 kN	545.72 kN	PASS
	Bearing Capacity	440.72 kN	2609.09 kN	PASS
	Column Buckling Resistance	440.72 kN	2577.27 kN	PASS
G4	Web Buckling Resistance	440.72 kN	94070.48 kN	PASS
	Local Crushing Resistance	440.72 kN	545.72 kN	PASS
	Bearing Capacity	440.72 kN	2609.09 kN	PASS
	Column Buckling Resistance	440.72 kN	2577.27 kN	PASS
G5	Web Buckling Resistance	440.72 kN	94070.48 kN	PASS
	Local Crushing Resistance	440.72 kN	545.72 kN	PASS
	Bearing Capacity	440.72 kN	2609.09 kN	PASS

continued on next page

continued from previous page

	Check	Required	Provided	Status
	Column Buckling Resistance	440.72 kN	2577.27 kN	PASS
G6	Web Buckling Resistance	440.72 kN	94070.48 kN	PASS
	Local Crushing Resistance	440.72 kN	545.72 kN	PASS
	Bearing Capacity	440.72 kN	2609.09 kN	PASS
	Column Buckling Resistance	440.72 kN	2577.27 kN	PASS
G7	Web Buckling Resistance	440.72 kN	94070.48 kN	PASS
	Local Crushing Resistance	440.72 kN	545.72 kN	PASS
	Bearing Capacity	440.72 kN	2609.09 kN	PASS
	Column Buckling Resistance	440.72 kN	2577.27 kN	PASS
G8	Web Buckling Resistance	440.72 kN	94070.48 kN	PASS
	Local Crushing Resistance	440.72 kN	545.72 kN	PASS
	Bearing Capacity	440.72 kN	2609.09 kN	PASS
	Column Buckling Resistance	440.72 kN	2577.27 kN	PASS
G9	Web Buckling Resistance	440.72 kN	94070.48 kN	PASS
	Local Crushing Resistance	440.72 kN	545.72 kN	PASS
	Bearing Capacity	440.72 kN	2609.09 kN	PASS
	Column Buckling Resistance	440.72 kN	2577.27 kN	PASS

Note: IS 800 Cl. 8.4.2.2

Table 5.9: Serviceability – Deflection Checks

	Check	Allowable	Actual	Status
G1	Live Load Deflection, δ_{LL} (mm)	$L/800 = 37.5$ mm	16.763	PASS
	Total Load Deflection, δ_{total} (mm)	$L/600 = 50.0$ mm	60.881	FAIL
G2	Live Load Deflection, δ_{LL} (mm)	$L/800 = 37.5$ mm	18.174	PASS
	Total Load Deflection, δ_{total} (mm)	$L/600 = 50.0$ mm	61.818	FAIL
G3	Live Load Deflection, δ_{LL} (mm)	$L/800 = 37.5$ mm	19.515	PASS
	Total Load Deflection, δ_{total} (mm)	$L/600 = 50.0$ mm	62.600	FAIL
G4	Live Load Deflection, δ_{LL} (mm)	$L/800 = 37.5$ mm	20.763	PASS
	Total Load Deflection, δ_{total} (mm)	$L/600 = 50.0$ mm	63.147	FAIL
G5	Live Load Deflection, δ_{LL} (mm)	$L/800 = 37.5$ mm	21.863	PASS
	Total Load Deflection, δ_{total} (mm)	$L/600 = 50.0$ mm	63.415	FAIL
G6	Live Load Deflection, δ_{LL} (mm)	$L/800 = 37.5$ mm	22.815	PASS
	Total Load Deflection, δ_{total} (mm)	$L/600 = 50.0$ mm	63.396	FAIL

continued on next page

continued from previous page

	Check	Allowable	Actual	Status
G7	Live Load Deflection, δ_{LL} (mm)	$L/800 = 37.5$ mm	23.606	PASS
	Total Load Deflection, δ_{total} (mm)	$L/600 = 50.0$ mm	63.091	FAIL
G8	Live Load Deflection, δ_{LL} (mm)	$L/800 = 37.5$ mm	24.185	PASS
	Total Load Deflection, δ_{total} (mm)	$L/600 = 50.0$ mm	62.505	FAIL
G9	Live Load Deflection, δ_{LL} (mm)	$L/800 = 37.5$ mm	24.594	PASS
	Total Load Deflection, δ_{total} (mm)	$L/600 = 50.0$ mm	61.712	FAIL

*Note: IRC 22 Cl. 604.3.2**continued on next page*

continued from previous page

	Element	Allowable Stress	Actual Stress	Status
--	---------	------------------	---------------	--------

Table 5.10: Serviceability – Maximum Stress Limitation

	Element	Allowable Stress	Actual Stress	Status
G1	Structural Steel ($0.9 f_y$)	315.00 MPa	95.82 MPa	PASS
G2	Structural Steel ($0.9 f_y$)	315.00 MPa	95.82 MPa	PASS
G3	Structural Steel ($0.9 f_y$)	315.00 MPa	95.82 MPa	PASS
G4	Structural Steel ($0.9 f_y$)	315.00 MPa	95.82 MPa	PASS
G5	Structural Steel ($0.9 f_y$)	315.00 MPa	95.82 MPa	PASS
G6	Structural Steel ($0.9 f_y$)	315.00 MPa	95.82 MPa	PASS
G7	Structural Steel ($0.9 f_y$)	315.00 MPa	95.82 MPa	PASS
G8	Structural Steel ($0.9 f_y$)	315.00 MPa	95.82 MPa	PASS
G9	Structural Steel ($0.9 f_y$)	315.00 MPa	95.82 MPa	PASS

Table 5.11: Serviceability – Fatigue Assessment

	Stress Range, $\Delta\sigma$ (MPa)	Fatigue Limit, f_{fd} (MPa)	Utilization Ratio	Status
G1	164.94 MPa	92.49 MPa	1.78	FAIL
G2	165.88 MPa	92.49 MPa	1.79	FAIL
G3	167.76 MPa	92.49 MPa	1.81	FAIL
G4	170.05 MPa	92.49 MPa	1.84	FAIL
G5	172.04 MPa	92.49 MPa	1.86	FAIL
G6	173.52 MPa	92.49 MPa	1.88	FAIL
G7	174.92 MPa	92.49 MPa	1.89	FAIL

continued on next page

continued from previous page

	Stress Range, $\Delta\sigma$ (MPa)	Fatigue Limit, f_{fd} (MPa)	Utilization Ratio	Status
G8	177.44 MPa	92.49 MPa	1.92	FAIL
G9	176.37 MPa	92.49 MPa	1.91	FAIL

Note: IRC 22 Cl. 605 — governing of normal and shear fatigue (worst by DCR). Capacity reduction factor μ_r applied where plate thickness ≥ 25 mm.

Table 5.12: Girder Design Summary (DCR / Utilization Ratio)

Girder	Controlling LC / Combination	Controlling Check	Demand	Capacity	UR	Status
G1	SLS.FREQUENT_ 1: 1.0DL + 1.2DW + 0.75LL + 0.5WL	Fatigue Normal Stress	164.94 MPa	92.49 MPa	1.783	FAIL
G2	SLS.FREQUENT_ 1: 1.0DL + 1.2DW + 0.75LL + 0.5WL	Fatigue Normal Stress	165.88 MPa	92.49 MPa	1.793	FAIL
G3	SLS.FREQUENT_ 1: 1.0DL + 1.2DW + 0.75LL + 0.5WL	Fatigue Normal Stress	167.76 MPa	92.49 MPa	1.814	FAIL
G4	SLS.FREQUENT_ 1: 1.0DL + 1.2DW + 0.75LL + 0.5WL	Fatigue Normal Stress	170.05 MPa	92.49 MPa	1.839	FAIL
G5	SLS.FREQUENT_ 1: 1.0DL + 1.2DW + 0.75LL + 0.5WL	Fatigue Normal Stress	172.04 MPa	92.49 MPa	1.860	FAIL
G6	SLS.FREQUENT_ 1: 1.0DL + 1.2DW + 0.75LL + 0.5WL	Fatigue Normal Stress	173.52 MPa	92.49 MPa	1.876	FAIL
G7	SLS.FREQUENT_ 1: 1.0DL + 1.2DW + 0.75LL + 0.5WL	Fatigue Normal Stress	174.92 MPa	92.49 MPa	1.891	FAIL
G8	SLS.FREQUENT_ 1: 1.0DL + 1.2DW + 0.75LL + 0.5WL	Fatigue Normal Stress	177.44 MPa	92.49 MPa	1.919	FAIL

continued on next page

continued from previous page

Girder	Controlling LC / Combination	Controlling Check	Demand	Capacity	UR	Status
G9	SLS_FREQUENT_1: 1.0DL + 1.2DW + 0.75LL + 0.5WL	Fatigue Normal Stress	176.37 MPa	92.49 MPa	1.907	FAIL

Note: UR = Demand / Capacity. A value ≤ 1.0 indicates a passing check. The controlling check is the criterion with the highest UR for each girder, with the real load case/combination that drives it.

Table 5.13: Shear Connector Capacity

Parameter	Formula	Value	Reference
Design Resistance, Q_u	$Q_u = \min(Q_{u,s}, Q_{u,c})$ $Q_{u,s} = \frac{0.8 f_u (\pi d^2 / 4)}{\gamma_v}$ $Q_{u,c} = \frac{0.29 \alpha d^2 \sqrt{f_{ck} E_{cm}}}{\gamma_v}$	95.36 kN	IRC 22 Cl. 606.3.1 (Eq. 6.1)
Fatigue Shear Resistance, Q_r	IRC 22 Table 8 ($\phi d, N_{sc}$)	25.00 kN	IRC 22 Cl. 606.3.2 (Table 8)

Table 5.14: Shear Connector Spacing

Criterion	Governing Spacing	Actual Spacing Provided	Status
ULS Shear (SL1)	1853.0 mm	376.9 mm	PASS
Full Composite (SL2)	376.9 mm	376.9 mm	PASS
SLS Fatigue (SR)	537.6 mm	376.9 mm	PASS
Max Spacing Limit (IRC 22)	400.0 mm	376.9 mm	PASS

Note: IRC 22 Cl. 606.4, 606.9. Governing spacing = $\min(S_{L1}, S_{L2}, S_R)$.

Table 5.15: Transverse Shear and Detailing Checks

Check	Value	Status
Longitudinal Shear per unit length, V_L	102.93 kN/m	—
Transverse Shear Capacity of Slab, V_{Rd}	999.28 kN/m	—
Transverse Shear Check	$V_L/V_{Rd} = 0.10$	PASS
Min. Transverse Reinforcement, $A_{st,min}$	Required 0.52 cm ² /m, Provided 11.03 cm ² /m	PASS
Stud Diameter $\leq 2t_f$	$d = 20.0 \text{ mm} \leq 2t_f = 44.0 \text{ mm}$	PASS
Stud Edge Distance	Provided 195.0 mm (req. $\geq 25.0 \text{ mm}$)	PASS

Note: IRC 22 Cl. 606.6, 606.10.

5.2 Deck Slab Design

The reinforced concrete deck slab is designed per IRC 112:2011 (flexure, shear, crack width) and IRC 22:2014 (composite construction). Wheel loads are distributed using Pigeaud's method. The deck is checked for flexure in the transverse and longitudinal directions, punching shear, one-way (beam) shear, crack width, and reinforcement detailing.

Table 5.16: Deck Slab — Loading and Geometry

Effective Span of Deck Slab, l_{eff}	2108 mm (girder spacing, c/c)
Deck Thickness, t_s	250.0 mm
Clear Cover (IRC 112 Cl. 15.2)	Top 50 / Bottom 50 mm
Concrete Grade (IRC 112 Cl. 6.4)	M40 ($f_{ck} = 40.0 \text{ MPa}$, $f_{ctm} = 3.0 \text{ MPa}$)
Reinforcement Grade (IRC 112 Cl. 6.2)	Fe 500 ($f_y = 500 \text{ MPa}$)
Dead Load per Unit Area, w_{DL}	6.13 kN/m ² (slab self-weight)
IRC 6 Wheel Load (Class A / 70R)	83.4 kN

continued on next page

continued from previous page

Effective Span of Deck Slab, l_{eff}	2108 mm (girder spacing, c/c)
Tyre Contact Width (IRC 6 Annex A)	300 mm (transverse)
Impact Factor (IRC 6 Cl. 208.2)	1.100
Governing Live Load Case	Class70R(W)

Table 5.17: Deck Slab — Flexure Check: Interior Panel (Pigeaud's Method)

Location	Parameter	Formula / Reference	Value	Status
At Midspan (Sagging)	Transverse BM (DL), $M_{T,DL}$	$w_{DL} l_{eff}^2 / 10$	2.73 kN-m/m	—
	Transverse BM (LL), $M_{T,LL}$	Effective width (IRC 112 B3.1)	24.83 kN-m/m	—
	Total Design BM, $M_{u,sag}$	1.35 DL + 1.50 LL	44.64 kN-m/m	—
	Effective depth, d	$t_s - c_{nom} - \phi/2$	194.0 mm	—
	Moment Capacity, M_{Rd}	IRC 112 Cl. 12.2	49.53 kN-m/m	PASS
At Support (Hogging)	Total Design BM, $M_{u,hog}$	1.35 DL + 1.50 LL (at support)	33.48 kN-m/m	—
	Required Top Steel, $A_{st,top}$	$M_u / (0.87 f_y d)$	488 mm ² /m	—
	Moment Capacity, M_{Rd}	IRC 112 Cl. 12.2	40.16 kN-m/m	PASS

Note: IRC 112 Cl. 12.2. Distribution (longitudinal) reinforcement designed for 20% of main steel moment (IRC 21 Cl. 305.18).

continued on next page

continued from previous page

Parameter	Formula	Value	Status
-----------	---------	-------	--------

Table 5.18: Deck Slab — Cantilever Overhang Flexure Check

Parameter	Formula	Value	Status
Overhang Length, l_{oh}	—	1.0542 m	—
Crash Barrier Load Moment	IRC 6 Cl. 206.4	7.50 kN-m/m	—
Dead Load Moment	$w_{DL} l_{oh}^2/2 + \text{railing}$	4.96 kN-m/m	—
Live Load Moment (eccentric wheel)	Wheel load $\times$ arm	50.77 kN-m/m	—
Total Hogging Moment, $M_{u,oh}$	1.35 DL + 1.50 (LL + CB)	101.72 kN-m/m	—
Moment Capacity (top steel), $M_{Rd,oh}$	IRC 112 Cl. 12.2	108.27 kN-m/m	PASS

Note: IRC 6 Cl. 206.4 crash barrier loads applied at kerb face; IRC 112 Cl. 12.2 flexure.

Table 5.19: Deck Slab — Punching Shear Check (IRC 112 Cl. 10.4.6)

Parameter	Formula / Reference	Value	Status
Design Wheel Load (ULS), V_{Ed}	$\gamma_Q (1 + IF) P_w$	137.6 kN	—
Tyre Contact Area	$a \times b$ (IRC 6 Annex A)	300×150 mm	—
Loaded Area at mid-depth, b_0	$c_1 \times c_2$ (incl. WC dispersion)	400×250 mm	—
Control Perimeter, u_1	$2(c_1 + c_2) + 4\pi d$	3738 mm	—
Punching Shear Stress, v_{Ed}	$V_{Ed}/(u_1 d)$	0.190 MPa	—
Punching Resistance, $v_{Rd,c}$	IRC 112 Eq. 10.1	0.555 MPa	—
Punching Shear Check	$v_{Ed} \leq v_{Rd,c}$	0.34	PASS

Note: Punching shear reinforcement not typically required for deck slabs with $d \geq 200$ mm and adequate longitudinal reinforcement.

Table 5.20: Crack Width Check (Deck Slab)

Parameter	Value / Reference
Min. Reinforcement for Crack Control, $A_{s,min}$	303 mm ² /m [IRC 112 Cl. 16.5.1]
Provided Reinforcement (bottom)	$\phi 12$ @ 185 mm c/c (611 mm ² /m)
Max. Permissible Crack Width	0.30 mm
Calculated Crack Width, w_k (governing)	0.2067 mm
Crack Width Check	PASS

Table 5.21: One-Way (Beam) Shear Check (Deck Slab)

Parameter	Formula / Reference	Value	Status
Design Shear per unit width, V_{Ed}	$\gamma_{DL}V_{DL} + \gamma_{LL}(1+IF)V_{LL}$	86.44 kN/m	—
Effective depth, d	$t_s - c_{nom} - \phi/2$	194.0 mm	—
Size factor, k	$1 + \sqrt{200/d} \leq 2.0$	2.000	—
Long. reinforcement ratio, ρ_l	$A_{sl}/(b_w d) \leq 0.02$	0.0032	—
Shear resistance (no stirrups), $V_{Rd,c}$	$v_{Rd,c} b_w d$ (Cl. 10.3.2)	107.58 kN/m	—
One-Way Shear Check	$V_{Ed} \leq V_{Rd,c}$	0.80	PASS

Note: IRC 112 Cl. 10.3.2. Shear reinforcement not provided in deck slabs; capacity relies on concrete and main reinforcement.

continued on next page

continued from previous page

Parameter	Required / Limit	Provided	Status
-----------	------------------	----------	--------

Table 5.22: Reinforcement Detailing Summary (Deck Slab)

Parameter	Required / Limit	Provided	Status
Main Reinforcement — Bottom (Transverse)			
Required Area, $A_{st,req}$ (mm ² /m)	579 mm ² /m	611 mm ² /m	PASS
Bar Diameter × Spacing	$\phi \geq 10$ mm (IRC 112)	$\phi 12$ @ 185 mm c/c	—
Min. Reinforcement $A_{s,min}$ (IRC 112 Cl. 16.3.1)	303 mm ² /m	611 mm ² /m	PASS
Max. Bar Spacing (IRC 112 Cl. 16.3.2)	300 mm	185 mm	PASS
Distribution Reinforcement — Longitudinal			
Required Area, $A_{st,dist}$ (mm ² /m)	$\geq 20\%$ of main steel	377 mm ² /m	PASS
Top Reinforcement (Support / Cantilever Overhang)			
Required Area, $A_{st,top}$ (mm ² /m)	488 mm ² /m	492 mm ² /m	PASS
Cover and Detailing			
Clear Cover (IRC 112 Cl. 15.2)	≥ 50 mm (Table 14.2)	Top 50 / Bottom 50 mm	PASS

Note: IRC 112 Cl. 16.3, IS 456 Cl. 26.5. All reinforcement provisions satisfy strength and detailing requirements.

5.3 Cross Bracing Design

Cross bracing between adjacent plate girders provides lateral stability during construction, resists transverse loads (wind, seismic, braking) in service, and prevents lateral torsional buckling of the girders. Members are designed per IS 800:2007 Cl. 7 (compression) and Cl. 6 (tension). Forces are derived from the grillage model under the governing load combination (DL + LL + WL).

Table 5.23: Cross Bracing — Connection and Section Properties

Panel	Member	Connection	Section	A_g (mm ²)	r_{min} (mm)
G1-G2	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G2-G3	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G3-G4	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G4-G5	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G5-G6	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G6-G7	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G7-G8	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0

continued on next page

continued from previous page

Panel	Member	Connection	Section	A_g (mm ²)	r_{min} (mm)
G8-G9	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0

Note: A_g = gross cross-sectional area; r_{min} = minimum radius of gyration.

Table 5.24: Cross Bracing — Slenderness Ratio Check (IS 800 Cl. 3.8)

Panel	Member	Nature	Eff. Length KL (mm)	KL/r	Limit / Status
G1-G2	Diagonal	C	2542	134.3	250 — PASS
	Top chord	C	2108	111.4	250 — PASS
	Bottom chord	T	2108	111.4	400 — PASS
G2-G3	Diagonal	C	2542	134.3	250 — PASS
	Top chord	C	2108	111.4	250 — PASS
	Bottom chord	T	2108	111.4	400 — PASS
G3-G4	Diagonal	C	2542	134.3	250 — PASS
	Top chord	C	2108	111.4	250 — PASS
	Bottom chord	T	2108	111.4	400 — PASS
G4-G5	Diagonal	C	2542	134.3	250 — PASS
	Top chord	C	2108	111.4	250 — PASS
	Bottom chord	T	2108	111.4	400 — PASS

continued on next page

continued from previous page

Panel	Member	Nature	Eff. Length KL (mm)	KL/r	Limit / Status
G5-G6	Diagonal	C	2542	134.3	250 — PASS
	Top chord	C	2108	111.4	250 — PASS
	Bottom chord	T	2108	111.4	400 — PASS
G6-G7	Diagonal	C	2542	134.3	250 — PASS
	Top chord	C	2108	111.4	250 — PASS
	Bottom chord	T	2108	111.4	400 — PASS
G7-G8	Diagonal	C	2542	134.3	250 — PASS
	Top chord	C	2108	111.4	250 — PASS
	Bottom chord	T	2108	111.4	400 — PASS
G8-G9	Diagonal	C	2542	134.3	250 — PASS
	Top chord	C	2108	111.4	250 — PASS
	Bottom chord	T	2108	111.4	400 — PASS

Note: 3. Limit = 250 for compression members, 400 for tension members. $K = 1.0$ for members with both ends pinned.

continued on next page

continued from previous page

Panel	Member	Section	Governing LC	Demand (kN)	Capacity (kN)	UR	Status
-------	--------	---------	--------------	-------------	---------------	----	--------

Table 5.25: Cross Bracing Design — Capacity Summary

Panel	Member	Section	Governing LC	Demand (kN)	Capacity (kN)	UR	Status
G1-G2	Diagonal	40 x 40 x 3	1.5 EQ (b)	13.144	16.740	0.810	PASS
	Chord	40 x 40 x 3	1.5 EQ (b)	10.903	22.030	0.670	PASS
G2-G3	Diagonal	40 x 40 x 3	1.5 EQ (b)	8.385	16.740	0.770	PASS
	Chord	40 x 40 x 3	1.5 EQ (b)	6.956	22.030	0.640	PASS
G3-G4	Diagonal	40 x 40 x 3	1.5 EQ (a)	6.061	45.000	0.130	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	5.027	45.000	0.110	PASS
G4-G5	Diagonal	40 x 40 x 3	1.5 EQ (a)	6.363	45.000	0.140	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	5.278	45.000	0.120	PASS
G5-G6	Diagonal	40 x 40 x 3	1.5 EQ (a)	6.772	45.000	0.150	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	5.618	45.000	0.120	PASS
G6-G7	Diagonal	40 x 40 x 3	1.5 EQ (a)	7.261	45.000	0.160	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	6.023	45.000	0.130	PASS
G7-G8	Diagonal	40 x 40 x 3	1.5 EQ (b)	9.384	45.000	0.210	PASS
	Chord	40 x 40 x 3	1.5 EQ (b)	7.784	45.000	0.170	PASS
G8-G9	Diagonal	40 x 40 x 3	1.5 EQ (b)	14.435	45.000	0.320	PASS
	Chord	40 x 40 x 3	1.5 EQ (b)	11.974	45.000	0.270	PASS

Note: Designed per IS 800 Cl. 7 (compression) and Cl. 6 (tension). OsdagBridge cross-bracing module used.

5.4 End Diaphragm Design

End diaphragms at the supports transfer transverse loads to the bearings, restrain the bottom flanges against lateral displacement, and maintain the girder cross-section geometry during construction and in service. They are designed per IS 800:2007 and IRC 24:2010 Cl. 507.

Table 5.26: End Diaphragm — Connection and Section Properties

Panel	Member	Connection	Section	A_g (mm ²)	r_{min} (mm)
G1-G2	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G2-G3	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G3-G4	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G4-G5	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G5-G6	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0

continued on next page

continued from previous page

Panel	Member	Connection	Section	A_g (mm ²)	r_{min} (mm)
G6-G7	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G7-G8	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0
G8-G9	Diagonal	Bolted	40 x 40 x 3	237.0	8.0
	Top / Bottom chord	Bolted	40 x 40 x 3	237.0	8.0

Note: A_g = gross cross-sectional area; r_{min} = minimum radius of gyration.

continued on next page

continued from previous page

Panel	Member	Nature	Eff. Length KL (mm)	KL/r	Limit / Status
-------	--------	--------	--------------------------	--------	----------------

Table 5.27: End Diaphragm — Slenderness Ratio Check (IS 800 Cl. 3.8)

Panel	Member	Nature	Eff. Length KL (mm)	KL/r	Limit / Status
G1-G2	Diagonal	C	2542	134.3	250 — PASS
	Top chord	C	2108	111.4	250 — PASS
	Bottom chord	T	2108	111.4	400 — PASS
G2-G3	Diagonal	C	2542	134.3	250 — PASS
	Top chord	C	2108	111.4	250 — PASS
	Bottom chord	T	2108	111.4	400 — PASS
G3-G4	Diagonal	C	2542	134.3	250 — PASS
	Top chord	C	2108	111.4	250 — PASS
	Bottom chord	T	2108	111.4	400 — PASS
G4-G5	Diagonal	C	2542	134.3	250 — PASS
	Top chord	C	2108	111.4	250 — PASS
	Bottom chord	T	2108	111.4	400 — PASS
G5-G6	Diagonal	C	2542	134.3	250 — PASS
	Top chord	C	2108	111.4	250 — PASS
	Bottom chord	T	2108	111.4	400 — PASS
G6-G7	Diagonal	C	2542	134.3	250 — PASS
	Top chord	C	2108	111.4	250 — PASS
	Bottom chord	T	2108	111.4	400 — PASS

continued on next page

continued from previous page

Panel	Member	Nature	Eff. Length KL (mm)	KL/r	Limit / Status
G7-G8	Diagonal	C	2542	134.3	250 — PASS
	Top chord	C	2108	111.4	250 — PASS
	Bottom chord	T	2108	111.4	400 — PASS
G8-G9	Diagonal	C	2542	134.3	250 — PASS
	Top chord	C	2108	111.4	250 — PASS
	Bottom chord	T	2108	111.4	400 — PASS

Note: 3. Limit = 250 for compression members, 400 for tension members. $K = 1.0$ for members with both ends pinned.

Table 5.28: End Diaphragm Design — Capacity Summary

Panel	Member	Section	Governing LC	Demand (kN)	Capacity (kN)	UR	Status
G1-G2	Diagonal	40 x 40 x 3	1.5 EQ (b)	13.144	16.740	0.810	PASS
	Chord	40 x 40 x 3	1.5 EQ (b)	10.903	22.030	0.670	PASS
G2-G3	Diagonal	40 x 40 x 3	1.5 EQ (b)	8.385	16.740	0.770	PASS
	Chord	40 x 40 x 3	1.5 EQ (b)	6.956	22.030	0.640	PASS
G3-G4	Diagonal	40 x 40 x 3	1.5 EQ (a)	6.061	45.000	0.130	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	5.027	45.000	0.110	PASS
G4-G5	Diagonal	40 x 40 x 3	1.5 EQ (a)	6.363	45.000	0.140	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	5.278	45.000	0.120	PASS
G5-G6	Diagonal	40 x 40 x 3	1.5 EQ (a)	6.772	45.000	0.150	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	5.618	45.000	0.120	PASS

continued on next page

continued from previous page

Panel	Member	Section	Governing LC	Demand (kN)	Capacity (kN)	UR	Status
G6-G7	Diagonal	40 x 40 x 3	1.5 EQ (a)	7.261	45.000	0.160	PASS
	Chord	40 x 40 x 3	1.5 EQ (a)	6.023	45.000	0.130	PASS
G7-G8	Diagonal	40 x 40 x 3	1.5 EQ (b)	9.384	45.000	0.210	PASS
	Chord	40 x 40 x 3	1.5 EQ (b)	7.784	45.000	0.170	PASS
G8-G9	Diagonal	40 x 40 x 3	1.5 EQ (b)	14.435	45.000	0.320	PASS
	Chord	40 x 40 x 3	1.5 EQ (b)	11.974	45.000	0.270	PASS

Note: Designed per IS 800 Cl. 7 (compression) and Cl. 6 (tension). OsdagBridge cross-bracing module used.

5.5 Overall Design Check Summary

continued on next page

continued from previous page

Member / Check	Governing Load Combo	Demand	Capacity	UR
-------------------	-------------------------	--------	----------	----

Table 5.29: Overall Design Check Summary — All Members


Member / Check	Governing Load Combo	Demand	Capacity	UR
Girder — Moment	ACCIDENTAL_1: 1.0DL + 1.0DW + 0.75LL	2709.05 kNm	11376.74 kNm	0.24
Girder — Shear	ACCIDENTAL_1: 1.0DL + 1.0DW + 0.75LL	440.72 kN	800.05 kN	0.55
Girder — LTB (constr.)	1.0 DL	1680.40 kNm	2621.07 kNm	0.64
Girder — Deflection	1.0 DL + 1.0 LL	28.29 mm	50.00 mm	0.57
Girder — Stress	SLS_RARE_1: 1.0DL + 1.2DW + 1.0LL + 0.6WL	96.86 MPa	315.00 MPa	0.31
Girder — Fatigue	SLS_FREQUENT_1: 1.0DL + 1.2DW + 0.75LL + 0.5WL	177.44 MPa	92.49 MPa	1.92
Transverse Shear (slab)	—	—	—	—
Crack Width (slab)	SLS_FREQUENT_1: 1.0DL + 1.2DW + 0.75LL + 0.5WL	0.207 mm	0.300 mm	0.69
Deck — Flexure (sagging)	Basic ULS: 1.35DL + 1.5LL	44.64 kN-m/m	49.53 kN-m/m	0.90
Deck — Flexure (hogging)	Basic ULS: 1.35DL + 1.5LL	33.48 kN-m/m	40.16 kN-m/m	0.83
Deck — Cantilever Overhang	Basic ULS: 1.35DL + 1.5LL	101.72 kN-m/m	108.27 kN-m/m	0.94
Deck — Punching Shear	Basic ULS: 1.35DL + 1.5LL	0.19 MPa	0.55 MPa	0.34
Deck — One-Way Shear	Basic ULS: 1.35DL + 1.5LL	86.44 kN/m	107.58 kN/m	0.80

continued on next page

continued from previous page

Member / Check	Governing Load Combo	Demand	Capacity	UR
Cross Bracing — Compression	1.5 EQ (b)	13.56 kN	16.740 kN	0.81
Cross Bracing — Tension	1.5 EQ (b)	14.40 kN	45.000 kN	0.32
Cross Bracing — Slenderness	—	134.3	250	0.54
End Diaphragm — Moment	1.5 EQ (b)	13.56 kN	16.740 kN	0.81
End Diaphragm — Shear	1.5 EQ (b)	14.40 kN	45.000 kN	0.32

Note: UR = Demand / Capacity. All values ≤ 1.0 indicate passing checks. The governing check for each component is highlighted in the individual design check sections above.

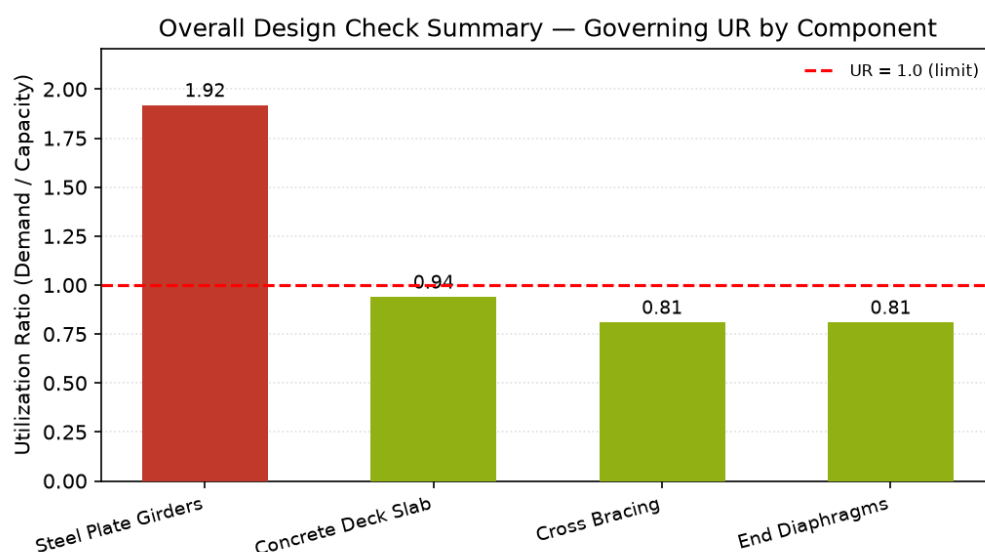

Overall Design Check Summary — governing Utilization Ratio (Demand/Capacity) by component, with the UR = 1.0 pass/fail threshold shown as a dashed line.

6 Drawings and Visualizations

This section presents CAD-generated views of the designed bridge and its components. All views are generated automatically by OsdagBridge using pythonOCC.

6.1 Bridge Configuration and Layout




Figure 6.1: Overall 3D Bridge Superstructure




Figure 6.2: Typical Cross Section



Figure 6.3: Top View

6.2 Plate Girder — Detailed Views




Figure 6.4: 3D View of Plate Girders



Figure 6.5: Cross Section of Plate Girder




Figure 6.6: Side View of Girder

6.3 Cross Bracing Detail




Figure 6.7: Cross Bracing Layout




Figure 6.8: Cross Bracing – Bracing Section




Figure 6.9: Cross Bracing – Top Chord Section




Figure 6.10: Cross Bracing – Bottom Chord Section

6.4 End Diaphragm Detail



Figure 6.11: End Diaphragm Layout




Figure 6.12: End
Diaphragm – Bracing
Section




Figure 6.13: End
Diaphragm – Top Chord
Section





Figure 6.14: End
Diaphragm – Bottom
Chord Section


7 Material Take-off & Quantity Summary

Table 7.1 Bill of Materials (Steel, Concrete, and Reinforcement Quantities)

S.N.	Item Description	Volume	Quantity	Total Volume	Weight (MT)	Total Weight (MT)
1	Structural Steel (IS 2062) for Girders	$0.03492 \text{ m}^2 \times 30.00 \text{ m} = 1.04756 \text{ m}^3$	9	9.43	8.22	74.01
2(a)	Cross Bracing - Top Chord	$0.00024 \text{ m}^2 \times 2.11 \text{ m} = 0.00050 \text{ m}^3$	8	0.00	0.0039	0.03
2(b)	Cross Bracing - Bottom Chord	$0.00024 \text{ m}^2 \times 2.11 \text{ m} = 0.00050 \text{ m}^3$	8	0.00	0.0039	0.03
2(c)	Cross Bracing - Diagonal Chord	$0.00024 \text{ m}^2 \times 2.54 \text{ m} = 0.00060 \text{ m}^3$	16	0.01	0.0047	0.08
3	Concrete (M40) for Deck Slab	$18.97 \text{ m} \times 0.25 \text{ m} \times 30.00 \text{ m} = 142.31 \text{ m}^3$	1	142.31	355.78	355.78
4	Reinforcement Steel (Fe 500)	$0.072516 \text{ m}^2 \times 30.00 \text{ m} = 2.17548 \text{ m}^3$	1	2.18	17.08	17.08
5	Shear Stud Connectors	$0.000314 \text{ m}^2 \times 0.100 \text{ m} = 0.000031 \text{ m}^3$	1440	0.05	0.000247	0.355
6	Crash Barrier	$0.30228 \text{ m}^2 \times 30.00 \text{ m} = 9.06848 \text{ m}^3$	2	18.14	22.67	45.34

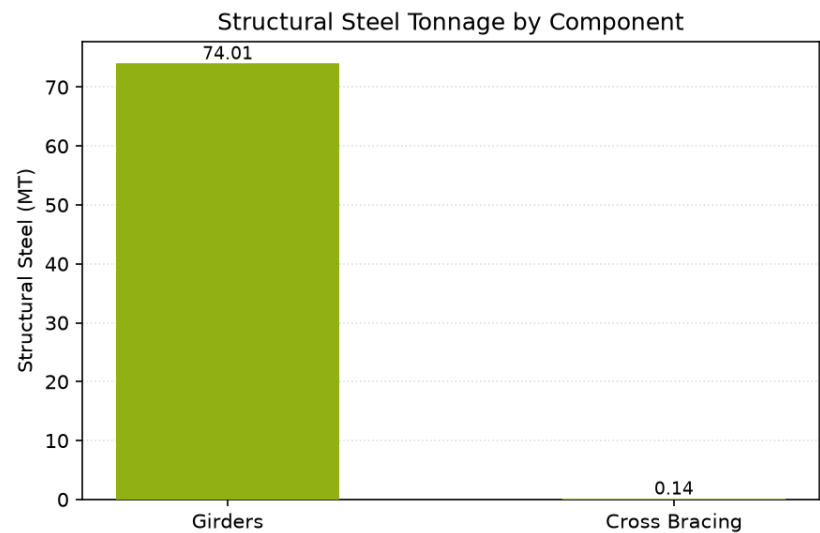

Structural steel tonnage by component (Girders, Cross Bracing). End Diaphragm steel is not currently itemized as a separate line in Table 7.1 and so cannot be charted here.

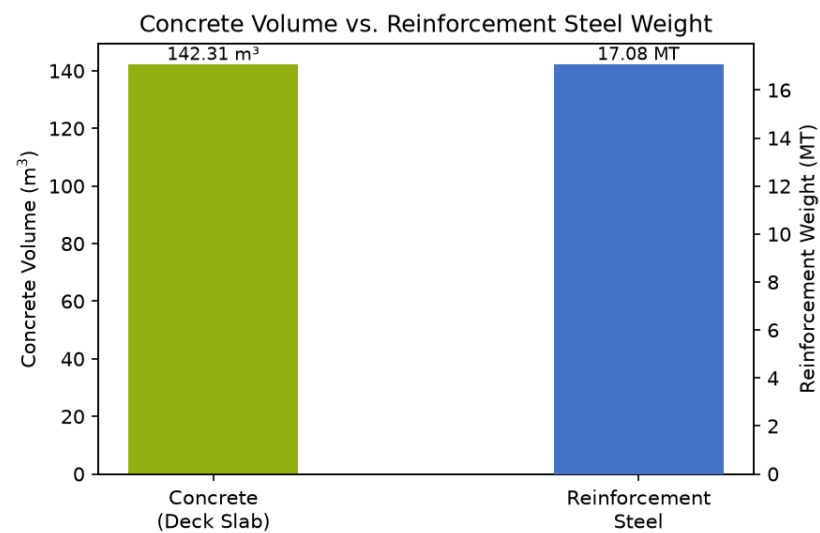

Concrete volume (deck slab) versus reinforcement steel weight.

8 Standards & Assumptions

This section provides references to standards used to calibrate the OsdagBridge design modules, and notes the limitations of the current software version.

8.1 Design Standards

The following Indian Road Congress (IRC) codes and Indian Standards (IS) form the basis of all design calculations in this software.

Table 8.1: IRC Codes

Code	Year	Title / Scope
IRC 5	2015	General Features of Design - carriageway widths, kerb, footpath dimensions
IRC 6	2017	Loads and Load Combinations - dead load, live load, impact, wind, temperature, etc.
IRC 22	2015	Composite Construction (LS) - Composite section properties, ULS/SLS design, shear connectors
IRC 24	2010	Steel Road Bridges (LS) - Stiffener design, skew angle limits, diaphragm requirements
IRC 112	2020	Concrete Road Bridges - Deck slab flexure, shear, crack width, reinforcement
IRC SP 114	2018	Seismic Design of Road Bridges

Table 8.2: IS Codes

Code	Year	Scope
IS 800	2007	Steel construction - tension, compression, bending, shear, LTB, stiffeners, combined checks
IS 456	2000	Concrete - simplified stress-block for deck moment capacity
IS 1786	2008	Reinforcement steel properties
IS 1893 (Part 3)	2014	Earthquake resistant design
IS 2062	2011	Structural steel - yield and ultimate strength by grade

8.2 Analysis and Design Assumptions of This Version

Structural Analysis

- All girders are modelled as simply supported; continuous spans are not currently supported.
- A 3D grillage model (OSPGrillage) is used for load distribution. Grillage members carry composite section properties after the construction stage.
- The transverse member forces are computed using an approximate 2D frame analogy. For irregular or skewed geometries, a 3D FEM is recommended.
- Fixed bearing stiffness is modelled as $k = 1,000,000 \text{ kN/m}$ (virtually rigid); free/expansion bearing as $k = 100 \text{ kN/m}$.
- Construction stage sequence analysis is approximate. Detailed staged analysis should be performed for long-term deflection checks.

Composite Action

- Full shear connection is assumed at ULS with headed stud connectors designed per IRC 22:2015 Cl.606.
- Short-term composite section properties (modular ratio $n = E_s/E_{cm}$) are used for ULS checks.
- Long-term composite section properties (with creep-adjusted modular ratio) are used for SLS deflection and crack-width checks.
- Pre-composite stage: the steel girder alone resists all construction loads prior to concrete gaining strength.

Material Properties (IRC 22:2015 Annex III)

- Steel: $E_s = 200,000 \text{ MPa}$, $G_s = 80,000 \text{ MPa}$, $\nu = 0.30$, $\alpha = 11.7 \times 10^{-6}/^\circ\text{C}$ (grade-independent).
- Minimum structural concrete grade: M25.
- Default reinforcement grade: Fe500.

Partial Safety Factors (IRC 22:2015 Cl.601.4)

- γ_{m0} (steel yield, ULS) = 1.10
- γ_{m1} (steel ultimate, ULS) = 1.25

- Reinforcement (ULS) = 1.15
- Welds – shop: 1.25; field: 1.50
- Fatigue (γ_{mft}) = 1.35

Loading

- Dead load densities per IRC 6:2017 Cl.203: structural steel 78.5 kN/m^3 , concrete 25.0 kN/m^3 , bituminous wearing course 24.0 kN/m^3 .
- Multi-lane live load reduction factors per IRC 6:2017 Cl.204.4 Table 6A: 1st lane = 1.0, 2nd lane = 0.8, 3rd lane onwards = 0.4.
- Impact factor (dynamic load allowance) computed from span per IRC 6:2017 Cl.208.2/208.3.
- Wind load applied as transverse, longitudinal, and vertical components per IRC 6:2017 Cl.209.3.3–209.3.5.

Serviceability Limits

- Deflection limits (IRC 22:2015 Cl.604.3.2): live load + impact $\leq L/800$; total $\leq L/600$.
- SLS stress limits: concrete $\sigma_c \leq 0.48f_{ck}$; rebar $\sigma_s \leq 0.80f_{yk}$; steel $f_e \leq 0.9f_y$.
- Permissible crack width: $w_k \leq 0.3 \text{ mm}$ (bridge deck, exposure class XS2/XD2 per IRC 112:2020 Cl.12.3.2).

Fatigue

- Reference fatigue life: $N_{sc} = 2 \times 10^6$ cycles (IRC 22:2015 Cl.605).
- Constant stress range is assumed. A thickness correction factor μ_r is applied for plate thickness $> 25 \text{ mm}$.

Stiffener Design

- Intermediate transverse stiffener and bearing stiffener design follows IS 800:2007 Cl.8.7.2/8.7.3 and IRC 24:2010 Cl.509.7.2/509.7.3.

8.3 Known Limitations of This Version

- Substructure (piers, pile caps, foundations) and bearing design are not included.
- Splice connection design is not implemented.
- Skew angle > 15 degrees requires independent manual analysis (IRC 24 Cl. 504.8).
- Construction stage sequence analysis is approximate; detailed staged analysis should be performed for long-term deflection checks.
- The grillage analysis assumes simply supported boundary conditions; continuous spans are not currently supported.

References

1. IRC 5 (2024) — *Standard Specifications and Code of Practice for Road Bridges, Section I: General Features of Design.*
2. IRC 6 (2017) — *Standard Specifications and Code of Practice for Road Bridges, Section II: Loads and Load Combinations.*
3. IRC 22 (2014) — *Standard Specifications and Code of Practice for Road Bridges, Section VI: Composite Construction (Limit State Design).*
4. IRC 24 (2010) — *Standard Specifications and Code of Practice for Road Bridges, Section V: Steel Road Bridges (Limit State Method).*
5. IRC 112 (2011) — *Code of Practice for Concrete Road Bridges.*
6. IRC SP 114 (2018) — *Guidelines for Seismic Design of Road Bridges.*
7. IS 800 (2007) — *Indian Standard: General Construction in Steel — Code of Practice.*
8. IS 2062 (2011) — *Hot Rolled Medium and High Tensile Structural Steel — Specification.*
9. Subramanian, N. (2008). *Design of Steel Structures.* Oxford University Press.
10. Steel-INS DAG Teaching Resource Materials. <https://www.steel-insdag.org>