

NOTES:

MATERIAL:

1. HOUSING MATERIAL :GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL :PHOSPHOR BRONZE t=0.30mm.
3. PLATING :SELECTING GOLD PLATING 1u"~50u" OVER NICKEL IN CONTACT AREA. 150u" TIN PLATING OVER NICKEL IN SOLDER AREA

4. SHIELD : 0.20mmTHICKNESS COPPER ALLY WITH NICKEL PLATEI

ELECTRICAL:



1. VOLTAGE RATING :125 VAC RMS.
2. CURRENT RATING :1.5 AMP.
3. CONTACT RESISTANCE :30 MILLIOHMS MAX.
4. INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC .
5. DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

1. DURRABILITY : 750 CYCLES MIN.
2. PCB RETENTION PRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : -40° C TO 85° C.
2. OPERATION : 0° C TO 70° C.

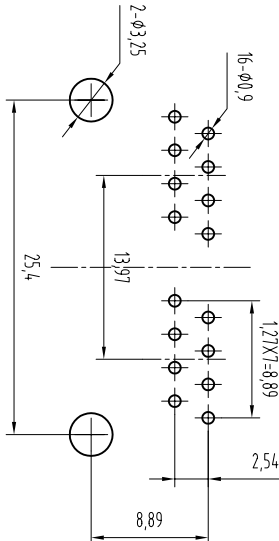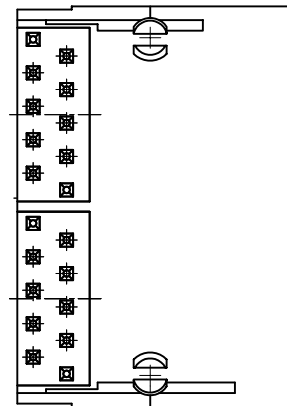


PC Board Layout

ponent Side Shown

E-mail:sales2@zxcnt.cn  
www.zxcnt.com

**ZXCNT®** 深圳市朱讯电子有限公司  
Shenzhen ZXCNT Electronic Co.,Ltd

UNLESS OTHERWISE SPECIFIED				设计 (draw)		袁志凯	
TOLERANCES				审核 (ch'k)		叶科研	
X.	+/-	METRIC		核准 (app' d)		叶科研	
.X	+/-	0.30		日期 (date)		2014-6-22	
.XX	+/-	0.25		字张 A4			
FRACTIONS	+/-	0.25					
ANGLES	+/-	2.00°					
DIMENSIONS				字张 A4			
(METRIC)				比例			
(MM)				1 : 1 状态码 A 页数 1 OF 1			

	
ANGLE OF PROJECTION	

工程图号： ZXRJ-598-12A		版本： A/1	
--------------------	--	---------	--

