





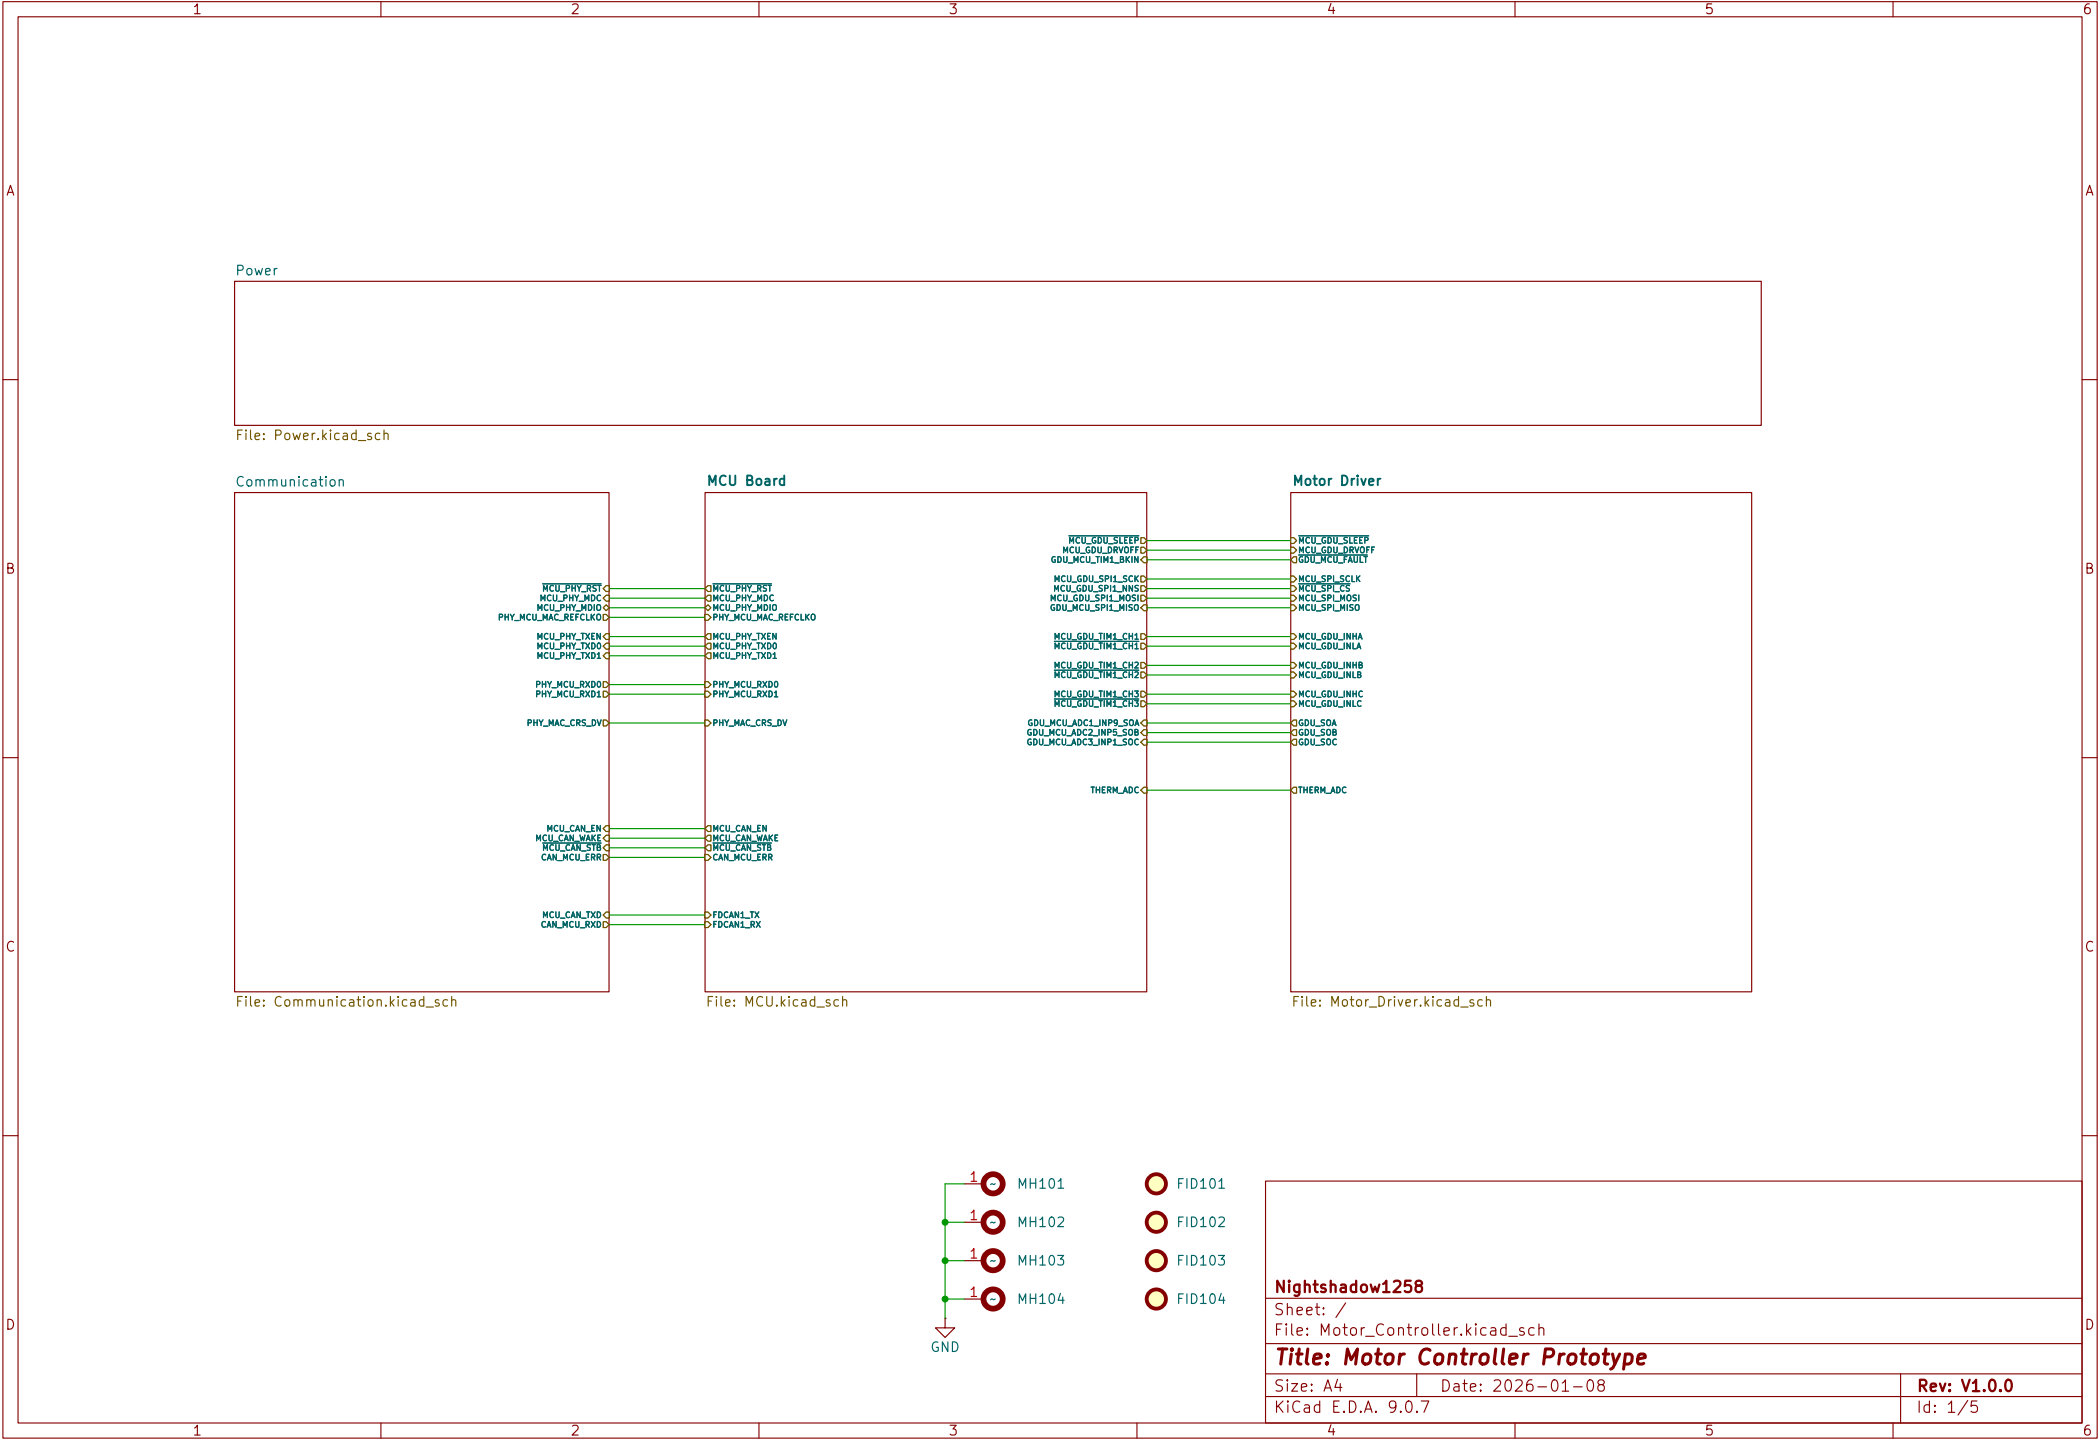

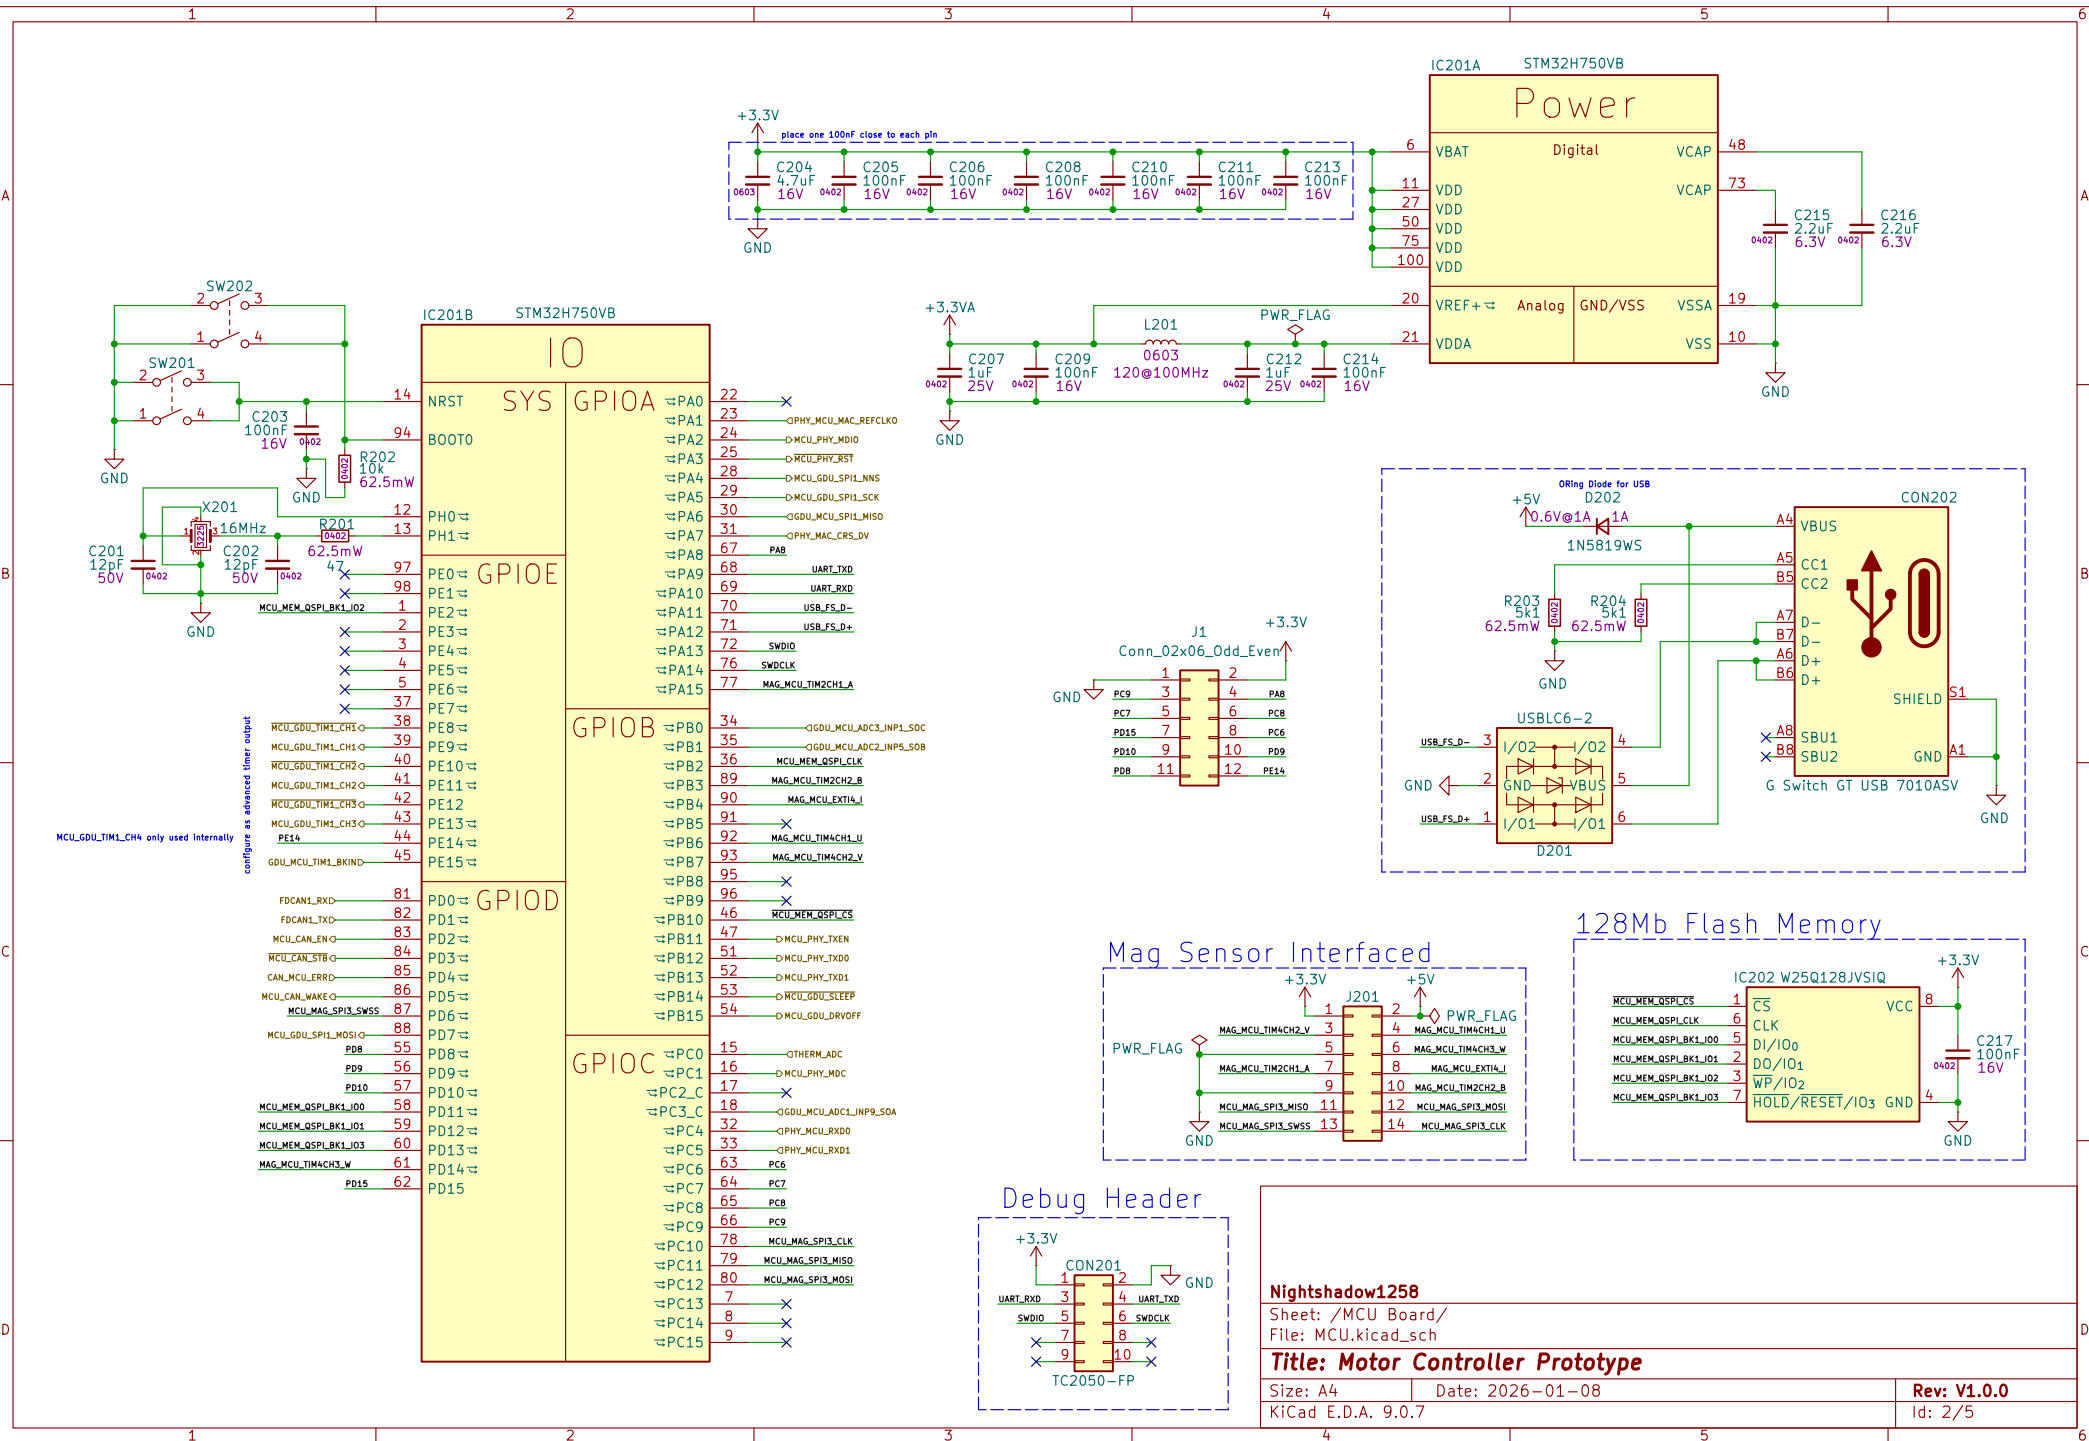

- achieve best CSA accuracy.
- The exposed pad is used for thermal dissipation, not electrical grounding, and has a high-impedance connection to the GND/AGND pins. Therefore, it is recommended to connect the exposed pad to the best thermal GND, and to connect the GND/AGND pins to the MCU-reference GND.

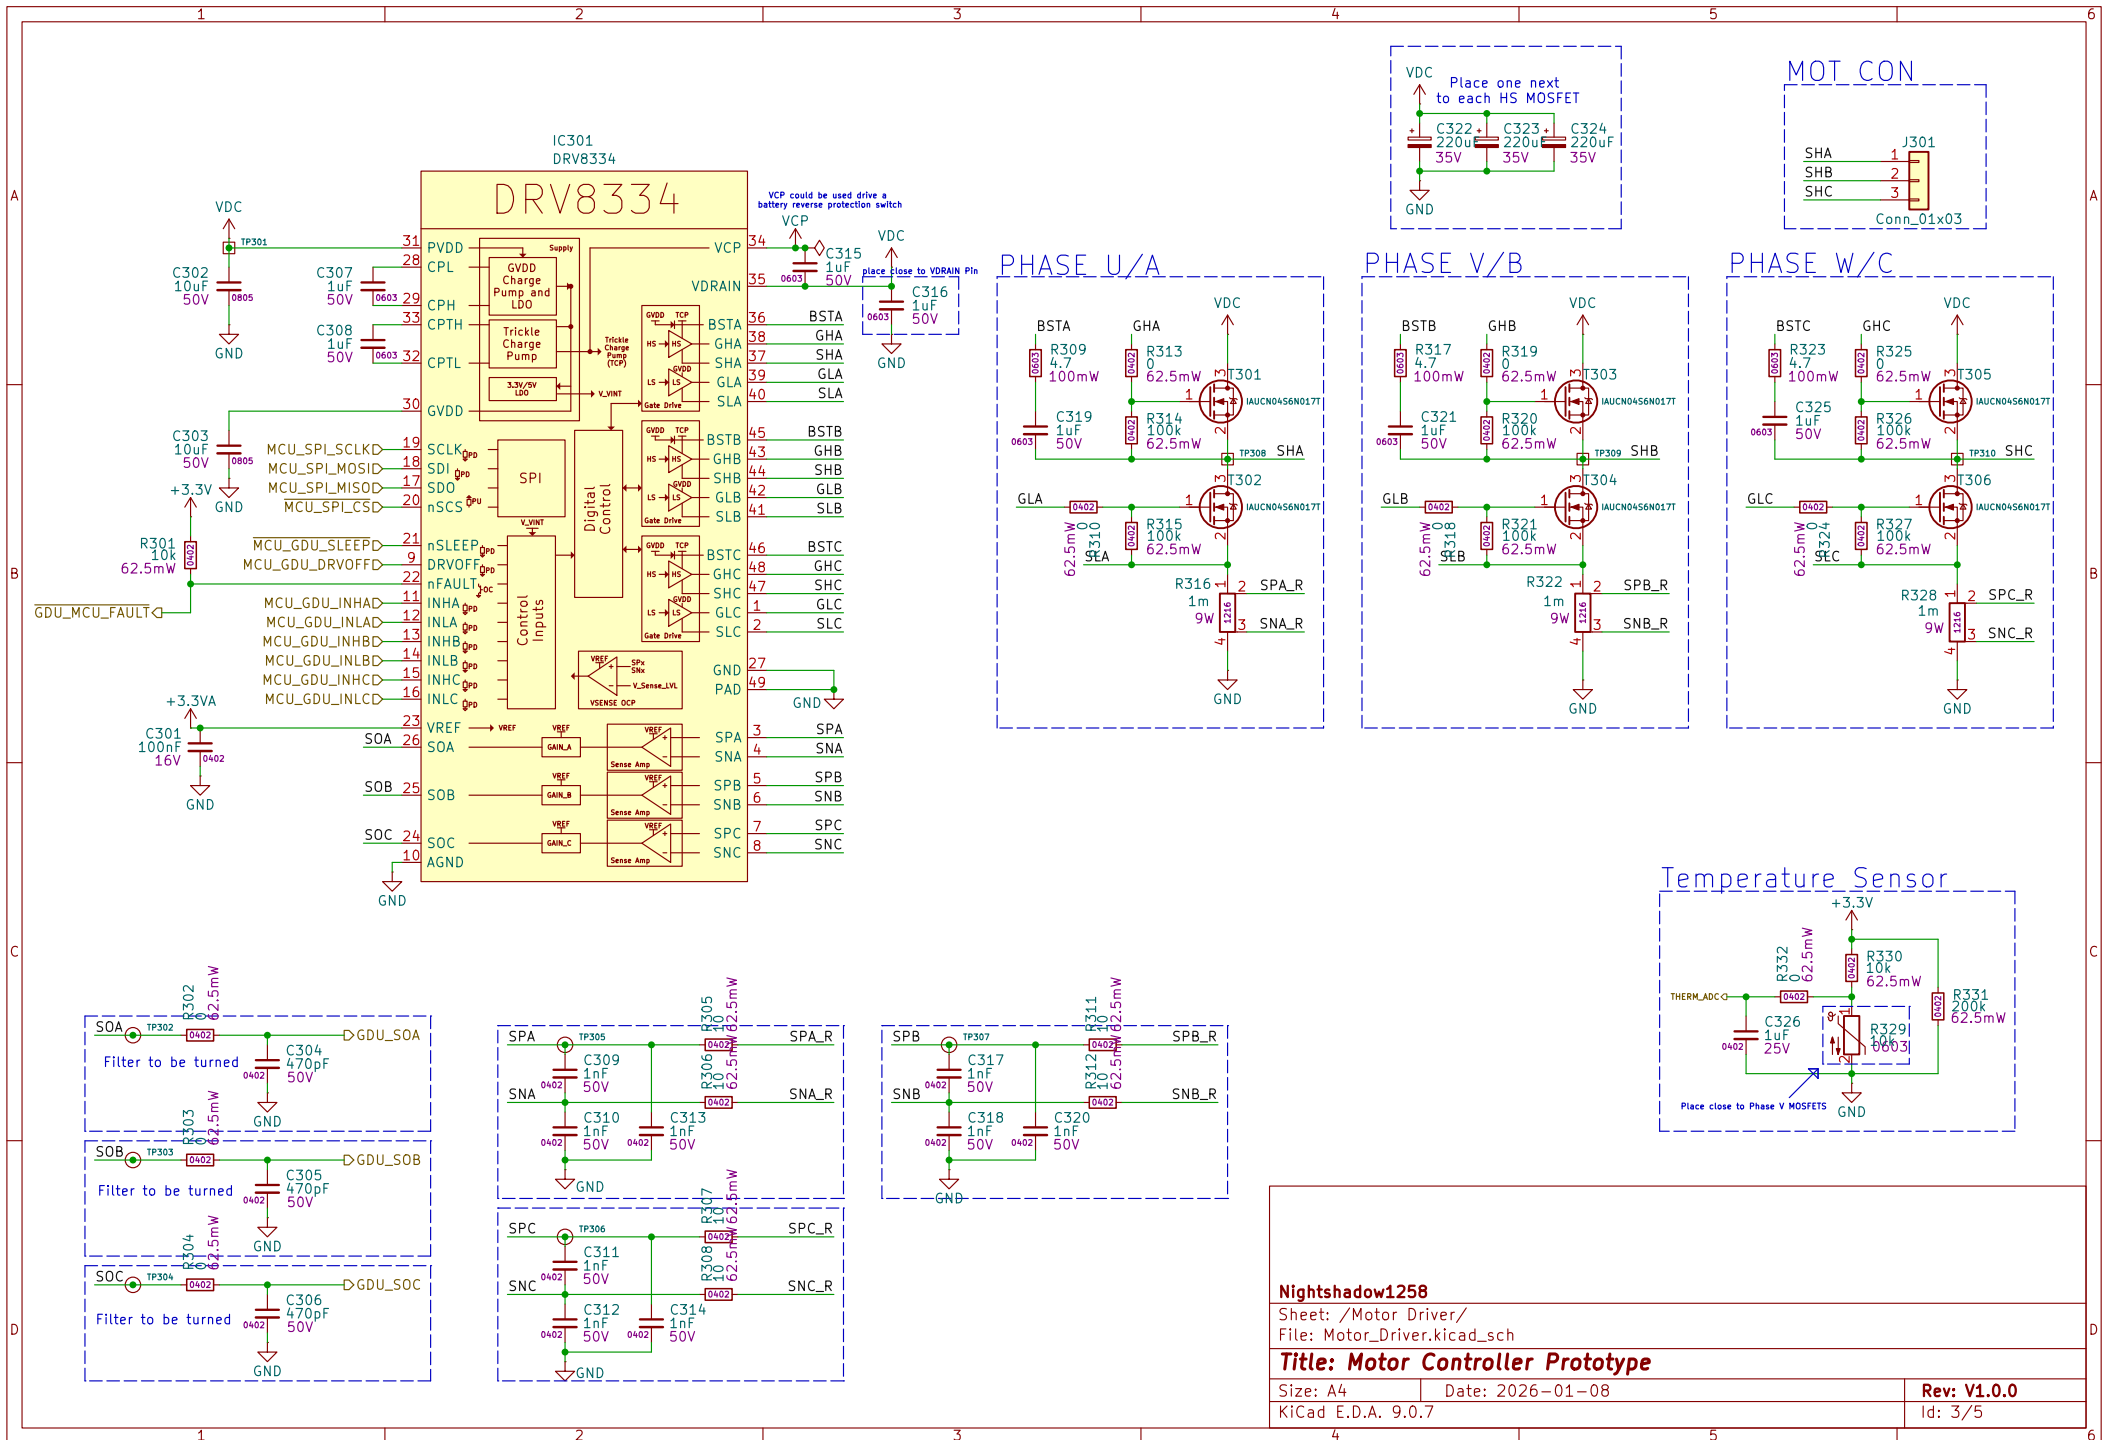

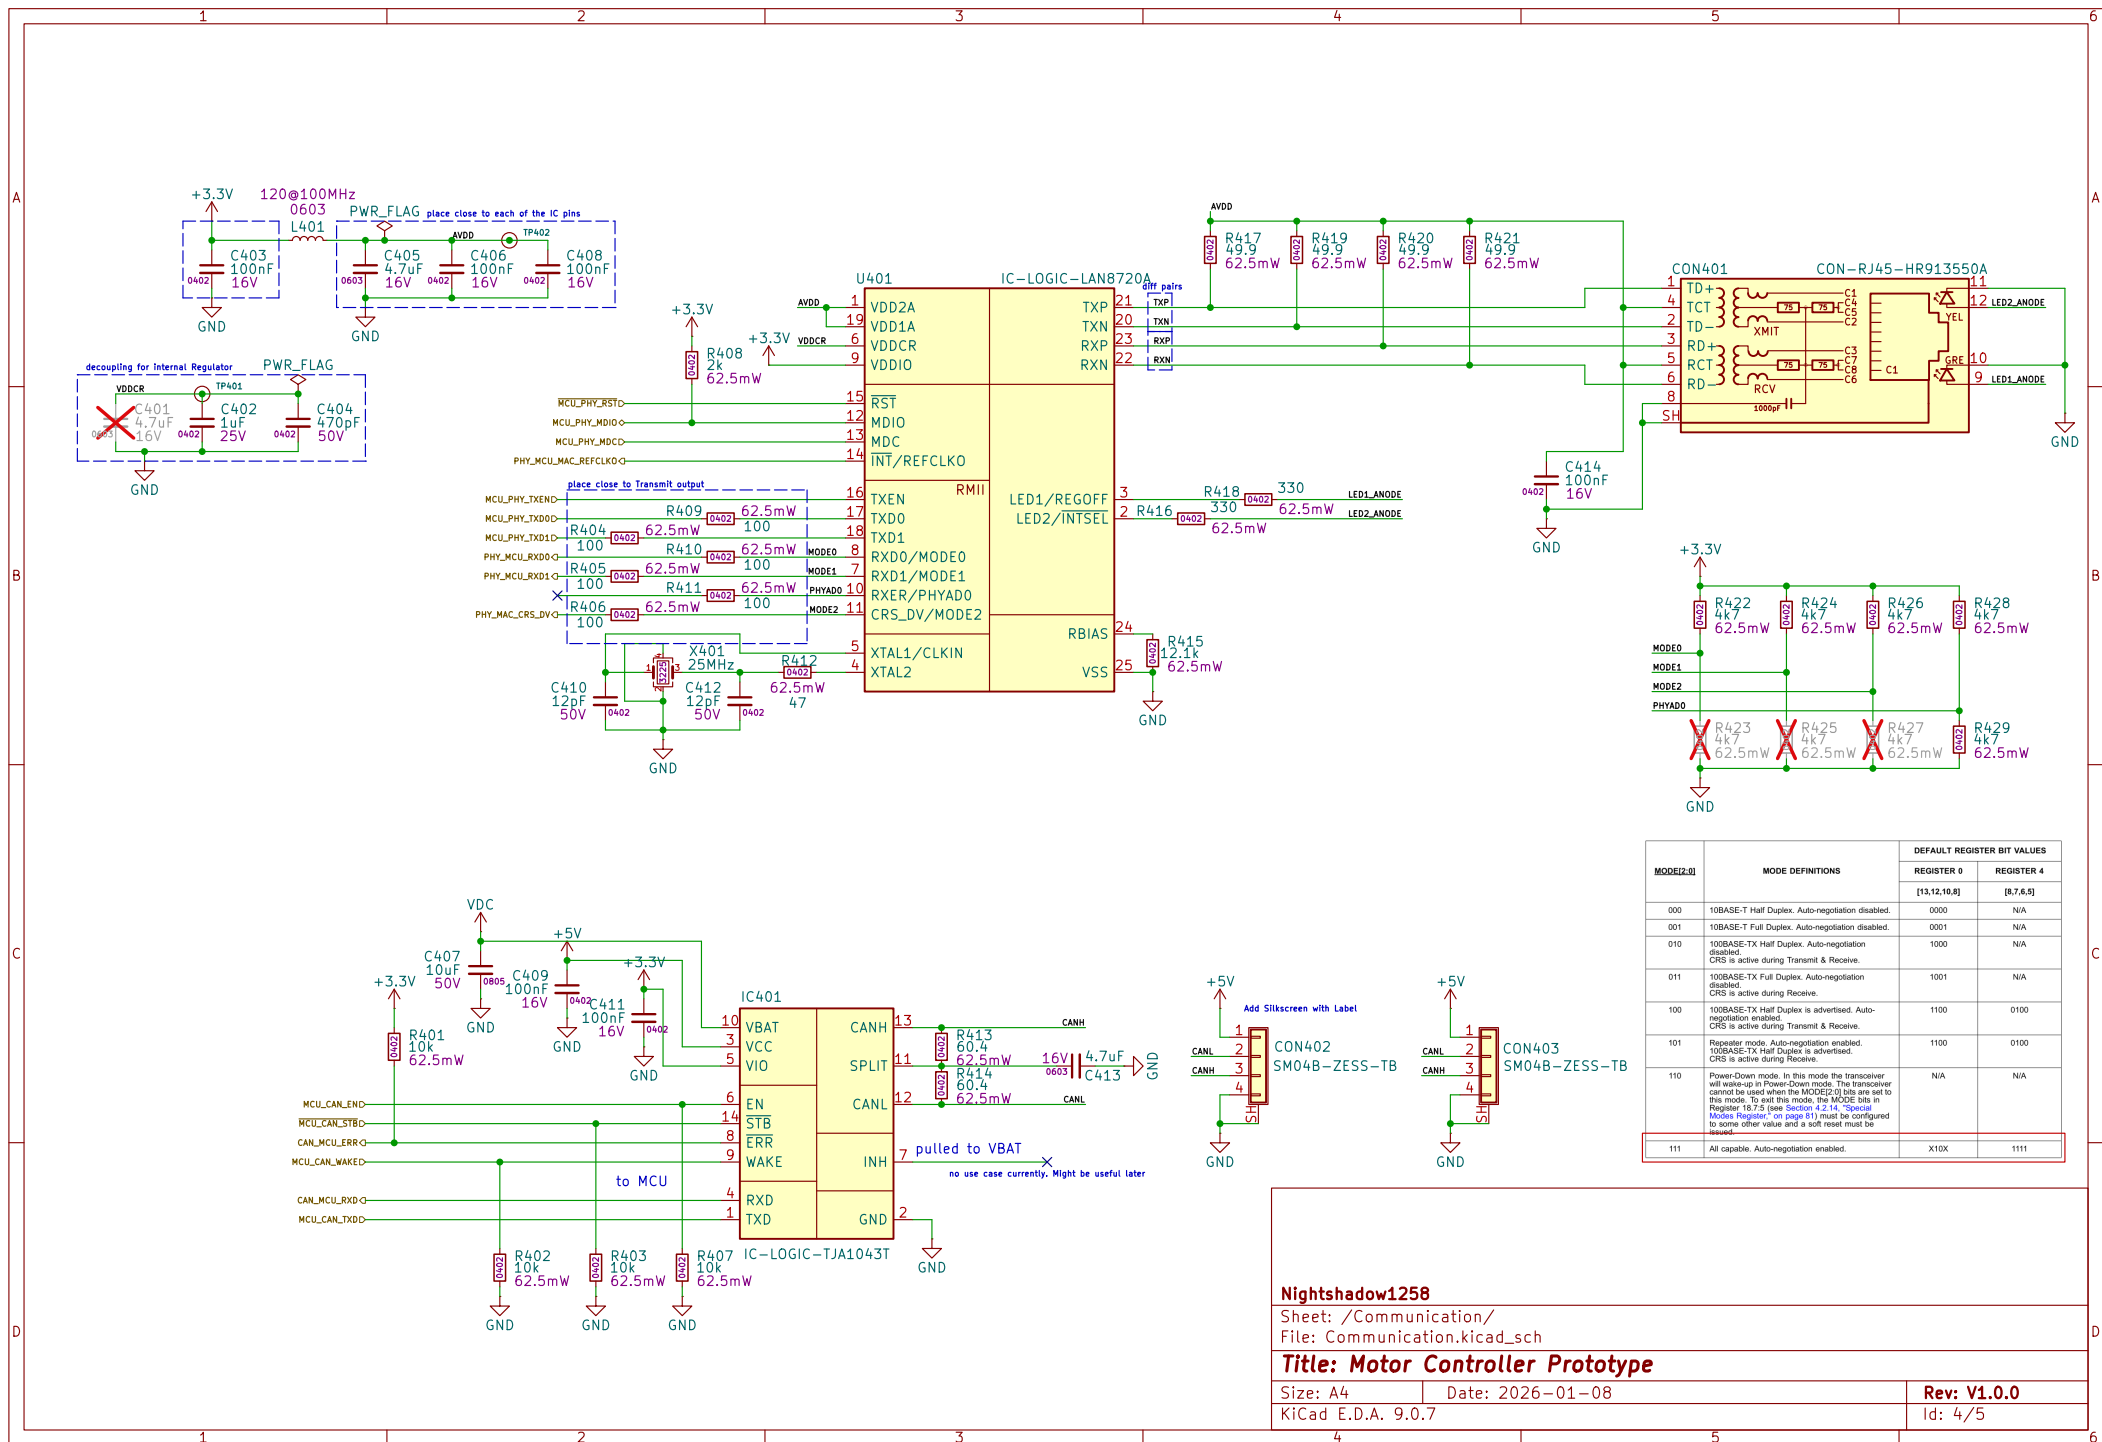

Nightshadow1258

Sheet: /Communication/

File: Communication.kicad_sch

Title: Motor Controller Prototype

Size: A4


Date: 2026-01-08

KiCad E.D.A. 9.0.7


Rev: V1.0.0

Id: 4/5

Buck converter 12-24V down to 5V and to 3.3V
low noise LDO with good suppression on 5V.
LM5143 or TPS5405 & TPS62824
TPS7A03 for LDO

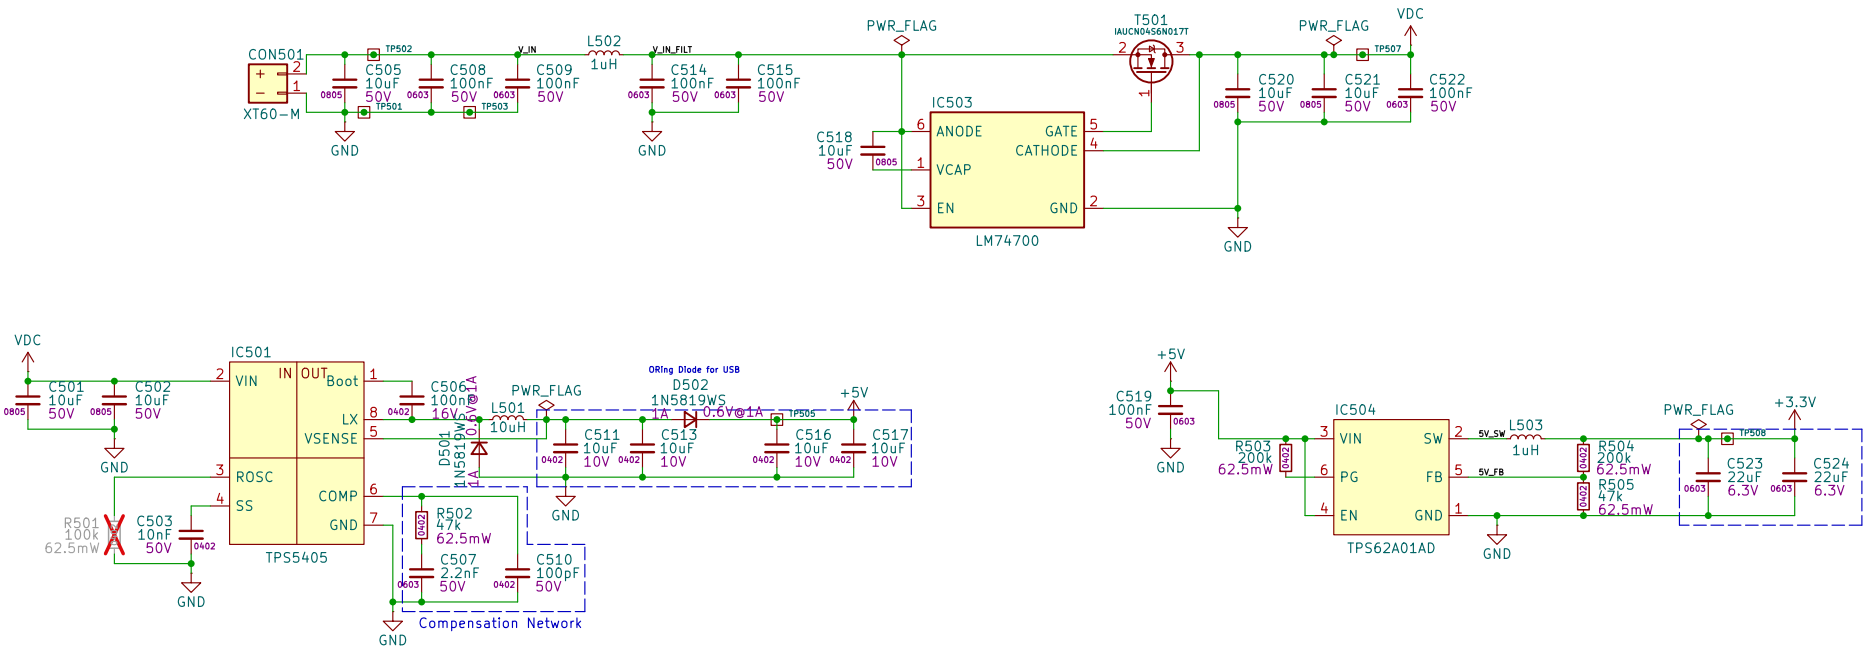

3.3V ADC

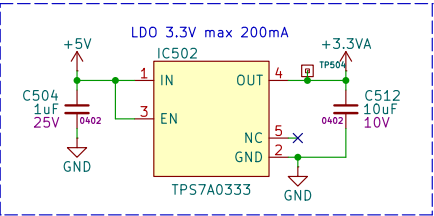

Nightshadow1258

Sheet: /Power/
File: Power.kicad_sch

Title: Motor Controller Prototype

Size: A4 Date: 2026-01-08

KiCad E.D.A. 9.0.7

Rev: V1.0.0

Id: 5/5