




CHHAPERIA

Material Science Meets Global Demand

PRODUCT CATALOGUE

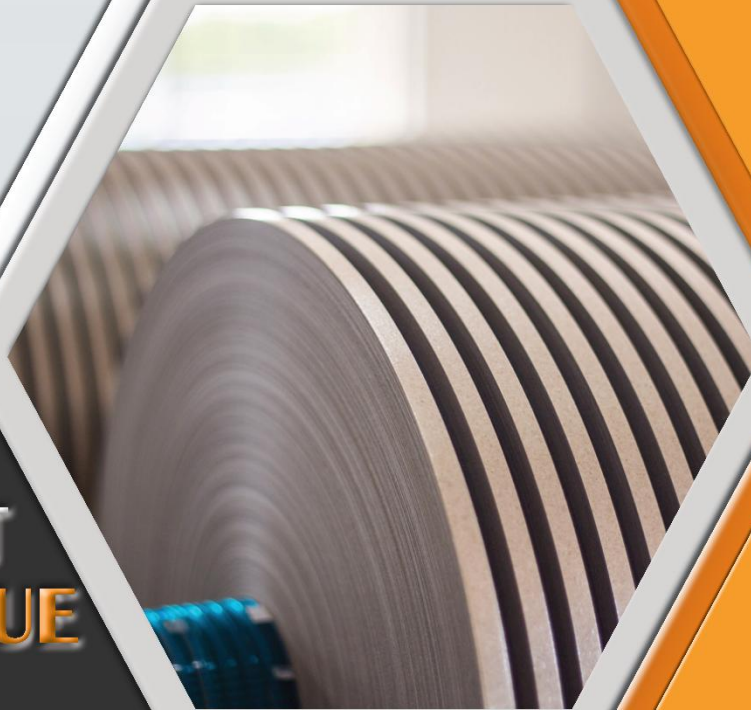

WE PROVIDE ALL RANGE OF MICA, WATER BLOCKING, SEMI CONDUCTING, POLYESTER, FIBER GLASS, WOVEN AND NON WOVEN PRODUCTS IN TAPES, FILMS AND FOILS FORM.



INDEX

SL NO	ITEM	PAGE NO.
1	MICA TAPE SERIES	2 - 7
2	WATER BLOCKING TAPE SERIES	8 - 16
2.a	Non Conducting Water Blocking Tape	9 - 10
2.b	Semi Conducting Water Blocking Tape	11 - 17
3	OTHER TAPES	18 - 31
3.a	Low Smoke Zero Halogen Tape	19
3.b	Fire Survival Zero Halogen Tape	
3.c	Fiber Glass Tape	20
3.d	Aluminium Polyester Tape	21
3.e	Aluminium Polyamide Tape	
3.f	Copper Polyester Tape	
3.g	Foamed Polypropylene (PP) Tape	22
3.h	Poly Fiber Glass Tape	23
3.i	Non-Woven Fleece Tape	24
3.j	Non-Woven Non-Compressed Tape	25
3.k	Non-Woven Binder Tape	26
3.l	Polyester Tape	27
3.m	Polyimide Film	28
3.n	PTFE Tape	
3.o	Polyester Binder Tape	29
3.p	Cotton Binder Tape	
3.q	Rubberised Cotton Tape	30
3.r	Rubber Proofed Synthetic Tape	
3.s	Bituminised Cotton Tape	31
3.t	Water Blocking Rope	32
4	Mica Taping on Conductor	33

CHHAPERIA MICA TAPE SERIES



SL NO	ITEM	TYPE
1	FIRES P - PHLOGOPITE MICA GLASS BACKED TAPE	CP 25G
2	FIRES P INORGANIC - PHLOGOPHITE MICA TAPE	CP25GE
3	FIRES M INORGANIC - MUSCOVITE MICA TAPE	CCM25GE
4	FIRES M - MUSCOVITE MICA GLASS BACKED TAPE	CM25G
5	FIRES M DOUBLE GLASS – MUSCOVITE GLASS MICA GLASS TAPE	CCM25DG

TDS



FIRES P - PHLOGOPITE MICA GLASS BACKED TAPE (TYPE: CP25G)

APPLICATION: Used in Fire-Resistant, Fire-Survival, Instrumentation, Control & Signal Cables by way of maintaining electrical continuity during fire conditions, making it indispensable for emergency systems such as fire alarms, emergency lighting, smoke extraction, and evacuation systems.

ADVANTAGE: Prevents arcing between conductors and maintains high insulation resistance, preventing short circuits when the cable is under electrical load.

TAPING PROCESS: During Taping, No Delamination and No Hairiness, Offering.

PROPERTIES	UNIT	THICKNESS					
		0.08 mm	0.10 mm	0.11 mm	0.12 mm	0.14 mm	0.15 mm
Appearance		Brown Colour, Smooth Surface					
Width	mm	4 ~ 1025					
Length	m	500m, 1000m in Pad Packing Above 100m in Spool Packing					
Thickness	mm	0.08 ± 0.015	0.10 ± 0.015	0.11 ± 0.015	0.12 ± 0.015	0.14 ± 0.015	0.15 ± 0.015
Weight of Tape	g/m ²	110 ± 10	140 ± 10	150 ± 10	170 ± 10	200 ± 10	225 ± 20
Weight of Mica Paper	g/m ²	75 ± 5	95 ± 5	100 ± 5	120 ± 5	145 ± 5	160 ± 5
Weight of Glass Cloth	g/m ²	24 ± 2	32 ± 2				
Silicon Binder Content	g/m ²	10 ± 3	13 ± 3	16 ± 3	18 ± 4	23 ± 5	23 ± 5
Breakdown Voltage	KV/Layer	> 0.09	> 1.0	> 1.1	>1.1	>1.2	>1.3
Tensile Strength	N/cm	> 80	>120				
Stiffness	N/m	<40	<40	<55	<55	<60	<55
Thermal Conductivity	W.m°C	0.20 – 0.25					
Dielectric Constant 200°C	ε	≈1.2					
Fire Grade	°C	750°C - 950°C					
Test Procedure		IEC 371-2					
Shelf Life		1 to 3 years					
Suitable for standard		IEC 60331 & BS 6387 CWZ					
Recommended storage conditions		1 Year if stored @ 30°C & 3 Years if stored @ 18°C					

TDS



FIRES P INORGANIC - PHLOGOPHITE MICA TAPE (TYPE: CP25GE)

APPLICATION: Used in Fire-Resistant, Fire-Survival, Instrumentation, Control & Signal Cables by way of maintaining electrical continuity during fire conditions, making it indispensable for emergency systems such as fire alarms, emergency lighting, smoke extraction, and evacuation systems.

ADVANTAGE: This tape ensures zero smoke emission and zero toxic gas (CO, CO₂) release, which is critical for life safety. It maintains high insulation resistance (IR) even at peak temperatures.

TAPING PROCESS: During Taping, No Delamination and No Hairiness, provides smooth surface and suitable for high-speed taping.

PROPERTIES	UNIT	CP25GE	
		0.13 MM	0.145 MM
Appearance		Brown & White Colour, Tapped Conductor have Smooth Surface	
Width	mm	4.0 ~ 1000	
Length	m	Up to 3000 m in Pad Packing Above 3000 m in spool Packing	
Thickness	mm	0.13 ± 0.015	0.15 ± 0.015
Weight of tape	g/m ²	170 ± 10	200 ± 10
Weight of mica paper	g/m ²	80 ± 5	100 ± 5
Silicon Binder Content	%	18 ± 5	20 ± 5
Breakdown Voltage	KV/Layer	> 3.0	> 3.2
Tensile Strength	N/cm	> 100	> 100
Stiffness	N/m	< 60	< 60
Dielectric Constant 200°C	ε	≈ 1.2	≈ 1.2
Thermal Conductivity	Wm°C	0.20 - 0.25	0.20 - 0.25
Fire Grade	°C	750°C - 1050°C	
Test Procedure		IEC 371-2	
Shelf Life		1 to 3 years	
Suitable for standard		IEC 60331, BS 6387 CWZ, EN 50200 / BS 8434	
Recommended storage conditions		1 Year if stored @ 30°C & 3 Years if stored @ 18°C	

TDS



FIRES M INORGANIC - MUSCOVITE MICA TAPE (TYPE: CCM25GE)

APPLICATION: Used in medium and high-voltage power cables requiring high dielectric strength, also used in Fire-Resistant, Fire-Survival, Instrumentation, Control & Signal Cables by way of maintaining electrical continuity during fire conditions, used in places where high-performance and high-frequency insulation is required.

ADVANTAGE: Inorganic Muscovite mica tape is essential due to its exceptional resistance to corona discharge and low energy loss. Its fully inorganic, halogen-free construction ensures superior flame endurance, high dielectric strength, and chemical stability without emitting toxic fumes. This combination of electrical efficiency and non-combustible reliability makes it a safe, high-performance insulator for critical enclosed applications. Compared to regular Phlogopite and Muscovites tapes, inorganic Muscovite allows heat to dissipate more efficiently from the copper conductor to the outer layers, preventing the cable from overheating.

TAPING PROCESS: Due to its high flexibility wrapping on conductor is smooth, no Delamination, no hairiness which is suitable for high-speed taping gives higher output.

PROPERTIES	UNIT	CCM25GE		
		0.10 mm	0.13 – 0.145 mm	0.16 mm
Appearance		Brown & White Colour, Tapped Conductor have Smooth Surface		
Width	mm	4.0 ~ 1000		
Length	m	Up to 3000 m in Pad Packing Above 3000 m in spool Packing		
Thickness	mm	0.10 ± 0.02	0.13 ± 0.02	0.16 ± 0.02
Weight of tape	g/m ²	130 ± 10	170 ± 10	215 ± 20
Weight of mica paper	g/m ²	50 ± 5	80 ± 5	100 ± 5
Silicon Binder Content	%	20 ± 5	25 ± 5	30 ± 5
Breakdown Voltage	KV/Layer	> 3.0	> 3.2	> 3.5
Tensile Strength	N/cm	> 60	> 100	> 100
Stiffness	N/m	< 40	< 40	< 40
Dielectric Constant 200°C	ε	≈ 1.2	≈ 1.2	≈ 1.2
Thermal Conductivity	Wm°C	0.20 - 0.25	0.20 - 0.25	0.20 - 0.25
Fire Grade	°C	950°C - 1200°C		
Test Procedure		IEC 371-2		
Shelf Life		1 to 3 years		
Recommended storage conditions		1 Year if stored @ 30°C & 3 Years if stored @ 18°C		
Suitable for standard		BS 6387 CWZ, EN 50200, BS 8434, BS 8491		
REMARKS		NO FLORINE GAS EMITTED ON BURNING		

TDS



FIRES M - MUSCOVITE MICA GLASS BACKED TAPE (Type: CM25G)

APPLICATION: Used in medium and high-voltage power cables requiring high dielectric strength as well as Fire-Resistant, Fire-Survival, Instrumentation, Control & Signal Cables by way of maintaining electrical continuity during fire conditions, used in places where high-performance and high-frequency insulation is required.

ADVANTAGE: Muscovite glass-backed tape combines high dielectric strength and corona resistance with glass-reinforced. This halogen-free, chemically inert insulator offers superior heat dissipation and thermal stability.

TAPING PROCESS: The taping process done with 30 – 50% overlap helps to establish a double-layered dielectric barrier, ensuring maximum electrical safety. Maintaining a precise tension on conductor guarantees a tight, void-free wrap, while the tape's inherent flexibility prevents delamination or "hairiness" during high-speed taping process.

PROPERTIES	UNIT	THICKNESS			
		0.08 – 0.10mm	0.11 – 0.12mm	0.13 mm	0.14 mm
Appearance		White Colour, smooth surface, High flexibility for tapping on small Dia conductor			
Width	mm	4 ~ 1000			
Length	m	500m, 1000m in Pad Packing Above 1000m in spool Packing			
Thickness	mm	0.08 - 0.10	0.11 – 0.12	0.13 ± 0.015	0.14 ± 0.015
Weight of tape	g/m²	115 ± 10	150 ± 10	170 ± 10	190 ± 10
Weight of mica paper	g/m²	80 ± 5	100 ± 5	120 ± 5	140 ± 5
Weight of Glass Cloth	g/m²	24 ± 2	32 ± 2	32 ± 2	32 ± 2
Binder Content	g/m²	10 ± 3	16 ± 3	18 ± 3	20 ± 3
Breakdown Voltage	KV/Layer	> 1.1	> 1.5	> 1.8	> 1.8
Tensile Strength	N/cm	> 120			
Stiffness	N/m	< 50		< 60	
Thermal Conductivity	W/ m°C	0.20 - 0.25			
Dielectric Constant 200° C	ε	≈ 1.2			
Fire Grade	°C	950°C - 1050° C			
Suitable for Test standard		IEC 60331, BS 6387 CWZ			
Test Procedure		IEC 371-2			
Shelf Life		1 to 3 years			
Recommended storage conditions		1 Year if stored @ 30°C & 3 Years if stored @ 18°C			
Remarks		NO FLORINE GAS EMITTED ON BURNING			

TDS



FIRES M DOUBLE GLASS – MUSCOVITE GLASS MICA GLASS TAPE (TYPE: CCM25DG)

APPLICATION: used in Instrumentation Fire Resistant, Control Fire Resistant, L.V. Fire Resistant, Single core Fire Resistant and many more fire survival cable.

ADVANTAGE: These applied in essential circuits and emergency power supply networks to guarantee continuous operation during a fire, specifically powering life safety alerts like fire alarm systems for early detection and orderly evacuation.

Mica tape ensures exceptional circuit integrity by preventing short circuits even after standard plastic insulation melts under direct flames. This high-temperature resilience is achieved through a robust inner fire barrier—when calcined mica with double glass is wrapped directly around the copper conductors—that keeps them safely insulated from each other at temperatures reaching 950° C or higher.

TAPING PROCESS: Due to its flexibility wrapping on conductor is smooth, no Delamination, no hairiness which is suitable for high-speed taping.

PROPERTIES	Unit	CCM25DG
		0.125 mm
Appearance		No Alien material, No Split, scar & hole, No broken & folded, No patched place
Width	mm	4.0 ~ 1000
Length	m	500m (OD – 300mm) / 1000m (OD – 400 mm)
Thickness	mm	0.125 ± 0.015
Weight of tape	g/m ²	164 ± 10
Weight of mica paper	g/m ²	100 ± 5
Weight of Glass Cloth	g/m ²	(22 ± 2) x 2
Silicon Binder Content	%	20 ± 3
Breakdown Voltage	KV/Layer	> 1.6
Tensile Strength	N/cm	> 120
Fire Grade	°C	950°C - 1050°C
Test Procedure		IEC 371-2
Shelf Life		1 to 3 years
Recommended storage conditions		1 Year if stored @ 30°C & 3 Years if stored @ 18°C
Suitable for Test Standards		BS 6387 CWZ, EN 50200, BS 8434 & BS 8491
Remarks		NO FLORINE GAS EMITTED ON BURNING

CHHAPERIA WATER BLOCKING TAPE SERIES



ITEM	TYPE
Non Conductive Water Blocking Tape	CHDNW
Double Side Semi Conductive Laminated Water Blocking Tape	CHDSW
Semi Conductive Woven Tape	CHN-WS
	CHN-TDM
Semi Conductive Woven Water Blocking Tape	CHSCWWBT
Semi Conductive Non-Woven Tape	CHCNW
Semi Conductive Water Blocking Foam (Bulky)	CHSMWBT-F
Copper Wire Woven Semi Conductive Water Blocking Tape	CHCWSCWBT

TDS



NON- CONDUCTIVE WATER- BLOCKING TAPE

APPLICATION: Used in MV/HV power cables, telecom and optical fiber cables, control and instrumentation cables, as well as submarine and underground cables. It is applied around insulation, cable cores, or under sheaths to prevent water ingress. By acting as a longitudinal moisture barrier, it protects insulation and optical fibres, maintains electrical performance, and enhances overall cable durability in harsh and high-humidity environments.

ADVANTAGE: our tapes have high tensile and high elongation with better flexibility and conformability with Good mechanical cushioning, High swelling rate, Easy wrapping. during high-speed cable manufacturing.

PROPERTIES	UNIT	CHSNW -15	CHDNW -15	CHDNW -20	CHDNW -25	TEST METHOD
Thickness	mm	0.15 ± 0.03	0.15 ± 0.03	0.20 ± 0.03	0.25 ± 0.03	ISO 9073-2
Mass Per Unit Area	g/m ²	55 ± 10	65 ± 10	80 ± 10	90 ± 10	ISO 9073-1
Tensile Strength	N/cm	≥ 20	≥ 30	≥ 35	≥ 35	ISO 9073-3
Elongation	%	≥ 8	≥ 8	≥ 8	≥ 8	ISO 9073-3
Swelling Speed	mm/1 min	≥ 6	≥ 6	≥ 8	≥ 8	GB 450
Swelling height	mm/3 min	≥ 8	≥ 8	≥ 12	≥ 12	GB 450
Short term Stability	° c	230				Q/TR.J02.031-2000
Long term Stability	°c	90				IEC216
Moisture Content	%	≤ 8				ISO 287

PROPERTIES	UNIT	CHDNW- 30	CHDNW-301216	CHDNW-30E	TEST METHOD
Thickness	mm	0.30 ± 0.05	0.32 ± 0.05	0.30 ± 0.03	ISO 9073-2
Mass Per unit Area	g/m	100 ± 10	110 ± 10	100 ± 10	ISO 9073-1
Tensile Strength	N/cm	≥ 40	≥ 40	$\geq 50/\text{cm}$	ISO 9073-3
Elongation	%	≥ 8	≥ 10	≥ 12	ISO 9073-3
Swelling Speed	mm/1 min	≥ 8	≥ 12	≥ 10	GB 450
Swelling Height	mm/3 min	≥ 12	≥ 16	≥ 15	GB 450
Short Term stability	°C	230		230	Q/TR.J02.031-2000
Long Term Stability	°C	90		90	IEC216
Moisture Content	%	≤ 8		≤ 9	ISO 287

TDS



NON- CONDUCTIVE WATER- BLOCKING TAPE

APPLICATION: Used in MV/HV power cables, telecom and optical fiber cables, control and instrumentation cables, as well as submarine and underground cables. It is applied around insulation, cable cores, or under sheaths to prevent water ingress. By acting as a longitudinal moisture barrier, it protects insulation and optical fibres, maintains electrical performance, and enhances overall cable durability in harsh and high-humidity environments.

ADVANTAGE: our tapes have high tensile and high elongation with better flexibility and conformability with Good mechanical cushioning, High swelling rate, Easy wrapping. during high-speed cable manufacturing.

PROPERTIES	UNIT	CHDNW-50	CHDNW-R1225	CHDNW-30R K3417H	TEST METHOD
Thickness	mm	0.50 ± 0.03	0.25 ± 0.03	0.28 ± 0.03	ISO 9073-2
Mass Per unit Area	g/m	150 ± 10	110 ± 10	120 ± 10	ISO 9073-1
Tensile Strength	N/cm	$\geq 60/\text{cm}$	$\geq 375/50\text{cm}$	$\geq 500/50\text{cm}$	ISO 9073-3
Elongation	%	≥ 12	≥ 10	≥ 20	ISO 9073-3
Swelling Speed	mm/1 min	≥ 10	≥ 11	≥ 13	GB 450
Swelling Height	mm/3 min	≥ 15	≥ 11	≥ 13	GB 450
Short Term stability	°C	230			Q/TR.J02.031-2000
Long Term Stability	°C	90			IEC216
Moisture Content	%	≤ 9			ISO 287

TDS



DOUBLE -SIDE SEMI-CONDUCTIVE LAMINATED WATER-BLOCKING TAPE

APPLICATION: Non-woven semi-conductive water blocking tape is used in MV, HV, and EHV XLPE power cables to provide electrical stress control and longitudinal water blocking. It swells on contact with water to prevent moisture ingress and is ideal for underground, duct, and submarine cable installations.

ADVANTAGE: Our tapes have high tensile and high elongation with better flexibility and conformability with Good mechanical cushioning, High swelling rate, Easy wrapping during high-speed cable manufacturing.

PROPERTIES	UNIT	CHDSW-25	CHDSW-30	CHDSW-321216	CHDSW-40	TEST METHOD
Thickness	mm	0.25 ± 0.03	0.30 ± 0.03	0.32 ± 0.03	0.40 ± 0.03	ISO 9073-2
Mass Per unit Area	g/m ²	100 ± 10	110 ± 10	120 ± 10	130 ± 10	ISO 9073-1
Tensile Strength	N/cm	≥ 35	≥ 40	≥ 40	≥ 50	ISO 9073-3
Elongation	%	≥ 10	≥ 10	≥ 12	≥ 10	ISO 9073-3
Swelling Speed	mm/1min	≥ 8	≥ 8	≥ 12 & 16	≥ 10	GB 450
Swelling Height	mm/3min	≥ 12	≥ 12	≥ 16 & 18	≥ 15	GB 450
Surface Resistance	Ω	≤ 2000				IEC216
Short Term Stability	°C	250				Q/TR.J02.031-2000
Long Term Stability	°C	90				IEC216
Moisture Content	%	≤ 9				ISO 287

PROPERTIES	UNIT	CHDSW-45	CHDSW-50	CHDSW-60	CHDSW-44R	TEST METHOD
Thickness	mm	0.45 ± 0.04	0.50 ± 0.03	0.60 ± 0.03	0.44 ± 0.04	ISO 9073-2
Mass Per unit Area	g/m ²	160 ± 20	165 ± 10	180 ± 10	130 ± 10	ISO 9073-1
Tensile Strength	N/cm	≥ 55	≥ 60	≥ 65	≥ 110	ISO 9073-3
Elongation	%	≥ 12				ISO 9073-3
Swelling Speed	mm/1min	≥ 12			≥ 15	GB 450
Swelling Height	mm/3min	≥ 14	≥ 15	≥ 15	≥ 16	GB 450
Surface Resistance	Ω	≤ 2000				IEC216
Short Term Stability	°C	250				Q/TR. J02.031-2000
Long Term Stability	°C	90				IEC216
Moisture Content	%	≤ 9				ISO 287

TDS



SEMI-CONDUCTIVE WOVEN TAPE

APPLICATION: Semi-conductive woven tape is used in MV, HV and XLPE power cables for electrical shielding and bedding. It is applied over the conductor or insulation screen and under the metallic shield to ensure proper electrical performance.

ADVANTAGE: It provides uniform stress control, good conductivity, high mechanical strength, dimensional stability, heat resistance, and added protection to cable layers.

PROPERTIES	UNIT	CHN-12 WS	CHN-20 WS	CHN-30 WS	TEST METHOD
Thickness	Mm	0.12 ± 0.02	0.20 ± 0.02	0.30 ± 0.03	ISO 9073-2
Mass Per Unit Area	g/m	100 ± 10	170 ± 10	180 ± 10	ISO 9073-2
Tensile Strength	N/cm	≥ 110	≥ 160	≥ 160	ISO 9073-3
Elongation	%	≥ 25			ISO 9073-3
Short term Stability	c	230			Q/TR. J2.01-2000
Long term Stability	°c	145			IEC 216-1990
Surface Resistance	Ω	≤ 1500			ASTM D 4496
Volume Resistance	KΩ.cm	< 100			ASTM D 4496
Moisture Content	%	≤ 6			ISO 287

TDS



SEMI-CONDUCTIVE WOVEN TAPE

APPLICATION: Semi-conductive woven tape is used in MV, HV, and EHV XLPE power cables for electrical shielding and bedding. This material comes without pin hole resulting in no extrusion penetration providing excellent electrical performance when applied over the conductor or insulation screen and under the metallic shield.

ADVANTAGE: It provides high tenacity with high tensile strength and maintains uniform stress control, good conductivity, high mechanical strength, dimensional stability, heat resistance, and added protection to cable layers.

PROPERTIES	UNIT	CHN-12 TDM	CHN-20 TDM	CHN-25 VHTTDM	TEST METHOD
Thickness	Mm	0.12 ± 0.02	0.20 ± 0.02	0.25 ± 0.03	ISO 9073-2
Mass Per Unit Area	g/m	100 ± 10	150 ± 10	200 ± 10	ISO 9073-2
Tensile Strength	N/cm	≥ 120	≥ 200	≥ 350	ISO 9073-3
Elongation	%	≥ 20	≥ 20	≥ 25	ISO 9073-3
Short term Stability	c	230			Q/TR.J02.01-2000
Long term Stability	°c	145			IEC 216-1990
Surface Resistance	Ω	≤ 2000		≤ 1500	ASTM D 4496
Volume Resistance	KΩ.cm	< 100			ASTM D 4496
Moisture Content	%	≤ 6			ISO 287

TDS



SEMI-CONDUCTIVE WOVEN WATER BLOCKING TAPE

APPLICATION: Semi-conducting woven water blocking tape is used in MV, HV, and EHV XLPE power cables for combined electrical shielding and longitudinal water blocking. It is applied over the insulation screen or under the metallic shield to maintain electrical continuity while preventing moisture ingress, especially in underground and submarine cable installations.

ADVANTAGES: It offers uniform electrical stress control, good conductivity, and high mechanical strength due to its woven construction. The water-swellable properties block moisture migration along the cable core, improving cable reliability, durability, and service life in harsh environments.

PROPERTIES	UNIT	CHSCWWBT -18	CHSCWWBT -20	CHSCWWBT -22	CHSCWWBT -25	TEST METHOD
Thickness	mm	0.18 ± 0.02	0.20 ± 0.02	0.22 ± 0.03	0.25 ± 0.03	ISO 9073-2
Mass Per unit Area	g/m ²	125 ± 15	140 ± 15	170 ± 20	190 ± 20	ISO 9073-1
Tensile Strength	N/cm	≥ 120	≥ 160	≥ 200	≥ 240	ISO 9073-3
Elongation	%	≥ 24			≥ 20	ISO 9073-3
Swelling Speed	mm/1min	≥ 3		≥ 1	≥ 4	GB 450
Swelling Height	mm/3min	≥ 4		-	≥ 5	GB 450
Swelling Height	mm/10min	≥ 8	≥ 8	≥ 2	≥ 8	GB 450
Short Term Stability	°C	250	250	250	250	Q/TR.J02.031-2000
Long Term Stability	°C	145	145	90	90	IEC216
Surface Resistance	Ω	≤ 2000	≤ 2000	≤ 2000	≤ 2000	ISO 287
Volume Resistance	Ω.cm	< 1 x 10 ⁶	< 1 x 10 ⁶	< 1 x 10 ⁶	< 1 x 10 ⁶	
Moisture Content	%	≤ 9	≤ 9	≤ 9	≤ 9	

TDS



SEMI CONDUCTIVE NON-WOVEN TAPE

APPLICATION: It is widely used in medium, high, and extra-high voltage power cables for conductor shielding and insulation shielding. The tape is applied over conductor screens and insulation layers to maintain smooth electrical stress distribution. It is also used in cable joints and terminations, as well as in other electrical systems requiring semi-conductive layering for reliable and safe power transmission.

ADVANTAGES: Semi-conductive non-woven fabric provides controlled electrical conductivity, allowing safe static dissipation without short circuits. It is lightweight, flexible, corrosion-resistant, cost-effective, breathable, and offers good mechanical strength and durability.

PROPERTIES	UNIT	CHCNW-12	CHCNW-15	CHCNW-20	CHCNW-30	TEST METHOD
Thickness	Mm	0.12 ± 0.03	0.15 ± 0.03	0.20 ± 0.03	0.30 ± 0.03	ISO 9073-2
Mass Per Unit Area	g/m ²	45 ± 10	50 ± 10	60 ± 10	80 ± 10	ISO 9073-2
Tensile Strength	N/cm	≥ 20	≥ 25	≥ 30	≥ 40	ISO 9073-3
Elongation	%	≥ 10				ISO 9073-3
Short term Stability	°C	250				Q/TR. J02.01-2000
Long term Stability	°C	90				IEC 216-1990
Surface Resistance	Ω	≤ 2000				ASTM D 4496
Volume Resistance	Ω.cm	< 1x10 ⁶				ASTM D 4496
Moisture Content	%	≤ 6				ISO 287

PROPERTIES	UNIT	CHCNW-15HE	CHCNW-25	CHCNW-35	TEST METHOD
Thickness	mm	0.15 ± 0.03	0.25 ± 0.03	0.35 ± 0.07	ISO 9073-2
Mass Per unit Area	g/m ²	100 ± 10	65 ± 10	110 ± 10	ISO 9073-2
Tensile Strength	N/cm	≥ 60	≥ 30	≥ 40	ISO 9073-3
Elongation	%	≥ 15	≥ 12	≥ 12	ISO 9073-3
Short Term Stability	C	250			Q/TR. J02.01-2000
Long Term Stability	°C	90			IEC 216-1990
Surface Resistance	Ω	≤ 2000			ASTM D 4496
Volume Resistance	Ω.cm	< 1 x 10 ⁶			ASTM D 4496
Moisture Content	%	≤ 9			ISO 287

TDS



SEMI-CONDUCTIVE WATER BLOCKING FOAM (BULKY)

APPLICATION: It is mainly used in medium and high voltage power cables for water blocking and electrical stress control. The tape is applied in cable joints and terminations to prevent moisture penetration. It is also used in underground and submarine cables, as well as in other electrical insulation systems where both water sealing and semi-conductive properties are required.

ADVANTAGES: Semi-conductive water blocking foam tape provides controlled electrical conductivity along with effective water sealing. It prevents moisture ingress while safely dissipating electrical stress. The foam structure offers good compressibility, flexibility, and gap-filling properties, ensuring tight sealing around cables. It is lightweight, easy to apply, corrosion-resistant, and provides reliable long-term performance in harsh environments.

PROPERTIES	UNIT	CHSMWBT-F-100	CHSMWBT-F-125	CHSMWBT-F-150	CHSMWBT-F-200	TEST METHOD
Thickness	mm	1.0 ± 0.2	1.25 ± 0.25	1.5 ± 0.3	2.0 ± 0.4	ISO 9073-2
Tensile Strength	N/cm	≥ 50				ISO 9073-1
Elongation	%	≥ 10				ISO 9073-3
Swelling Speed	mm/1min	≥ 8			≥ 12	ISO 9073-3
Swelling Height	mm/3min	≥ 12			≥ 16	GB 450
Short Term Stability	°C	250				GB 450
Long Term Stability	°C	90				Q/TR.J02.031-2000
Surface Resistance	Ω	≤ 1500				IEC216
Volume Resistance	Ω.cm	< 1 x 10 ⁶				ISO 287
Moisture Content	%	≤ 9				

TDS



COPPER WIRE WOVEN SEMI CONDUCTIVE WATER BLOCKING TAPE

APPLICATION: They are mainly used in medium, high, and extra-high voltage power cables for grounding, shielding, and water blocking purposes. These tapes are applied over cable cores to provide a conductive path and prevent water penetration. They are commonly used in underground and submarine power cables, cable joints and terminations, and other critical power transmission systems requiring both shielding and moisture protection.

ADVANTAGE: Copper wire woven semi-conductive water blocking tapes provide excellent electrical conductivity along with effective water blocking performance. The woven copper wire ensures superior grounding and electrical shielding, while the water-blocking components prevent moisture ingress into the cable. These tapes offer high mechanical strength, durability, and resistance to corrosion. They also provide good flexibility, allowing easy wrapping around cable cores, and ensure reliable long-term performance in demanding environments.

PROPERTIES	UNITS	CHCWSCWBT -50	CHCWSCWBT -50	TEST METHOD
Thickness	mm	0.50 ± 0.05	0.50 ± 0.05	ISO 9073-2
Weight	g/m ²	330 ± 20	400 ± 20	ISO 9073-1
Width	mm	60,70,80 & 100		ISO 9073-3
Tensile Strength	N/Width	≥ 550	≥ 600	ISO 9073-3
Swelling Speed	mm/1min	≥ 5		GB 450
Swelling Height	mm/3min	≥ 8		GB 450
Elongation	%	≥ 5		Q/TR.J02.031-2000
Surface Resistivity	Ω/ sq	<1500	<1000	IEC216
Copper Wire	Dia	0.19	0.19	ISO 287
Copper Wire Grade		Tin Plated Copper		
Copper Wire Construction		Wire is placed at an interval of 4 or 5 mm in Machine Direction		

CHHAPERIA OTHER TAPE SERIES

SR. NO	ITEMS	TYPE
1	Low Smoke Zero Halogen Tape	CH-LSZH
	Fire Survival Zero Halogen Tape	CH-FSZH
2	Fiber Glass Tape	CH-FGT
3	Aluminium Polyester Tape	CH-ALPET
	Aluminium Polyamide Tape	CH-ALPFT
	Copper Polyester Tape	CH-CUPET
4	Foamed Polypropylene (PP) Tape	CH-FPP
5	Poly Fiber Glass Tape	CH-PFGT
6	Non- Woven Fleece Tape	CH-NW-F
7	Non-Woven Non-Compressed Tape	CH-NW
	Non-Woven Binder Tape	CH-NW-B
8	Polyester Tape	CH-PET
	Polyimide Film	CH-PFT
	PTFE Tape	CH-PTFE
9	Polyester Binder Tape	CH-PT
	Cotton Binder Tape	CH-CT
10	Rubberised Cotton Tape	CH-RCT
	Rubber Proofed Synthetic Tape	CH-RPST
	Bituminised Cotton Tape	CH-BCT
11	Water Blocking Rope	CWR

TDS



FIRE RETARDANT TAPE LOW SMOKE ZERO HALOGEN

APPLICATION: LSZH tapes are widely used in power, control, and communication cables installed in enclosed or populated areas such as buildings, tunnels, metro systems, airports, hospitals, and data centers. They are applied as wrapping or bedding layers in cable manufacturing where fire safety, low toxicity, and reduced smoke emission are critical requirements.

ADVANTAGE: Low Smoke Zero Halogen (LSZH) tapes emit very low smoke and no halogen gases when exposed to fire, reducing toxic and corrosive emissions. They improve fire safety by limiting flame spread and minimizing damage to equipment and structures. These tapes are environmentally safer, produce less acidic smoke, and enhance visibility during fire incidents. They also offer good insulation properties, mechanical strength, and compatibility with various cable constructions.

PROPERTIES	UNIT	CH-LSZH -12	CH-LSZH-15	CH-LSZH-20
Thickness	mm	0.12 ± 0.02	0.15 ± 0.02	0.20 ± 0.02
Mass per unit area	g/m ²	120 ± 10	165 ± 10	220 ± 20
Tensile Strength	N/cm	≥ 150	≥ 200	≥ 250
Elongation	%	≥ 5	≥ 5	≥ 5
Oxygen Index	%	≥ 70	≥ 90	≥ 90
Temperature Index	°C	> 400		
Ph Value	pH	≥ 4.3		
Conductivity	μ S/mm	≤ 10		

FIRE SURVIVAL ZERO HALOGEN TAPE

APPLICATION: Suitable for wrapping and protecting fire-resistant power, control, and communication cables, the tape is widely used in buildings, industrial plants, tunnels, data centers, and infrastructure projects. It is also ideal for cable bundling, joint insulation, and fire barrier reinforcement in transportation systems such as rail and marine installations where low-smoke, zero-halogen materials are required.

ADVANTAGE: Fire Survival Zero Halogen Tape is designed for enhanced safety in fire-critical environments. Free from halogens, it emits very low smoke and non-toxic, non-corrosive gases during fire exposure, helping protect both personnel and equipment. Its flame-retardant and fire-resistant properties assist in limiting flame spread and maintaining circuit integrity. The tape offers strong adhesion, good flexibility, high thermal stability, and compliance with modern fire safety standards.

PROPERTIES	UNIT	CH-FSZH-18
Thickness	mm	0.18 ± 0.02
Mass per unit area	g/m ²	180 ± 10
Width	mm	According to the requirements
Longitudinal strength	N/25mm	≥ 440
Oxygen Index	%	≥ 50
PH		≥ 50
Conductivity	μ s/mm	≤ 3.0

TDS



FIBER GLASS TAPE

APPLICATION: Fiber glass tape is used for electrical insulation and mechanical reinforcement in power cables, control cables, transformers, and fire-resistant cable systems. It is also applied in high-temperature insulation for pipelines, furnaces, heaters, and industrial equipment, as well as in demanding industrial and marine environments.

ADVANTAGE: Fiber glass tape offers excellent heat resistance (up to 550–600°C), high electrical insulation, and strong mechanical strength. It is non-combustible, halogen-free, chemically stable, moisture resistant, and suitable for high-speed application, ensuring long-term reliability in harsh conditions.

PROPERTIES	Unit	CH-FGT-12	CH-FGT-20	CH-FGT-30	CH-FGT-58	TEST METHOD
Thickness	mm	0.12 ± 0.02	0.20 ± 0.02	0.30 ± 0.02	0.58 ± 0.02	ASTM D1777
Mass per unit Area	g/m ²	150 ± 15	240 ± 20	360 ± 20	700 ± 50	ISO 9073-1
Density	g/m ²	1.20 ± 0.10				-
Tensile Strength	N/cm	> 125	> 150	> 220	> 430	-
Elongation	%	3.8	5.2	8.6	12.6	ASTM D 5035
Length Available	mtr/roll	Up to 1000				-
Fire Resistance	°C	180 min >350				-

NOTE: 10% of the roll will have deviation in OD 280 – 500 mm to avoid joints & breakage during tapping process. Means 10% of the rolls will be of smaller diameter (OD 140 to 240 mm)

TDS



ALUMINIUM POLYESTER TAPE

APPLICATION: General purpose, thin shielding laminate tape. Typically used as an economical shielding tape to wrap and shield individual pairs in electronic cable, multi-conductor and multi-pair cables such as electronic, instrumentation, data, coaxial instrumentation or LAN cables.

ADVANTAGE: Aluminium Polyester (AL-PET) tape provides effective EMI/RFI shielding, good heat resistance, and reliable electrical conductivity for grounding. It combines the strength and flexibility of polyester with the corrosion resistance of aluminium, offering durability, moisture protection, and lightweight performance. It is also easy to wrap and process, making it ideal for cable insulation and shielding applications.

PROPERTIES	Unit	CH-ALPET-33	CH-ALPET-34	CH-ALPET-40	CH-ALPET-50	CH-ALPET-60
Structure	mm	AL15/PET18	AL9/PET25	AL15/PET25	AL25/PET25	AL25/PET36
Mass per unit area	g/m ²	68.7	62.3	78.5	108	120
Thickness	μ	33	34	40	52	63
Yield	m ² /kg	14.55	16.05	12.73	9.25	7.4
Tensile Strength	N/mm ²	≥75				
Elongation at Break	%	≥30				

ALUMINIUM POLYIMIDE TAPE

PROPERTIES	Unit	CH-ALPFT-034	CH-ALPFT-50
Structure	mm	AL9/PI25	AL25/PI25
Mass per Unit Area	g/m ²	60 ± 0.2	100 ± 0.2
Thickness	μ	36	52
Yield	m ² /kg	18.0	10.5
Tensile Strength	N/mm ²	≥ 35	≥ 40
Elongation at Break	%	≥ 30	≥ 10

COPPER POLYESTER TAPE

TYPE	STRUCTURE	THICKNESS (μ)	WEIGHT (G/M ²)	YIELD (M ² /KG)	TENSILE STRENGTH (N/MM ²)	ELONGATION (%)
CH-CUPET	CU25/PET25	52	260	3.85	≥100	≥10

Our Chhaperia- the Copper Polyester Tape (CU/PET), is used as a shielding foil for cables, which must be free of or electrostatic interference. The copper layer has excellent mechanical and shielding characteristics whereas the Mylar layer provides the electric insulation characteristics and makes the tape softer to wrap. The Copper Polyester Tape is used for example in low and medium voltage cables, control cables, coaxial cables, and many more.

TDS



FOAMED POLYPROPYLENE (PP) TAPE

APPLICATIONS: Foamed Polypropylene (PP) Tape is widely used in the cable industry as a bedding, separation, and filling tape for power, control, instrumentation, and communication cables. It is applied between cable layers to provide cushioning, maintain roundness, and improve cable flexibility. The tape is also used as a moisture barrier support layer and for general insulation and wrapping in low and medium-voltage cable constructions.

ADVANTAGES: Foamed PP Tape is lightweight, flexible, and offers excellent cushioning with good mechanical strength. It is moisture resistant, chemically inert, and non-toxic, making it suitable for long term cable performance. The tape is easy to apply on high-speed taping machines, helps reduce cable weight, improves process efficiency, and ensures uniform layering with consistent quality.

PROPERTIES	Unit	CH-FPP-10	CH-FPP-125	CH-FPP-15	CH-FPP-20
Appearance		No foreign Material, No marks, Colour: White			
Thickness	mm	0.100 ± 0.02	0.125 ± 0.02	0.150 ± 0.02	0.200 ± 0.02
Width	mm	$10 \sim 830 \pm 0.5$			
Density	g/cm^3	0.6			
Weight of Tape	g/m^2	52 ± 5	65 ± 6	78 ± 8	104 ± 10
Tensile Strength	N/Cm	≥ 100			
Elongation of Break	%	≥ 20			
Process Temperature	$^{\circ}\text{C}$	Max. 225			
Melting Point	$^{\circ}\text{C}$	$160 \sim 170$			

TDS




POLY FIBER GLASS TAPE

APPLICATIONS: Poly Fiber Glass Tape is used for insulation and reinforcement in power and control cables, motors, transformers, and fire-resistant cable constructions, as well as for high-temperature industrial wrapping.

ADVANTAGES: It offers high heat resistance, good electrical insulation, strong mechanical strength, and resistance to moisture and chemicals. The tape is non-combustible, flexible, easy to apply at high speeds, and ensures long-term reliability.

PROPERTIES	UNIT	CH-PFGT-14	CH-PFGT-15	CH-PFGT-16
Overall Thickness	mm	0.14 ± 0.02	0.15 ± 0.02	0.16 ± 0.02
Thickness of Glass Fiber	mm	0.110 ± 0.15	0.115 ± 0.15	0.125 ± 0.15
Thickness of Polyester film	mm	0.030 ± 0.05	0.030 ± 0.05	0.030 ± 0.05
Total weight in GSM	g/m ²	150 ± 20	175 ± 20	185 ± 20
Breakdown Voltage	KV/Layer	≥ 6.5	≥ 7	≥ 7.5
Tensile Strength	N/cm (min)	190	190	190
Core ID / Roll OD	mm	76 / 480	76 / 480	76 / 480
Elongation at Break	% (min)	2	2	2
Length	meter	1000	500 - 1000	500 - 1000

TDS



NON WOVEN- FLEECE TAPE

APPLICATIONS: Non-Woven-Fleece Tape is used in cable manufacturing as a bedding, separation, and cushioning layer for power, control, and communication cables. It helps maintain cable roundness, protects inner cores, and is also used for filling and wrapping applications in low- and medium-voltage cables.

ADVANTAGES: The tape provides excellent cushioning, flexibility, and dimensional stability. It is lightweight, moisture resistant, chemically inert, and easy to apply on high-speed taping machines, ensuring smooth processing and reliable cable performance.

PROPERTIES		UNIT	CH-NW-F50	CH-NW-F100	CH-NW-F125	TEST METHOD
Thickness		mm	0.05 ± 0.01	0.100 ± 0.015	0.125 ± 0.020	ISO 9073-2
Weight		g/m^2	35 ± 5	70 ± 10	87 ± 10	ISO 9073-1
Apparent Density		g/m^3	0.70 ± 0.10			
Tensile Strength	MD	N/50mm	≥ 70	≥ 130	≥ 180	ISO 9073-3
	TD		≥ 15	≥ 40	≥ 50	
Elongation	MD	%	≤ 4	≤ 12	≤ 14	
	TD		≤ 3	≤ 10	≤ 12	

TDS




NON WOVEN – NON COMPRESSED TAPE

APPLICATIONS: Non-Woven – Non-Compressed Tape is primarily used in cable constructions where soft packing and void-filling are required without adding rigidity. It is applied around insulated conductors to gently support cable cores, reduce internal gaps, and accommodate movement during bending and installation, especially in flexible cable designs.

ADVANTAGES: This tape has a voluminous, breathable structure that provides natural cushioning without compression, allowing better stress distribution inside the cable. It improves flexibility, absorbs minor mechanical shocks, adapts easily to irregular surfaces, and processes smoothly without creating hardness or deformation in the finished cable.

PROPERTIES		UNIT	CH-NW-12	CH-NW-15	CH-NW-20	TEST METHOD
Thickness		mm	0.12 ± 0.15	0.15 ± 0.20	0.20 ± 0.30	ISO 9073-2
Weight		g/m^2	20 ± 5	30 ± 5	40 ± 5	ISO 9073-1
Apparent Density		g/m^3	0.18 ± 0.03	0.18 ± 0.03	0.18 ± 0.03	
Tensile Strength	MD	N/50mm	≥ 40	≥ 45	≥ 50	ISO 9073-3
	TD		≥ 15	≥ 20	≥ 25	
Elongation	MD	%	≥ 7	≥ 7.5	≥ 8	
	CD		≥ 5	≥ 5.5	≥ 6	

TDS




NON WOVEN - BINDER TAPE

APPLICATIONS: Non-Woven – Binder Tape is used in cable manufacturing to bind and hold laid-up cable cores firmly in position before sheathing or armouring. It ensures dimensional stability during subsequent extrusion processes and helps maintain consistent cable geometry.

ADVANTAGES: The tape provides controlled holding strength without damaging insulation, offering good tear resistance and uniform wrapping. It runs cleanly on high-speed lines, resists splitting during application, and ensures stable core integrity throughout cable processing.

PROPERTIES		UNIT	CH-NW-B07	CH-NW-B10	CH-NW-B15	CH-NW-HR20	TEST METHOD
Thickness		mm	0.07 ± 0.15	0.10 ± 0.20	0.15 ± 0.30	0.20 ± 0.30	ISO 9073-2
Weight		g/m^2	30 ± 5	40 ± 5	55 ± 5	100 ± 5	ISO 9073-1
Apparent Density		g/m^3	0.40 ± 0.03	0.70 ± 0.03	0.70 ± 0.03	0.70 ± 0.03	
Tensile Strength	MD	N/50mm	≥ 65	≥ 75	≥ 85	≥ 100	ISO 9073-3
	TD		≥ 15	≥ 20	≥ 25	≥ 25	
Elongation	MD	%	≥ 8	≥ 8.5	≥ 8.5	≥ 8.5	
	CD		≥ 5	≥ 5.5	≥ 6	≥ 6	

TDS

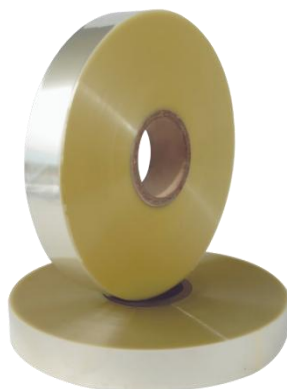

POLYESTER TAPE

APPLICATIONS: Polyester Tape is used as an insulation and wrapping film in jelly-filled cables, telephone cables, power cables, and submersible cables. It is applied for core wrapping, insulation support, and layer separation, and is also used in colour-coded cable constructions for easy identification.

ADVANTAGES: The tape provides reliable electrical insulation, smooth wrapping, and good mechanical strength. It is available in multiple heat-stable colours as per cable industry requirements, maintains performance in demanding environments, and supports consistent, high-quality cable manufacturing.

PROPERTIES	UNIT	CH-PET						TEST METHOD
Thickness	Micron	15	19	25	30	36	50	POLYMERS
Yield	M2/Kg	47.6	37.8	31	23.8	19.8	14.3	POLYMERS
Density	gm/cc	1.4	1.4	1.4	1.4	1.4	1.4	ASTM·D·1505
Water Absorption (Max)	%	0.8	0.8	0.8	0.8	0.8	0.8	ASTM·D·1505

TDS

POLYIMIDE FILM

APPLICATIONS: Polyimide Film is used as a high-performance insulation material in high-temperature electrical cables, motors, transformers, and electronic components where thermal and electrical stability are critical.

ADVANTAGES: It offers exceptional heat resistance, high dielectric strength, and long-term dimensional stability, maintaining performance under extreme thermal and electrical stress.

PROPERTIES		UNIT	CH-PFT					
Normal Thickness		um	25	50	75	100	125	175
Density		g/cm	1.4 ± 0.02					
Tensile	MD	Mpa	≥175	≥170	≥155	≥150	≥135	≥130 3
Strength	TD		≥170	≥165	≥140	≥130	≥110	≥100
Ultimate Elongation		%	≥60		≥70			
Shrinkage	30min at 150°C		0.15					
	30min at 400°C		2				1.9	1.8
Dielectric Strength		V/um	≥185	≥165	≥150	≥125	≥120	≥110
Surface Resistivity ,200°C		Ω	≥1.0×1013					
Volume Resistivity ,200°C		Ω.M	≥1.0×1010					
Dielectric Constant 48-62Hz			3.5 ± 0.4					
Dissipation Factor 48-62Hz			≤4.0×10-3					
Long-term Heat-Resistance 11 Temperature		°C	180					
Thickness tolerance		%	±10					

PTFE SKIVED TAPE

APPLICATIONS: PTFE Skived Tape is used for electrical insulation, chemical lining, sealing, and wrapping in cables, wires, and components exposed to high temperatures, chemicals, weathering, and electrical stress.

ADVANTAGES: It offers excellent chemical, weather, and arc resistance, high dielectric strength, and outstanding thickness uniformity, ensuring reliable performance in demanding electrical and industrial environments.

PROPERTIES	UNIT	CH-PTFE			TEST METHOD
Thickness	micron	50	75	100	
Tensile strength	Mpa	> 20	> 25	> 25	ASTM D1708
Elongation	%	> 200			
Compressive strength	N/mm ²	118			ASTM D625
Deformation under Load	1hr, 23°C, 14.2N/mm ²	11.8			ASTM D621A
	24 Hrs, 23°C, 14.2N/mm ²	14.3			
Water absorption, (24 hours)	%	<0.01			ASTM
Dielectric strength,	kV/mm	5.9			ASTM D149, D150
Continuous service Temperature	°C	250			
Melting point	°C	375			

TDS



POLYESTER BINDER TAPE

APPLICATIONS: Polyester Binder Tape is used in cable manufacturing to bind and secure laid-up conductors or cable cores before extrusion of inner sheath, outer sheath, or armouring. It helps maintain core alignment and dimensional stability during high-speed processing in power, control, and communication cables.

ADVANTAGES: The tape provides high tensile strength and controlled binding force without tearing or damaging insulation. It offers excellent heat resistance during extrusion, low elongation, smooth running on taping machines, and ensures stable, uniform cable construction throughout the manufacturing process.

PROPERTIES	UNIT	CH-PT- 12	CH-PT-16	TEST METHOD
Thickness	mm	0.12 ± 0.02	0.16 ± 0.02	ISO 9073-2
Mass Per Unit Area	g/m	110 ± 10	130 ± 10	ISO 9073-2
Tensile Strength	N/cm	≥ 140	≥ 150	ISO 9073-3
Elongation	%	≥ 30	≥ 30	ISO 9073-3

COTTON BINDER TAPE

APPLICATIONS: Cotton Binder Tape is used in cable manufacturing for binding and holding cable cores during laying-up and prior to sheathing or armouring. It is commonly applied in power, control, and specialty cables where natural, breathable materials are preferred.

ADVANTAGES: The tape offers good absorbency and flexibility, providing secure binding without damaging insulation. It withstands extrusion temperatures, adapts well to uneven surfaces, and ensures stable core formation with reliable performance during cable processing.

PROPERTIES	UNIT	CH-CT-15	CH-CT-25	CH-CT-35	TEST METHOD
Thickness	mm	0.15 ± 0.03	0.25 ± 0.03	0.35 ± 0.03	ISO 9073-2
Mass Per Unit Area	g/m	90 ± 10	125 ± 10	135 ± 10	ISO 9073-2
Tensile Strength	N/cm	≥ 50	≥ 50	≥ 50	ISO 9073-3
Elongation	%	≥ 5	≥ 5	≥ 5	ISO 9073-3

TDS



RUBBERIZED COTTON TAPE

APPLICATIONS: Rubberized Cotton Tape is used in cable manufacturing as a protective and insulating wrapping layer for power and control cables, especially in areas requiring flexibility and moisture protection. It is normally applied between inner sheath and armouring and between armouring and outer sheath so that it provides protection from moisture penetration and avoid impression on outer sheath.

ADVANTAGES: The tape provides good elasticity, adhesion, and moisture resistance while maintaining flexibility. The rubber coating enhances insulation, absorbs vibration, and ensures secure wrapping with durable performance under mechanical and environmental stress.

PROPERTIES	UNIT	CH-RCT-15	CH-RCT-20	CH-RCT-25	CH-RCT-30
Thickness	mm	0.15 + 0.03	0.20 + 0.03	0.25 + 0.03	0.30 + 0.03
Mass per Unit Area	g/m ²	110 ± 10	135 ± 20	155 ± 20	170 ± 20
Tensile Strength	N/CM	≥ 40	≥ 65	≥ 75	≥ 100
Elongation	%	≥ 7.50	≥ 8	≥ 8	≥ 10
Adhesive type	--	Modified Rubber	Modified Rubber	Modified Rubber	Modified Rubber
Temperature Resistance	°C	130			

RUBBER PROOFED SYNTHETIC TAPE

APPLICATIONS: Functions as a separator and binder in heavy-duty flexible cables for mining, marine, and locomotive industries. It is wrapped around cable cores to maintain a circular shape and acts as a barrier between the inner insulation and the outer sheath.

ADVANTAGES: Ensures "clean strip ability" by preventing the outer jacket from bonding to the cores during vulcanization. Its high flexibility allows cables to withstand constant bending and reeling, while the rubber coating offers superior resistance to moisture, oil, and internal friction.

PROPERTIES	UNIT	CH-RPST-13	CH-PST-16
Thickness	mm	0.13 ± 0.02	0.16 ± 0.02
Weight	g/m ²	85 ± 10	120 ± 10
Tensile Strength	N/cm	≥ 100	≥ 120
Elongation	%	≥ 20	≥ 20
Adhesive Type	----	Synthetic Rubber	

TDS



BITUMINISED COTTON TAPE

APPLICATIONS: Bituminised Cotton Tape is used in cable manufacturing as a moisture-resistant binding and protective wrapping layer, particularly in underground and outdoor power cables. It is applied over cable cores or armouring to provide additional environmental protection.

ADVANTAGES: The tape offers excellent water resistance and corrosion protection due to bitumen impregnation, along with good adhesion and flexibility. It enhances cable durability, dampens vibration, and provides long-term protection against moisture ingress and harsh environmental conditions.

PROPERTIES	UNIT	CH-BCT-20 (Single side)	CH-BCT-40 (Double side)
Thickness	mm	0.20 ± 0.03	0.40 ± 0.04
Total Weight	GSM	235 ± 25	280 ± 30
Tensile Strength (Longitudinal)	N/cm	≥ 60	≥ 100
Tensile Strength (Traverse)	N/cm	≥ 35	
Elongation (Longitudinal)	%	≥ 4	
Elongation (Traverse)	%	≥ 4	
Bitumen Penetration Point	PEN	70	

TDS



White



Black

WATER BLOCKING ROPE

APPLICATIONS: Water Blocking Rope is used in power, control, instrumentation, and communication cables to prevent longitudinal water ingress. It is typically placed in the interstices of stranded conductors or cable cores, and is widely applied in underground, outdoor, and direct-buried cables, as well as in cables installed in damp, humid, or flood-prone environments.



ADVANTAGES: Water Blocking Rope provides rapid water swelling and absorption, effectively sealing the cable core and restricting water migration along the cable length. It improves cable reliability and service life by protecting conductors and insulation from moisture-related damage and corrosion. The product is lightweight, easy to apply during cabling, and compatible with standard cable manufacturing processes. It is chemically stable, non-toxic, and halogen-free, and does not adversely affect the electrical or mechanical performance of the cable.

PROPRIETIES	UNIT	CWR-3.0	CWR-4.0	CWR-5.0	CWR-6.0	CWR-7.0	CWR-8.0
Diameter	mm	3 ± 0.5	4 ± 0.5	5 ± 0.6	6 ± 0.6	7 ± 0.7	8 ± 0.5
Liner Density	m/kg	250 ± 10	181 ± 10	142 ± 5	100 ± 8	66 ± 5	50 ± 5
Weight per mtr	gram/m	4.0	5.5	7	10	15	20
Tensile Strength	N	≥90			≥110		
Elongation at Break	%	≥12				≥12	
Swelling Speed	ml/g/1 min	≥35				≥30	
Swelling Capacity	ml/g/5min	≥70				≥60	
Short term stability	°C	250				250	
Long term stability	°C	90				90	
Moisture content	%	≤9				≤9	

PROPRIETIES	UNIT	CWR-9.0	CWR-10.0	CWR-11.0	CWR-12.0
Diameter	mm	9 ± 0.5	10 ± 0.5	11 ± 0.5	12 ± 0.5
Liner Density	m/kg	40 ± 5	28 ± 5	22 ± 5	18 ± 5
Wight per mtr	gram/m	25	35	45	55
Tensile Strength	N	≥130			
Elongation at Break	%	≥12			
Swelling Speed	ml/g/1 min	≥25			
Swelling Capacity	ml/g/5min	≥50			
Short term stability	°C	250			
Long term stability	°C	90			
Moisture content	%	≤9			

MICA TAPPING ON CONDUCTOR

Chhaperia provides tapping of mica tapes on conductor to customer as per their requirement.

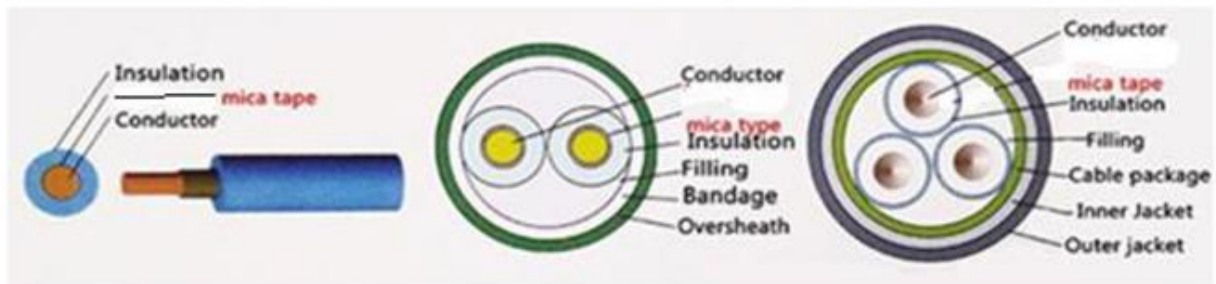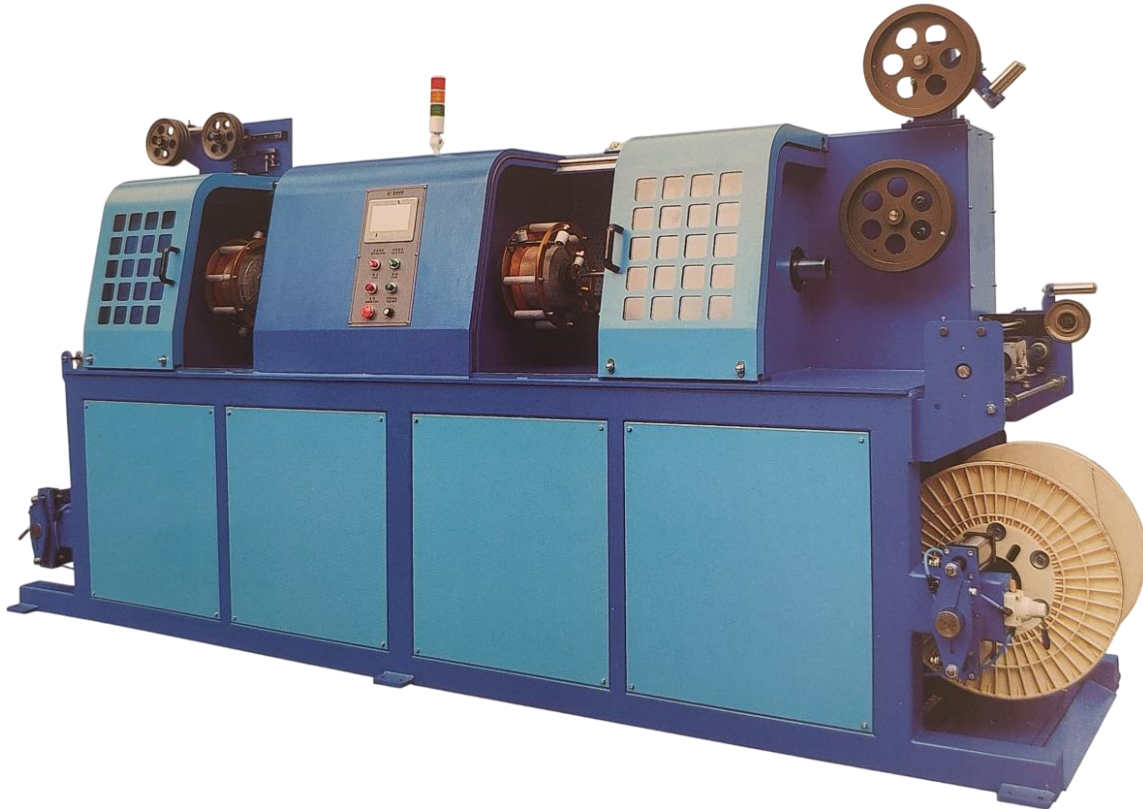

Facility available 20 tapping line with per day production of 100 kms of tapped conductor.

Conductor diameter: 0.50 sqm to 16 sqm.

Taping head: 03 means we can put 3 tapes on conductor at a time

Overlap: Mica Tape overlap available from 10 - 50%.

OUR RANGE OF PRODUCTS


MUSCOVITE MICA INORGANIC

MUSCOVITE MICA TAPE

PHLOGOPHITE MICA TAPE

SEMI CONDUCTIVE - WOVEN

SEMI CONDUCTING WBT


SEMI CONDU WB FOAM TAPE

SEMI COND COPPER WOVEN

BITUMINISED COTTON TAPE

NON-WOVEN TAPE

NON WOVEN WBT

WATER BLOCKING ROPE

RUBBERISED COTTON TAPE


COTTON TAPE

FOAMED PP TAPE

LOW SMOKE HELOGEN (LSZH)

FIBER GLASS TAPE

POLYESTER TAPE

ALUMINIUM MYLAR TAPE

COPPER POLYESTER TAPE

MICA TAPPED CONDUCTOR

ABOUT US

A heritage of insulation expertise, built for modern cable manufacturing.

Chhaperia's journey began with the family mica-mining business in 1959. Over the decades, the group expanded into mica and mica-based electrical and thermal insulation products, and later into a broad portfolio of specialised cable tapes for power, control, instrumentation and fibre-optic applications.

Today, Chhaperia combines manufacturing capability, product development and responsive customer service to supply engineered cable materials from its industrial base in Bengaluru, India.



Leadership

Mr. Anup Chhaperia & Mr. Pravin Chhaperia

Led by experience & customer focus

Chhaperia Cable Material Pvt. Ltd. is promoted and managed by Mr. Anup Chhaperia and Mr. Pravin Chhaperia. Their leadership supports the company's continued focus on quality, innovation, dependable supply and long-term relationships with cable manufacturers in India and international markets.

Mr. Anup Chhaperia

DIRECTOR

Business contact for the Delhi NCR unit and Chhaperia's US office.

M +91 98454 93493

E sales@micagroup.net

Mr. Pravin Chhaperia

DIRECTOR

Business contact for Chhaperia Cable Material's Unit-1 in Bengaluru.

M +91 98863 26886

E info@micagroup.net

1959

FAMILY HERITAGE IN MICA

300,000 square meters

INDUSTRIAL SETUP IN
BENGALURU

Engineering materials that help cables perform with **reliability, protection and confidence.**



CONNECTING YOUR VISION TO THE WORLD.



CHHAPERIA INTERNATIONAL COMPANY CHHAPERIA CABLE MATERIAL PVT LTD

**MAIN UNIT: Sy. No. 18, K.G. Kuntanahalli, Kasaba Hobli.
Doddaballapura, Bengalore- 561203, India.
BRANCH UNIT: Khushkhera, Delhi NCR, India.**

CONTACT:

Mr. Anup Chhaperia - Phone No: +91 9845493493

Mr. Pravin Chhaperia - Phone No: +91 9886326886

E-mail: info@micagroup.net / sales@micagroup.net

VISIT:

Website: www.chhaperiatapes.com / www.micagroup.net

LinkedIn: <https://www.linkedin.com/in/anup-chhaperia-b0423822/>