

Date: 18/08/ 2025

Lab Practical #05:

Study the concept of VLAN using packet tracer.

Practical Assignment #05:

1. Implement the different network structures in VLAN and VLAN trunking. Also check connectivity between them using ping command or PDU utility.

Solution :

Steps:

1. Open Packet Tracer.
2. Add 1 Switch + 4 PCs.
3. Assign IPs:
 - VLAN 10 → PC1: 192.168.10.1, PC2: 192.168.10.2
 - VLAN 20 → PC3: 192.168.20.1, PC4: 192.168.20.2
4. Go to Switch → CLI → Configure VLANs:

```
Switch> enable
Switch# configure terminal
Switch(config)# vlan 10
Switch(config-vlan)# name SALES
Switch(config-vlan)# exit
Switch(config)# vlan 20
Switch(config-vlan)# name HR
Switch(config-vlan)# exit
```

5. Assign VLANs to ports:

```
Switch(config)# interface fastEthernet 0/1
Switch(config-if)# switchport mode access
Switch(config-if)# switchport access vlan 10

Switch(config)# interface fastEthernet 0/2
Switch(config-if)# switchport mode access
Switch(config-if)# switchport access vlan 10

Switch(config)# interface fastEthernet 0/3
Switch(config-if)# switchport mode access
Switch(config-if)# switchport access vlan 20

Switch(config)# interface fastEthernet 0/4
Switch(config-if)# switchport mode access
Switch(config-if)# switchport access vlan 20
```



Date: 18/08/2025

6. For VLAN trunking (between switches):

```
Switch(config)# interface fastEthernet 0/24
Switch(config-if)# switchport mode trunk
```

7. Test connectivity:

- PCs in the **same VLAN** can ping each other.
- PCs in **different VLANs** cannot ping unless a router-on-a-stick or Layer 3 switch is configured.

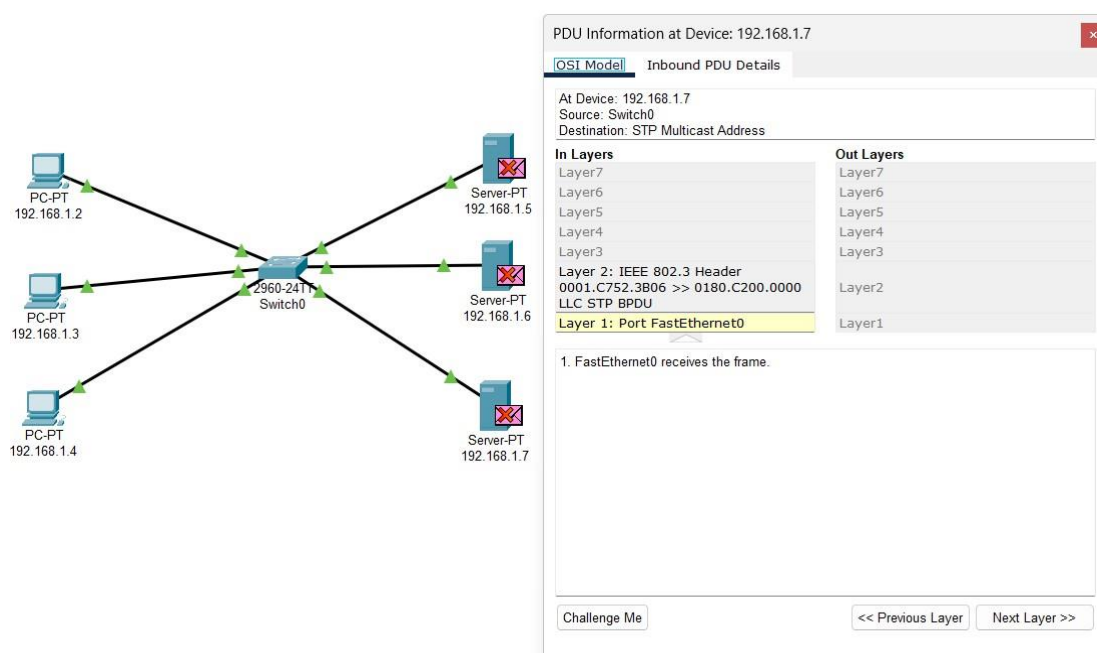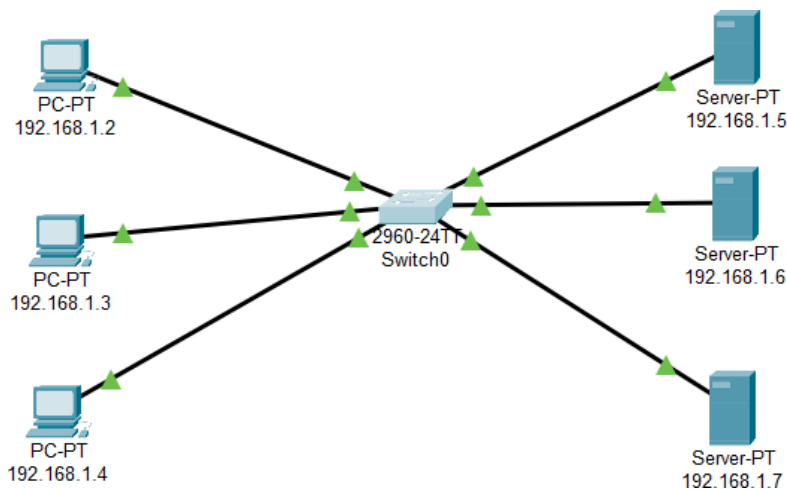




DARSHAN INSTITUTE OF COMPUTER APPLICATION

MCA Semester 3 | Practical Assignment | Computer Networks (2305CS332)

Date: 18/08/ 2025

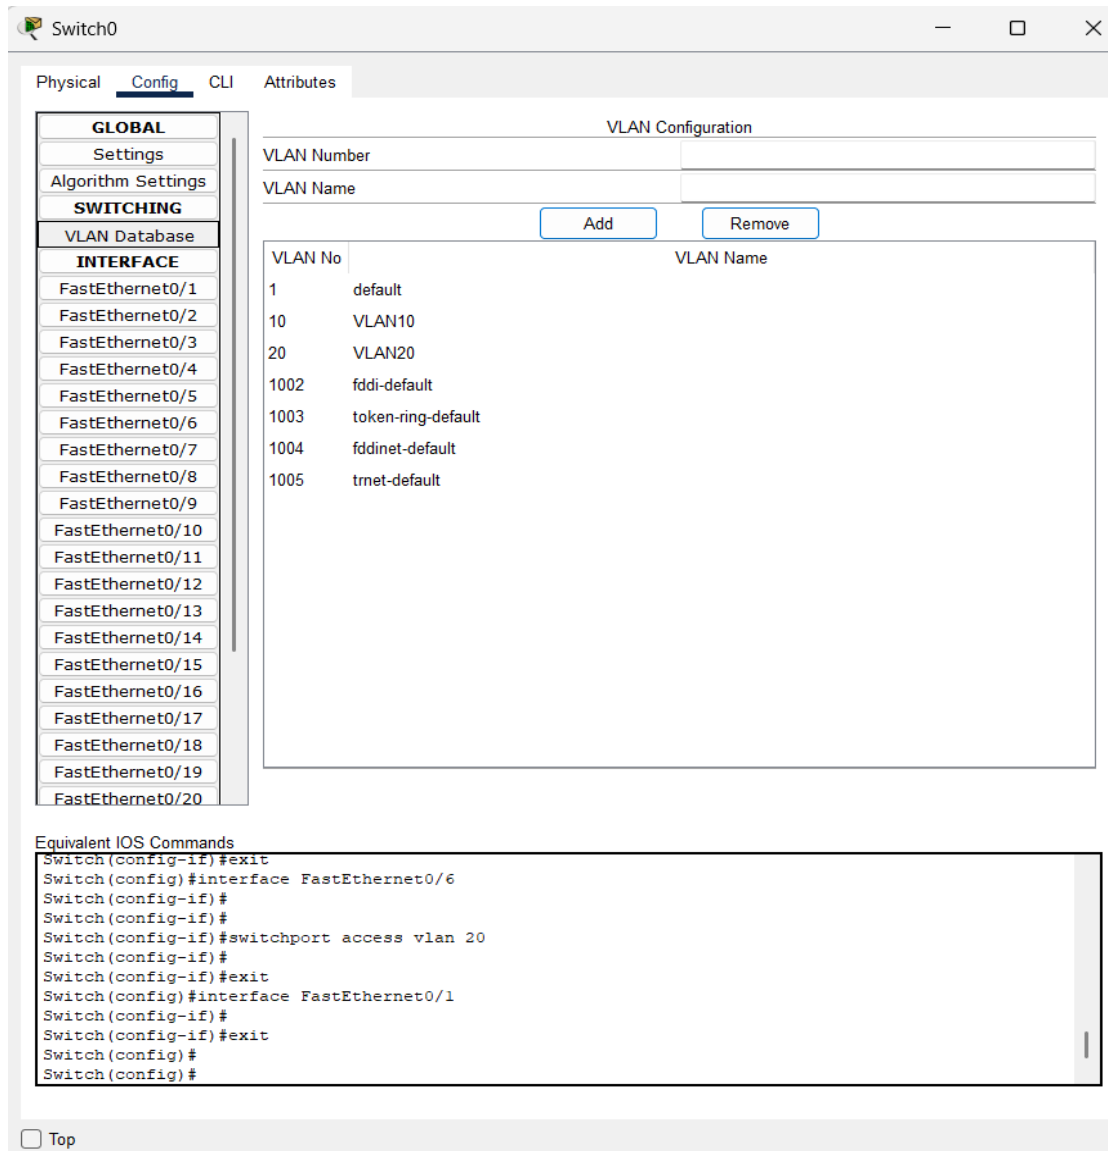

Switch0

Physical Config CLI Attributes

GLOBAL

- Settings
- Algorithm Settings

SWITCHING

- VLAN Database

INTERFACE

- FastEthernet0/1
- FastEthernet0/2
- FastEthernet0/3
- FastEthernet0/4
- FastEthernet0/5
- FastEthernet0/6
- FastEthernet0/7
- FastEthernet0/8
- FastEthernet0/9
- FastEthernet0/10
- FastEthernet0/11
- FastEthernet0/12
- FastEthernet0/13
- FastEthernet0/14
- FastEthernet0/15
- FastEthernet0/16
- FastEthernet0/17
- FastEthernet0/18
- FastEthernet0/19
- FastEthernet0/20

VLAN Configuration

VLAN Number

VLAN Name

Add Remove

VLAN No	VLAN Name
1	default
10	VLAN10
20	VLAN20
1002	fddi-default
1003	token-ring-default
1004	fddinet-default
1005	trnet-default


Equivalent IOS Commands

```
Switch(config-if)#exit
Switch(config)#interface FastEthernet0/6
Switch(config-if)#
Switch(config-if)#
Switch(config-if)#switchport access vlan 20
Switch(config-if)#
Switch(config-if)#exit
Switch(config)#interface FastEthernet0/1
Switch(config-if)#
Switch(config-if)#exit
Switch(config)#
Switch(config)#
```

☐ Top

Here we setup VLAN database add VLAN number and name

Date: 18/08/2025

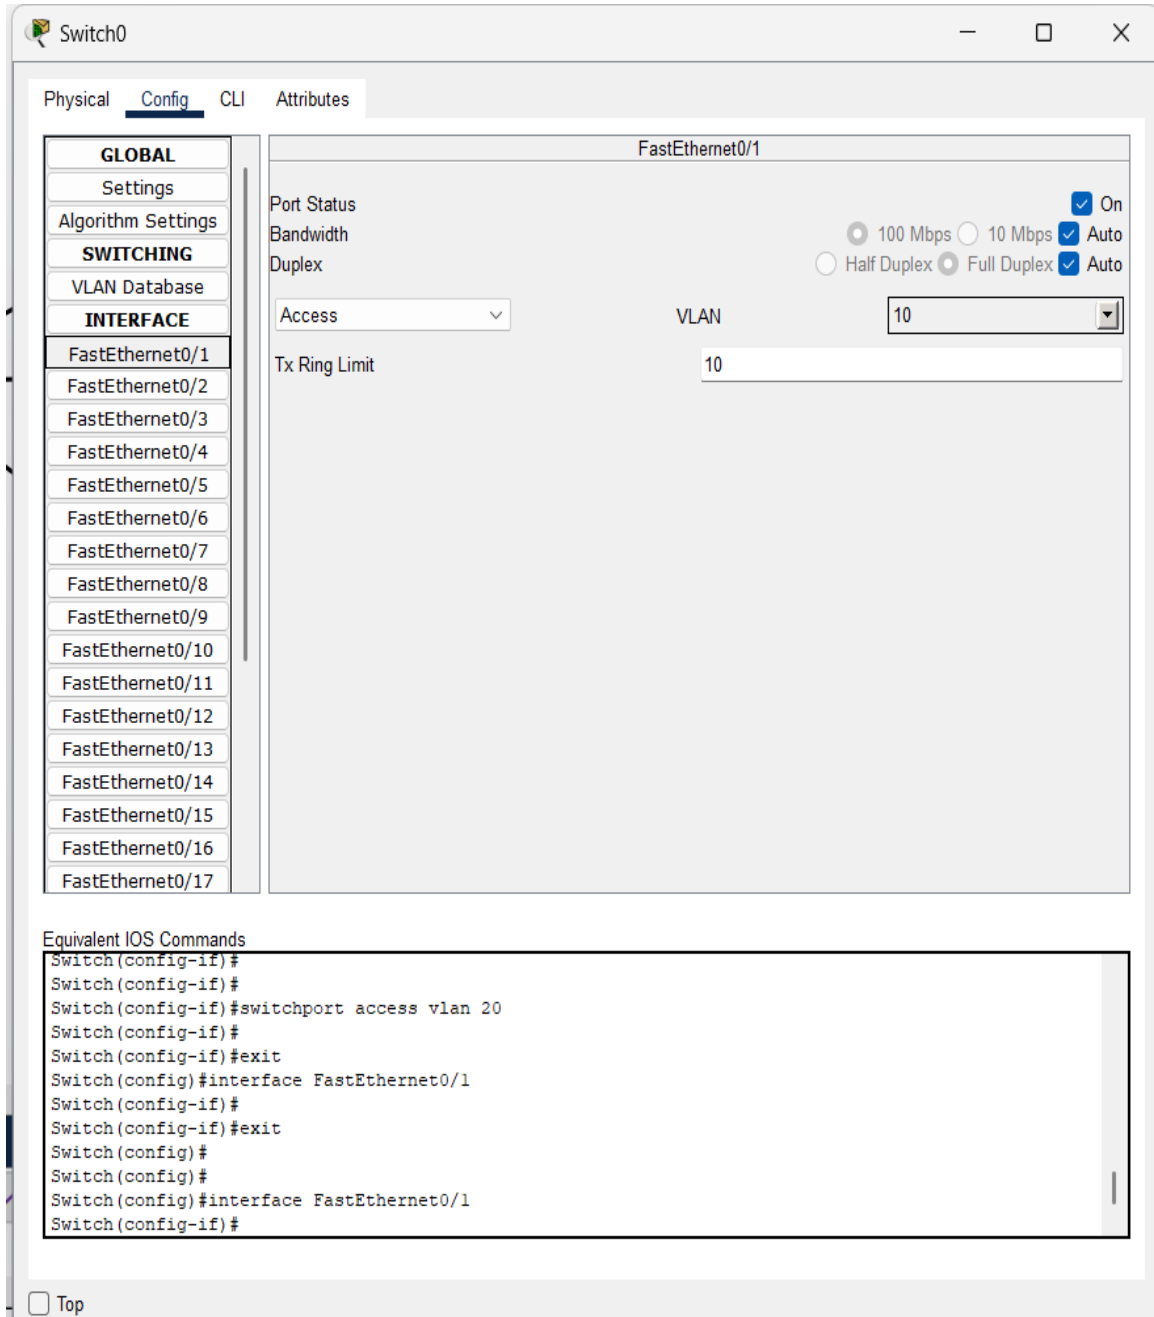

Switch0

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

SWITCHING

VLAN Database

INTERFACE

FastEthernet0/1

FastEthernet0/2

FastEthernet0/3

FastEthernet0/4

FastEthernet0/5

FastEthernet0/6

FastEthernet0/7

FastEthernet0/8

FastEthernet0/9

FastEthernet0/10

FastEthernet0/11

FastEthernet0/12

FastEthernet0/13

FastEthernet0/14

FastEthernet0/15

FastEthernet0/16

FastEthernet0/17

FastEthernet0/1

Port Status

Bandwidth

Duplex

Access

VLAN

10

100 Mbps

10 Mbps

Half Duplex

Full Duplex

On

Auto

Auto

Tx Ring Limit

10


Equivalent IOS Commands

```
Switch(config-if)#
Switch(config-if)#
Switch(config-if)#switchport access vlan 20
Switch(config-if)#
Switch(config-if)#exit
Switch(config)#interface FastEthernet0/1
Switch(config-if)#
Switch(config-if)#exit
Switch(config)#
Switch(config)#
Switch(config)#interface FastEthernet0/1
Switch(config-if)#
```

Top

Here we setup the switch ,set vlan10->10 and vlan20->20

Date: 18/08/ 2025

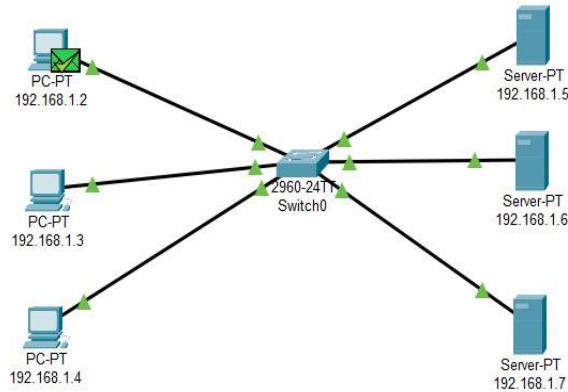

PDU Information at Device: 192.168.1.2


OSI Model Inbound PDU Details

At Device: 192.168.1.2
Source: 192.168.1.2
Destination: 192.168.1.4

In Layers	Out Layers
Layer7	Layer7
Layer6	Layer6
Layer5	Layer5
Layer4	Layer4
Layer 3: IP Header Src. IP: 192.168.1.4, Dest. IP: 192.168.1.2 ICMP Message Type: 0	
Layer 2: Ethernet II Header 0002.16E0.7424 >> 0007.EC3A.B65B	
Layer 1: Port FastEthernet0	Layer1

1. FastEthernet0 receives the frame.

Challenge Me << Previous Layer Next Layer >>

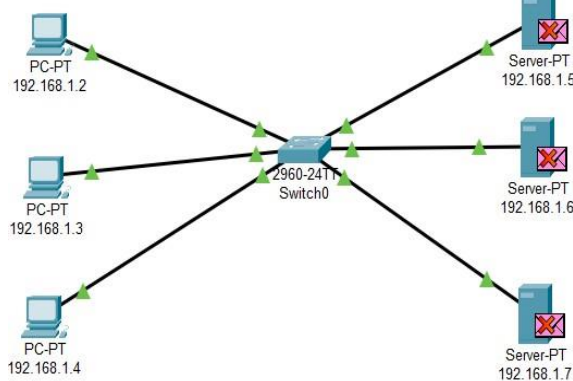

PDU Information at Device: 192.168.1.7




OSI Model Inbound PDU Details

At Device: 192.168.1.7
Source: Switch0
Destination: STP Multicast Address

In Layers	Out Layers
Layer7	Layer7
Layer6	Layer6
Layer5	Layer5
Layer4	Layer4
Layer3	Layer3
Layer 2: IEEE 802.3 Header 0001.C752.3B06 >> 0180.C200.0000 LLC STP BPDU	
Layer 1: Port FastEthernet0	Layer1

1. FastEthernet0 receives the frame.

Challenge Me << Previous Layer Next Layer >>

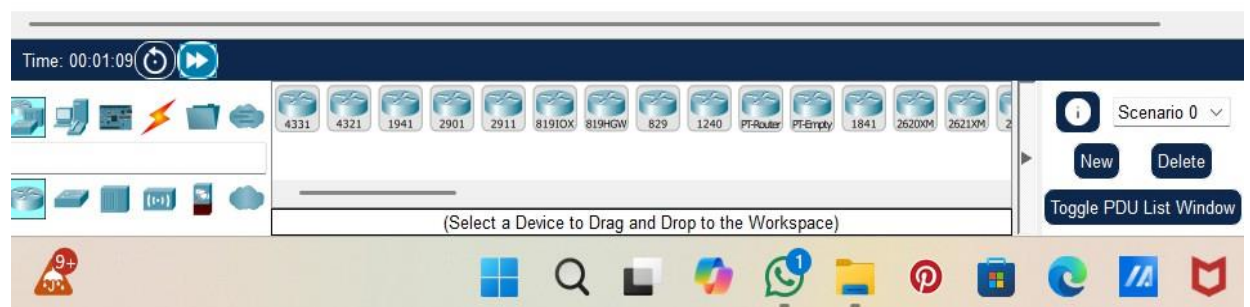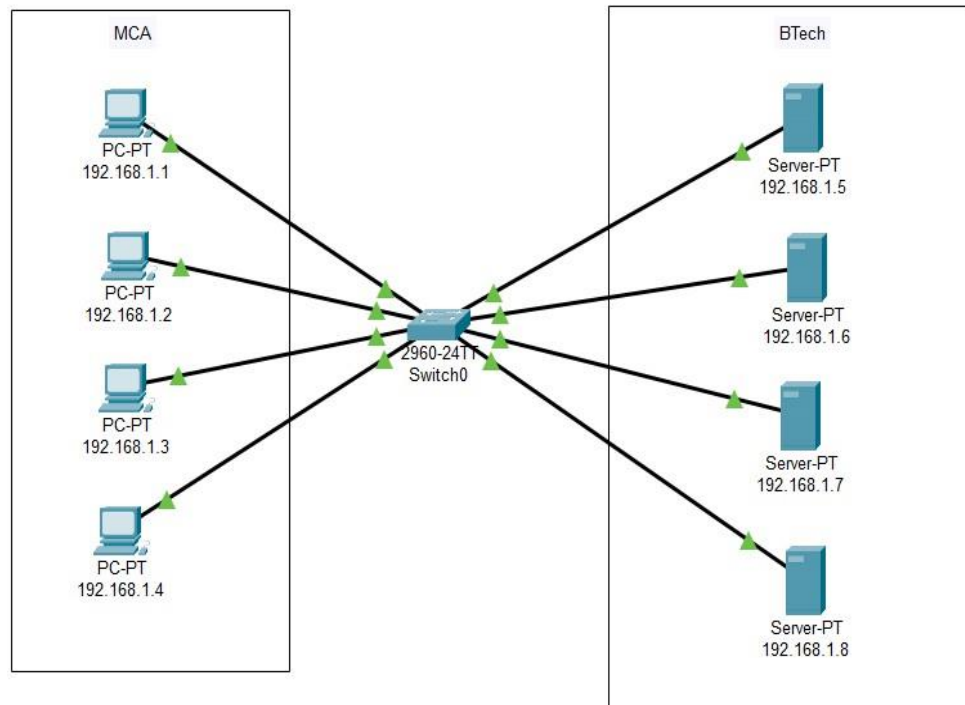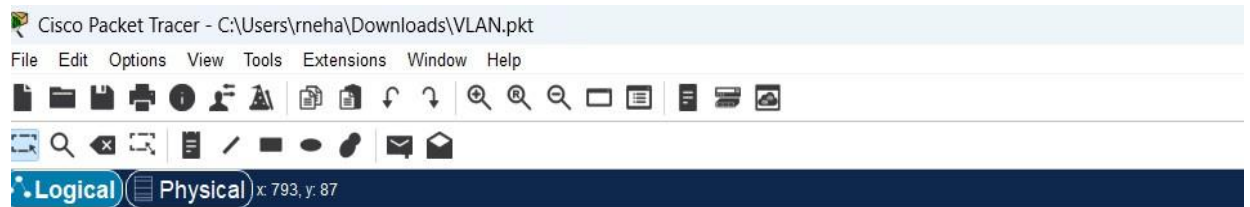Date: 18/08/ 2025**Other VLAN NETWORK SCREENSHOTS OR LABWORK**

Date: 18/08/ 2025

