

How to Configure Static Route and Default Route to the Routers

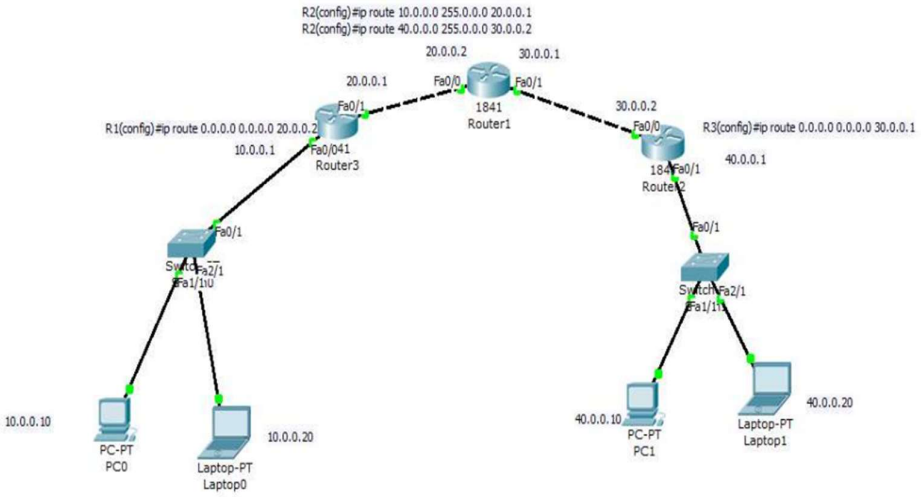


Output:

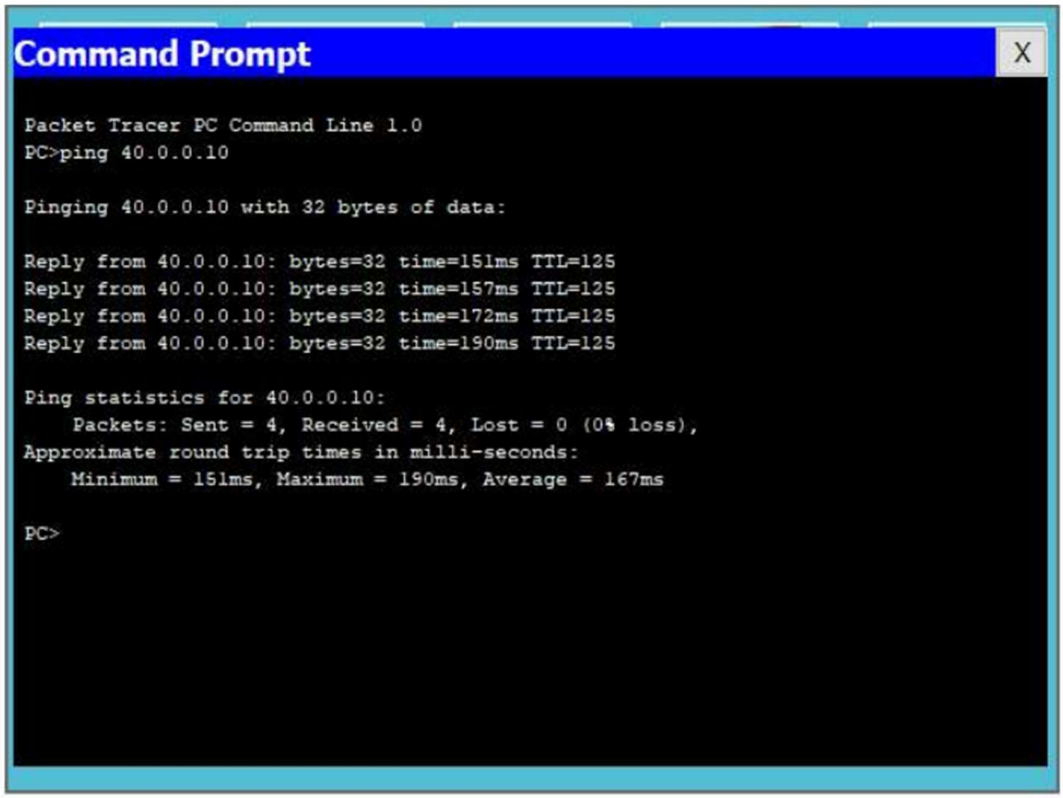

7. Lab program 4

How to configure static route to the routers.

step 1 :- Create the topology with two sub-networks. Apply the basic configuration to all hosts and interfaces.

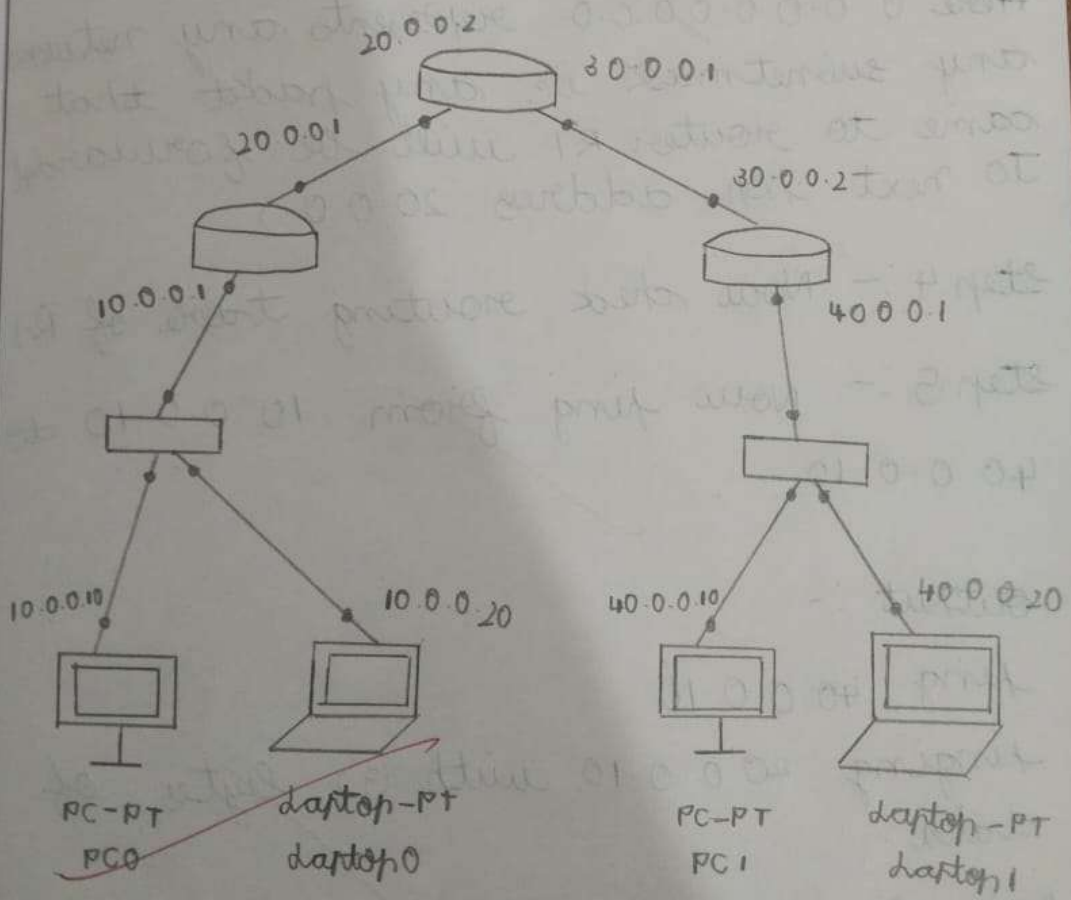

step 2 :- Configure static route on R2 to route packets for 10.0.0.0 and 40.0.0.0

networks using the commands in CLI

R2(config)# ip route Destination Network / Destination N/W SubnetMask / Next Hop address

step 3 :- Now we are going to configure default route on R1 & R3. So the routers forward packets to assigned ip address next hop address

Here 0.0.0.0.0.0.0.0 represents any network any subnetmask ie any packet that came to router R1 will be forwarded to next hop address 20.0.0.2

step 4 :- Now check routing table of R1

step 5 :- Now ping from 10.0.0.10 to 40.0.0.10

output :-

ping 40.0.0.10

pinging 40.0.0.10 with 32 bytes of data:

Reply from 40.0.0.10 : bytes=32 time=151ms TTL=

Reply from 40.0.0.10 bytes=32 time=167ms

Reply from 40.0.0.10 bytes=32 time=17

Reply from 40.0.0.10 bytes = 32 time = 190 ms

Ping statistics for 40.0.0.10

Packets sent = 4, received = 4, lost = 0

Approx round trip time

minimum = 151 ms, maximum = 190 ms

Average = 167 ms

(10)

CO6

5/10/26