



SCHOOL OF AEROSPACE MECHANICAL AND MECHATRONIC ENGINEERING

AERO3760: SPACE ENGINEERING 2

---

## **Group E: SnapSat**

### **Data Package Document 1**

### **Critical Design Review**

---

21 AUGUST 2015

<b>Name and Email</b>	<b>Role and Responsibility</b>
James Allworth   312073038 jall8741@uni.sydney.edu.au	<i>Attitude Determination and Control System</i> TASKS
Thomas Forbutt   312101058 tfor8012@uni.sydney.edu.au	<i>Communications and Data Handling</i> TASKS
Oscar McNulty   312106130 omcn3220@uni.sydney.edu.au	<i>Structural Design and Development</i> TASKS
Penelope Player   312106718 ppla7388@uni.sydney.edu.au	<i>On-board Computer and Power System</i> TASKS
Nikita Sardesai   312088205 nsar2497@uni.sydney.edu.au	<i>Thermal System Design and Payload</i> TASKS

Table 0.1: caption

# Contents

<b>1</b>	<b>System Overview</b>	<b>3</b>
<b>2</b>	<b>Payload Design</b>	<b>4</b>
<b>3</b>	<b>Structural Subsystem</b>	<b>5</b>
<b>4</b>	<b>Attitude Determination and Control Subsystem</b>	<b>6</b>
<b>5</b>	<b>Electrical Power Subsystem</b>	<b>7</b>
<b>6</b>	<b>On-Board Computer and On-board Data Handling Subsystem</b>	<b>8</b>
<b>7</b>	<b>Communications Subsystem</b>	<b>9</b>
<b>8</b>	<b>Thermal Control Subsystem</b>	<b>10</b>
8.1	The Three Modes of Heat Transfer	10
8.1.1	Convection	11
8.1.2	Conduction	11
8.1.3	Radiation	11
8.2	Total Incoming Radiation	11
8.2.1	View Factors	12
8.3	Spacecraft Thermal Environment	13
8.3.1	Solar Radiation	13
8.3.2	Earth Infrared Radiation	14
8.3.3	Earth Albedo	14
8.3.4	Total Incoming Radiation Per Panel	14

## List of Figures

8.1	Incoming thermal radiation on the satellite	10
8.2	Radiation incoming onto the satellite as it orbits	12
8.3	Representation of Satellite Orbit	13
8.4	Solar radiation falling on each panel	14
8.5	Total radiation falling upon panel 2	14

## List of Tables

0.1	caption	1
-----	---------	---

# 1 System Overview

## **2 Payload Design**

### **3 Structural Subsystem**

## **4 Attitude Determination and Control Subsystem**

## 5 Electrical Power Subsystem



## **6 On-Board Computer and On-board Data Handling Subsystem**

## **7 Communications Subsystem**

## 8 Thermal Control Subsystem

The method of developing thermal control used for SnapSat considers the following simplified model of the satellite. The main body is idealised as a system dissipating heat (located at the centre of the CubeSat) to the boundary located on the face of the CubeSat. This boundary is exposed to the outer environment. Energy conservation laws require that in steady state, the heat dissipated by the internal electronics is equal to that transferred to the boundary. Thus, the heat from internal dissipation added to the heat adsorbed from the outside is equal to the heat rejected to space. The general governing equation is

$$Q_{1 \rightarrow 2} = K_{1 \rightarrow 2}(T_a - T_2) \quad (8.1)$$

Where  $Q$  = heat exchange (Watts)

$K$  = proportionality factor constant (Watts/Kelvin)

$T$  = temperature of bodies (Kelvin)

between bodies 1 and 2. Additionally, the heat radiated from a blackbody surface of temperature  $T$  is given by

$$Q_r = K T^4 \quad (8.2)$$

Where the proportionality factor depends on physical constants, the material properties, surface conditions and geometry. A schematic of the incoming thermal radiation on the CubeSat in Low-Earth Orbit (LEO) is shown below.

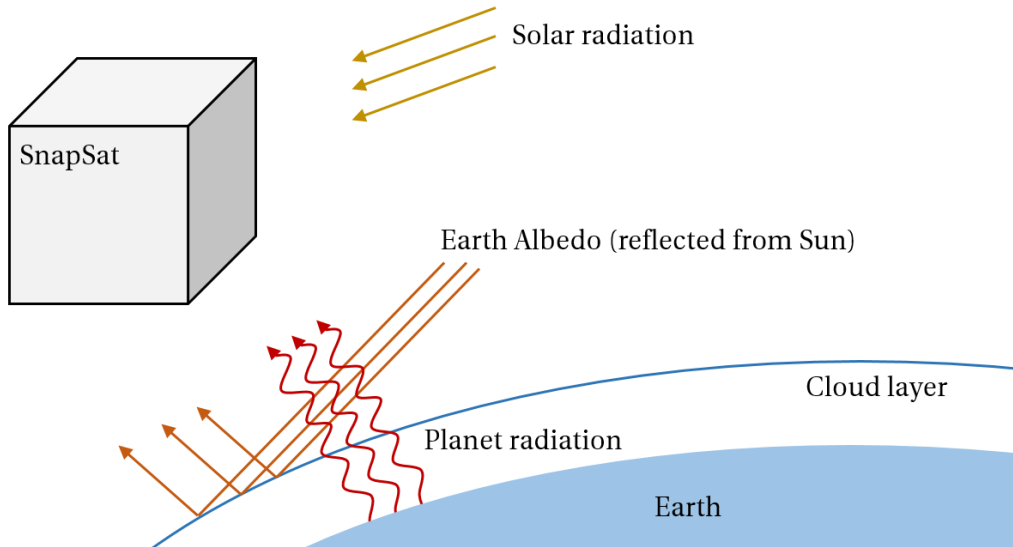


Figure 8.1: Incoming thermal radiation on the satellite

### 8.1 The Three Modes of Heat Transfer

The first law of thermodynamics states that the internal energy change on a system is equal to the amount of heat added subtracted by the amount of work done. The work done by the satellite on its environment is zero in our case, so the change in energy becomes

$$\frac{dU}{dt} = Q = A \rho c_p \frac{dT}{dt} dx$$

Where  $Q$  = heat added (Watts)  
 $A$  = cross-sectional area ( $\text{m}^2$ )  
 $\rho$  = density of material ( $\text{kg}/\text{m}^3$ )  
 $c_p$  = specific heat capacity ( $\text{J}/\text{kg K}$ )  
 $T$  = temperature (K)  
 $dx$  = incremental length (m)

Is is dependent on the physical and geometric properties of the satellite and the change in temperature. The total heat balance for the satellite is then given by the heat flux entering the system minus the flux leaving the system. These are characterised by the modes of heat transfer below.

### 8.1.1 Convection

Convection is the heat transfer between a solid surface and flowing fluid. This is of importance during mission launch, however does not apply in a space environment. Convection considerations were ignored for this design.

### 8.1.2 Conduction

Thermal energy transfer within a material due to vibrating atoms - for example if the material is heated in one location, conduction is the method by which it spreads to the rest of the material. This is most important for on-board electronics, the rate of heat transfer is given by

$$Q_{\text{conduction}} = \frac{kA}{\Delta x}(T_1 - T_2)$$

which is the same as equation 8.1. The heat transfer depends on the area of the satellite normal to the direction of heat transfer  $A$ , the thermal conductivity  $k$  and the temperature differential  $T$ .

### 8.1.3 Radiation

Perhaps the most complex form of heat transfer is radiation, where all bodies above 0K emit and absorb electromagnetic energy. We consider each body as a perfect emitter (black body) and integrate the emitted energy across all wavelengths, this gives

$$E_{bb} = \epsilon \sigma T^4 \quad (8.3)$$

measured in  $\text{Watts}/\text{m}^2$ . This is the same as equation 8.2, where  $\sigma$  is the Stefan-Boltzmann constant. In this case, the emissivity  $\epsilon$  has been added to account for the fact that the surfaces are not perfect black bodies.

## 8.2 Total Incoming Radiation

The total radiation incoming onto the satellite as it orbits is defined in figure 8.2 below. This assumes that the satellite is in full view of the sun 65% of the time in each orbit.

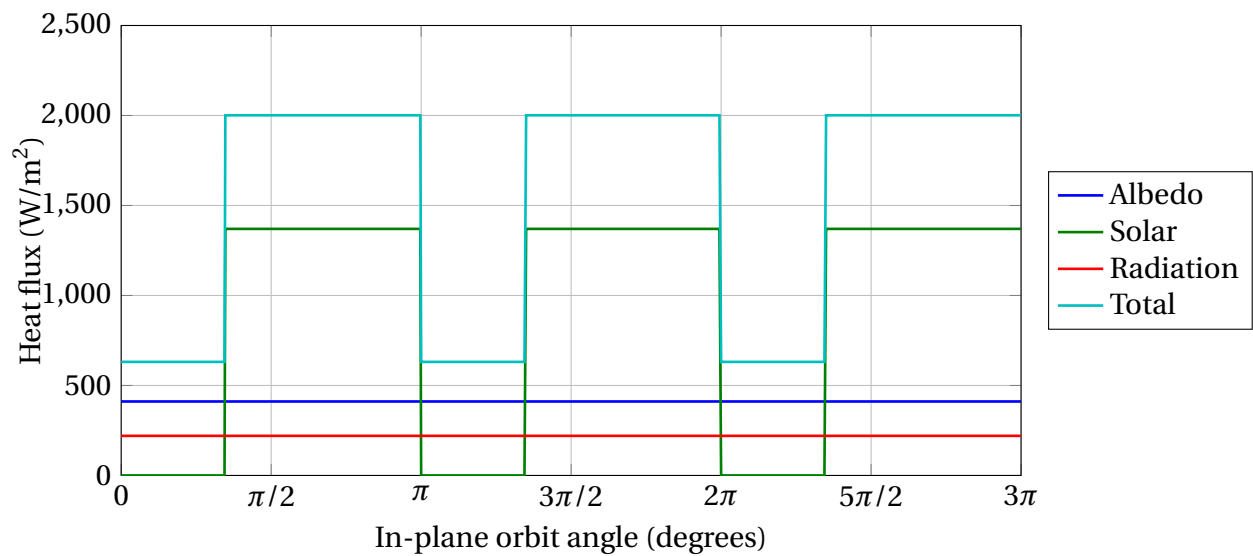


Figure 8.2: Radiation incoming onto the satellite as it orbits

Whilst this is the incoming radiation on the satellite as a whole, it is not indicative of the amount of radiation received by each side of the satellite. As the spacecraft is attitude controlled, the lower side will be facing the Earth always and only receive solar radiation for a short period of time. The amount of solar radiation (and even Earth IR radiation) received depends on the projected area that the radiation falls upon. Corrections are found using the view factor of each side of the satellite.

### 8.2.1 View Factors

The view factor of each side of the satellite allows for the calculation of the effect of the incoming radiation. The calculation takes into account the projected amount of heat flux on each side. The view factor is of importance when considering the radiation effect of Earth's infrared and albedo. The view factor indicates the area of the panel that radiation falls upon. Naturally, the view factor for the panel facing the Earth is 1, whilst that of the panel facing away from the Earth is 0. The other panels lie between these values, they are listed below.

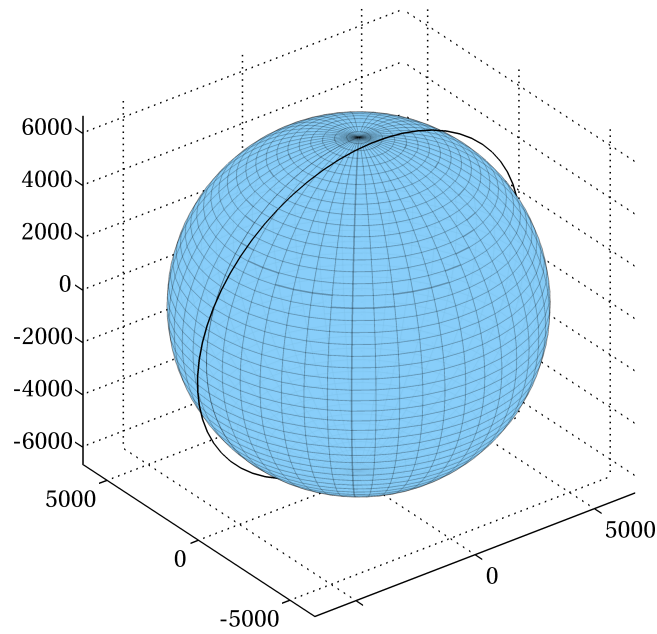


Figure 8.3: Representation of Satellite Orbit

## 8.3 Spacecraft Thermal Environment

As shown in figure 8.1, the spacecraft is subject to the following heating mediums: solar radiation, Earth infra-red and Earth albedo. The amount of radiation falling upon each panel is a function of the surface absorptivity and the view factor of the panel. The panel naming convention for this section is shown below.

### 8.3.1 Solar Radiation

The incoming solar radiation on the satellite is given by

$$Q_{solar} = Q_{sun} \alpha \cos \phi \quad (8.4)$$

Where  $Q_{sun}$  = solar heat flux (Watts)

$\alpha$  = panel surface absorptivity

$\phi$  = angle between the normal of the panel to the sun (rad)

For each of the panels, the solar radiation intensity is shown in the figure below. The skew in four of the panels is due to the  $45^\circ$  rotation of the orbit along the  $z$  Earth frame.

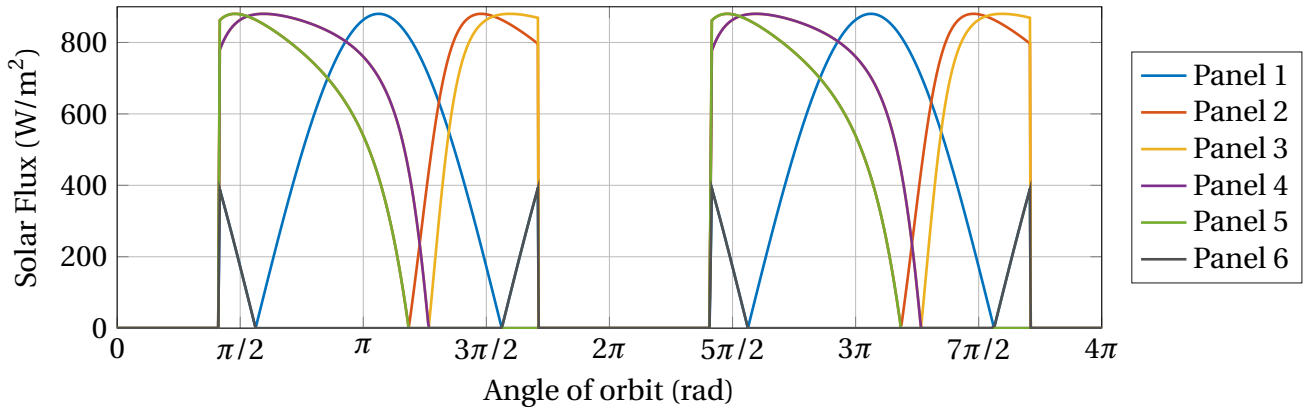


Figure 8.4: Solar radiation falling on each panel

### 8.3.2 Earth Infrared Radiation

The incoming radiation from the Earth is in the infrared band. This radiation is due to the effective temperature of the Earth and is a constant value for each panel. For this reason, the values will not be displayed on a graph. The incoming radiation varies from panel to panel depending only on the view factors as described in section 8.2.1. The value is given by

$$Q_{Earth-IR} = \sigma T_{Earth}^4 \alpha VF \quad (8.5)$$

Where  $\sigma = 1.381 \times 10^{-23} \text{ m}^2 \text{ kg s}^{-2} \text{ K}^{-1}$  (Boltmann constant)

$T$  = effective temperature of the Earth

$\alpha$  = panel surface absorptivity

$VF$  = panel view factor

### 8.3.3 Earth Albedo

### 8.3.4 Total Incoming Radiation Per Panel

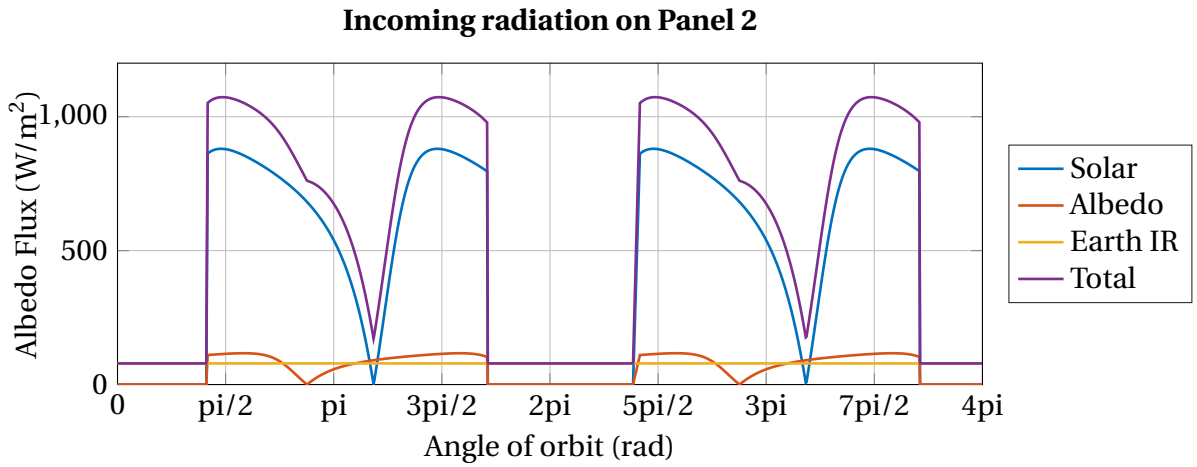


Figure 8.5: Total radiation falling upon panel 2

# References