
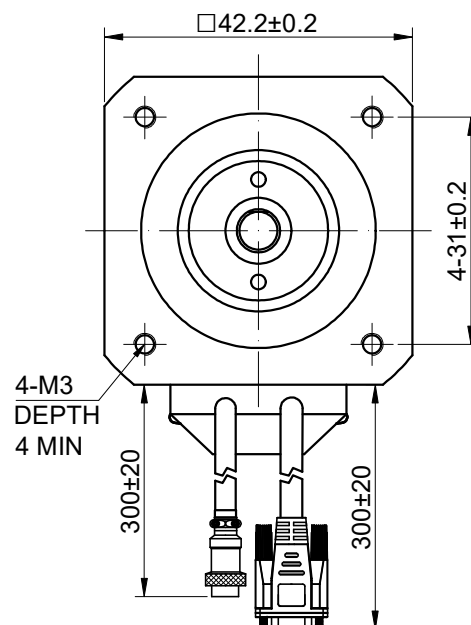


MODEL NO.	17E1K-07	DWG NO.	A0473
-----------	----------	---------	-------

CUSTOMER'S MODEL: NO MODEL
END COVER COLOR: BLACK


REV.	REVISION RECORD	BY	DATE
0	ORIGIN	LJ	6.12.2026

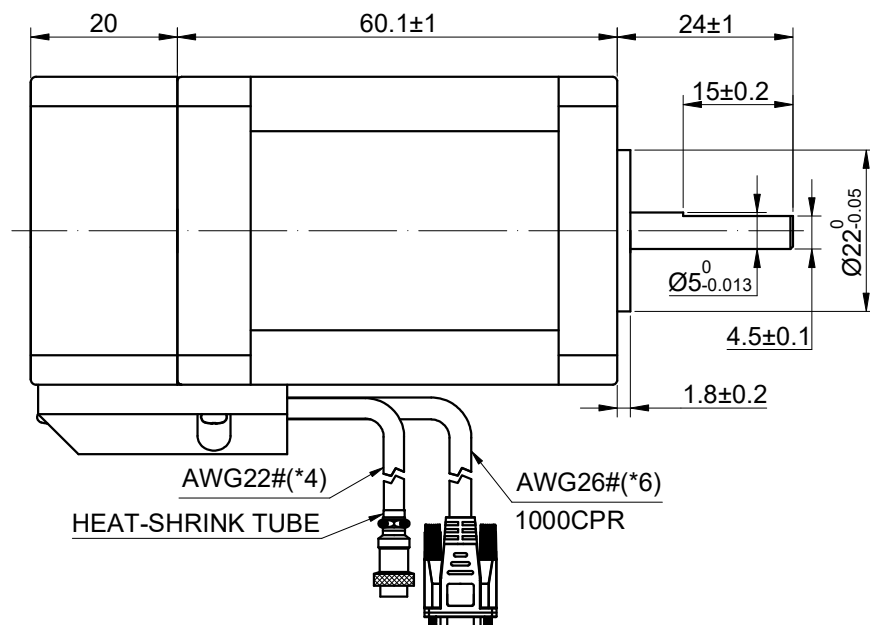

STEPPER MOTOR
17E1K-07
S/N: XXXXXXXXXXXXX



4-PIN GX16 FEMALE PLUG 15-PIN DB MALE PLUG

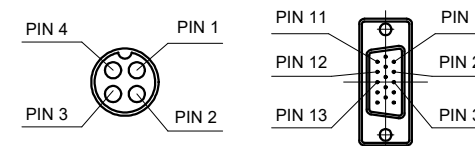

MOTOR CONNECTION				
PIN NO	BIPOLAR	LEADS	WINDING	
1	A+		A+	
2	A-		A-	
3	B+		B+	
4	B-		B+	B-

CONNECTION	BIPOLAR
SPECIFICATION	
AMPS/PHASE	2.00
RESISTANCE/PHASE(Ohms)@25°C	1.75±10%
INDUCTANCE/PHASE(mH)@1KHz	4.00±20%
HOLDING TORQUE(Nm)[lb-in]	0.72 [6.38]
STEP ANGLE(°)	1.80
STEP ACCURACY(NON-ACCUM)	±5.00%
ROTOR INERTIA(g-cm²)	—
WEIGHT(Kg)[lb]	—
AMBIENT TEMPERATURE	0°C~50°C[32°F~122°F]
INSULATION CLASS	B 130°C[266°F]
TEMPERATURE RISE	MAX.80°C

COMMENT:

- 1.TMBF 6000h OR MORE @ 24V/300RPM
- 2.INSULATION RESISTANCE (NORMAL TEMPERATURE AND HUMIDITY): 100 Mohm
- 3.DIELECTRIC STRENGTH 500VAC FOR 1MIN.(BETWEEN THE MOTOR COILS AND THE MOTOR CASE)

FULL STEP 2 PHASE-Ex.,WHEN FACING MOUNTING END (X)						DIMENSIONS ARE IN MILLIMETERS.	
STEP	A+	B+	A-	B-		TOLERANCES AS BELOW:	ANGLES
1	+	+	-	-		DECIMALS	±2°
2	-	+	+	-		X ±0.5	
3	-	-	+	+		X.X ±0.25	
4	+	-	-	+		X.XX ±0.13	

THIS DOCUMENT SHALL NOT BE REPRODUCED NOR SHALL THE INFORMATION CONTAINED HEREIN BE USED BY OR DISCLOSED TO OTHERS UNLESS EXPRESSLY AUTHORIZED IN BY WRITING STEPPERONLINE.

SIGNATURE		DATE
DRN	LJ	6.12.2026
APVD	MYX	6.12.2026

ENCODER RESOLUTION:1000PPR(4000CPR)						
PIN NO	1	2	3	11	12	13
ENCODER	EA+	VCC	GND	EB+	EB-	EA-

STEPPERONLINE®

STEPPER MOTOR

17E1K-07

REV.	0	SCALE	1:1	DWG NO.	A0473
------	---	-------	-----	---------	-------