Recommended Cutting Conditions

High efficiency cuttiing condition | High accuracy cuttiing condition

Please refer to P.13
about high accuracy cutting conditions

Epoch Deep Ball Evolution EPDBE-PN EPDBE-ATH

Recommended range				PN series											
												ATH series			
Work material				1		2		3		4		5		6	
				Coppers		Carbon steels, Alloy steels (180～250HB)		Stainless steels, Tool steels (25～35HRC)		Pre-hardened steels (35～45HRC)		Hardened steels (45～55HRC)		Hardened steels (55～65HRC)	
Ratio to standard depth of cut				120%		100%		90%		80%		65%		60%	
Ball radius RE (mm)	Tool dia. DC (mm)	Under neck length LU (mm)	ap (mm)	Revolution n min-1	Feed rate vf mm/min	Revolution n min-1	Feed rate vf mm/min	Revolution n min-1	Feed rate vf mm/min	Revolution n min-1	Feed rate vf mm/min	Revolution n min-1	Feed rate vf mm/min	Revolution n min-1	Feed rate vf mm/min
0.05	0.1	0.2	0.008	50,000	300	50,000	250	50,000	250	50,000	225	50,000	200	50,000	188
		0.3	0.006	50,000	300	50,000	250	50,000	250	50,000	225	50,000	200	50,000	188
		0.5	0.004	50,000	300	50,000	250	50,000	250	50,000	225	50,000	200	50,000	188
0.1	0.2	0.5	0.02	50,000	420	50,000	350	50,000	350	50,000	325	45,500	273	42,000	210
		0.75	0.017	50,000	420	50,000	350	50,000	350	50,000	325	45,500	273	42,000	210
		1	0.014	50,000	420	50,000	350	50,000	350	50,000	325	45,500	273	42,000	210
		1.25	0.011	50,000	378	50,000	315	48,600	306	45,900	269	40,500	219	37,800	170
		1.5	0.008	50,000	378	50,000	315	48,600	306	45,900	269	40,500	219	37,800	170
		2	0.008	50,000	378	50,000	315	48,600	306	45,900	269	40,500	219	37,800	170
		2.5	0.006	48,000	323	48,000	269	43,200	242	40,800	212	36,000	173	33,600	134
		3	0.004	48,000	323	48,000	269	43,200	242	40,800	212	36,000	173	33,600	134
0.15	0.3	0.5	0.027	50,000	600	50,000	500	50,000	500	50,000	450	45,000	383	42,000	336
		0.75	0.024	50,000	600	50,000	500	50,000	500	50,000	450	45,000	383	42,000	336
		1	0.021	50,000	600	50,000	500	50,000	500	50,000	450	45,000	383	42,000	336
		1.25	0.019	50,000	600	50,000	500	50,000	500	50,000	450	45,000	383	42,000	336
		1.5	0.016	50,000	600	50,000	500	50,000	500	50,000	450	45,000	383	42,000	336
		2	0.012	50,000	540	50,000	450	48,600	437	45,900	372	40,500	310	37,800	272
		2.5	0.01	50,000	540	50,000	450	48,600	437	45,900	372	40,500	310	37,800	272
		3	0.008	50,000	540	50,000	450	48,600	437	45,900	372	40,500	310	37,800	272
0.2	0.4	0.75	0.043	50,000	967	50,000	840	50,000	839	50,000	770	46,800	655	43,680	612
		1	0.04	50,000	967	50,000	840	50,000	839	50,000	770	46,800	655	43,680	612
		1.5	0.034	50,000	829	50,000	720	50,000	719	50,000	660	46,800	468	43,680	437
		2	0.028	50,000	691	50,000	600	50,000	600	50,000	550	46,800	468	43,680	437
		2.5	0.022	50,000	560	43,200	467	38,880	420	36,720	364	32,400	292	36,288	272
		3	0.016	50,000	560	43,200	467	38,880	420	36,720	364	32,400	292	36,288	272
		3.5	0.012	50,000	560	43,200	467	38,880	420	36,720	364	32,400	292	36,288	272
		4	0.01	50,000	560	43,200	467	38,880	420	36,720	364	32,400	292	36,288	272
		4.5	0.008	46,080	470	38,400	392	34,560	353	32,640	305	28,800	245	26,880	228
0.25	0.5	1	0.045	50,000	1,500	50,000	1,500	46,800	1,404	44,200	1,193	39,000	1,053	36,400	743
		1.5	0.04	50,000	1,500	50,000	1,500	46,800	1,404	44,200	1,193	39,000	1,053	36,400	681
		2	0.035	50,000	1,200	50,000	1,200	46,800	1,123	44,200	955	39,000	842	36,400	681
		2.5	0.033	50,000	1,081	50,000	1,000	42,120	758	39,780	645	35,100	568	32,760	502
		3	0.03	50,000	900	46,800	842	42,120	758	39,780	645	35,100	568	25,200	386
		4	0.02	43,200	778	36,000	648	32,400	583	30,600	496	32,400	524	25,200	386
		5	0.018	43,200	778	36,000	648	32,400	583	30,600	496	32,400	524	25,200	386
		5.5	0.015	38,400	653	32,000	544	28,800	490	27,200	416	24,000	367	22,400	324
		6	0.013	38,400	653	32,000	544	28,800	490	27,200	416	24,000	367	22,400	324
		8	0.008	38,400	653	32,000	544	28,800	490	27,200	416	24,000	367	22,400	324
0.3	0.6	1	0.075	50,000	2,250	50,000	2,250	50,000	2,250	50,000	1,950	48,000	1,728	44,800	1,344
		2	0.063	50,000	2,250	50,000	2,250	50,000	2,250	50,000	1,950	48,000	1,728	44,800	1,344
		2.5	0.046	50,000	1,800	50,000	1,800	50,000	1,800	50,000	1,560	48,000	1,382	44,800	986
		3	0.041	50,000	1,800	50,000	1,800	50,000	1,800	50,000	1,560	48,000	1,382	44,800	986
		3.5	0.035	50,000	1,710	50,000	1,710	50,000	1,709	48,960	1,452	43,200	1,183	40,320	843
		4	0.026	50,000	1,710	50,000	1,710	50,000	1,709	48,960	1,452	43,200	1,183	40,320	766
		4.5	0.022	50,000	1,350	50,000	1,350	48,600	1,313	45,900	1,074	40,500	875	37,800	681
		5	0.02	50,000	1,350	46,800	1,264	42,120	1,138	39,780	931	35,100	758	32,760	590
		5.5	0.017	50,000	1,350	46,800	1,264	42,120	1,138	39,780	931	35,100	758	32,760	590
		6	0.015	50,000	1,350	46,800	1,264	42,120	1,138	39,780	931	35,100	758	32,760	590
		7	0.015	38,400	979	32,000	816	28,800	881	27,200	601	24,000	490	22,400	495
		8	0.015	38,400	979	32,000	816	28,800	734	27,200	601	24,000	490	22,400	381
		9	0.012	38,400	979	32,000	816	28,800	734	27,200	601	24,000	490	22,400	381
		10	0.009	33,600	857	28,000	714	25,200	643	23,800	526	21,000	428	19,600	333
		12	0.007	28,800	691	24,000	576	21,600	518	20,400	424	18,000	346	16,800	269
0.35	0.7	2	0.092	50,000	2,475	50,000	2,475	50,000	2,475	50,000	2,155	48,000	1,932	42,000	1,188
		4	0.041	50,000	1,880	50,000	1,880	50,000	1,880	48,960	1,603	43,200	1,321	37,800	846
		6	0.027	50,000	1,485	46,800	1,390	42,120	1,251	39,780	1,028	35,100	848	30,240	641
		8	0.02	38,400	1,013	32,000	844	28,800	760	27,200	625	24,000	515	22,400	422

【Note】 Please refer to P.12

Recommended range				PN series / ATH series											
Work material				1		2		3		4		5		6	
				Coppers		Carbon steels, Alloy steels (180～250HB)		Stainless steels, Tool steels (25～35HRC)		Pre-hardened steels (35～45HRC)		Hardened steels (45～55HRC)		Hardened steels (55～65HRC)	
Ratio to standard depth of cut				120%		100%		90%		80%		65%		60%	
Ball radius RE (mm)	Tool dia. DC (mm)	Under neck length LU (mm)	ap (mm)	Revolution n min-1	Feed rate vf mm/min	Revolution n min-1	Feed rate vf mm/min	Revolution n min-1	Feed rate vf mm/min	Revolution n min-1	Feed rate vf mm/min	Revolution n min-1	Feed rate vf mm/min	Revolution n min-1	Feed rate vf mm/min
0.4	0.8	2	0.12	50,000	2,700	50,000	2,700	50,000	2,700	50,000	2,400	48,000	2,592	44,800	1,882
		4	0.078	50,000	2,700	50,000	2,700	50,000	2,700	50,000	2,400	48,000	2,592	44,800	1,882
		5	0.059	50,000	2,431	50,000	2,429	50,000	2,431	48,960	2,114	43,200	2,123	40,320	1,524
		6	0.042	50,000	2,269	50,000	2,267	45,360	2,058	42,840	1,727	37,800	1,429	35,280	1,245
		8	0.02	49,920	1,617	41,600	1,348	37,440	1,213	35,360	1,018	31,200	842	29,120	733
		10	0.02	38,400	1,175	32,000	979	28,800	881	27,200	740	24,000	612	22,400	533
0.45	0.9	2	0.135	50,000	3,197	50,000	3,197	50,000	3,197	50,000	2,821	45,600	2,411	42,560	2,138
		4	0.081	50,000	2,771	50,000	2,771	50,000	2,771	48,450	2,369	42,750	1,959	39,900	1,737
		6	0.05	50,000	2,302	47,880	2,020	43,092	1,818	40,698	1,515	35,910	1,253	33,516	1,111
		8	0.036	43,776	1,679	36,480	1,399	32,832	1,259	31,008	1,049	27,360	868	25,536	770
0.5	1	2	0.2	50,000	3,750	50,000	3,750	48,600	3,645	45,900	3,098	43,200	2,722	37,800	2,268
		3	0.2	50,000	3,750	50,000	3,750	48,600	3,645	45,900	3,098	43,200	2,722	37,800	2,268
		4	0.14	50,000	3,750	50,000	3,750	48,600	3,645	45,900	3,098	43,200	2,722	37,800	2,268
		5	0.09	50,000	3,500	46,800	3,276	42,120	2,948	39,780	2,596	43,200	2,540	32,760	1,835
		6	0.06	50,000	3,151	42,120	2,654	40,824	2,558	38,556	2,319	38,880	2,353	29,484	1,379
		7	0.06	46,656	2,100	38,880	1,750	34,992	1,574	33,048	1,338	31,590	1,323	27,216	1,061
		8	0.06	46,656	2,100	38,880	1,750	34,992	1,574	33,048	1,338	31,590	1,323	27,216	979
		9	0.045	46,656	2,100	38,880	1,750	34,992	1,574	33,048	1,338	31,590	1,323	27,216	979
		10	0.038	46,656	2,100	38,880	1,750	34,992	1,574	33,048	1,338	31,590	1,323	27,216	979
		12	0.025	34,560	1,469	28,800	1,224	25,920	1,102	24,480	936	21,600	771	20,160	685
		13	0.023	34,560	1,469	28,800	1,224	25,920	1,102	24,480	936	21,600	771	20,160	685
		14	0.02	34,560	1,469	28,800	1,224	25,920	1,102	24,480	936	21,600	771	20,160	685
		16	0.015	34,560	1,469	28,800	1,224	25,920	1,102	24,480	936	21,600	771	20,160	685
		18	0.012	30,240	1,210	25,200	1,008	22,680	907	21,420	771	18,900	635	17,640	564
		20	0.01	25,920	1,037	21,600	864	19,440	778	18,360	661	16,200	544	15,120	484
0.55	1.1	2	0.2	50,000	3,924	50,000	3,924	45,360	3,560	42,840	2,927	37,800	2,452	35,280	2,176
		4	0.14	50,000	3,924	50,000	3,924	45,360	3,560	42,840	2,927	37,800	2,452	35,280	2,176
		6	0.06	47,736	2,767	39,780	2,306	35,802	2,075	33,813	1,706	29,835	1,430	27,846	1,268
		8	0.06	47,736	2,306	39,780	2,306	35,802	1,729	31,212	1,312	27,540	1,100	25,704	975
		10	0.038	47,736	2,306	39,780	1,774	35,802	1,729	31,212	1,312	27,540	1,100	25,704	975
0.6	1.2	4	0.16	50,000	3,924	46,154	3,743	41,538	3,260	39,230	2,717	36,923	2,555	32,307	1,860
		6	0.11	44,928	2,570	37,440	2,142	33,696	2,103	31,824	2,069	30,240	2,062	26,208	1,048
		8	0.06	44,928	2,570	37,440	2,142	33,696	2,103	31,824	2,069	30,240	2,062	26,208	1,048
		10	0.053	41,472	1,940	34,560	1,708	31,104	1,456	29,376	1,322	27,000	1,069	24,192	871
		12	0.045	41,472	1,940	34,560	1,618	31,104	1,456	29,376	1,322	25,920	1,026	24,192	871
0.7	1.4	8	0.11	39,312	2,830	32,760	2,359	29,484	2,123	27,846	1,805	24,570	1,533	22,932	1,376
		12	0.053	36,288	1,960	30,240	1,633	27,216	1,470	25,704	1,249	22,680	1,062	21,168	953
		16	0.035	26,880	1,371	22,400	1,142	20,160	1,028	19,040	874	16,800	743	15,680	666
0.75	1.5	4	0.2	50,000	4,951	42,000	4,158	37,800	3,742	35,700	3,213	31,500	2,552	29,400	2,205
		6	0.2	50,000	4,951	42,000	4,158	37,800	3,742	35,700	3,213	31,500	2,552	29,400	2,205
		8	0.09	39,312	2,802	32,760	2,627	29,484	2,101	27,846	1,805	24,570	1,434	22,932	1,239
		10	0.09	36,288	2,586	30,240	2,156	27,216	1,940	25,704	1,666	22,680	1,323	21,168	1,143
		12	0.09	36,288	2,155	30,240	1,796	27,216	1,616	25,704	1,388	22,680	1,103	21,168	953
		14	0.075	32,256	1,810	30,240	1,796	24,192	1,357	22,848	1,165	20,160	925	18,816	799
		16	0.038	26,880	1,508	22,400	1,257	20,160	1,131	19,040	971	16,800	771	15,680	666
		18	0.038	26,880	1,508	22,400	1,257	20,160	1,131	19,040	971	16,800	771	15,680	666
		20	0.038	26,880	1,508	22,400	1,257	20,160	1,131	19,040	971	16,800	771	15,680	666
0.8	1.6	8	0.22	43,680	3,669	36,400	3,058	32,760	2,752	30,940	2,493	27,300	2,129	23,660	1,590
		12	0.098	39,312	3,467	32,760	2,889	29,484	2,601	27,846	2,176	24,570	1,858	21,294	1,289
		16	0.06	33,696	2,123	28,080	1,769	25,272	1,592	23,868	1,332	21,060	1,138	19,656	991
		20	0.04	24,960	1,485	20,800	1,238	18,720	1,114	17,680	932	15,600	796	14,560	693
0.9	1.8	8	0.26	40,560	3,894	33,800	3,245	30,420	2,920	28,730	2,413	25,350	2,008	23,660	1,704
		12	0.105	33,696	2,426	28,080	2,022	25,272	1,819	23,868	1,504	21,060	1,250	19,656	1,062
		16	0.068	33,696	2,426	28,080	2,022	25,272	1,819	23,868	1,504	21,060	1,250	19,656	1,062
		20	0.045	24,960	1,697	20,800	1,414	18,720	1,273	17,680	1,052	15,600	875	14,560	743
1	2	3	0.4	37,800	5,670	31,500	4,725	28,350	4,253	26,775	3,616	23,625	3,049	22,050	2,646
		4	0.4	37,800	5,670	31,500	4,725	28,350	4,253	26,775	3,616	23,625	3,049	22,050	2,646
		6	0.4	37,800	5,103	31,500	4,253	28,350	3,827	26,775	3,213	23,625	2,693	22,050	2,381
		8	0.28	37,800	5,103	31,500	4,253	28,350	3,827	26,775	3,213	23,625	2,693	22,050	2,381
		10	0.21	35,280	4,234	29,400	3,528	26,460	3,175	24,990	2,699	22,050	2,249	19,110	1,468

【Note】 Please refer to P.12

Recommended Cutting Conditions

High efficiency cuttiing condition | High accuracy cuttiing condition

Please refer to P.13
about high accuracy cutting conditions

Epoch Deep Ball Evolution EPDBE-PN EPDBE-ATH

Recommended range				PN series											
												ATH series			
Work material				1		2		3		4		5		6	
				Coppers		Carbon steels, Alloy steels (180～250HB)		Stainless steels, Tool steels (25～35HRC)		Pre-hardened steels (35～45HRC)		Hardened steels (45～55HRC)		Hardened steels (55～65HRC)	
Ratio to standard depth of cut				120%		100%		90%		80%		65%		60%	
Ball radius RE (mm)	Tool dia. DC (mm)	Under neck length LU (mm)	a_p (mm)	Revolution n min^{-1}	Feed rate v_f mm/min	Revolution n min^{-1}	Feed rate v_f mm/min	Revolution n min^{-1}	Feed rate v_f mm/min	Revolution n min^{-1}	Feed rate v_f mm/min	Revolution n min^{-1}	Feed rate v_f mm/min	Revolution n min^{-1}	Feed rate v_f mm/min
1	2	12	0.12	31,752	3,809	26,460	3,175	23,814	2,858	22,491	2,430	19,845	2,051	17,199	1,321
		13	0.12	31,752	3,809	26,460	3,175	23,814	2,858	22,491	2,430	19,845	2,024	15,876	1,016
		14	0.12	31,752	3,301	26,460	2,752	23,814	2,477	22,491	2,106	18,428	1,629	15,876	1,016
		16	0.12	29,484	2,123	24,570	1,769	22,113	1,593	20,885	1,353	18,428	1,467	15,876	914
		18	0.09	27,216	1,960	22,680	1,633	20,412	1,470	19,278	1,249	18,428	1,354	15,876	914
		20	0.075	27,216	1,960	22,680	1,633	20,412	1,470	19,278	1,249	18,428	1,128	15,876	914
		22	0.05	21,420	1,457	17,850	1,214	16,065	1,092	15,173	929	13,388	774	14,994	816
		25	0.05	20,160	1,371	16,800	1,142	15,120	1,028	14,280	874	12,600	728	14,112	768
		30	0.03	20,160	1,371	16,800	1,142	15,120	1,028	14,280	874	12,600	728	14,112	768
		35	0.025	17,640	1,129	14,700	941	13,230	847	12,495	720	11,025	600	10,290	527
		40	0.022	15,120	968	12,600	806	11,340	726	10,710	617	9,450	514	8,820	452
1.25	2.5	6	0.5	33,300	6,075	27,750	5,063	24,975	4,556	23,588	3,797	20,813	3,088	19,425	2,531
		10	0.34	33,300	6,075	27,750	5,063	24,975	4,556	23,588	3,797	20,813	3,088	19,425	2,531
		15	0.15	25,974	3,411	21,645	2,842	19,481	2,558	18,398	2,132	16,234	2,023	15,152	1,421
		20	0.12	23,976	2,624	19,980	2,186	17,982	1,968	16,983	1,640	16,234	1,445	13,986	1,093
		25	0.098	23,976	2,360	19,980	1,967	17,982	1,770	16,983	1,475	14,985	1,200	13,986	983
		30	0.055	17,760	1,836	14,800	1,530	13,320	1,377	12,580	1,148	11,100	933	10,360	765
1.5	3	8	0.6	28,800	6,480	24,000	5,400	21,600	4,860	20,400	4,100	18,000	3,402	16,800	3,024
		10	0.42	28,800	6,480	24,000	5,400	21,600	4,860	20,400	4,100	18,000	3,402	16,800	3,024
		13	0.315	26,880	4,838	22,400	4,032	20,160	3,629	19,040	3,061	16,800	2,540	15,680	2,258
		16	0.315	26,880	4,355	22,400	3,629	20,160	3,266	19,040	2,755	16,800	2,286	14,560	1,888
		20	0.18	22,464	3,033	18,720	2,527	16,848	2,275	15,912	1,919	14,040	1,593	12,096	1,307
		25	0.12	22,464	3,033	18,720	2,527	16,848	2,275	15,912	1,919	14,040	1,593	12,096	1,307
		30	0.12	20,736	2,800	17,280	2,333	15,552	2,100	14,688	1,771	12,960	1,470	12,096	1,307
		35	0.08	15,360	1,958	12,800	1,632	11,520	1,469	10,880	1,239	9,600	1,028	10,752	1,097
1.75	3.5	15	0.36	21,450	4,399	17,875	3,666	16,088	3,299	15,194	2,750	13,406	2,236	12,513	1,833
		25	0.21	17,820	2,736	14,850	2,280	13,365	2,052	12,623	1,710	11,138	1,391	10,395	1,140
		35	0.09	17,820	2,736	14,850	2,280	13,365	2,052	12,623	1,710	11,138	1,391	10,395	1,140
		45	0.09	13,200	1,918	11,000	1,598	9,900	1,438	9,350	1,199	8,250	975	7,700	799
2	4	10	0.6	20,700	6,210	17,250	5,175	15,525	4,658	14,663	3,960	12,938	3,299	12,075	2,898
		13	0.48	20,700	6,210	17,250	5,175	15,525	4,658	14,663	3,960	12,938	3,299	12,075	2,898
		16	0.42	20,700	6,210	17,250	5,175	15,525	4,658	14,663	3,960	12,938	3,299	12,075	2,898
		20	0.42	17,940	4,306	14,950	3,588	13,455	3,229	12,708	2,746	11,213	2,287	10,465	2,009
		25	0.24	16,146	3,488	13,455	2,906	12,110	2,616	11,437	2,223	10,092	2,162	9,419	1,627
		30	0.16	14,904	2,683	12,420	2,236	11,178	2,012	10,558	1,710	9,316	1,426	8,694	1,252
		35	0.1	14,904	2,683	12,420	2,236	11,178	2,012	10,558	1,710	9,316	1,426	8,694	1,252
		40	0.1	14,904	2,683	12,420	2,236	11,178	2,012	10,558	1,710	9,316	1,426	8,694	1,252
		45	0.1	11,040	1,877	9,200	1,564	8,280	1,408	7,820	1,196	6,900	997	6,440	876
		50	0.1	11,040	1,877	9,200	1,564	8,280	1,408	7,820	1,196	6,900	997	6,440	876
2.5	5	20	0.525	15,120	5,443	12,600	4,536	11,340	4,082	10,710	3,213	9,450	2,835	8,820	2,381
		25	0.525	14,040	5,054	11,700	3,650	10,530	3,791	9,945	2,984	8,775	2,633	8,190	2,211
		30	0.3	12,636	4,549	10,530	2,780	9,477	3,413	8,951	2,685	7,898	2,369	7,371	1,991
		40	0.2	11,664	2,520	9,720	2,100	8,748	1,890	8,262	1,487	7,290	1,313	6,804	1,103
3	6	12	0.6	16,200	6,804	13,500	5,670	12,150	5,103	11,475	4,253	10,125	3,459	9,450	2,835
		20	0.5	15,300	5,967	12,750	4,973	11,475	4,475	10,838	3,729	9,563	3,033	8,925	2,486
		30	0.42	12,480	3,594	10,400	2,995	9,360	2,696	8,840	2,122	7,800	2,028	7,280	1,572
		50	0.15	10,368	2,687	8,640	2,239	7,776	2,016	7,344	1,587	6,480	1,400	6,048	1,175

※(1) a_p is shown as the criteria for Group 2 workpieces. For other groups, adjust the cutting depth according to the cutting depth factors in the above table.
※(2) When performing cutting where cutting chips may cause clogging, such as for rib processing, blind grooves, etc., cutting depth setting should be set by multiplying a cutting depth factor to calculate the cutting depth amount, and this amount should then be reduced to 80% of the calculated value.
※(3) Adjust by setting a_e to (3 to 5)×(a_p)×(cutting depth ratio). When performing finishing processing, calculate the theoretical cusp height and set accordingly.

Cutting depth setting example: When cutting rib groove contours in hardened steel (50HRC) using an EPDBE2020-10-ATH tool:
Cutting depth = 0.21 (a_p) × 0.65 (cutting depth factor for Group 5 hardened steel) × 0.8 (for closed-area cutting) = 0.11mm

【Note】
① PN coating is less electro conductive. Therefore, electric transmitted measuring systems may not work.
② Use the appropriate coolant for the work material and machining shape.
③ These Recommended Cutting Conditions indicate only the rule of a thumb for the cutting conditions. In actual machining, the condition should be adjusted according to the machining shape, purpose and the machine type.
④ If the rpm of the machine is low, lower the feed rate also to put the rpm and feed rate in the same ratio.

2 types of coatings to handle a variety of work materials.

Recommended machining areas for each coating

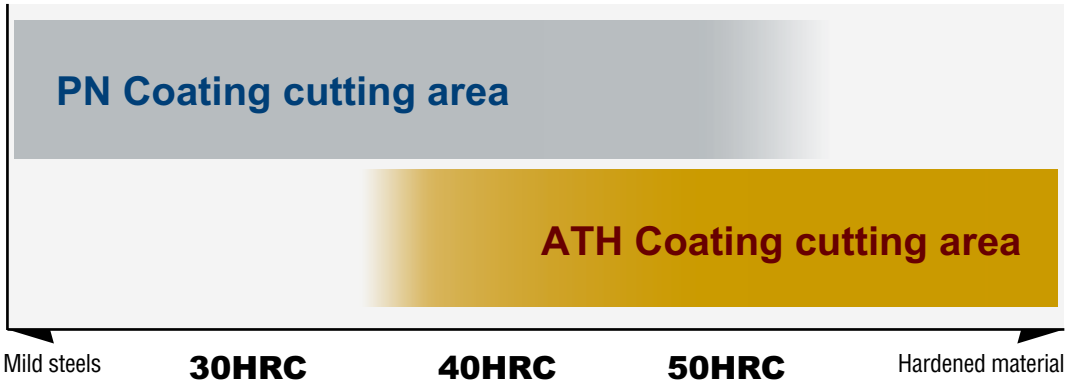

Cutting Data 1

Work material : **SCM440Ⓗ 30HRC**
Holder : HSK-F63
Tool dia. : R0.5×Under neck 6㎜
Coolant : Air-blow
n=28,000min^{-1} (v_c=88m/min)
v_f=1,200mm/min (f_z=0.02mm/t)
a_p=0.036mm a_e=0.108mm OH=18mm
Cutting length 10m

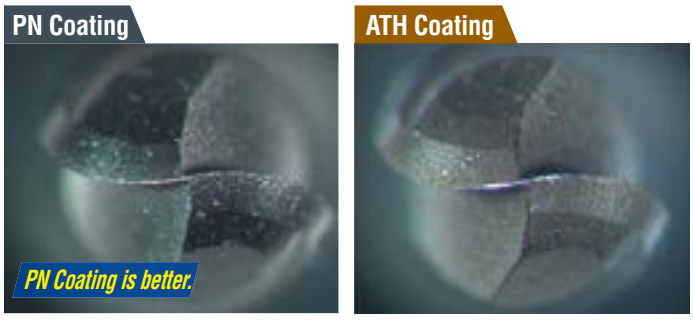

Cutting Data 2

Work material : **HPM-MAGIC 40HRC**
Holder : HSK-F63
Tool dia. : R0.5×Under neck10㎜
Coolant : Air-blow
n=24,300min^{-1} (v_c=76m/min)
v_f=900mm/min (f_z=0.018mm/t)
a_p=0.04mm Cutting reciprocating slot.
OH=18mm

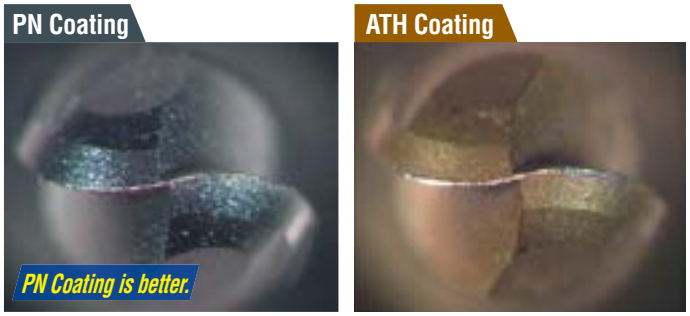

Cutting Data 3

Work material : **DACⒽ 45HRC**
Holder : HSK-F63
Tool dia. : R0.5×Under neck 6㎜
Coolant : Air-blow
n=27,540min^{-1} (v_c=86m/min)
v_f=1,115mm/min (f_z=0.02mm/t)
a_p=0.032mm a_e=0.096mm OH=18mm
Cutting length 10m

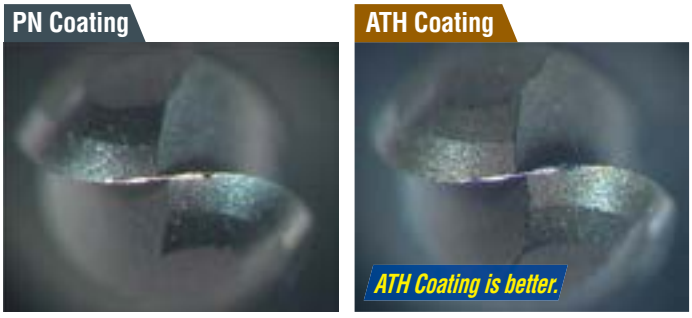

Cutting Data 4

Work material : **HPM38 52HRC**
Holder : HSK-F63
Tool dia. : R0.5×Under neck10㎜
Coolant : Air-blow
n=24,300min^{-1} (v_c=76m/min)
v_f=919mm/min (f_z=0.018mm/t)
a_p=0.016mm OH=18mm
Cutting length 20m

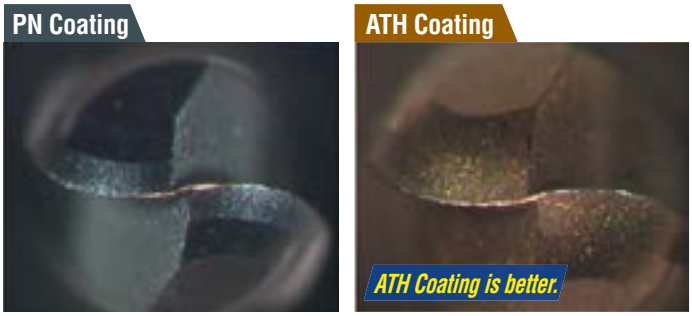

Enables high-accuracy stable machining with excellent surface quality.

EPDBE-PN

PN Coating

Technical Data SCM440Ⓗ 33HRC rib slot evaluation

Tool : EPDBE2010-10-PN (R0.5 Under neck10mm)

★This is amazing! Point 1 Uniformity of machined surface

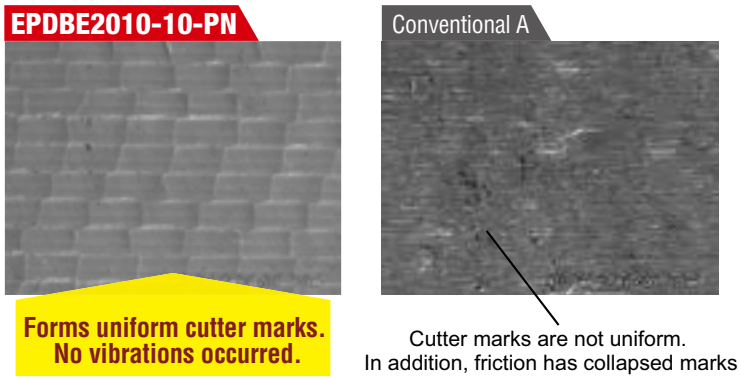

★This is amazing! Point 2 Low deflection provides improved machining accuracy!

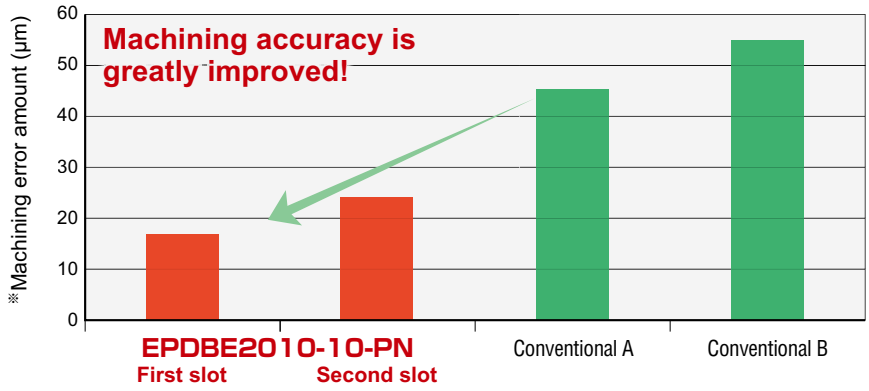

Rib slot evaluation



Work material : SCM440Ⓗ 33HRC
Holder : HSK-F63
Coolant : Wet
n=16,000min^{-1} (v_c=50m/min)
v_f=1,000mm/min (f_z=0.03mm/t)
$a_p \times a_e$=0.02mm×0.04mm



※Machining error amount::
(Ideal dimension)-(Measured dimension after cutting)

★This is amazing! Point 3 Long life: Wear resistance plus good chipping resistance

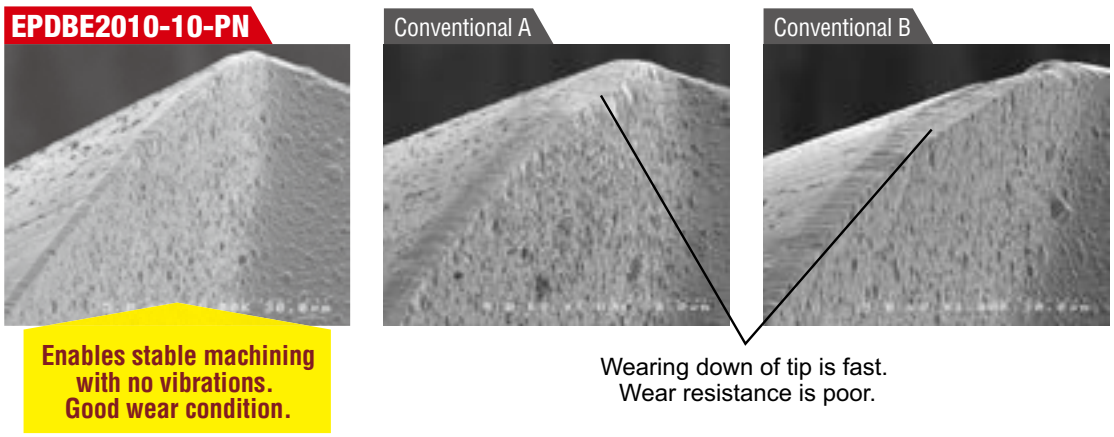

Rely on ATH Coating for stable machining of even high-hardness materials!

EPDBE-ATH

ATHCoating

Technical Data

Tool：EPDBE2010-10-ATH (R0.5 Under neck10mm)

★This is amazing! Point 1 **Wear condition is stable. No chipping even on high-hardness materials.**

Machining shape	Cutting condition	EPDBE2010-10-ATH	Conventional
	Work material : **SLDⒽ 60HRC** Holder : HSK-F63 Coolant：Air Blow n=10,000min^{-1} (v_c=31.4m/min) v_f=800mm/min (f_z=0.04mm/t) a_p×a_e=0.02mm×0.02mm	 Stable wear condition from chisel to outer perimeter	 Chipping occurred

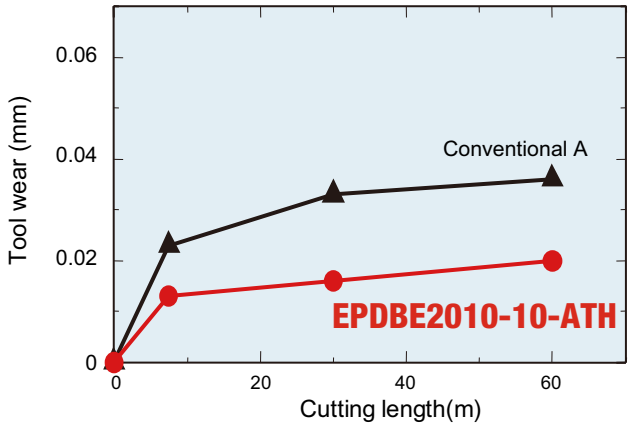

Technical Data

Tool：EPDBE2010-10-ATH (R0.5 Under neck10mm)

★This is amazing! Point 2 **High accuracy achieved due to little deflection.**

Machining shape	Cutting condition
	Work material : **SUS420J2Ⓗ 52HRC** Holder: HSK-F63 Coolant：Air Blow n=16,000min^{-1} (v_c=50m/min) v_f=1,000mm/min (f_z=0.03mm/t) a_p×a_e=0.02mm×0.02mm

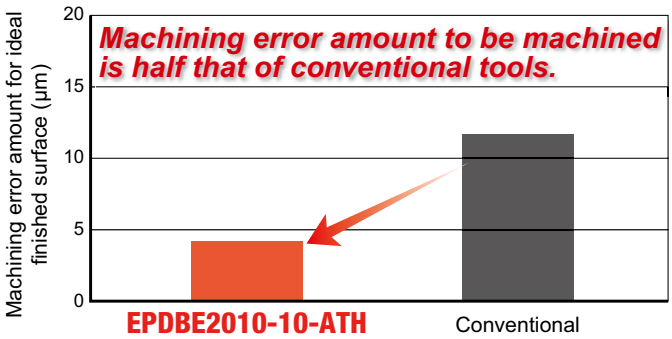

Periphery helix angle is strong, improving cutting performance.

Tool interference check, Re-grinding

Example of difference in neck interference area

Difference in interference area for R=0.3 x Under neck length=2mm
(Figures show a slope angle of 1°.)

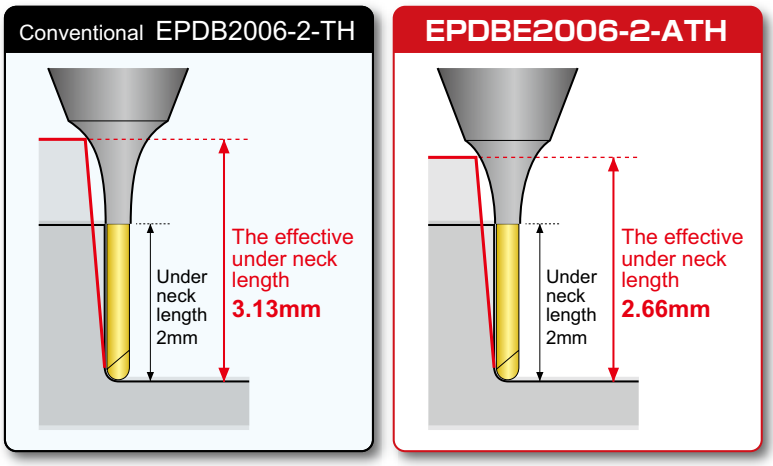

When a conventional product and new product with R=0.3 x Under neck length=2mm are compared for a surface with a 1° slope angle, the conventional EPDB2006-2-TH has an effective under neck length of 3.13mm, but for the new EPDBE2006-2-ATH, the effective under neck length is 2.66mm.

The improved neck shape used in these new products results in a different interference area than the EPDB and EPDS conventional models.

For checking interference:

Re-grinding compatibility range table

Item code	Product name	Tool dia. (mm)	Shape	Re-grinding compatibility range (mm)	
				Outer dia.	End
EPDBE-PN	Epoch Deep Ball Evolution (PN Coating)	0.1～6		N/A	1～6
EPDBE-ATH	Epoch Deep Ball Evolution (ATH Coating)	0.1～6		N/A	1～6
EPDSE-PN	Epoch Deep Square Evolution (PN Coating)	0.1～6		6	2～6
EPDSE-ATH	Epoch Deep Square Evolution (ATH Coating)	0.1～6		6	2～6

【Note】Contact our sales office regarding whether or not regrinding is possible for tools where Under neck length/Tool diameter is 10 or greater.

MOLDINO

The Edge To Innovation

The diagrams and table data are examples of test results, and are not guaranteed values.
"MOLDINO" is a registered trademark of MOLDINO Tool Engineering, Ltd.

⚠ Attentions on Safety

1. Cautions regarding handling

(1) When removing the tool from its case (packaging), be careful that the tool does not pop out or is dropped. Be particularly careful regarding contact with the tool flutes.
(2) When handling tools with sharp cutting flutes, be careful not to touch the cutting flutes directly with your bare hands.

2. Cautions regarding mounting

(1) Before use, check the outside appearance of the tool for scratches, cracks, etc. and that it is firmly mounted in the collet chuck, etc.
(2) If abnormal chattering, etc. occurs during use, stop the machine immediately and remove the cause of the chattering.

3. Cautions during use

(1) Before use, confirm the dimensions and direction of rotation of the tool and milling work material.
(2) The numerical values in the standard cutting conditions table should be used as criteria when starting new work. The cutting conditions should be adjusted as appropriate when the cutting depth is large, the rigidity of the machine being used is low, or according to the conditions of the work material.
(3) Cutting tools are made of a hard material. During use, they may break and fly off. In addition, cutting chips may also fly off. Since there is a danger of injury to workers, fire, or eye damage from such flying pieces, a safety cover should be attached when work is performed and safety equipment such as safety goggles should be worn to create a safe environment for work.
(4) There is a risk of fire or inflammation due to sparks, heat due to breakage, and cutting chips. Do not use where there is a risk of fire or explosion. **Please caution of fire while using oil base coolant, fire prevention is necessary.**
(5) Do not use the tool for any purpose other than that for which it is intended.

4. Cautions regarding regrinding

(1) If regrinding is not performed at the proper time, there is a risk of the tool breaking. Replace the tool with one in good condition, or perform regrinding.
(2) Grinding dust will be created when regrinding a tool. When regrinding, be sure to attach a safety cover over the work area and wear safety clothes such as safety goggles, etc.
(3) This product contains the specified chemical substance cobalt and its inorganic compounds. When performing regrinding or similar processing, be sure to handle the processing in accordance with thelocal laws and regulations regarding prevention of hazards due to specified chemical substances.

MOLDINO Tool Engineering, Ltd.

Head Office
Hulic Ryogoku Bldg. 8F, 4-31-11, Ryogoku, Sumida-ku, Tokyo, Japan 130-0026
International Sales Dept. : TEL +81-3-6890-5103 FAX +81-3-6890-5128

Official Web Site
http://www.moldino.com/en/

Database for selection Cutting Tool Products【TOOL SEARCH】
TOOLSEARCH Search Web

Europe **MOLDINO Tool Engineering Europe GmbH**
Itterpark 12, 40724 Hilden,Germany.
Tel +49-(0)2103-24820 Fax +49-(0)2103-248230

China **MOLDINO Tool Engineering (Shanghai), Ltd.**
Room 2604-2605, Metro Plaza, 555 Loushanguan Road, Changning Disctrict,Shanghai, 200051, China
Tel +86-(0)21-3366-3058 Fax +86-(0)21-3366-3050

America **MITSUBISHI MATERIALS U.S.A. CORPORATION**
DETROIT OFFICE Customer service
41700 Gardenbrook Road, Suite 120, Novi, MI 48375-1320 U.S.A.
Tel +1(248) 308-2620 Fax +1(248) 308-2627

Mexico **MMC METAL DE MEXICO, S.A. DE C.V.**
Av. La Cañada No.16, Parque Industrial Bernardo Quintana, El Marques, Querétaro, CP 76246, México
Tel +52-442-1926800

Brazil **MMC METAL DO BRASIL LTDA.**
Rua Cincinato Braga, 340 13° andar.Bela Vista – CEP 01333-010 São Paulo – SP ., Brasil
Tel +55(11)3506-5600 Fax +55(11)3506-5677

Thailand **MMC Hardmetal (Thailand) Co.,Ltd. MOLDINO Division**
622 Emporium Tower, Floor 22/1-4, Sukhumvit Road, Klong Tan, Klong Toei,
Bangkok 10110, Thailand
TEL:+66-(0)2-661-8175 FAX:+66-(0)2-661-8176

India **MMC Hardmetal India Pvt Ltd.**
H.O.: Prasad Enclave, #118/119, 1st Floor, 2nd Stage, 5th main, BBMP Ward #11, (New #38),
Industrial Suburb, Yeshwanthpura, Bengaluru, 560 022, Karnataka, India.
Tel +91-80-2204-3600

DISTRIBUTED BY:

Specifications for the products listed in this catalog are subject to change without notice due to replacement or modification.

VEGETABLE OIL INK Printed using vegetable oil ink.

Printed in JAPAN

2022-12(K)
2012-8:FP