Epoch Deep Ball Evolution EPDBE-PN EPDBE-ATH

Recommended range				PN series / ATH series											
Work material				1		2		3		4		5		6	
				Coppers		Carbon steels, Alloy steels (180～250HB)		Stainless steels, Tool steels (25～35HRC)		Pre-hardened steels (35～45HRC)		Hardened steels (45～55HRC)		Hardened steels (55～65HRC)	
Ratio to standard depth of cut				120%		100%		90%		80%		65%		60%	
Ball radius RE (mm)	Tool dia. DC (mm)	Under neck length LU (mm)	ap (mm)	Revolution n min-1	Feed rate vf mm/min	Revolution n min-1	Feed rate vf mm/min	Revolution n min-1	Feed rate vf mm/min	Revolution n min-1	Feed rate vf mm/min	Revolution n min-1	Feed rate vf mm/min	Revolution n min-1	Feed rate vf mm/min
0.05	0.1	0.2	0.004	50,000	300	50,000	250	50,000	250	50,000	225	50,000	200	50,000	188
		0.3	0.003	50,000	300	50,000	250	50,000	250	50,000	225	50,000	200	50,000	188
		0.5	0.002	50,000	300	50,000	250	50,000	250	50,000	225	50,000	200	50,000	188
0.1	0.2	0.5	0.015	50,000	420	50,000	350	50,000	350	50,000	325	45,500	273	42,000	210
		0.75	0.013	50,000	420	50,000	350	50,000	350	50,000	325	45,500	273	42,000	210
		1	0.011	50,000	420	50,000	350	50,000	350	50,000	325	45,500	273	42,000	210
		1.25	0.008	50,000	378	50,000	315	48,600	306	45,900	269	40,500	219	37,800	170
		1.5	0.007	50,000	378	50,000	315	48,600	306	45,900	269	40,500	219	37,800	170
		2	0.006	50,000	378	50,000	315	48,600	306	45,900	269	40,500	219	37,800	170
		2.5	0.005	48,000	323	48,000	269	43,200	242	40,800	212	36,000	173	33,600	134
		3	0.003	48,000	323	48,000	269	43,200	242	40,800	212	36,000	173	33,600	134
0.15	0.3	0.5	0.02	50,000	600	50,000	500	50,000	500	50,000	450	45,000	383	42,000	336
		0.75	0.018	50,000	600	50,000	500	50,000	500	50,000	450	45,000	383	42,000	336
		1	0.016	50,000	600	50,000	500	50,000	500	50,000	450	45,000	383	42,000	336
		1.25	0.014	50,000	600	50,000	500	50,000	500	50,000	450	45,000	383	42,000	336
		1.5	0.012	50,000	600	50,000	500	50,000	500	50,000	450	45,000	383	42,000	336
		2	0.009	50,000	540	50,000	450	48,600	437	45,900	372	40,500	310	37,800	272
		2.5	0.008	50,000	540	50,000	450	48,600	437	45,900	372	40,500	310	37,800	272
		3	0.006	50,000	540	50,000	450	48,600	437	45,900	372	40,500	310	37,800	272
0.2	0.4	0.75	0.043	50,000	691	48,000	576	43,200	518	40,800	449	36,000	360	33,600	336
		1	0.04	50,000	691	48,000	576	43,200	518	40,800	449	36,000	360	33,600	336
		1.5	0.034	50,000	691	48,000	576	43,200	518	40,800	449	36,000	360	33,600	336
		2	0.028	50,000	691	48,000	576	43,200	518	40,800	449	36,000	360	33,600	336
		2.5	0.016	50,000	560	43,200	467	38,880	420	36,720	364	32,400	292	30,240	272
		3	0.011	50,000	560	43,200	467	38,880	420	36,720	364	32,400	292	30,240	272
		3.5	0.008	50,000	560	43,200	467	38,880	420	36,720	364	32,400	292	30,240	272
		4	0.005	50,000	560	43,200	467	38,880	420	36,720	364	32,400	292	30,240	272
		4.5	0.004	46,080	470	38,400	392	34,560	353	32,640	305	28,800	245	26,880	228
0.25	0.5	1	0.045	48,000	960	40,000	800	36,000	720	34,000	612	30,000	540	28,000	476
		1.5	0.04	48,000	960	40,000	800	36,000	720	34,000	612	30,000	540	28,000	476
		2	0.035	48,000	960	40,000	800	36,000	720	34,000	612	30,000	540	28,000	476
		2.5	0.033	43,200	778	40,000	800	32,400	583	30,600	496	27,000	437	25,200	386
		3	0.03	43,200	778	36,000	648	32,400	583	30,600	496	27,000	437	25,200	386
		4	0.02	43,200	778	36,000	648	32,400	583	30,600	496	27,000	437	25,200	386
		5	0.018	43,200	778	36,000	648	32,400	583	30,600	496	27,000	437	25,200	386
		5.5	0.008	38,400	653	32,000	544	28,800	490	27,200	416	24,000	367	22,400	324
		6	0.007	38,400	653	32,000	544	28,800	490	27,200	416	24,000	367	22,400	324
		8	0.004	38,400	653	32,000	544	28,800	490	27,200	416	24,000	367	22,400	324
0.3	0.6	1	0.05	48,000	1,440	40,000	1,200	36,000	1,080	34,000	884	30,000	720	28,000	560
		2	0.042	48,000	1,440	40,000	1,200	36,000	1,080	34,000	884	30,000	720	28,000	560
		2.5	0.038	48,000	1,440	40,000	1,200	36,000	1,080	34,000	884	30,000	720	28,000	560
		3	0.034	48,000	1,440	40,000	1,200	36,000	1,080	34,000	884	30,000	720	28,000	560
		3.5	0.029	43,200	1,231	36,000	1,026	32,400	923	30,600	756	27,000	616	25,200	479
		4	0.024	43,200	1,231	36,000	1,026	32,400	923	30,600	756	27,000	616	25,200	479
		4.5	0.022	43,200	1,166	36,000	972	32,400	875	30,600	716	27,000	583	25,200	454
		5	0.02	43,200	1,166	36,000	972	32,400	875	30,600	716	27,000	583	25,200	454
		5.5	0.017	43,200	1,166	36,000	972	32,400	875	30,600	716	27,000	583	25,200	454
		6	0.015	43,200	1,166	36,000	972	32,400	875	30,600	716	27,000	583	25,200	454
		7	0.008	38,400	979	32,000	816	28,800	734	27,200	601	24,000	490	22,400	381
		8	0.008	38,400	979	32,000	816	28,800	734	27,200	601	24,000	490	22,400	381
		9	0.006	38,400	979	32,000	816	28,800	734	27,200	601	24,000	490	22,400	381
		10	0.005	33,600	857	28,000	714	25,200	643	23,800	526	21,000	428	19,600	333
		12	0.004	28,800	691	24,000	576	21,600	518	20,400	424	18,000	346	16,800	269
0.35	0.7	2	0.061	48,000	1,584	40,000	1,320	36,000	1,188	34,000	977	30,000	805	28,000	660
		4	0.034	43,200	1,354	36,000	1,128	32,400	1,015	30,600	835	27,000	688	25,200	564
		6	0.027	43,200	1,283	36,000	1,069	32,400	962	30,600	791	27,000	652	25,200	535
		8	0.01	38,400	1,013	32,000	844	28,800	760	27,200	625	24,000	515	22,400	422

【Note】 Please refer to P.15

Recommended Cutting Conditions

High efficiency cuttiing condition | **High accuracy cuttiing condition**

Please refer to P.10 about high efficiency cutting conditions

Epoch Deep Ball Evolution EPDBE-PN EPDBE-ATH

Recommended range				PN series / ATH series											
Work material				1 Coppers		2 Carbon steels, Alloy steels (180～250HB)		3 Stainless steels, Tool steels (25～35HRC)		4 Pre-hardened steels (35～45HRC)		5 Hardened steels (45～55HRC)		6 Hardened steels (55～65HRC)	
Ratio to standard depth of cut				120%		100%		90%		80%		65%		60%	
Ball radius RE (mm)	Tool dia. DC (mm)	Under neck length LU (mm)	ap (mm)	Revolution n min-1	Feed rate vf mm/min	Revolution n min-1	Feed rate vf mm/min	Revolution n min-1	Feed rate vf mm/min	Revolution n min-1	Feed rate vf mm/min	Revolution n min-1	Feed rate vf mm/min	Revolution n min-1	Feed rate vf mm/min
0.4	0.8	2	0.08	48,000	1,728	40,000	1,440	36,000	1,296	34,000	1,088	30,000	900	28,000	784
		4	0.056	48,000	1,728	40,000	1,440	36,000	1,296	34,000	1,088	30,000	900	28,000	784
		5	0.045	43,200	1,400	36,000	1,166	32,400	1,050	30,600	881	27,000	729	25,200	635
		6	0.032	43,200	1,400	36,000	1,166	32,400	1,050	30,600	881	27,000	729	25,200	635
		8	0.02	38,400	1,244	32,000	1,037	28,800	933	27,200	783	24,000	648	22,400	564
		10	0.01	38,400	1,175	32,000	979	28,800	881	27,200	740	24,000	612	22,400	533
0.45	0.9	2	0.09	45,600	1,944	38,000	1,620	34,200	1,458	32,300	1,215	28,500	1,004	26,600	891
		4	0.058	45,600	1,944	38,000	1,620	34,200	1,458	32,300	1,215	28,500	1,004	26,600	891
		6	0.042	41,040	1,574	34,200	1,312	30,780	1,181	29,070	984	25,650	813	23,940	722
		8	0.03	36,480	1,399	30,400	1,166	27,360	1,049	25,840	875	22,800	723	21,280	641
0.5	1	2	0.1	43,200	2,160	36,000	1,800	32,400	1,620	30,600	1,377	27,000	1,134	25,200	1,008
		3	0.1	43,200	2,160	36,000	1,800	32,400	1,620	30,600	1,377	27,000	1,134	25,200	1,008
		4	0.07	43,200	2,160	36,000	1,800	32,400	1,620	30,600	1,377	27,000	1,134	25,200	1,008
		5	0.06	43,200	2,160	36,000	1,800	32,400	1,620	30,600	1,377	27,000	1,134	25,200	1,008
		6	0.04	38,880	1,750	32,400	1,458	29,160	1,312	27,540	1,115	24,300	919	22,680	816
		7	0.04	38,880	1,750	32,400	1,458	29,160	1,312	27,540	1,115	24,300	919	22,680	816
		8	0.04	38,880	1,750	32,400	1,458	29,160	1,312	27,540	1,115	24,300	919	22,680	816
		9	0.03	38,880	1,750	32,400	1,458	29,160	1,312	27,540	1,115	24,300	919	22,680	816
		10	0.025	38,880	1,750	32,400	1,458	29,160	1,312	27,540	1,115	24,300	919	22,680	816
		12	0.013	34,560	1,469	28,800	1,224	25,920	1,102	24,480	936	21,600	771	20,160	685
		13	0.011	34,560	1,469	28,800	1,224	25,920	1,102	24,480	936	21,600	771	20,160	685
		14	0.01	34,560	1,469	28,800	1,224	25,920	1,102	24,480	936	21,600	771	20,160	685
		16	0.008	34,560	1,469	28,800	1,224	25,920	1,102	24,480	936	21,600	771	20,160	685
		18	0.006	30,240	1,210	25,200	1,008	22,680	907	21,420	771	18,900	635	17,640	564
		20	0.005	25,920	1,037	21,600	864	19,440	778	18,360	661	16,200	544	15,120	484
0.55	1.1	2	0.1	40,320	2,110	33,600	1,758	30,240	1,582	28,560	1,301	25,200	1,090	23,520	967
		4	0.07	40,320	2,110	33,600	1,758	30,240	1,582	28,560	1,301	25,200	1,090	23,520	967
		6	0.04	36,720	1,774	30,600	1,478	27,540	1,330	26,010	1,094	22,950	916	21,420	813
		8	0.04	36,720	1,774	30,600	1,478	27,540	1,330	26,010	1,094	22,950	916	21,420	813
		10	0.025	36,720	1,774	30,600	1,478	27,540	1,330	26,010	1,094	22,950	916	21,420	813
0.6	1.2	4	0.08	36,923	1,932	30,769	1,610	27,692	1,449	26,154	1,208	23,077	998	21,538	886
		6	0.06	34,560	1,797	28,800	1,498	25,920	1,348	24,480	1,102	21,600	950	20,160	806
		8	0.04	34,560	1,797	28,800	1,498	25,920	1,348	24,480	1,102	21,600	950	20,160	806
		10	0.035	34,560	1,617	28,800	1,423	25,920	1,213	24,480	1,102	21,600	855	20,160	726
		12	0.03	34,560	1,617	28,800	1,348	25,920	1,213	24,480	1,102	21,600	855	20,160	726
0.7	1.4	8	0.055	30,240	1,814	25,200	1,512	22,680	1,361	21,420	1,157	18,900	983	17,640	882
		12	0.035	30,240	1,633	25,200	1,361	22,680	1,225	21,420	1,041	18,900	885	17,640	794
		16	0.017	26,880	1,371	22,400	1,142	20,160	1,028	19,040	874	16,800	743	15,680	666
0.75	1.5	4	0.1	33,600	2,218	28,000	1,848	25,200	1,663	23,800	1,428	21,000	1,134	19,600	980
		6	0.1	33,600	2,218	28,000	1,848	25,200	1,663	23,800	1,428	21,000	1,134	19,600	980
		8	0.06	30,240	1,796	25,200	1,497	22,680	1,347	21,420	1,157	18,900	919	17,640	794
		10	0.06	30,240	1,796	25,200	1,497	22,680	1,347	21,420	1,157	18,900	919	17,640	794
		12	0.06	30,240	1,796	25,200	1,497	22,680	1,347	21,420	1,157	18,900	919	17,640	794
		14	0.05	26,880	1,508	25,200	1,497	20,160	1,131	19,040	971	16,800	771	15,680	666
		16	0.019	26,880	1,508	22,400	1,257	20,160	1,131	19,040	971	16,800	771	15,680	666
		18	0.019	26,880	1,508	22,400	1,257	20,160	1,131	19,040	971	16,800	771	15,680	666
		20	0.019	26,880	1,508	22,400	1,257	20,160	1,131	19,040	971	16,800	771	15,680	666
0.8	1.6	8	0.11	31,200	2,184	26,000	1,820	23,400	1,638	22,100	1,370	19,500	1,170	18,200	1,019
		12	0.065	28,080	1,769	23,400	1,474	21,060	1,327	19,890	1,110	17,550	948	16,380	826
		16	0.04	28,080	1,769	23,400	1,474	21,060	1,327	19,890	1,110	17,550	948	16,380	826
		20	0.02	24,960	1,485	20,800	1,238	18,720	1,114	17,680	932	15,600	796	14,560	693
0.9	1.8	8	0.13	31,200	2,496	26,000	2,080	23,400	1,872	22,100	1,547	19,500	1,287	18,200	1,092
		12	0.07	28,080	2,022	23,400	1,685	21,060	1,516	19,890	1,253	17,550	1,042	16,380	885
		16	0.045	28,080	2,022	23,400	1,685	21,060	1,516	19,890	1,253	17,550	1,042	16,380	885
		20	0.022	24,960	1,697	20,800	1,414	18,720	1,273	17,680	1,052	15,600	875	14,560	743
1	2	3	0.2	25,200	2,520	21,000	2,100	18,900	1,890	17,850	1,607	15,750	1,355	14,700	1,176
		4	0.2	25,200	2,520	21,000	2,100	18,900	1,890	17,850	1,607	15,750	1,355	14,700	1,176
		6	0.2	25,200	2,268	21,000	1,890	18,900	1,701	17,850	1,428	15,750	1,197	14,700	1,058
		8	0.14	25,200	2,268	21,000	1,890	18,900	1,701	17,850	1,428	15,750	1,197	14,700	1,058
		10	0.14	25,200	2,016	21,000	1,680	18,900	1,512	17,850	1,285	15,750	1,071	14,700	941

Recommended range				PN series / ATH series											
Work material				1		2		3		4		5		6	
				Coppers		Carbon steels, Alloy steels (180～250HB)		Stainless steels, Tool steels (25～35HRC)		Pre-hardened steels (35～45HRC)		Hardened steels (45～55HRC)		Hardened steels (55～65HRC)	
Ratio to standard depth of cut				120%		100%		90%		80%		65%		60%	
Ball radius RE (mm)	Tool dia. DC (mm)	Under neck length LU (mm)	a_p (mm)	Revolution n min^{-1}	Feed rate v_f mm/min	Revolution n min^{-1}	Feed rate v_f mm/min	Revolution n min^{-1}	Feed rate v_f mm/min	Revolution n min^{-1}	Feed rate v_f mm/min	Revolution n min^{-1}	Feed rate v_f mm/min	Revolution n min^{-1}	Feed rate v_f mm/min
1	2	12	0.08	22,680	1,814	18,900	1,512	17,010	1,361	16,065	1,157	14,175	964	13,230	847
		13	0.08	22,680	1,814	18,900	1,512	17,010	1,361	16,065	1,157	14,175	964	13,230	847
		14	0.08	22,680	1,814	18,900	1,512	17,010	1,361	16,065	1,157	14,175	964	13,230	847
		16	0.08	22,680	1,633	18,900	1,361	17,010	1,225	16,065	1,041	14,175	868	13,230	762
		18	0.06	22,680	1,633	18,900	1,361	17,010	1,225	16,065	1,041	14,175	868	13,230	762
		20	0.05	22,680	1,633	18,900	1,361	17,010	1,225	16,065	1,041	14,175	868	13,230	762
		22	0.042	21,420	1,457	17,850	1,214	16,065	1,092	15,173	929	13,388	774	12,495	680
		25	0.035	20,160	1,371	16,800	1,142	15,120	1,028	14,280	874	12,600	728	11,760	640
		30	0.015	20,160	1,371	16,800	1,142	15,120	1,028	14,280	874	12,600	728	11,760	640
		35	0.012	17,640	1,129	14,700	941	13,230	847	12,495	720	11,025	600	10,290	527
		40	0.01	15,120	968	12,600	806	11,340	726	10,710	617	9,450	514	8,820	452
1.25	2.5	6	0.25	22,200	2,700	18,500	2,250	16,650	2,025	15,725	1,688	13,875	1,373	12,950	1,125
		10	0.17	22,200	2,700	18,500	2,250	16,650	2,025	15,725	1,688	13,875	1,373	12,950	1,125
		15	0.1	19,980	2,186	16,650	1,822	14,985	1,640	14,153	1,367	12,488	1,111	11,655	911
		20	0.08	19,980	2,186	16,650	1,822	14,985	1,640	14,153	1,367	12,488	1,111	11,655	911
		25	0.065	19,980	1,967	16,650	1,639	14,985	1,475	14,153	1,229	12,488	1,000	11,655	820
		30	0.044	17,760	1,836	14,800	1,530	13,320	1,377	12,580	1,148	11,100	933	10,360	765
1.5	3	8	0.3	19,200	2,880	16,000	2,400	14,400	2,160	13,600	1,822	12,000	1,512	11,200	1,344
		10	0.21	19,200	2,880	16,000	2,400	14,400	2,160	13,600	1,822	12,000	1,512	11,200	1,344
		13	0.21	19,200	2,880	16,000	2,400	14,400	2,160	13,600	1,822	12,000	1,512	11,200	1,344
		16	0.21	19,200	2,592	16,000	2,160	14,400	1,944	13,600	1,640	12,000	1,361	11,200	1,210
		20	0.12	17,280	2,333	14,400	1,944	12,960	1,750	12,240	1,476	10,800	1,225	10,080	1,089
		25	0.08	17,280	2,333	14,400	1,944	12,960	1,750	12,240	1,476	10,800	1,225	10,080	1,089
		30	0.08	17,280	2,333	14,400	1,944	12,960	1,750	12,240	1,476	10,800	1,225	10,080	1,089
		35	0.064	15,360	1,958	12,800	1,632	11,520	1,469	10,880	1,239	9,600	1,028	8,960	914
1.75	3.5	15	0.24	16,500	2,820	13,750	2,350	12,375	2,115	11,688	1,763	10,313	1,434	9,625	1,175
		25	0.14	14,850	2,280	12,375	1,900	11,138	1,710	10,519	1,425	9,281	1,159	8,663	950
		35	0.09	14,850	2,280	12,375	1,900	11,138	1,710	10,519	1,425	9,281	1,159	8,663	950
		45	0.072	13,200	1,918	11,000	1,598	9,900	1,438	9,350	1,199	8,250	975	7,700	799
2	4	10	0.4	13,800	2,760	11,500	2,300	10,350	2,070	9,775	1,760	8,625	1,466	8,050	1,288
		13	0.32	13,800	2,760	11,500	2,300	10,350	2,070	9,775	1,760	8,625	1,466	8,050	1,288
		16	0.28	13,800	2,760	11,500	2,300	10,350	2,070	9,775	1,760	8,625	1,466	8,050	1,288
		20	0.28	13,800	2,760	11,500	2,300	10,350	2,070	9,775	1,760	8,625	1,466	8,050	1,288
		25	0.16	12,420	2,236	10,350	1,863	9,315	1,677	8,798	1,425	7,763	1,188	7,245	1,043
		30	0.16	12,420	2,236	10,350	1,863	9,315	1,677	8,798	1,425	7,763	1,188	7,245	1,043
		35	0.1	12,420	2,236	10,350	1,863	9,315	1,677	8,798	1,425	7,763	1,188	7,245	1,043
		40	0.1	12,420	2,236	10,350	1,863	9,315	1,677	8,798	1,425	7,763	1,188	7,245	1,043
		45	0.08	11,040	1,877	9,200	1,564	8,280	1,408	7,820	1,196	6,900	997	6,440	876
		50	0.07	11,040	1,877	9,200	1,564	8,280	1,408	7,820	1,196	6,900	997	6,440	876
2.5	5	20	0.35	10,800	2,592	9,000	2,160	8,100	1,944	7,650	1,530	6,750	1,350	6,300	1,134
		25	0.35	10,800	2,592	9,000	2,160	8,100	1,944	7,650	1,530	6,750	1,350	6,300	1,134
		30	0.2	9,720	2,333	8,100	1,944	7,290	1,750	6,885	1,377	6,075	1,215	5,670	1,021
		40	0.2	9,720	2,100	8,100	1,750	7,290	1,575	6,885	1,239	6,075	1,094	5,670	919
3	6	12	0.6	10,800	3,024	9,000	2,520	8,100	2,268	7,650	1,890	6,750	1,537	6,300	1,260
		20	0.5	10,200	2,652	8,500	2,210	7,650	1,989	7,225	1,658	6,375	1,348	5,950	1,105
		30	0.42	9,600	2,304	8,000	1,920	7,200	1,728	6,800	1,360	6,000	1,200	5,600	1,008
		50	0.15	8,640	1,866	7,200	1,555	6,480	1,400	6,120	1,102	5,400	972	5,040	816

※(1) a_p is shown as the criteria for Group 2 workpieces. For other groups, adjust the cutting depth according to the cutting depth factors in the above table.
※(2) When performing cutting where cutting chips may cause clogging, such as for rib processing, blind grooves, etc., cutting depth setting should be set by multiplying a cutting depth factor to calculate the cutting depth amount, and this amount should then be reduced to 80% of the calculated value.
※(3) Adjust by setting a_e to (3 to 5)×(a_p)×(cutting depth ratio). When performing finishing processing, calculate the theoretical cusp height and set accordingly.

Cutting depth setting example: When cutting rib groove contours in hardened steel (50HRC) using an EPDBE2020-10-ATH tool:
Cutting depth = 0.14 (a_p) × 0.65 (cutting depth factor for Group 5 hardened steel) × 0.8 (for closed-area cutting) = 0.073mm

【Note】
① PN coating is less electro conductive. Therefore, electric transmitted measuring systems may not work.
② Use the appropriate coolant for the work material and machining shape.
③ These Recommended Cutting Conditions indicate only the rule of a thumb for the cutting conditions. In actual machining, the condition should be adjusted according to the machining shape, purpose and the machine type.
④ If the rpm of the machine is low, lower the feed rate also to put the rpm and feed rate in the same ratio.

2 types of coatings to handle a variety of work materials.

Recommended machining areas for each coating

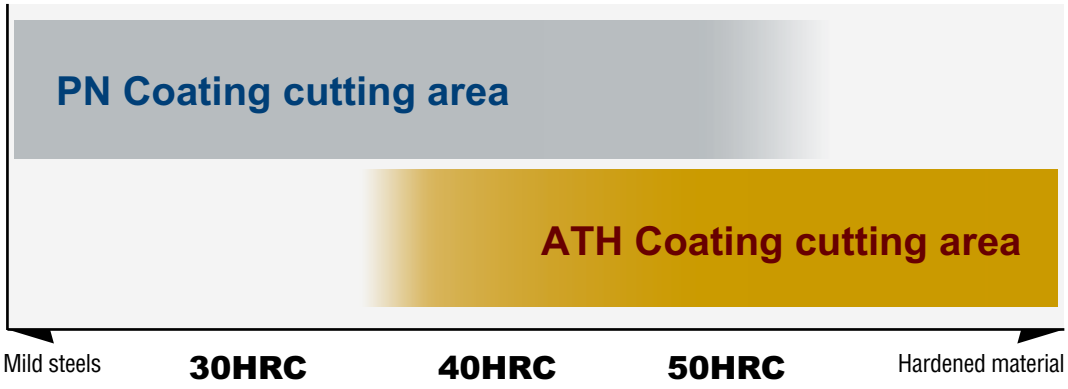

Cutting Data 1

Work material : **SCM440Ⓗ 30HRC**
Holder : HSK-F63
Tool dia. : R0.5×Under neck 6㎜
Coolant : Air-blow
n=28,000min^{-1} (v_c=88m/min)
v_f=1,200mm/min (f_z=0.02mm/t)
a_p=0.036mm a_e=0.108mm OH=18mm
Cutting length 10m

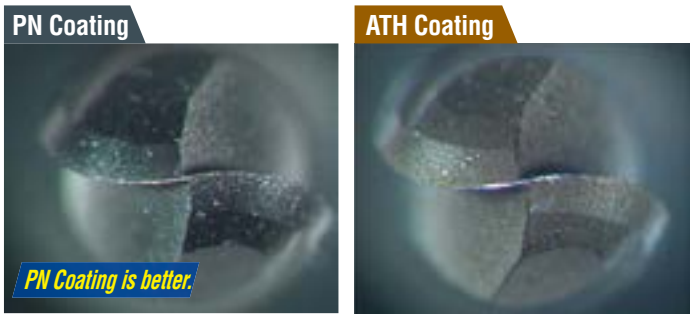

Cutting Data 2

Work material : **HPM-MAGIC 40HRC**
Holder : HSK-F63
Tool dia. : R0.5×Under neck10㎜
Coolant : Air-blow
n=24,300min^{-1} (v_c=76m/min)
v_f=900mm/min (f_z=0.018mm/t)
a_p=0.04mm Cutting reciprocating slot.
OH=18mm

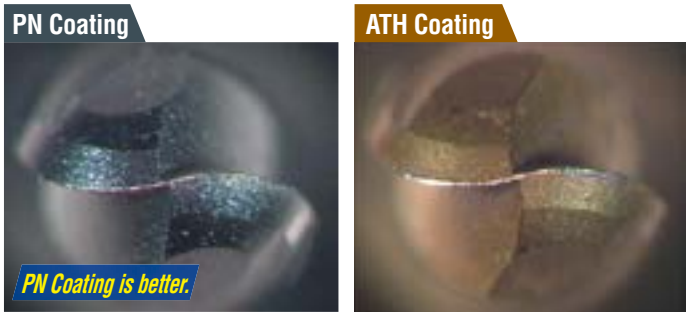

Cutting Data 3

Work material : **DACⒽ 45HRC**
Holder : HSK-F63
Tool dia. : R0.5×Under neck 6㎜
Coolant : Air-blow
n=27,540min^{-1} (v_c=86m/min)
v_f=1,115mm/min (f_z=0.02mm/t)
a_p=0.032mm a_e=0.096mm OH=18mm
Cutting length 10m

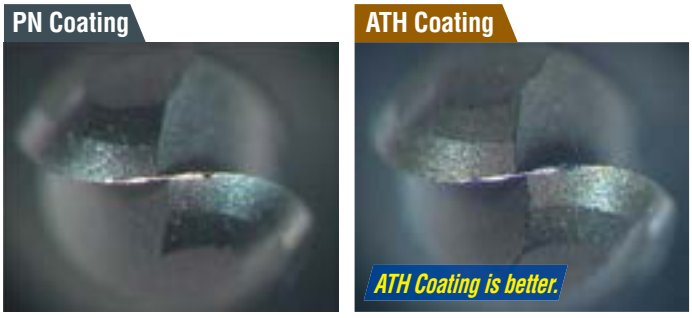

Cutting Data 4

Work material : **HPM38 52HRC**
Holder : HSK-F63
Tool dia. : R0.5×Under neck10㎜
Coolant : Air-blow
n=24,300min^{-1} (v_c=76m/min)
v_f=919mm/min (f_z=0.018mm/t)
a_p=0.016mm OH=18mm
Cutting length 20m

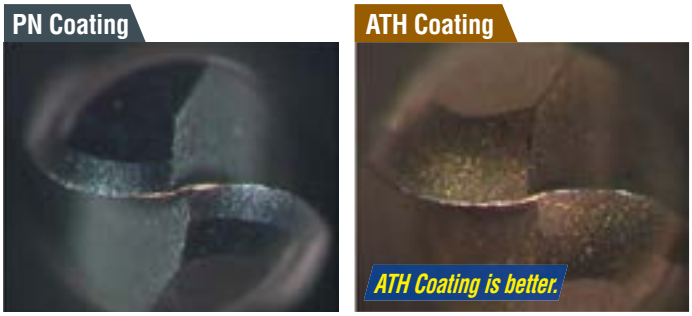

Enables high-accuracy stable machining with excellent surface quality.

EPDBE-PN

PN Coating

Technical Data SCM440Ⓗ 33HRC rib slot evaluation

Tool : EPDBE2010-10-PN (R0.5 Under neck10mm)

★This is amazing! Point 1 Uniformity of machined surface

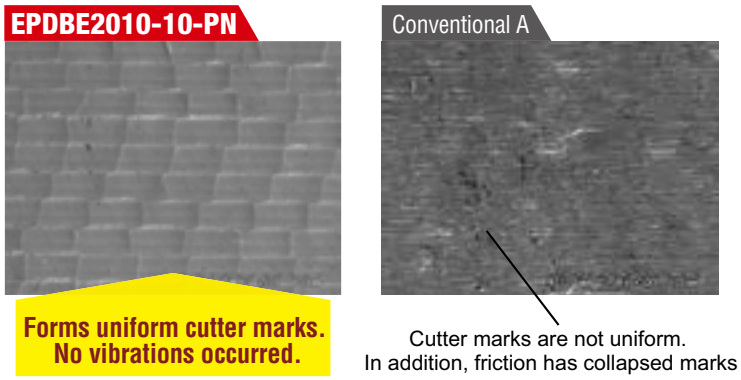

★This is amazing! Point 2 Low deflection provides improved machining accuracy!

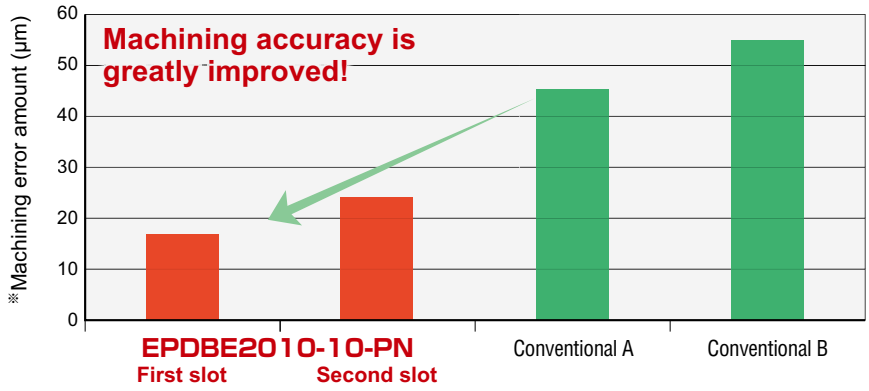

Rib slot evaluation



Work material : SCM440Ⓗ 33HRC
Holder : HSK-F63
Coolant : Wet
n=16,000min^{-1} (v_c=50m/min)
v_f=1,000mm/min (f_z=0.03mm/t)
$a_p \times a_e$=0.02mm×0.04mm



※Machining error amount::
(Ideal dimension)-(Measured dimension after cutting)

★This is amazing! Point 3 Long life: Wear resistance plus good chipping resistance

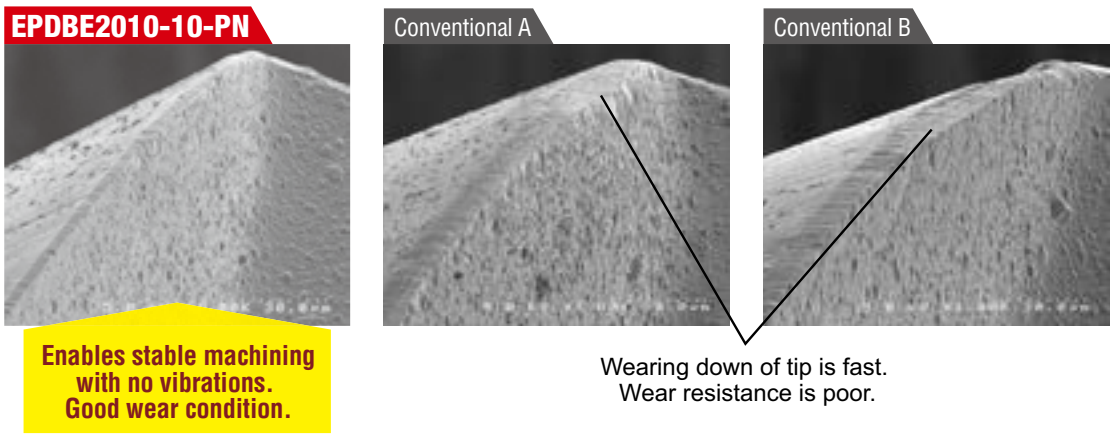

Rely on ATH Coating for stable machining of even high-hardness materials!

EPDBE-ATH

ATHCoating

Technical Data

Tool：EPDBE2010-10-ATH (R0.5 Under neck10mm)

★This is amazing! Point 1 **Wear condition is stable. No chipping even on high-hardness materials.**

Machining shape	Cutting condition	EPDBE2010-10-ATH	Conventional
	Work material : **SLDⒽ 60HRC** Holder : HSK-F63 Coolant：Air Blow n=10,000min^{-1} (v_c=31.4m/min) v_f=800mm/min (f_z=0.04mm/t) a_p×a_e=0.02mm×0.02mm	 Stable wear condition from chisel to outer perimeter	 Chipping occurred

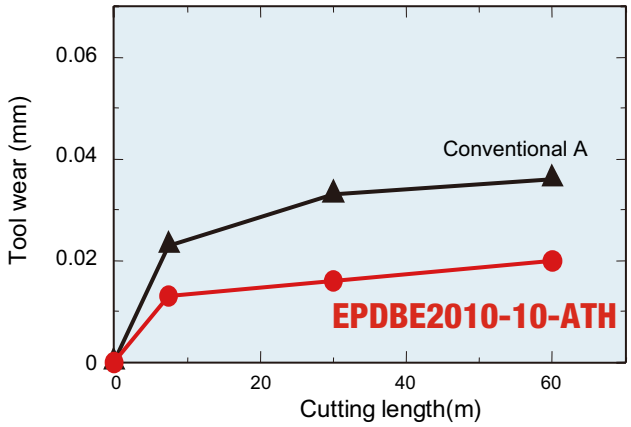

Technical Data

Tool：EPDBE2010-10-ATH (R0.5 Under neck10mm)

★This is amazing! Point 2 **High accuracy achieved due to little deflection.**

Machining shape	Cutting condition
	Work material : **SUS420J2Ⓗ 52HRC** Holder: HSK-F63 Coolant：Air Blow n=16,000min^{-1} (v_c=50m/min) v_f=1,000mm/min (f_z=0.03mm/t) a_p×a_e=0.02mm×0.02mm

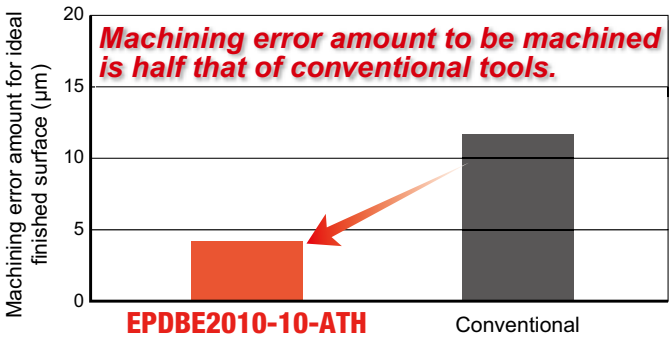

Periphery helix angle is strong, improving cutting performance.

Tool interference check, Re-grinding

Example of difference in neck interference area

Difference in interference area for R=0.3 x Under neck length=2mm
(Figures show a slope angle of 1°.)

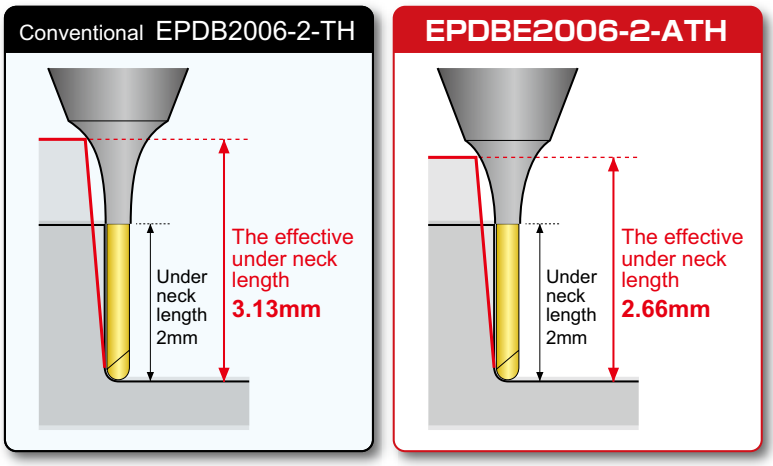

When a conventional product and new product with R=0.3 x Under neck length=2mm are compared for a surface with a 1° slope angle, the conventional EPDB2006-2-TH has an effective under neck length of 3.13mm, but for the new EPDBE2006-2-ATH, the effective under neck length is 2.66mm.

The improved neck shape used in these new products results in a different interference area than the EPDB and EPDS conventional models.

For checking interference:

Re-grinding compatibility range table

Item code	Product name	Tool dia. (mm)	Shape	Re-grinding compatibility range (mm)	
				Outer dia.	End
EPDBE-PN	Epoch Deep Ball Evolution (PN Coating)	0.1～6		N/A	1～6
EPDBE-ATH	Epoch Deep Ball Evolution (ATH Coating)	0.1～6		N/A	1～6
EPDSE-PN	Epoch Deep Square Evolution (PN Coating)	0.1～6		6	2～6
EPDSE-ATH	Epoch Deep Square Evolution (ATH Coating)	0.1～6		6	2～6

【Note】Contact our sales office regarding whether or not regrinding is possible for tools where Under neck length/Tool diameter is 10 or greater.

MOLDINO

The Edge To Innovation

The diagrams and table data are examples of test results, and are not guaranteed values.
"MOLDINO" is a registered trademark of MOLDINO Tool Engineering, Ltd.

⚠ Attentions on Safety

1. Cautions regarding handling

(1) When removing the tool from its case (packaging), be careful that the tool does not pop out or is dropped. Be particularly careful regarding contact with the tool flutes.
(2) When handling tools with sharp cutting flutes, be careful not to touch the cutting flutes directly with your bare hands.

2. Cautions regarding mounting

(1) Before use, check the outside appearance of the tool for scratches, cracks, etc. and that it is firmly mounted in the collet chuck, etc.
(2) If abnormal chattering, etc. occurs during use, stop the machine immediately and remove the cause of the chattering.

3. Cautions during use

(1) Before use, confirm the dimensions and direction of rotation of the tool and milling work material.
(2) The numerical values in the standard cutting conditions table should be used as criteria when starting new work. The cutting conditions should be adjusted as appropriate when the cutting depth is large, the rigidity of the machine being used is low, or according to the conditions of the work material.
(3) Cutting tools are made of a hard material. During use, they may break and fly off. In addition, cutting chips may also fly off. Since there is a danger of injury to workers, fire, or eye damage from such flying pieces, a safety cover should be attached when work is performed and safety equipment such as safety goggles should be worn to create a safe environment for work.
(4) There is a risk of fire or inflammation due to sparks, heat due to breakage, and cutting chips. Do not use where there is a risk of fire or explosion. **Please caution of fire while using oil base coolant, fire prevention is necessary.**
(5) Do not use the tool for any purpose other than that for which it is intended.

4. Cautions regarding regrinding

(1) If regrinding is not performed at the proper time, there is a risk of the tool breaking. Replace the tool with one in good condition, or perform regrinding.
(2) Grinding dust will be created when regrinding a tool. When regrinding, be sure to attach a safety cover over the work area and wear safety clothes such as safety goggles, etc.
(3) This product contains the specified chemical substance cobalt and its inorganic compounds. When performing regrinding or similar processing, be sure to handle the processing in accordance with thelocal laws and regulations regarding prevention of hazards due to specified chemical substances.

MOLDINO Tool Engineering, Ltd.

Head Office
Hulic Ryogoku Bldg. 8F, 4-31-11, Ryogoku, Sumida-ku, Tokyo, Japan 130-0026
International Sales Dept. : TEL +81-3-6890-5103 FAX +81-3-6890-5128

Official Web Site
http://www.moldino.com/en/

Database for selection Cutting Tool Products【TOOL SEARCH】
TOOLSEARCH Search Web

Europe **MOLDINO Tool Engineering Europe GmbH**
Itterpark 12, 40724 Hilden,Germany.
Tel +49-(0)2103-24820 Fax +49-(0)2103-248230

China **MOLDINO Tool Engineering (Shanghai), Ltd.**
Room 2604-2605, Metro Plaza, 555 Loushanguan Road, Changning Disctrict,Shanghai, 200051, China
Tel +86-(0)21-3366-3058 Fax +86-(0)21-3366-3050

America **MITSUBISHI MATERIALS U.S.A. CORPORATION**
DETROIT OFFICE Customer service
41700 Gardenbrook Road, Suite 120, Novi, MI 48375-1320 U.S.A.
Tel +1(248) 308-2620 Fax +1(248) 308-2627

Mexico **MMC METAL DE MEXICO, S.A. DE C.V.**
Av. La Cañada No.16, Parque Industrial Bernardo Quintana, El Marques, Querétaro, CP 76246, México
Tel +52-442-1926800

Brazil **MMC METAL DO BRASIL LTDA.**
Rua Cincinato Braga, 340 13° andar.Bela Vista – CEP 01333-010 São Paulo – SP ., Brasil
Tel +55(11)3506-5600 Fax +55(11)3506-5677

Thailand **MMC Hardmetal (Thailand) Co.,Ltd. MOLDINO Division**
622 Emporium Tower, Floor 22/1-4, Sukhumvit Road, Klong Tan, Klong Toei,
Bangkok 10110, Thailand
TEL:+66-(0)2-661-8175 FAX:+66-(0)2-661-8176

India **MMC Hardmetal India Pvt Ltd.**
H.O.: Prasad Enclave, #118/119, 1st Floor, 2nd Stage, 5th main, BBMP Ward #11, (New #38),
Industrial Suburb, Yeshwanthpura, Bengaluru, 560 022, Karnataka, India.
Tel +91-80-2204-3600

DISTRIBUTED BY:

Printed in JAPAN

2022-12(K)
2012-8:FP