

NILOMAT_STUDIOS

NI_CPU-E series

CPU_E/E2/E2G

SPECS

The CPU_E series is a turing complete 8bit processor.
With 2-4 multi purpose registers and 2 ALU registers
and 65k of rom. It also has 255 bytes of ram.

THE ALU

It consists of an addition subtraction unit
and the comparetors larger than smaller than and equals.
It aslo has the logical operation XOR OR and AND.

THE I/O

It has 4 input and 4 output ports.
The general counter x/y(gcx/gcy) is also execeble from the outside.
Each I/O port is 8 bit (including gcx/gcy).

INSTRUCTIONS

(hex to NIScript)


```
dec hex
31 1F set ar2
30 1E set ar1
29 1D (ALU Operation) *ALU
28 1C set ram
27 1B load
26 1A get ram
25 19 set ra
24 18 output
23 17 set count
22 16 output2
21 15 input
20 14 set zpe
19 13 get zpe
18 12 get count
17 11 set sr
16 10 get sr
15 F input2
14 E input3
13 D input4
12 C output3
11 B output4
10 A inc gcx
9 9 set gcx
8 8 get gcx
7 7 inc gcy
6 6 set gcy
5 5 get gcy
4 4
3 3
2 2
1 1
0 0
```

*ALU

["NAME", hex BYTE]
["add", 1d], ["sub", 5d], ["and", 7d], ["comp", 3d], ["or", 9d], ["xor", bd], ["ar2_gt_ar1", dd], ["ar1_gt_ar2", fd],

LOGIC DIAGRAMM

BLACK LINES – DATA
RED LINES – INSTRUCTION LINES

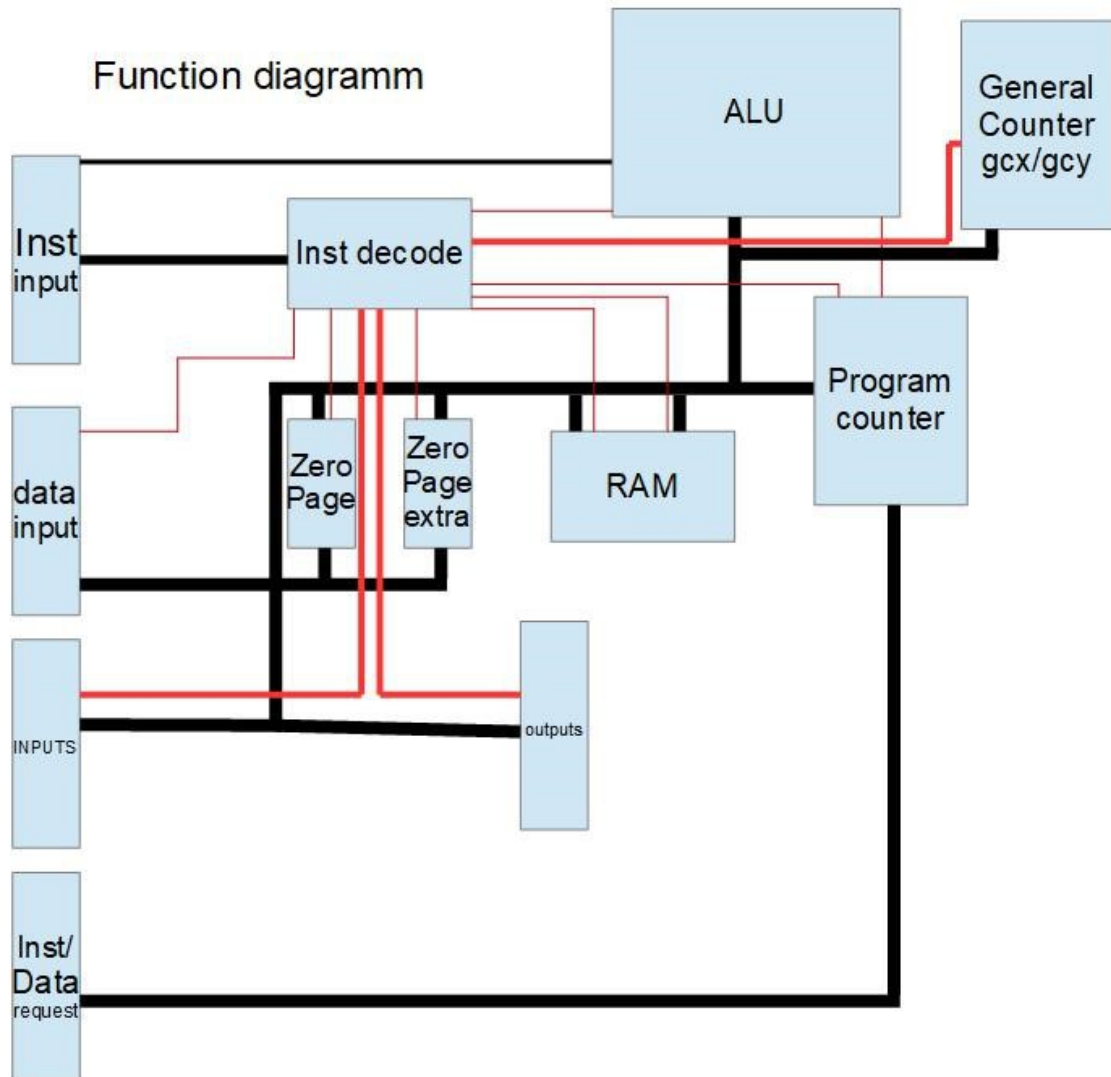

NEEDED SIGNALS

INPUT

5v
clock
data
instructions(inst)
inputs 1-4

OUTPUT

data 1-4
gcx/gcy
inst data request

NI-SCRIPT BASICS

Command	Description	External Data Needed?
`load <val>`	Load constant into zp	Yes (value)
set ar1`	Move zp to ar1	No
`set ar2`	Move zp to ar2	No
`set ra`	set the ram adress to zp	No
`set ram`	set current ram to zp	No
`set zpe`	set zpe to zp	No
`get ram`	set zp to current ram	No
`get zpe`	set zp to zpe	No
`get input`	set zp to user input	No
`get input2`	set zp to user input 2	No
`get input3`	set zp to user input 3	No
`get input4`	set zp to user input 4	No
`get count`	get the current adress	No
`get sr`	get the mem sector reg	No
`set sr`	set the mem sector reg	No
`add`	Add ar1 + ar2 → zp	No
`sub`	Subtract ar1 - ar2 → zp	No
`and`	Bitwise AND	No
`comp`	jump to zpif ar1==ar2	No
`or`	Bitwise OR	No
`xor`	Bitwise XOR	No
`ar2_gt_ar1`	Compare ar2 > ar1	No
`ar1_gt_ar2`	Compare ar1 > ar2	No
`output`	Output zp	No
`output2`	Output2 zp	No
`output3`	Output3 zp	No
`output4`	Output4 zp	No
`jumpzp`	jump to value stored in zp	No
`set/get gcy/gcx`	Set/get gcy/gcx	No

IMPORTANT INFO

RA is RAM ADDRESS
 ZP is ZERO PAGE (ZPE IS ZERO PAGE EXTRA)
 AR1/2 is ARITHMATIC REGISTER 1/2
 SR is SECTOR REGISTER
 GCX/GCY is GENERAL COUNTER X/Y

ALL BITWISE OPERATIONS ALSO USE THE AR REGISTERS

INTEGRATION INFO

You dont have to worry about opcodes,
the 8 bit inst data stream is made of 3 opcode and 5 instruction bits.
The opcode is only used for ALU operations and are listed in the *ALU in the instructions table.