

*BY APPROVING THIS DRAWING YOU ARE ENSURING THAT THESE DIMENSIONS HAVE BEEN FIELD VERIFIED.

☐ APPROVED BY: _____

☐ REVISION REQUESTED

DATE: _____

ATTENTION:
ELECTRIC MIRROR RECOMMENDS A HARDWIRED INSTALLATION AS THE PREFERRED METHOD OF INSTALLATION FOR ALL LIGHTED MIRROR PRODUCTS. PRIOR TO THE DELIVERY OF THIS CORD CONNECTED LUMINAIRE, WE RECOMMEND THAT YOU CONTACT YOUR LOCAL ELECTRICAL INSPECTOR TO REVIEW THE PLANNED CONDITIONS FOR THE INSTALLATION OF THIS PRODUCT. THIS WILL ENSURE COMPLIANCE WITH THE LOCAL ELECTRICAL CODE.

IF A GFCI CIRCUIT IS REQUIRED, INSTALL A NON-GFCI OUTLET BEHIND THE MIRROR. THIS OUTLET MUST BE WIRED FROM THE LOAD SIDE OF AN ACCESSIBLE GFCI OUTLET. THIS WILL PREVENT HAVING TO REMOVE THE MIRROR TO RESET THE GFCI RECEPTACLE. THE LOAD ON THIS GFCI CIRCUIT SHOULD BE CAREFULLY CONSIDERED TO PREVENT UNINTENDED TRIPPING OF THE GFCI. MUST BE INSTALLED IN ACCORDANCE WITH ALL NATIONAL AND LOCAL ELECTRICAL CODES.

ELECTRIC MIRROR IS NOT RESPONSIBLE FOR COMPATIBILITY OF A GFCI CIRCUIT WITH OUR PRODUCTS. CONTACT THE GFCI MANUFACTURER TO ENSURE COMPATIBILITY.



SPECIFICATION:
PLUG FIXTURE INTO RECEPTACLE LOCATED IN WALL BEHIND MIRROR. RECEPTACLES SHOULD BE CONTROLLED BY WALL SWITCHES (BY OTHERS).

MIRROR SHOULD BE MOUNTED TO A MECHANICALLY SOUND SURFACE SUCH AS WALL STUDS TO SUPPORT ITS WEIGHT.

POWER REQUIREMENTS:
120 VOLTS, 0.30 AMPS

LED SPECIFICATION:
LED TYPE: REPLACEABLE FLEX STRIP
LENGTH (IN): 130
WATTAGE (W): 40
CALCULATED L70 LIFESPAN (HRS): 140,000
CCT(K): 3,000
TOTAL INITIAL LUMENS PER FIXTURE: 3,269 @ 302 LM/FT
CRI: 90+

FIXTURE SPECIFICATION:
WEIGHT: 33 LBS (EST.)

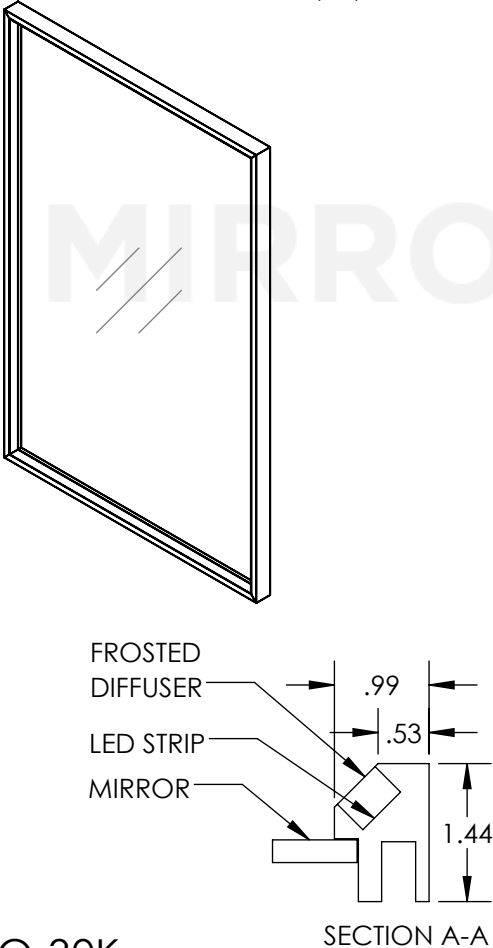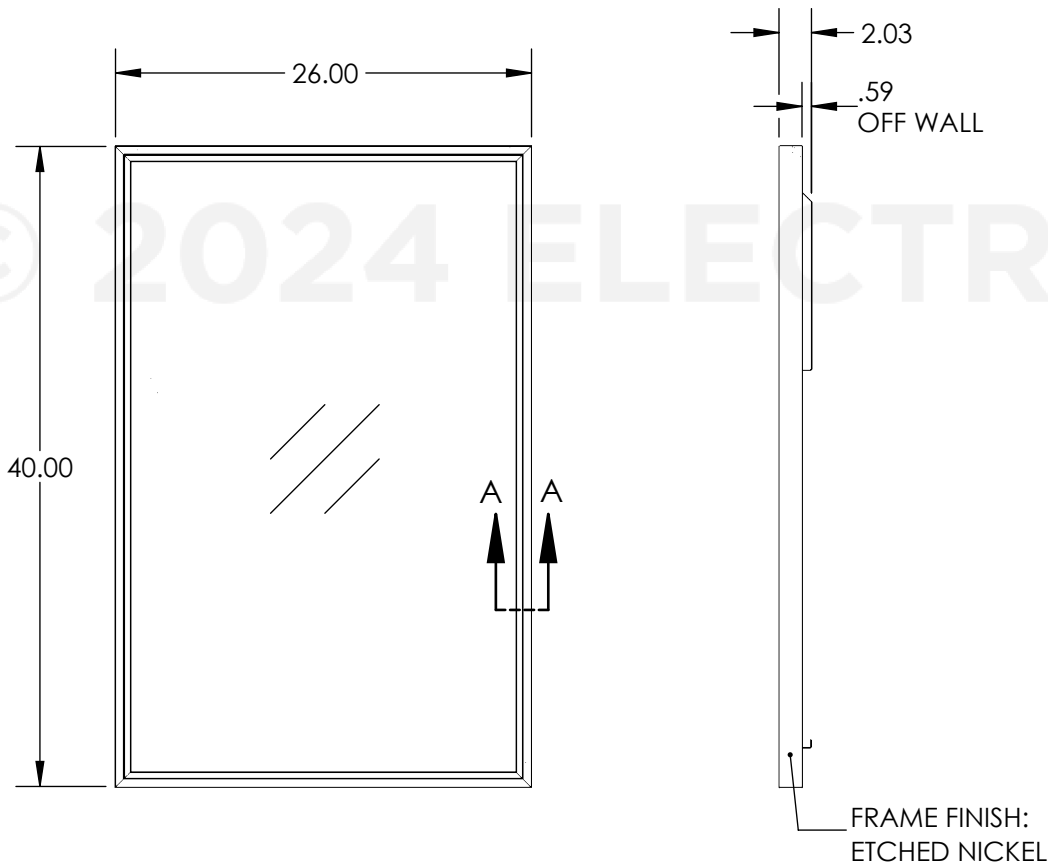

ELECTRIC MIRROR® 2024

CONTACT US: consultants@electricmirror.com T+1.425.776.4946

RAD4-26.00X40.00-NK04-CC2-NO-30K

SALES AID - 10/10/2024

NOTE: MIRROR CAN ONLY BE HUNG IN THE WXH ORIENTATION AS SHOWN AND IS NOT FIELD INTERCHANGEABLE.


PROPRIETARY AND CONFIDENTIAL:
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ELECTRIC MIRROR L.L.C. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ELECTRIC MIRROR L.L.C. IS PROHIBITED. © 2024 ELECTRIC MIRROR

DIMS IN INCHES [mm]
TOLERANCE: ±1/8" [±3]


REV. A.1

SCALE: 1:12

PG. 1 OF 2

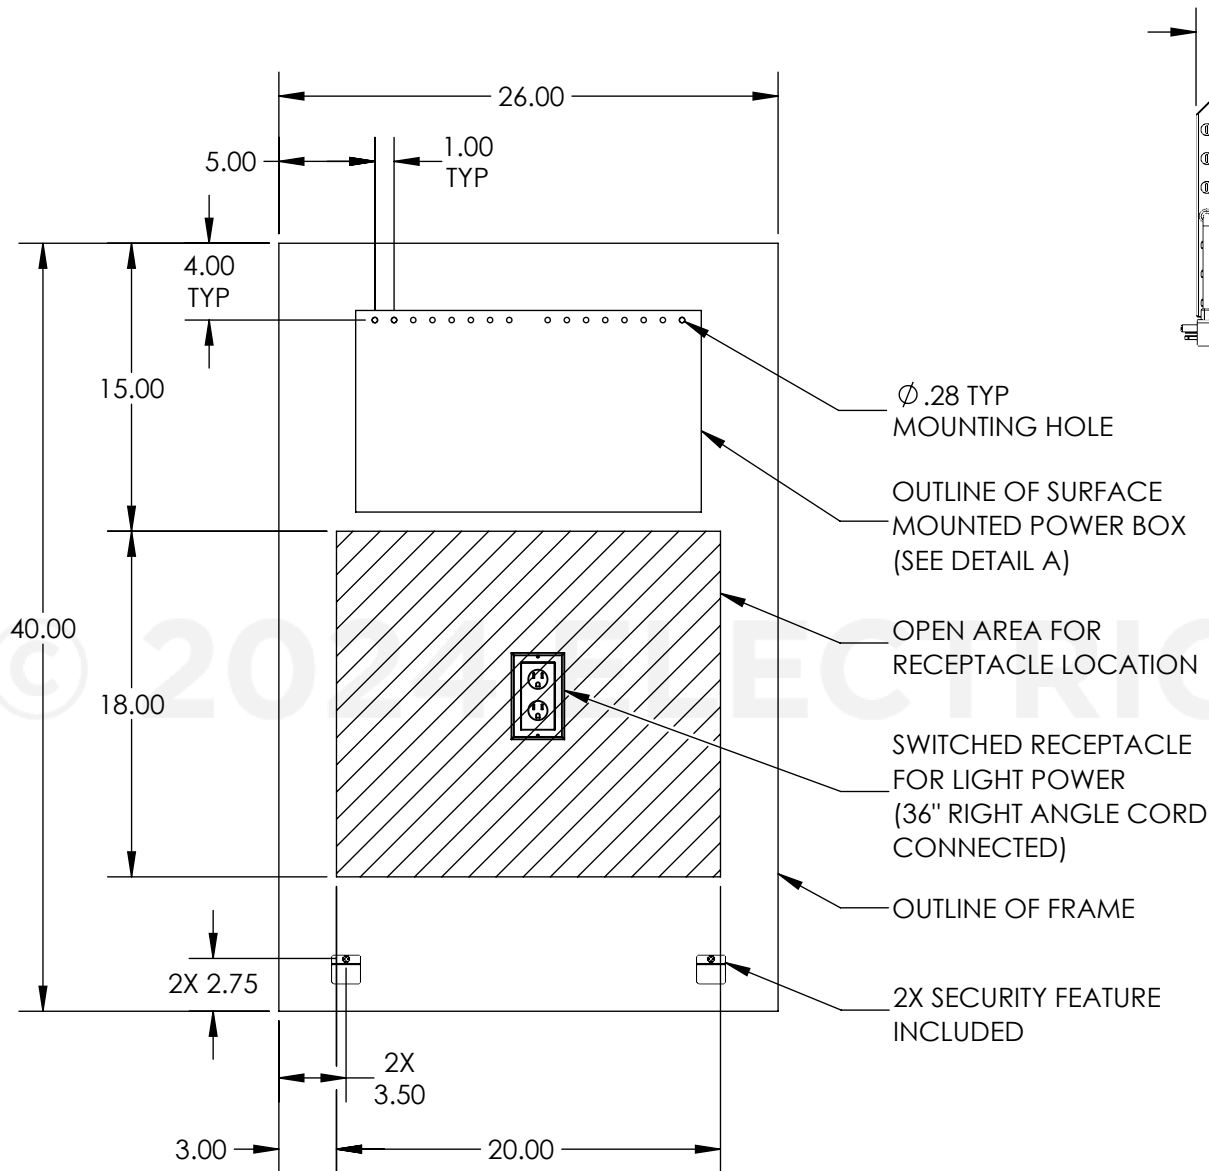

WALL MOUNTING DETAILS

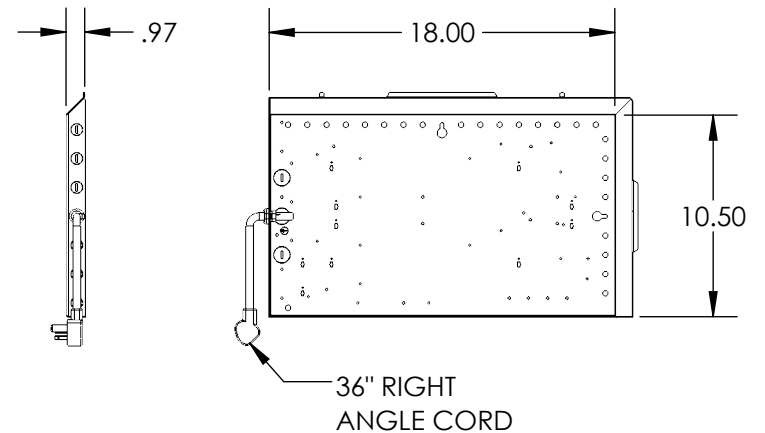

DETAIL A POWER BOX REF: 81330-CC2-96W

SEE RADIANCE MOUNT INSTALLATION
INSTRUCTIONS FOR FURTHER DETAILS.

ELECTRIC MIRROR® 2024

CONTACT US: consultants@electricmirror.com T+1.425.776.4946

RAD4-26.00X40.00-NK04-CC2-NO-30K

SALES AID - 10/10/2024

NOTE: MIRROR CAN ONLY BE HUNG IN THE
WXH ORIENTATION AS SHOWN AND IS NOT
FIELD INTERCHANGEABLE.

PROPRIETARY AND CONFIDENTIAL:

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ELECTRIC
MIRROR L.L.C. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF ELECTRIC MIRROR L.L.C. IS PROHIBITED. © 2024 ELECTRIC MIRROR

DIMS IN INCHES [mm]
TOLERANCE: $\pm 1/8"$ [± 3]

REV. A.1

SCALE: 1:10

PG. 2 OF 2