


*BY APPROVING THIS DRAWING YOU ARE ENSURING THAT THESE DIMENSIONS HAVE BEEN FIELD VERIFIED.

☐ APPROVED BY: _____

☐ REVISION REQUESTED _____

DATE: _____

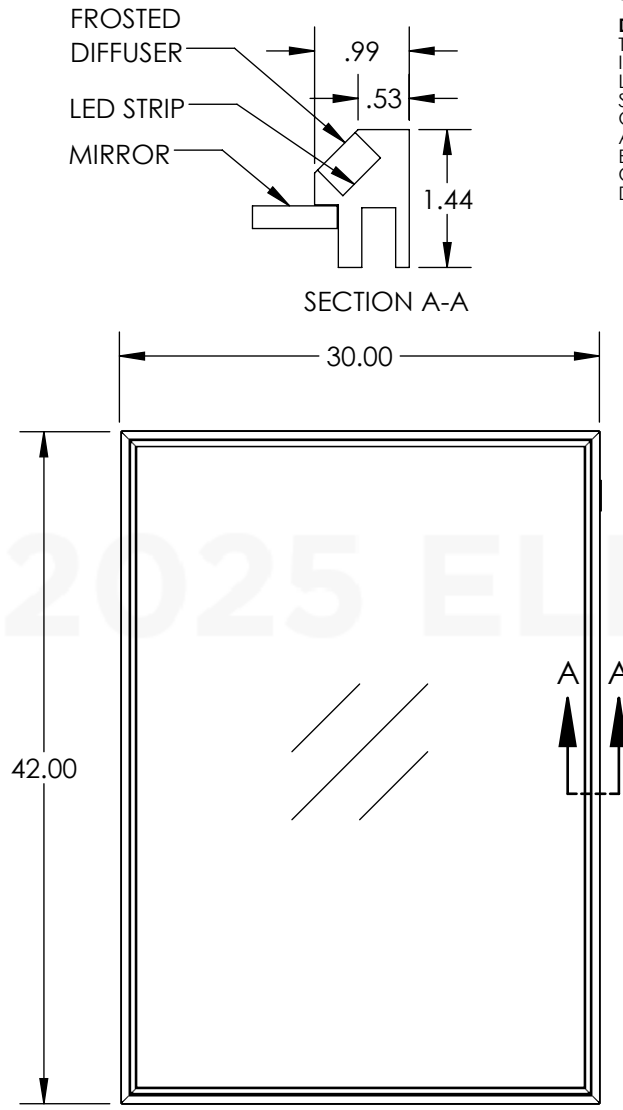

SPECIFICATION:
BRING MC CALBE TO ENCLOSURE. INSERT GROUND WIRE IN GROUNDED CONNECTOR. INSERT HOT AND NEUTRAL WIRE INTO LUMINAIRE DISCONNECT. NO ELECTRICAL BOX REQUIRED. ELECTRICAL POWER SHOULD BE CONTROLLED BY A WALL SWITCH (BY OTHERS).



MIRROR SHOULD BE MOUNTED TO A MECHANICALLY SOUND SURFACE SUCH AS WALL STUDS TO SUPPORT ITS WEIGHT.

DIMMER COMPATIBILITY:
TO ENSURE PROPER OPERATION OF THIS DIMMABLE PRODUCT IT IS IMPORTANT TO SELECT A COMPATIBLE DIMMING SWITCH. THIS LUMINAIRE REQUIRES A COMPATIBLE FORWARD PHASE LINE DIMMER SWITCH. CONTACT THE CONTROLLER MANUFACTURER TO CONFIRM COMPATIBILITY WITH THIS PRODUCT. MUST BE INSTALLED IN ACCORDANCE WITH ALL NATIONAL AND LOCAL ELECTRICAL CODES. ELECTRIC MIRROR IS NOT RESPONSIBLE FOR DIMMER SWITCH COMPATIBILITY. THIS PRODUCT USES: SMT-024-096VTSP TRIAC PHASE DIMMING DRIVER.

POWER REQUIREMENTS:
120 - 277 VOLTS, 0.36 - 0.16 AMPS

LED SPECIFICATION:
LED TYPE: REPLACEABLE FLEX STRIP
LENGTH (IN): 142
WATTAGE (W): 44
CALCULATED L70 LIFESPAN (HRS): 140,000
CCT(K): 3,000
TOTAL INITIAL LUMENS PER FIXTURE: 3,566 @ 302 LM/FT
CRI: 90+

FIXTURE SPECIFICATION:
WEIGHT: 38 LBS (EST.)

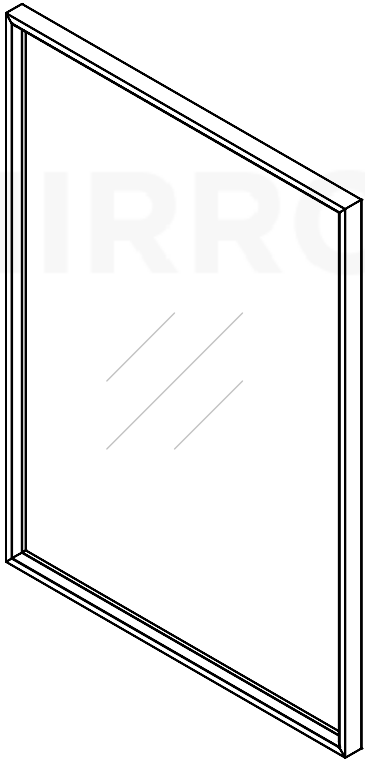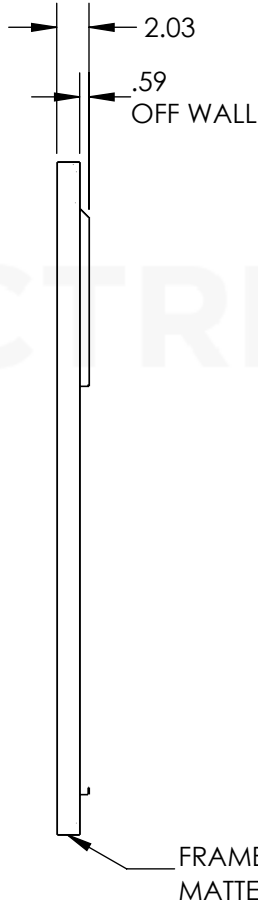

ELECTRIC MIRROR

CONTACT US: consultants@electricmirror.com T+1.425.776.4946

® RAD4-30.00X42.00-BK05-D2-30K

2025 SALES AID -5/14/2025

NOTE: MIRROR CAN ONLY BE HUNG IN THE WXH ORIENTATION AS SHOWN AND IS NOT FIELD INTERCHANGEABLE.

PROPRIETARY AND CONFIDENTIAL:
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ELECTRIC MIRROR L.L.C. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ELECTRIC MIRROR L.L.C. IS PROHIBITED. © 2025 ELECTRIC MIRROR

DIMS IN INCHES [mm]
TOLERANCE: ±1/8" [±3]

SCALE: 1:12

REV. A.1

PG. 1 OF 2

