


*BY APPROVING THIS DRAWING YOU ARE ENSURING THAT THESE DIMENSIONS HAVE BEEN FIELD VERIFIED.

☐ APPROVED BY: _____

☐ REVISION REQUESTED _____

DATE: _____

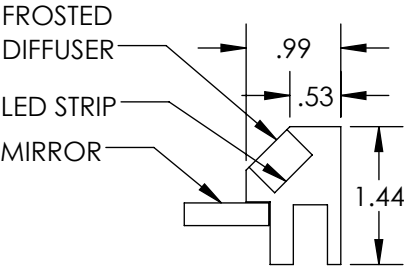

SECTION A-A

SPECIFICATION:
BRING MC CABLE TO ENCLOSURE. INSERT GROUND WIRE IN GROUNDED CONNECTOR. INSERT HOT AND NEUTRAL WIRE INTO LUMINAIRE DISCONNECT. NO ELECTRICAL BOX REQUIRED. ELECTRICAL POWER SHOULD BE CONTROLLED BY A WALL SWITCH (BY OTHERS).

MIRROR SHOULD BE MOUNTED TO A MECHANICALLY SOUND SURFACE SUCH AS WALL STUDS TO SUPPORT ITS WEIGHT.




ATTENTION:
THIS PRODUCT MUST BE CONNECTED TO EARTH GROUND IN ACCORDANCE WITH NEC CODE 250.20 (B). IMPROPER GROUND CAN RESULT IN IRREGULAR FUNCTION OF THE UNIT.

POWER REQUIREMENTS:
120 OR 277 VOLTS, 0.63 OR 0.27 AMPS

LED SPECIFICATION:
LED TYPE: REPLACEABLE FLEX STRIP
LENGTH (IN): 142
WATTAGE (W): 43
CALCULATED L70 LIFESPAN (HRS): 140,000
CCT(K): 3,000
TOTAL INITIAL LUMENS PER FIXTURE: 3,571 @ 302 LM/FT
CRI: 90+

WALL GLOW SPECIFICATION:
LED TYPE: REPLACEABLE FLEX STRIP
LENGTH (IN): 126
WATTAGE (W): 38
CALCULATED L70 LIFESPAN (HRS): 140,000
CCT (K): 3000
TOTAL INITIAL LUMENS PER FIXTURE: 3,217 @ 302 LM/FT
CRI: 90+

FIXTURE SPECIFICATION:
WEIGHT: 45 LBS (EST.)

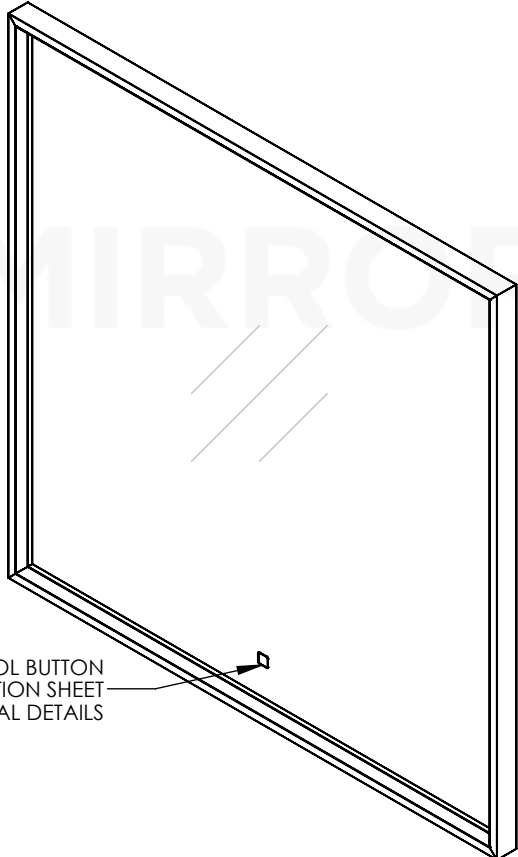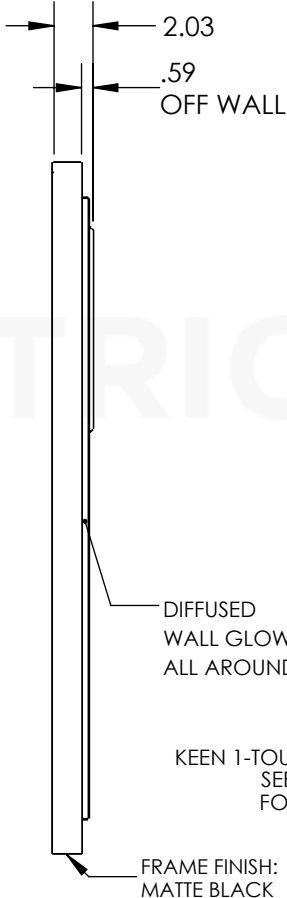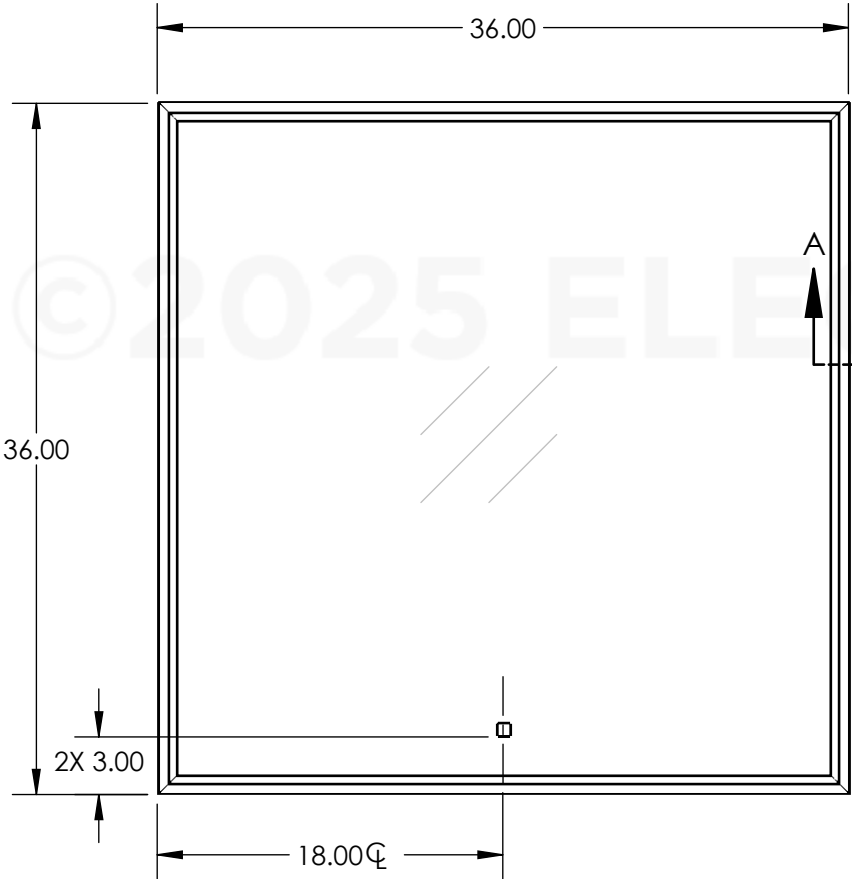

ELECTRIC MIRROR® 2025

CONTACT US: consultants@electricmirror.com T+1.425.776.4946

RAD4-36.00X36.00-BK05-KG-WG3-30K

SALES AID - 01/28/2025

NOTE: MIRROR CAN ONLY BE HUNG IN THE WXH ORIENTATION AS SHOWN AND IS NOT FIELD INTERCHANGEABLE.


PROPRIETARY AND CONFIDENTIAL:
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ELECTRIC MIRROR L.L.C. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ELECTRIC MIRROR L.L.C. IS PROHIBITED. © 2025 ELECTRIC MIRROR

DIMS IN INCHES [mm]
TOLERANCE: ±1/8" [±3]

REV. A.1

SCALE: 1:10

PG. 1 OF 2

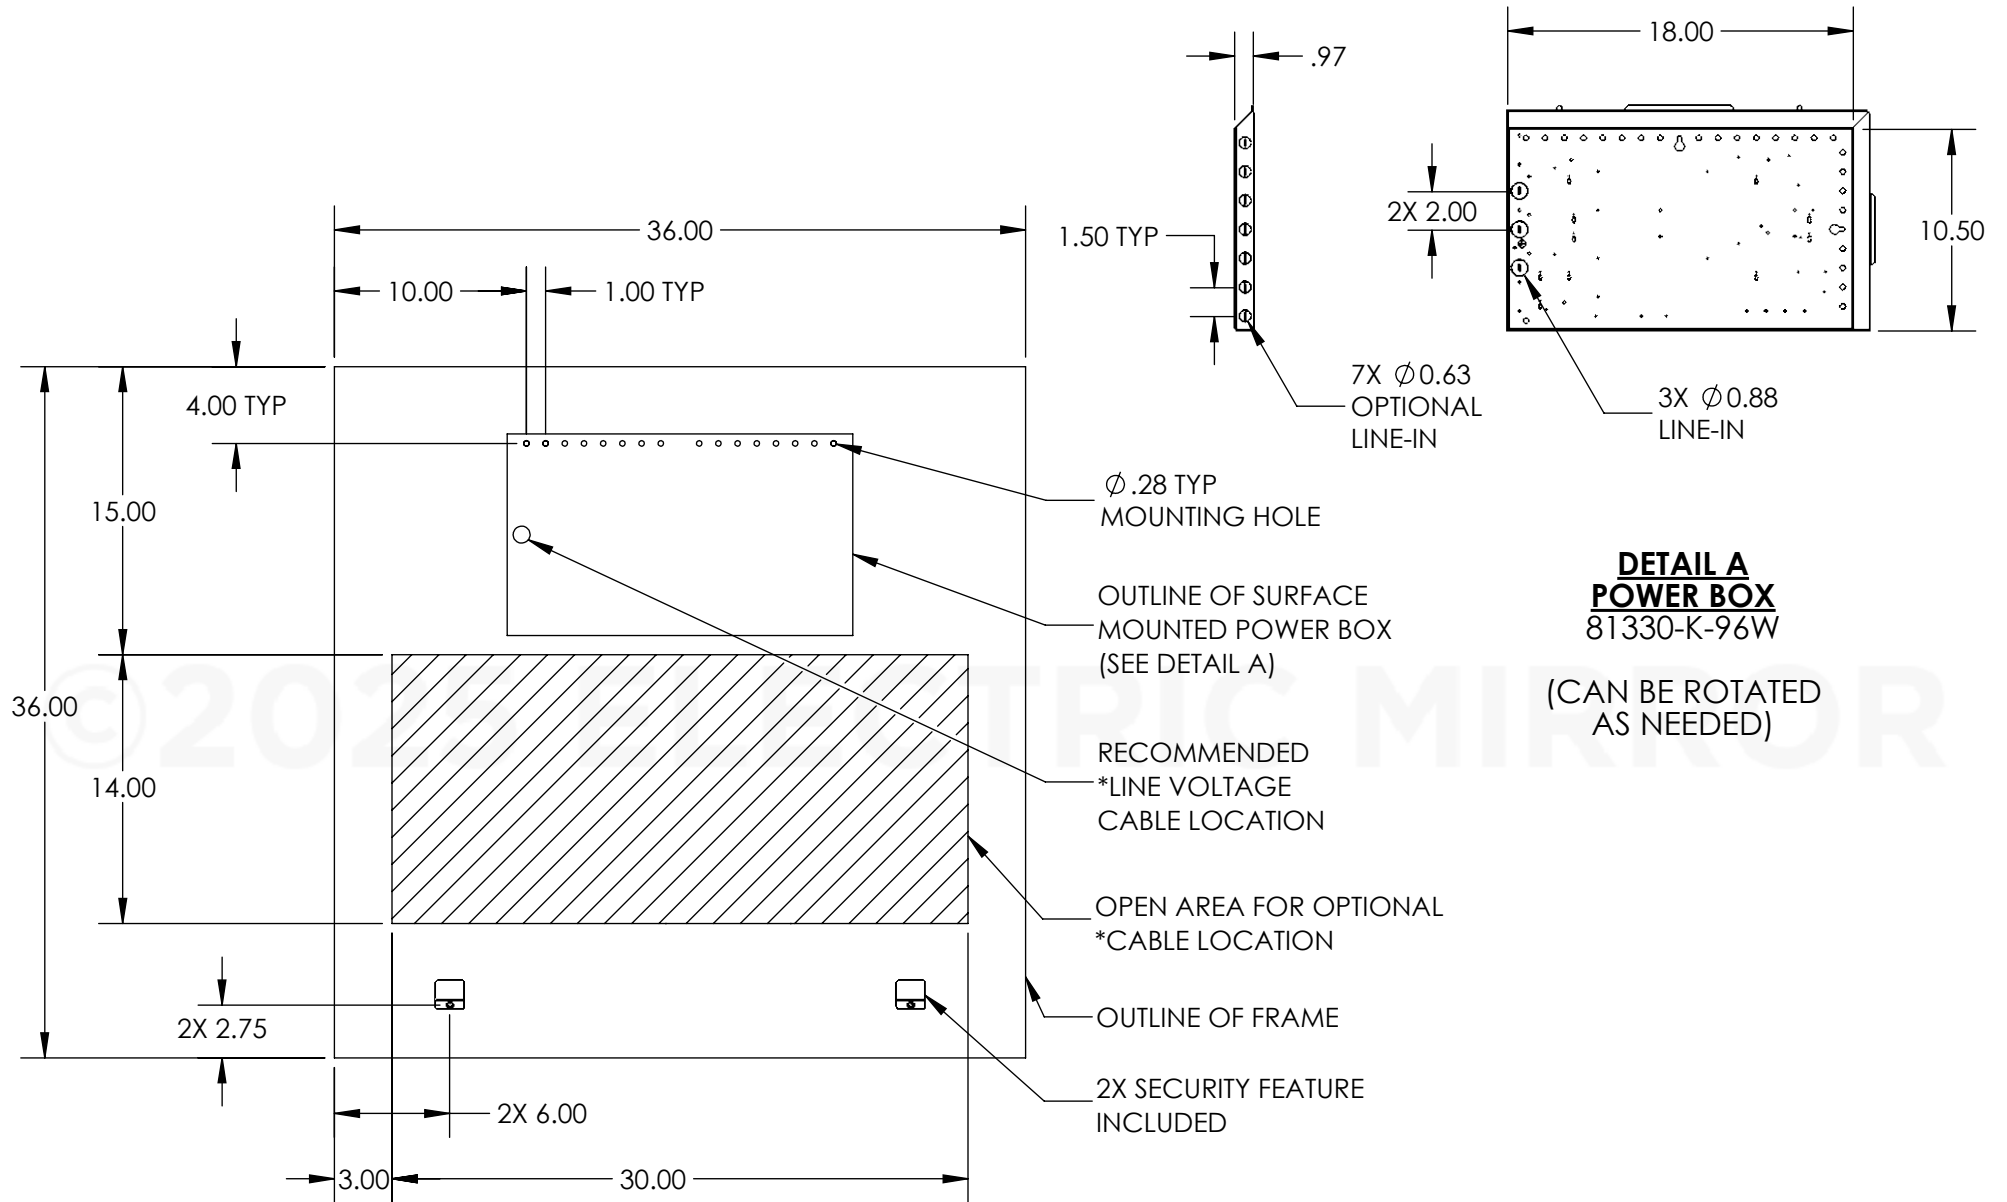

WALL MOUNTING DETAILS

SEE RADIANCE MOUNT INSTALLATION
INSTRUCTIONS FOR FURTHER DETAILS.
*REFER TO LOCAL AND NEC REGULATIONS FOR
ACCEPTABLE WIRE TYPE.

ELECTRIC MIRROR® 2025

CONTACT US: consultants@electricmirror.com T+1.425.776.4946

RAD4-36.00X36.00-BK05-KG-WG3-30K

SALES AID - 01/28/2025

NOTE: MIRROR CAN ONLY BE HUNG IN THE
WXH ORIENTATION AS SHOWN AND IS NOT
FIELD INTERCHANGEABLE.

PROPRIETARY AND CONFIDENTIAL:

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ELECTRIC
MIRROR L.L.C. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF ELECTRIC MIRROR L.L.C. IS PROHIBITED. © 2025 ELECTRIC MIRROR

DIMS IN INCHES [mm]
TOLERANCE: $\pm 1/8"$ [± 3]

REV. A.1

SCALE: 1:10

PG. 2 OF 2