

*BY APPROVING THIS DRAWING YOU ARE ENSURING THAT THESE DIMENSIONS HAVE BEEN FIELD VERIFIED.

☐ APPROVED BY: _____

☐ REVISION REQUESTED _____

DATE: _____

SPECIFICATION:
BRING CABLE TO DRIVER ENCLOSURE EITHER DIRECTLY FROM BEHIND INTO KNOCKOUT OR PROVIDE (30" MAX) WHIP TO SIDE KNOCKOUT. INSERT HOT AND NEUTRAL WIRE INTO LUMINAIRE DISCONNECT. NO ELECTRICAL BOX REQUIRED. ELECTRICAL POWER SHOULD BE CONTROLLED BY A WALL SWITCH (BY OTHERS).




MIRROR SHOULD BE MOUNTED TO A MECHANICALLY SOUND SURFACE SUCH AS WALL STUDS TO SUPPORT ITS WEIGHT.

ATTENTION:
THIS PRODUCT MUST BE CONNECTED TO EARTH GROUND IN ACCORDANCE WITH NEC CODE 250.20 (B). IMPROPER GROUND CAN RESULT IN IRREGULAR FUNCTION OF THE UNIT.

POWER REQUIREMENTS:
120 OR 277 VOLTS, 0.38 OR 0.16 AMPS

LED SPECIFICATION:
LED TYPE: REPLACEABLE FLEX STRIP
LENGTH (IN): 166
WATTAGE (W): 52
CALCULATED L70 LIFESPAN (HRS): 140,000
CCT(K): 3,000*
TOTAL INITIAL LUMENS PER FIXTURE: 4175 @ 302 LM/FT
CRI: 90+

FIXTURE SPECIFICATION:
WEIGHT: 52 LBS (EST.)

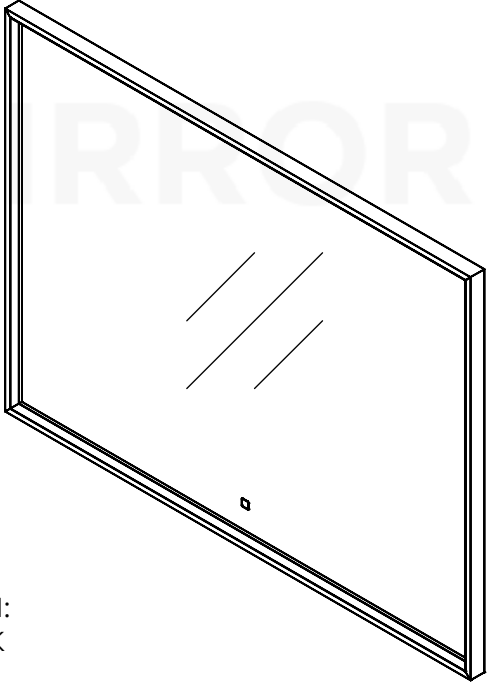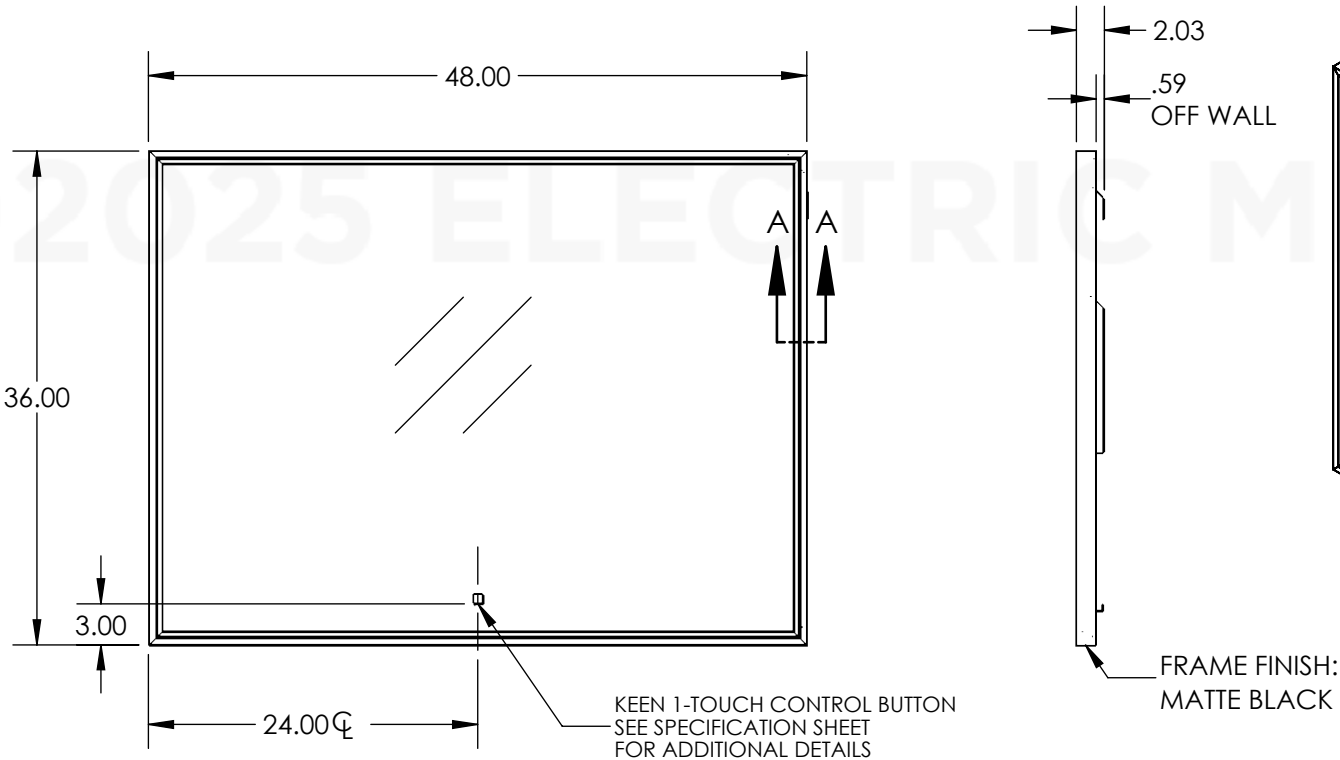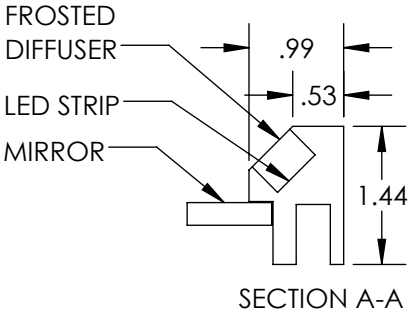

ELECTRIC MIRROR

2025

RAD4-48.00X36.00-BK05-KG-30K

CONTACT US: consultants@electricmirror.com T+1.425.776.4946

SALES AID - 10/11/2025
NOTE: MIRROR CAN ONLY BE HUNG IN THE WXH ORIENTATION AS SHOWN AND IS NOT FIELD INTERCHANGEABLE.

PROPRIETARY AND CONFIDENTIAL:
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ELECTRIC MIRROR L.L.C. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ELECTRIC MIRROR L.L.C. IS PROHIBITED. © 2025 ELECTRIC MIRROR

DIMS IN INCHES [mm] TOLERANCE: ±1/8" [±3]	REV. A.1
SCALE: 1:14	PG. 1 OF 2

