


*BY APPROVING THIS DRAWING YOU ARE ENSURING THAT THESE DIMENSIONS HAVE BEEN FIELD VERIFIED.

☐ APPROVED BY:

DATE:

☐ REVISION REQUESTED

REV.	DESCRIPTION	ECR#	REVISED	APPROVED	DATE
A.2	CHANGE CLOCK LOCATION	N/A	EP	SDG	2/9/2026
A.3	CLARIFY OPEN AREA FOR RECEPTACLE AND ENCLOSURE	N/A	EP	SDG	2/12/2026

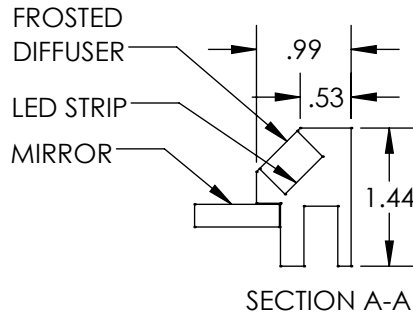

SPECIFICATION:

BRING CABLE TO DRIVER ENCLOSURE EITHER DIRECTLY FROM BEHIND INTO KNOCKOUT OR PROVIDE (30" MAX) WHIP TO SIDE KNOCKOUT. INSERT HOT AND NEUTRAL WIRE INTO LUMINAIRE DISCONNECT. NO ELECTRICAL BOX REQUIRED. ELECTRICAL POWER SHOULD BE CONTROLLED BY A WALL SWITCH (BY OTHERS). MIRROR SHOULD BE MOUNTED TO A MECHANICALLY SOUND SURFACE SUCH AS WALL STUDS TO SUPPORT ITS WEIGHT.

KEEN / DEFOGGER DISCLAIMER:

KEEN UNIT CONTROLS THE LIGHTING ONLY SEPERATE WALL SWITCH IS REQUIRED TO CONTROL DEFOGGER POWER

ATTENTION:

THIS PRODUCT MUST BE CONNECTED TO EARTH GROUND IN ACCORDANCE WITH NEC CODE 250.20 (B). IMPROPER GROUND CAN RESULT IN IRREGULAR FUNCTION OF THE UNIT.

POWER REQUIREMENTS:

120 VOLTS, 1.36 AMPS

LED SPECIFICATION:

LED TYPE: REPLACEABLE FLEX STRIP
LENGTH (IN): 227
WATTAGE (W): 69
CALCULATED L70 LIFESPAN (HRS): 140,000
CCT(K): 3,000
TOTAL INITIAL LUMENS PER FIXTURE: 5694 @ 302 LM/FT
CRI: 90+

FIXTURE SPECIFICATION:


WEIGHT: 86 LBS (EST.)

DEFOGGER:


VOLTAGE: 120V
WATTAGE: 100W

CLOCK POWER REQUIREMENTS:

PLUG-IN
EXTERNAL 5V POWER SUPPLY
120 VOLTS INPUT,
50-60Hz
2.0 WATTS

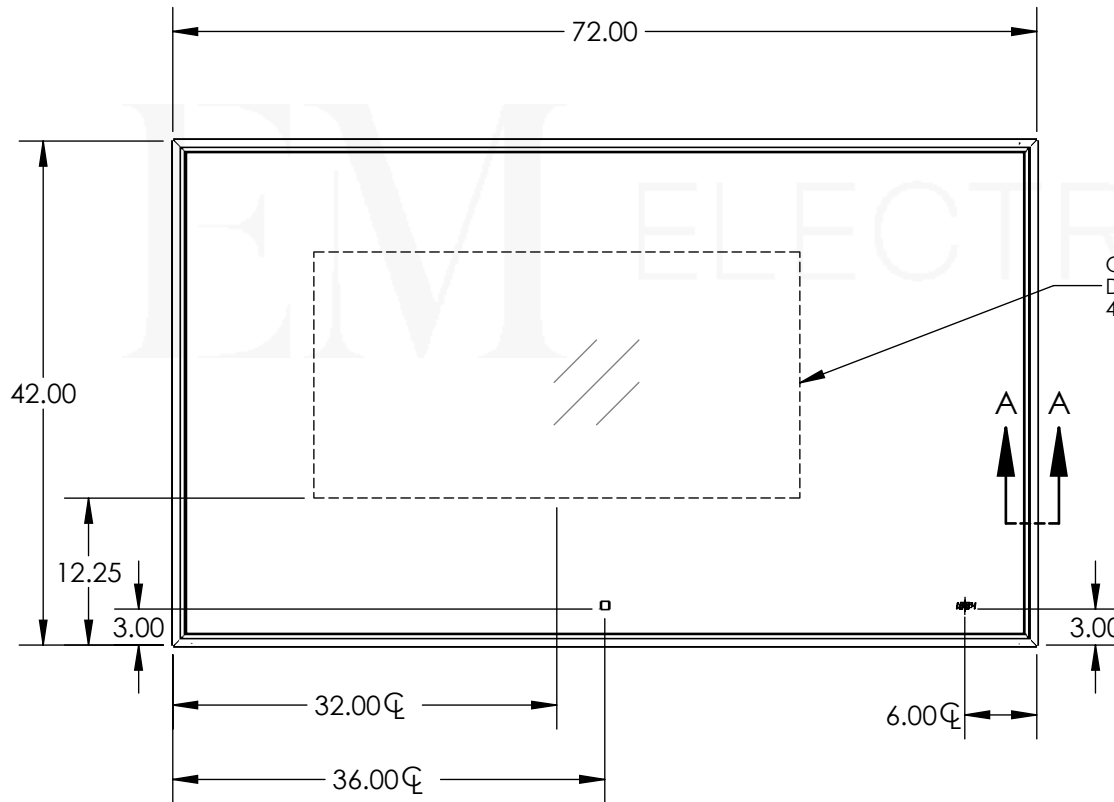

OUTLINE OF
DEFOGGER
40.5X20.5

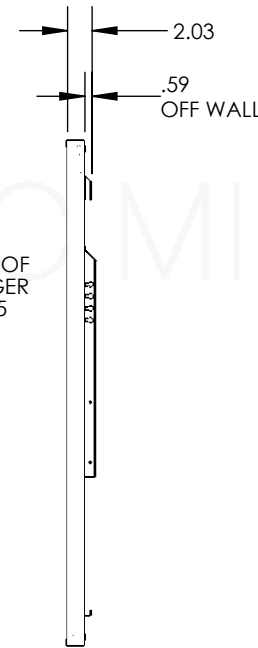

FRAME FINISH:
BRUSHED BRASS

KEEN 1-TOUCH CONTROL BUTTON
SEE SPECIFICATION SHEET
FOR ADDITIONAL DETAILS

SEAMLESS
CLOCK

EM ELECTRIC
MIRROR® 2026

CONTACT US: consultants@electricmirror.com T+1.425.776.4946

RAD4-72.00X42.00-BR02-CK3-DF-KG-30K

SALES AID -2/12/2026

NOTE: MIRROR CAN ONLY BE HUNG IN THE
WXH ORIENTATION AS SHOWN AND IS NOT
FIELD INTERCHANGEABLE.

PROPRIETARY AND CONFIDENTIAL:

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ELECTRIC
MIRROR L.L.C. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF ELECTRIC MIRROR L.L.C. IS PROHIBITED. © 2026 ELECTRIC MIRROR


DIMS IN INCHES [mm]
TOLERANCE: $\pm 1/8"$ [± 3]

SCALE: 1:16

REV. A.3

PG. 1 OF 2

MIRROR ASSEMBLY: RAD4-72.00X42.00-BR02-CK-DF-KG-30K-M
POWERBOX ASSEMBLY: 81330-CK3-DF-K-96W

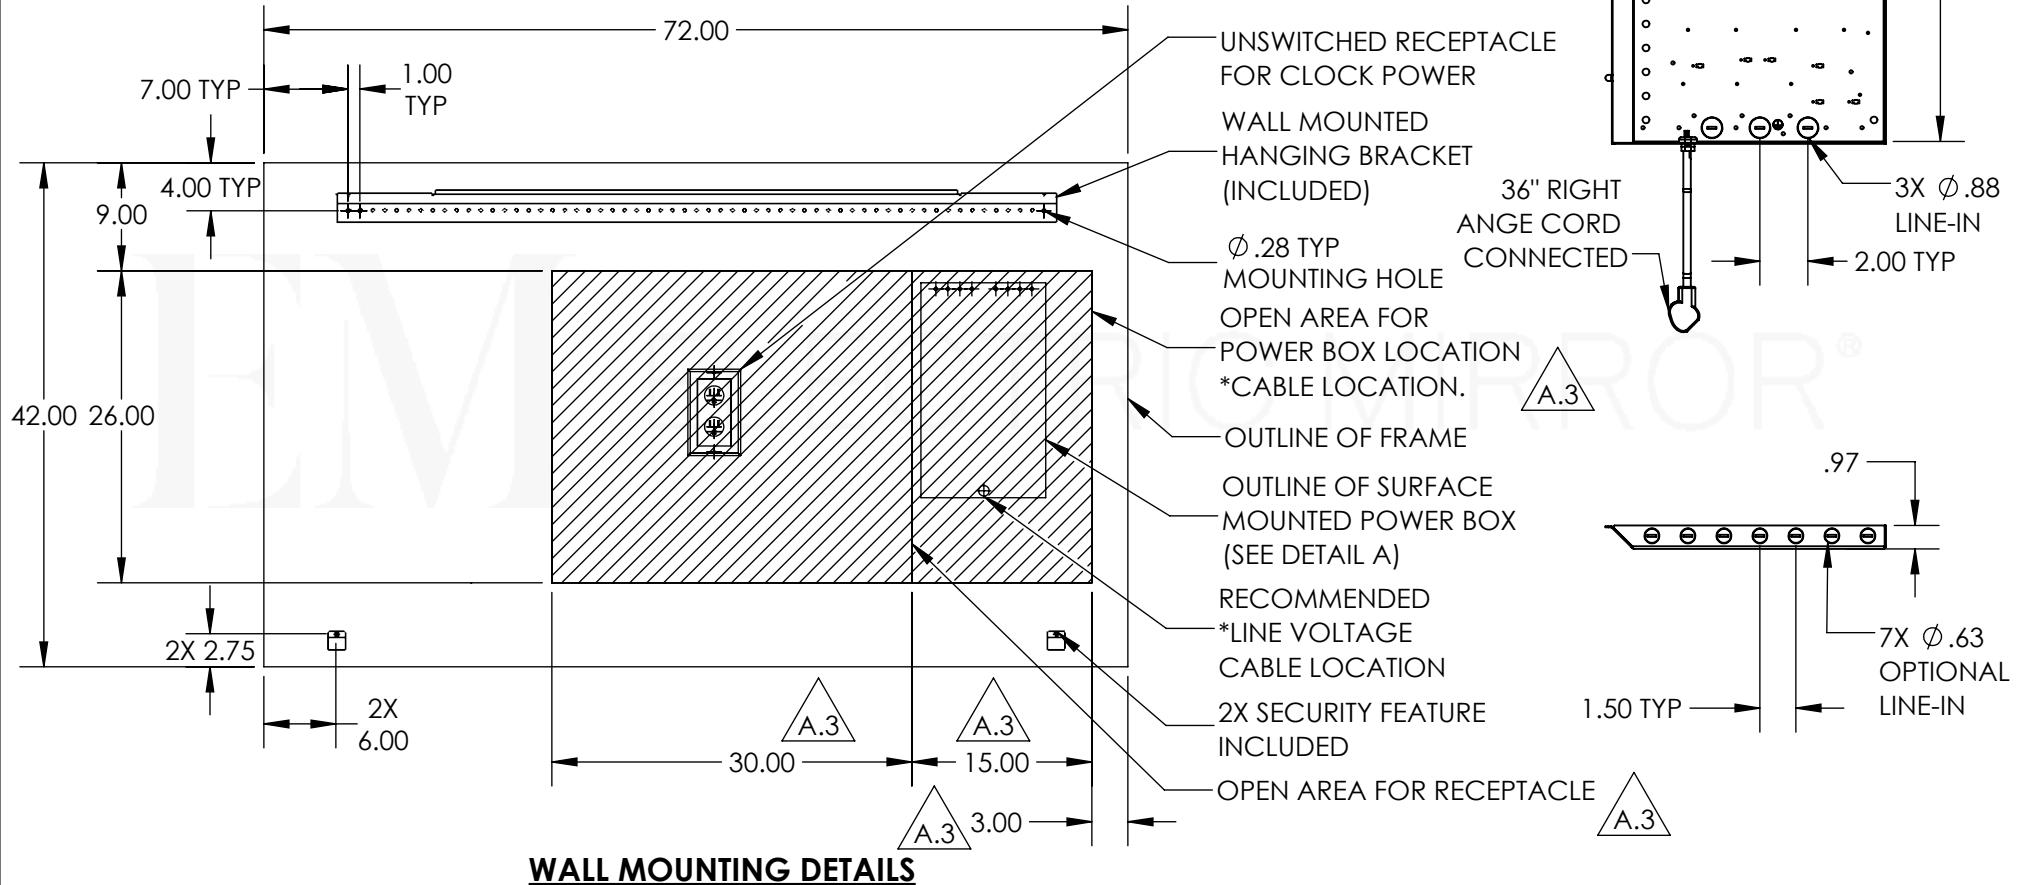

SEE RADIANCE MOUNT INSTALLATION INSTRUCTIONS FOR FURTHER DETAILS.
*REFER TO LOCAL AND NEC REGULATIONS FOR ACCEPTABLE WIRE TYPE.

EM ELECTRIC MIRROR® 2026

CONTACT US: consultants@electricmirror.com T+1.425.776.4946

RAD4-72.00X42.00-BR02-CK3-DF-KG-30K

SALES AID -2/12/2026

NOTE: MIRROR CAN ONLY BE HUNG IN THE WXH ORIENTATION AS SHOWN AND IS NOT FIELD INTERCHANGEABLE.

PROPRIETARY AND CONFIDENTIAL:

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ELECTRIC MIRROR L.L.C. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ELECTRIC MIRROR L.L.C. IS PROHIBITED. © 2026 ELECTRIC MIRROR

DIMS IN INCHES [mm]
TOLERANCE: $\pm 1/8"$ [± 3]

REV. A.3

SCALE: 1:16

PG. 2 OF 2