


Figure 4 — End-to-end case study: pipeline attrition + top-K analog metrics

Two leads, no-LID path (every functional group classified as TARGET). Wall-clock per case: CASE_001: 139.73s; CASE_002: 55.4s.

(a) Stage-by-stage attrition through the 12-stage pipeline

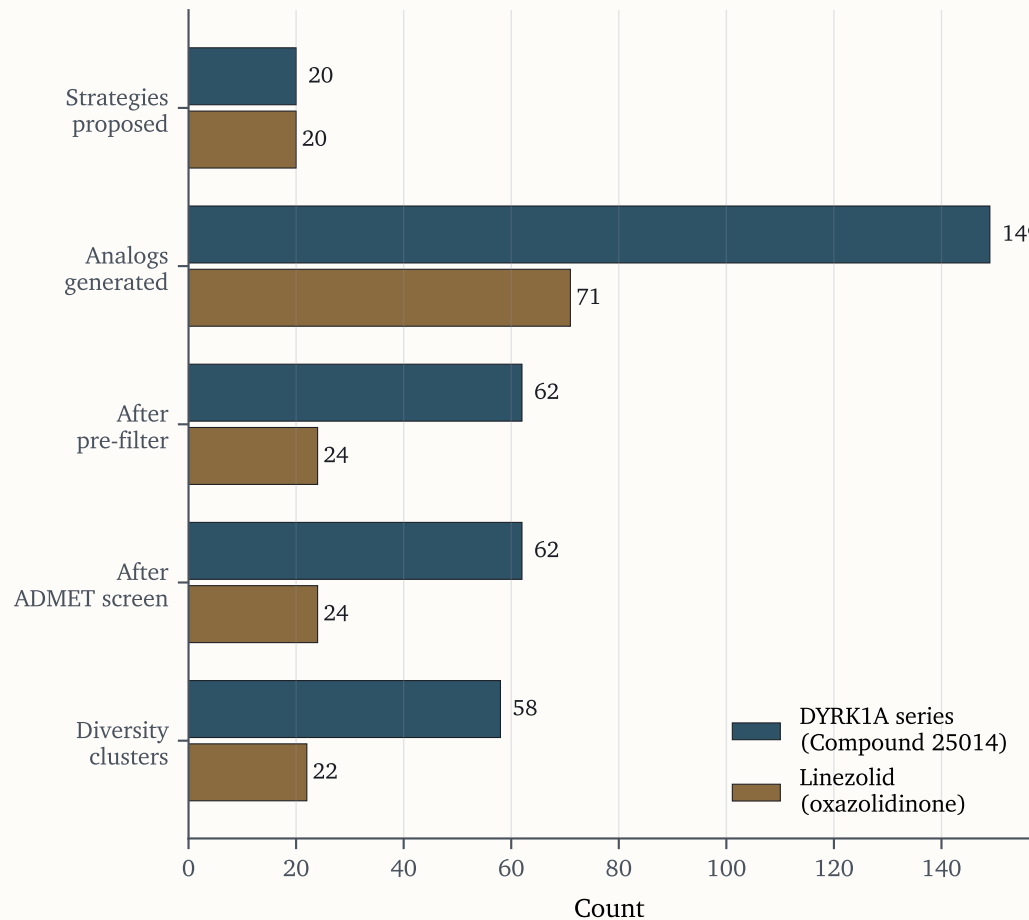

(b) Top-10 per case — total-score vs synthetic accessibility

