

Performing an OR operation on 32-bit data

DOR(P) [using two operands]


FX5S

FX5UJ

FX5U

FX5UC

These instructions OR each bit of 32-bit binary data from the device specified by (d) and each bit of 32-bit binary data from device specified by (s), and store the results in the device specified by (d).

Ladder diagram	Structured text
	Not supported ➤ Page 290 DOR(P) [using three operands]
FBD/LD	
Not supported. ➤ Page 290 DOR(P) [using three operands]	

Setting data

■ Descriptions, ranges, and data types


Operand	Description	Range	Data type	Data type (label)
(s)	Data for OR or head device where data is stored	-2147483648 to +2147483647	32-bit signed binary	ANY32
(d)	Head device for storing the OR results	-2147483648 to +2147483647	32-bit signed binary	ANY32

■ Applicable devices

Operand	Bit	Word			Double word		Indirect specification	Constant			Others
	X, Y, M, L, SM, F, B, SB, S	T, ST, C, D, W, SD, SW, R	U□\G□	Z	LC	LZ		K, H	E	\$	
(s)	○	○	○	○	○	○	○	○	—	—	—
(d)	○	○	○	○	○	○	○	—	—	—	—

Processing details

- These instructions OR each bit of 32-bit binary data from the device specified by (d) and each bit of 32-bit binary data from device specified by (s), and store the results in the device specified by (d).

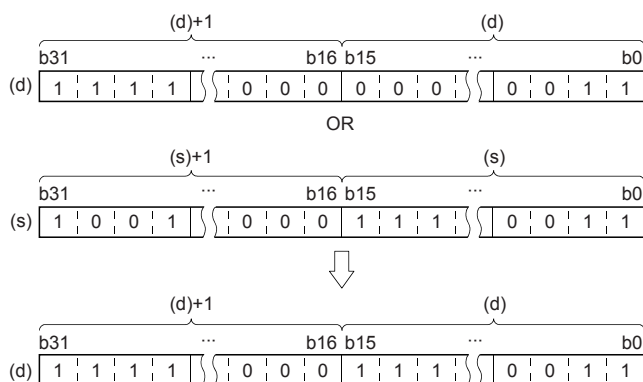

- Bit devices subsequent to number of points by digit specification are calculated as 0.

Operation error

There is no operation error.

DOR(P) [using three operands]

FX5S

FX5UJ

FX5U

FX5UC

These instructions OR each bit of 32-bit binary data from the device specified by (s1) and each bit of 32-bit binary data from device specified by (s2), and store the results in the device specified by (d).

Ladder diagram	Structured text
	<pre>ENO:=DOR(EN,s1,s2,d); ENO:=DORP(EN,s1,s2,d);</pre>

FBD/LD

Setting data

■Descriptions, ranges, and data types


Operand	Description	Range	Data type	Data type (label)
(s1)	Data for OR or head device where data is stored	-2147483648 to +2147483647	32-bit signed binary	ANY32
(s2)	Data for OR or head device where data is stored	-2147483648 to +2147483647	32-bit signed binary	ANY32
(d)	Head device for storing the OR results	—	32-bit signed binary	ANY32
EN	Execution condition	—	Bit	BOOL
ENO	Execution result	—	Bit	BOOL

■Applicable devices

Operand	Bit	Word			Double word		Indirect specification	Constant			Others
	X, Y, M, L, SM, F, B, SB, S	T, ST, C, D, W, SD, SW, R	U□\G□	Z	LC	LZ		K, H	E	\$	
(s1)	○	○	○	○	○	○	○	○	—	—	—
(s2)	○	○	○	○	○	○	○	○	—	—	—
(d)	○	○	○	○	○	○	○	—	—	—	—

Processing details

- These instructions OR each bit of 32-bit binary data from the device specified by (s1) and each bit of 32-bit binary data from device specified by (s2), and store the results in the device specified by (d).

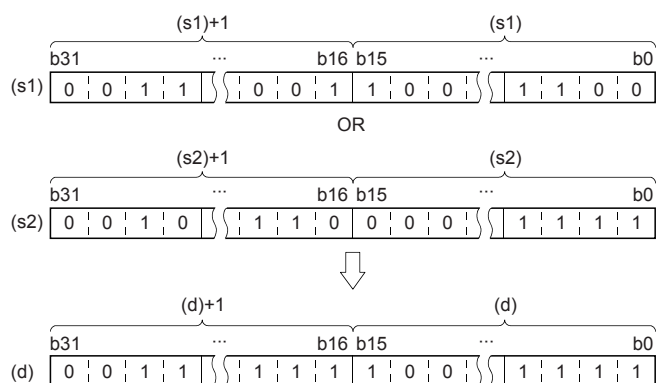

- Bit devices subsequent to number of points by digit specification are calculated as 0.

Operation error

There is no operation error.