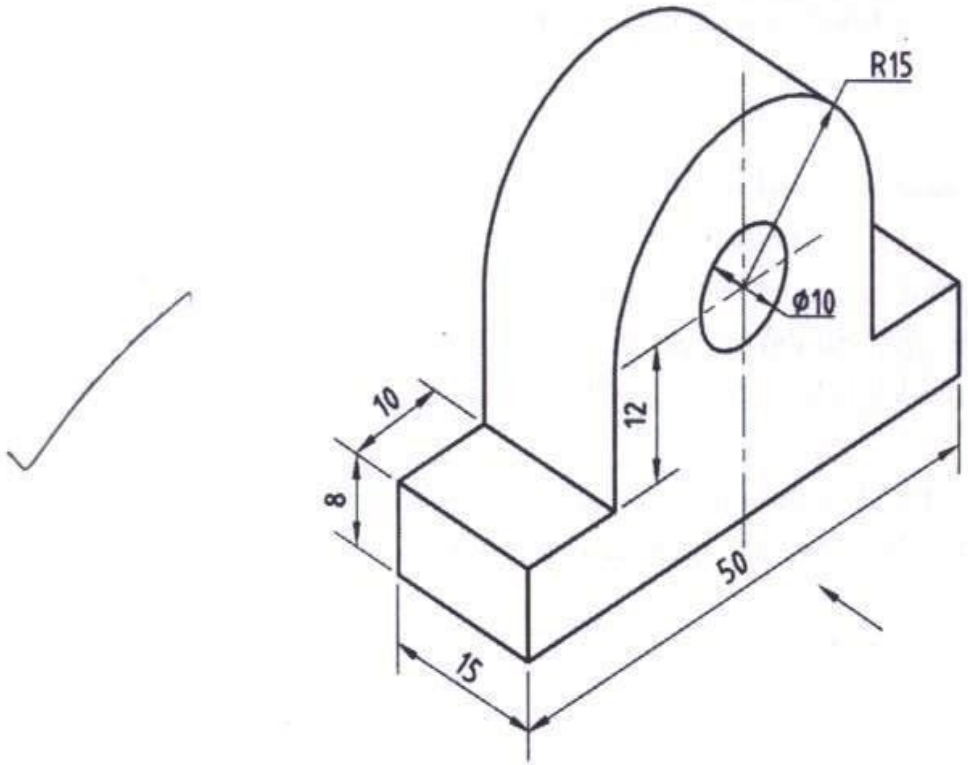
Conversion of Isometric Views to Orthographic Views

as front view. The second view is either top or side view. Consider the illustrations in Fig. 7.9.






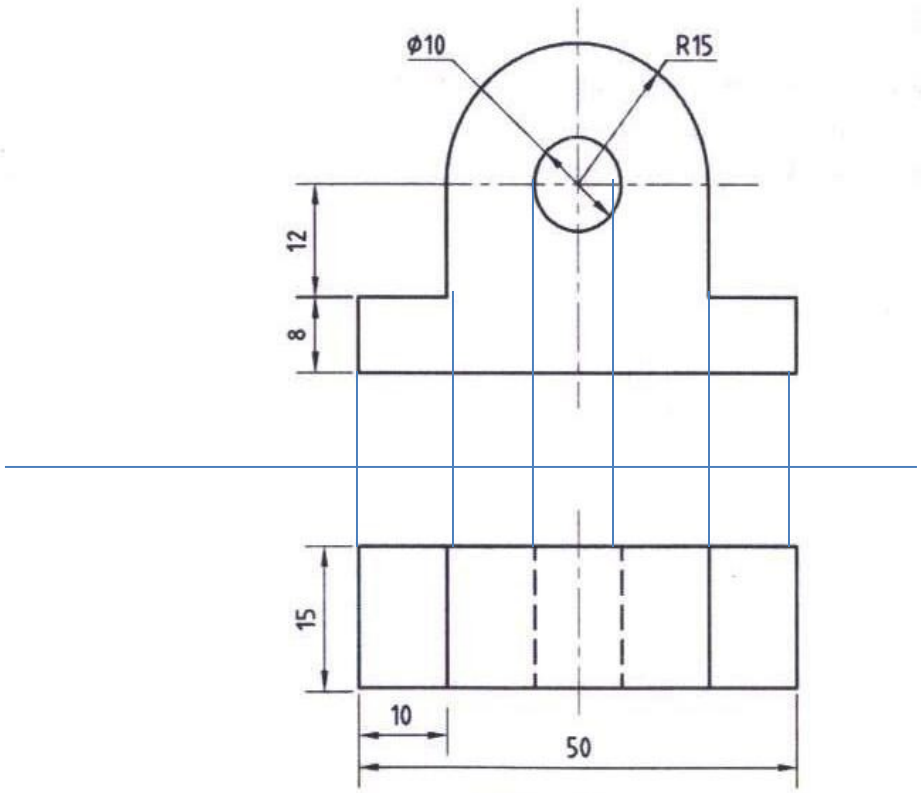


Figure 7.9



20
20
16
60
Ø18
15
50
14


20
ϕ18
20
60
15
50
14
16
14


v the front view, top view and left-side view of the object given in Fig. 7.22.

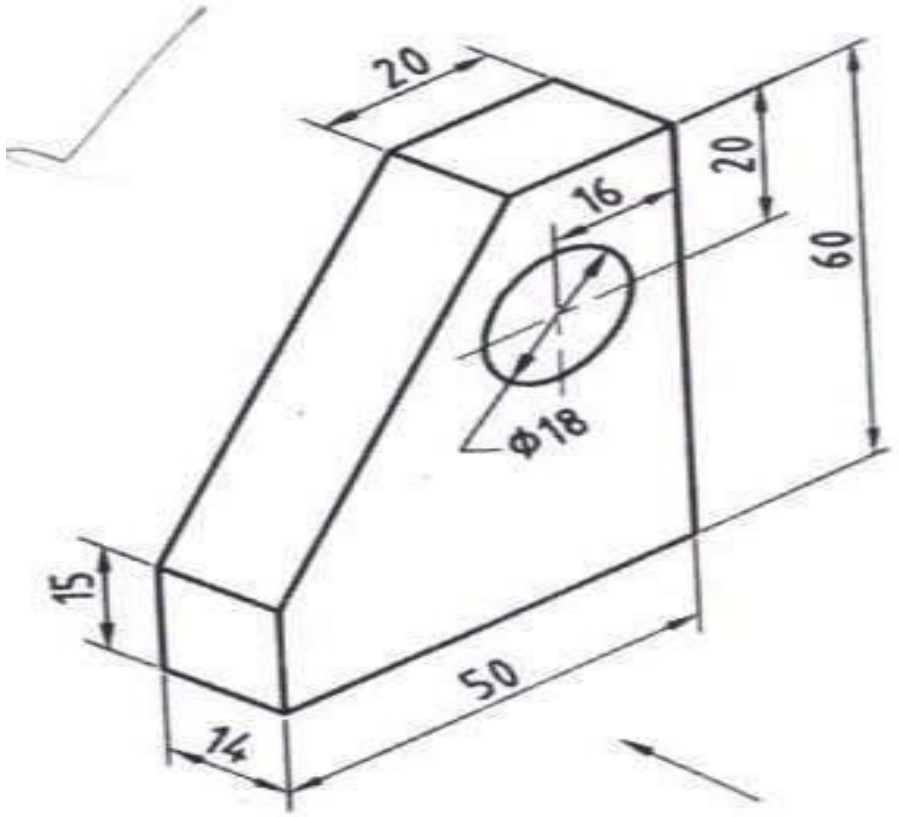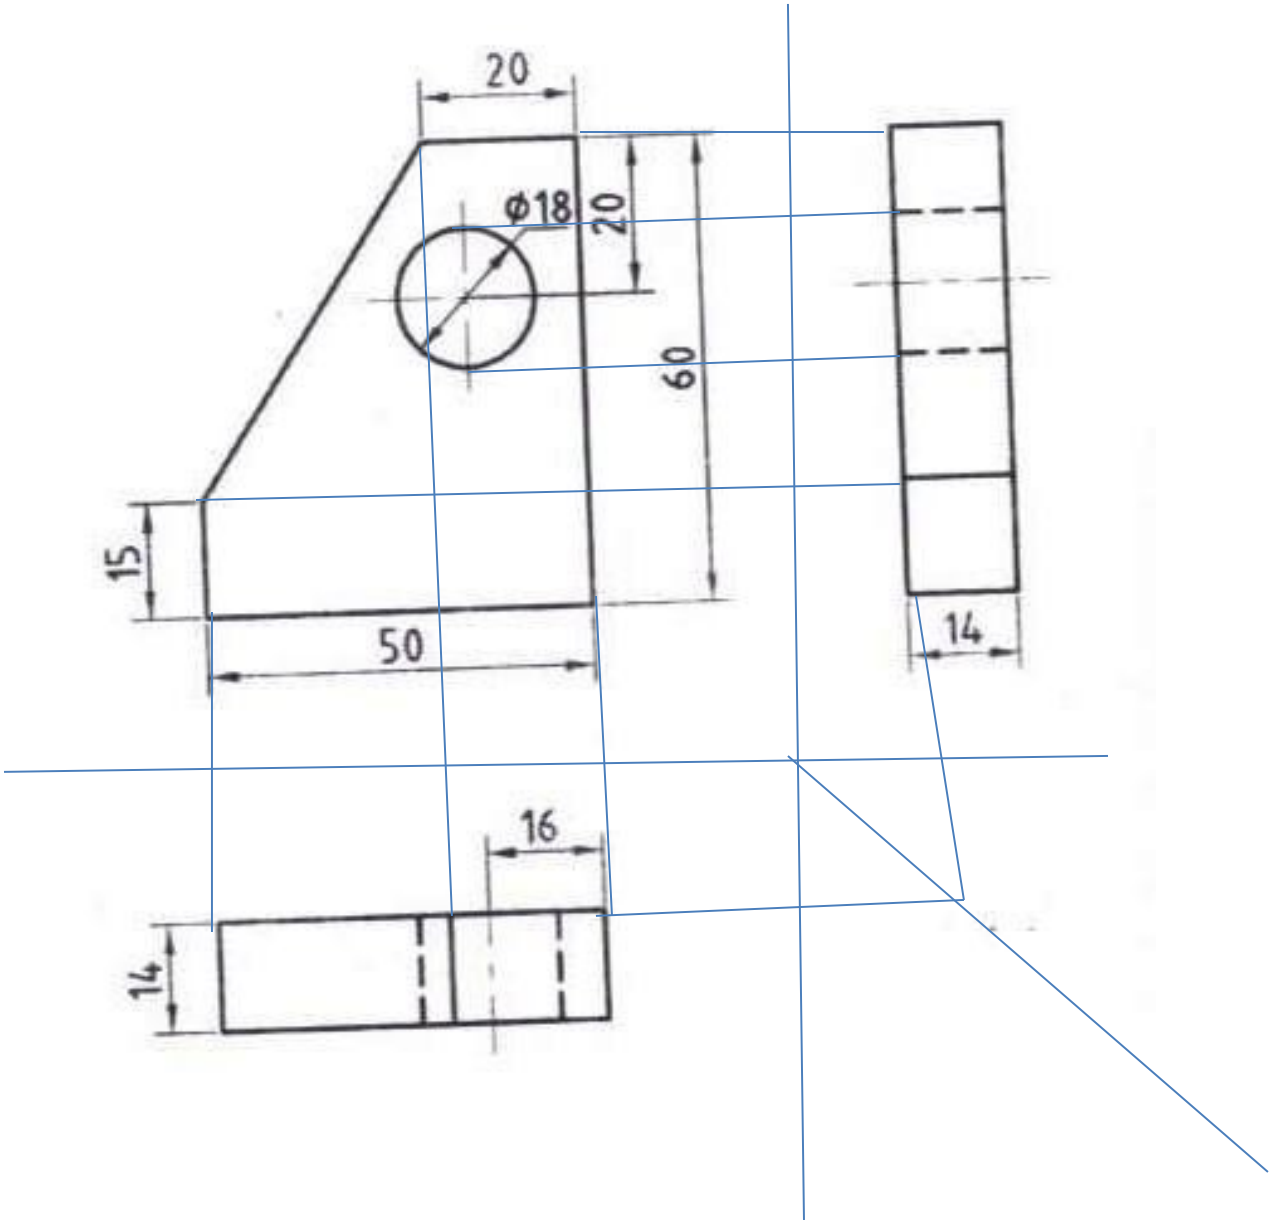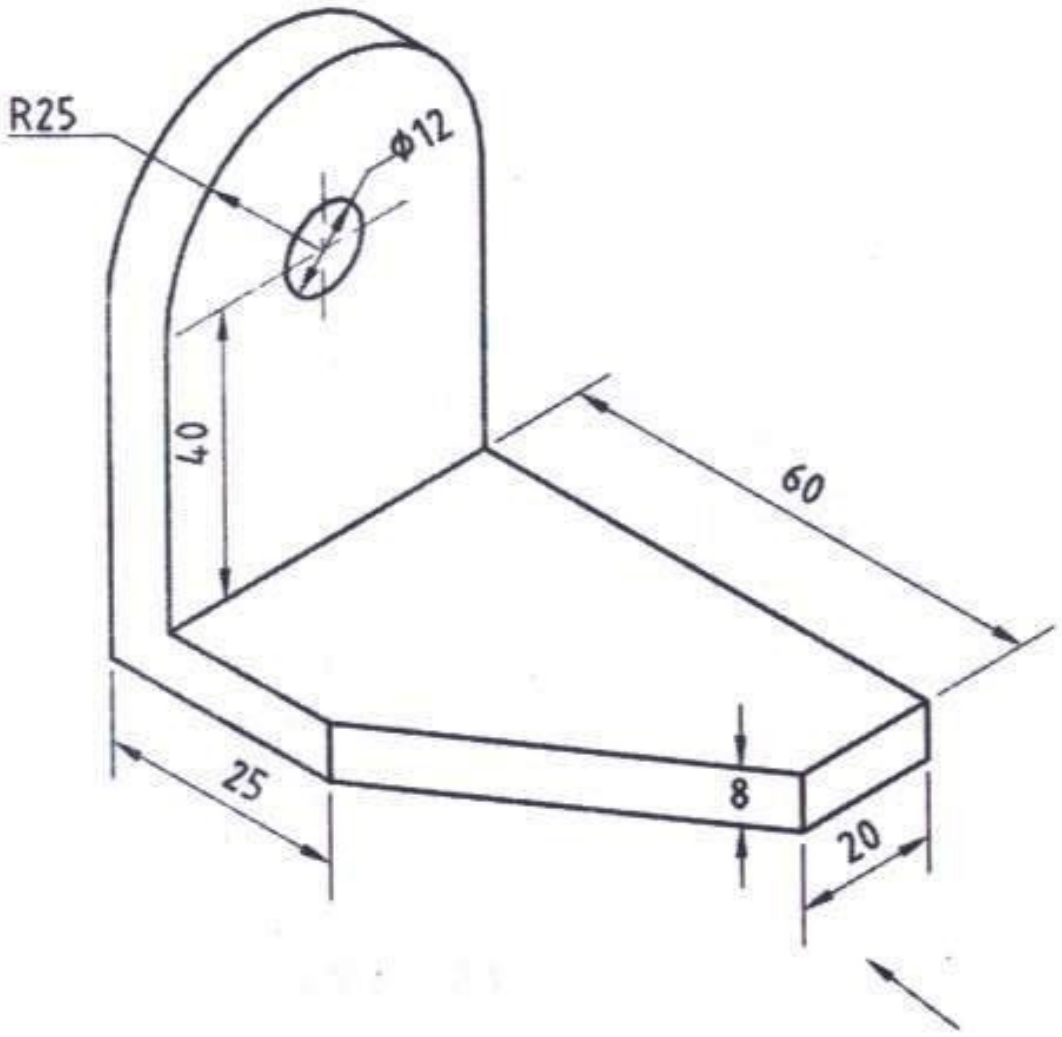


ution

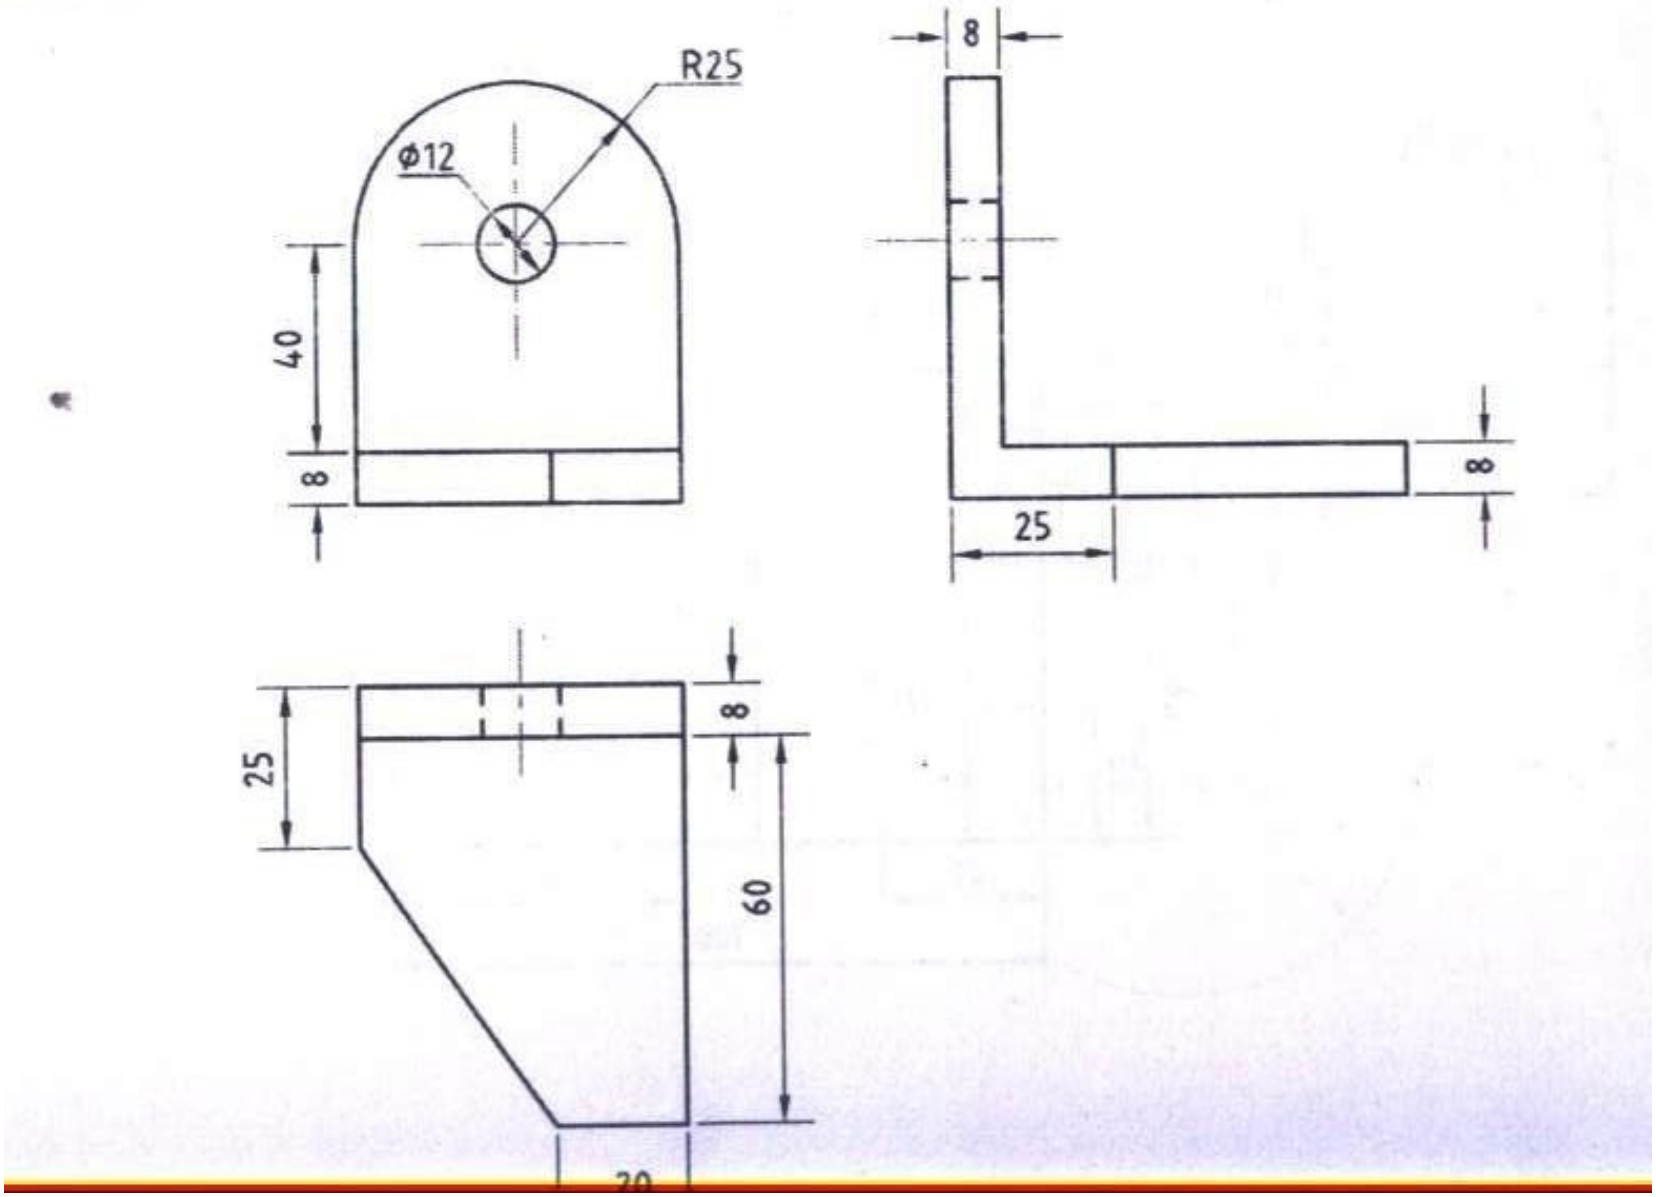

Draw the front view, top view and left-side view of the solid bearing block shown in Fig. 7.30.

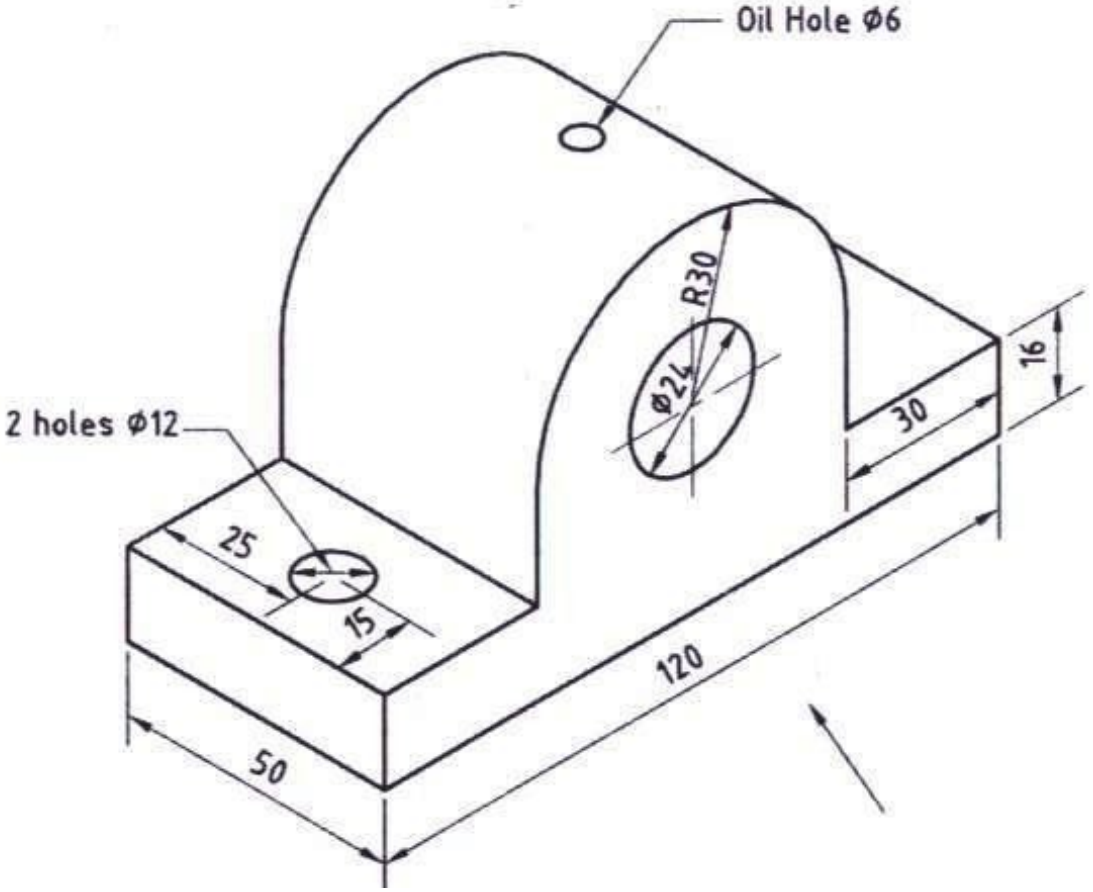



Solution

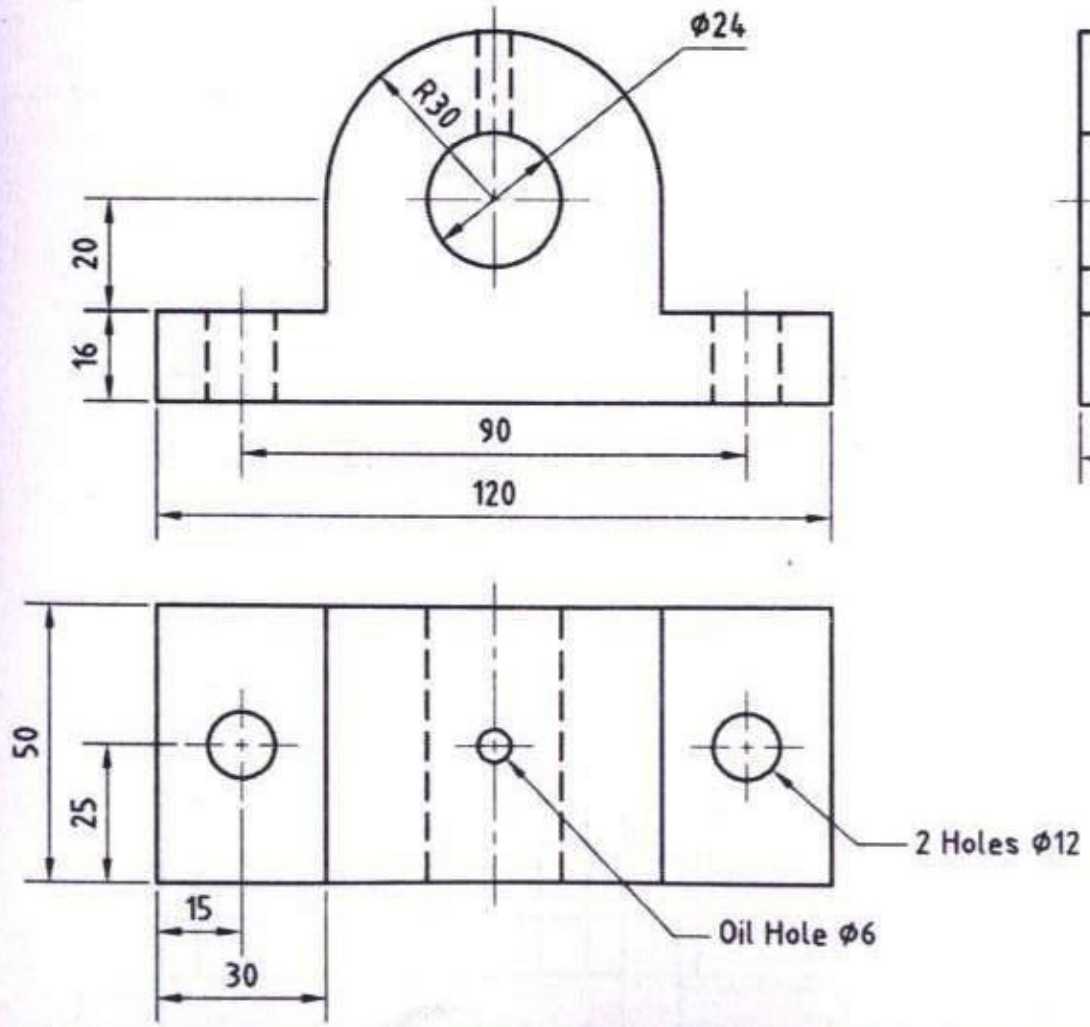



ple 7.11

the front view, top view and right-side view of the object shown in Fig. 7.21.

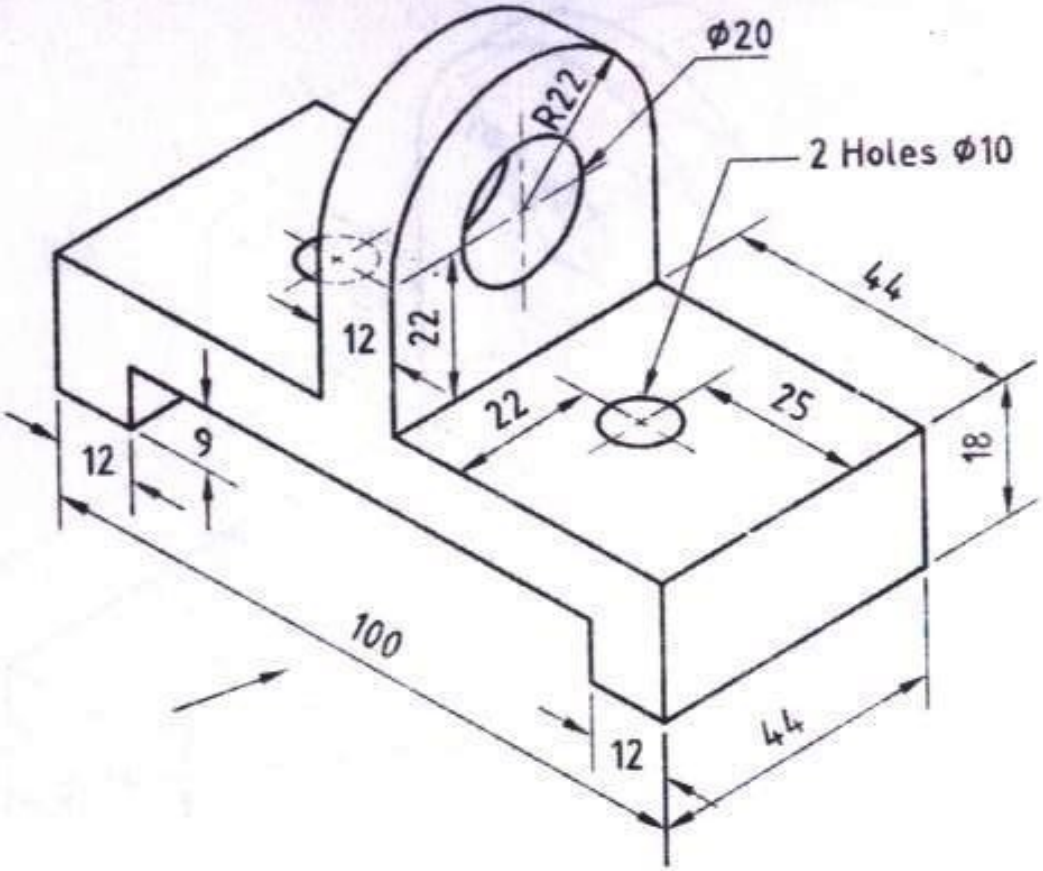


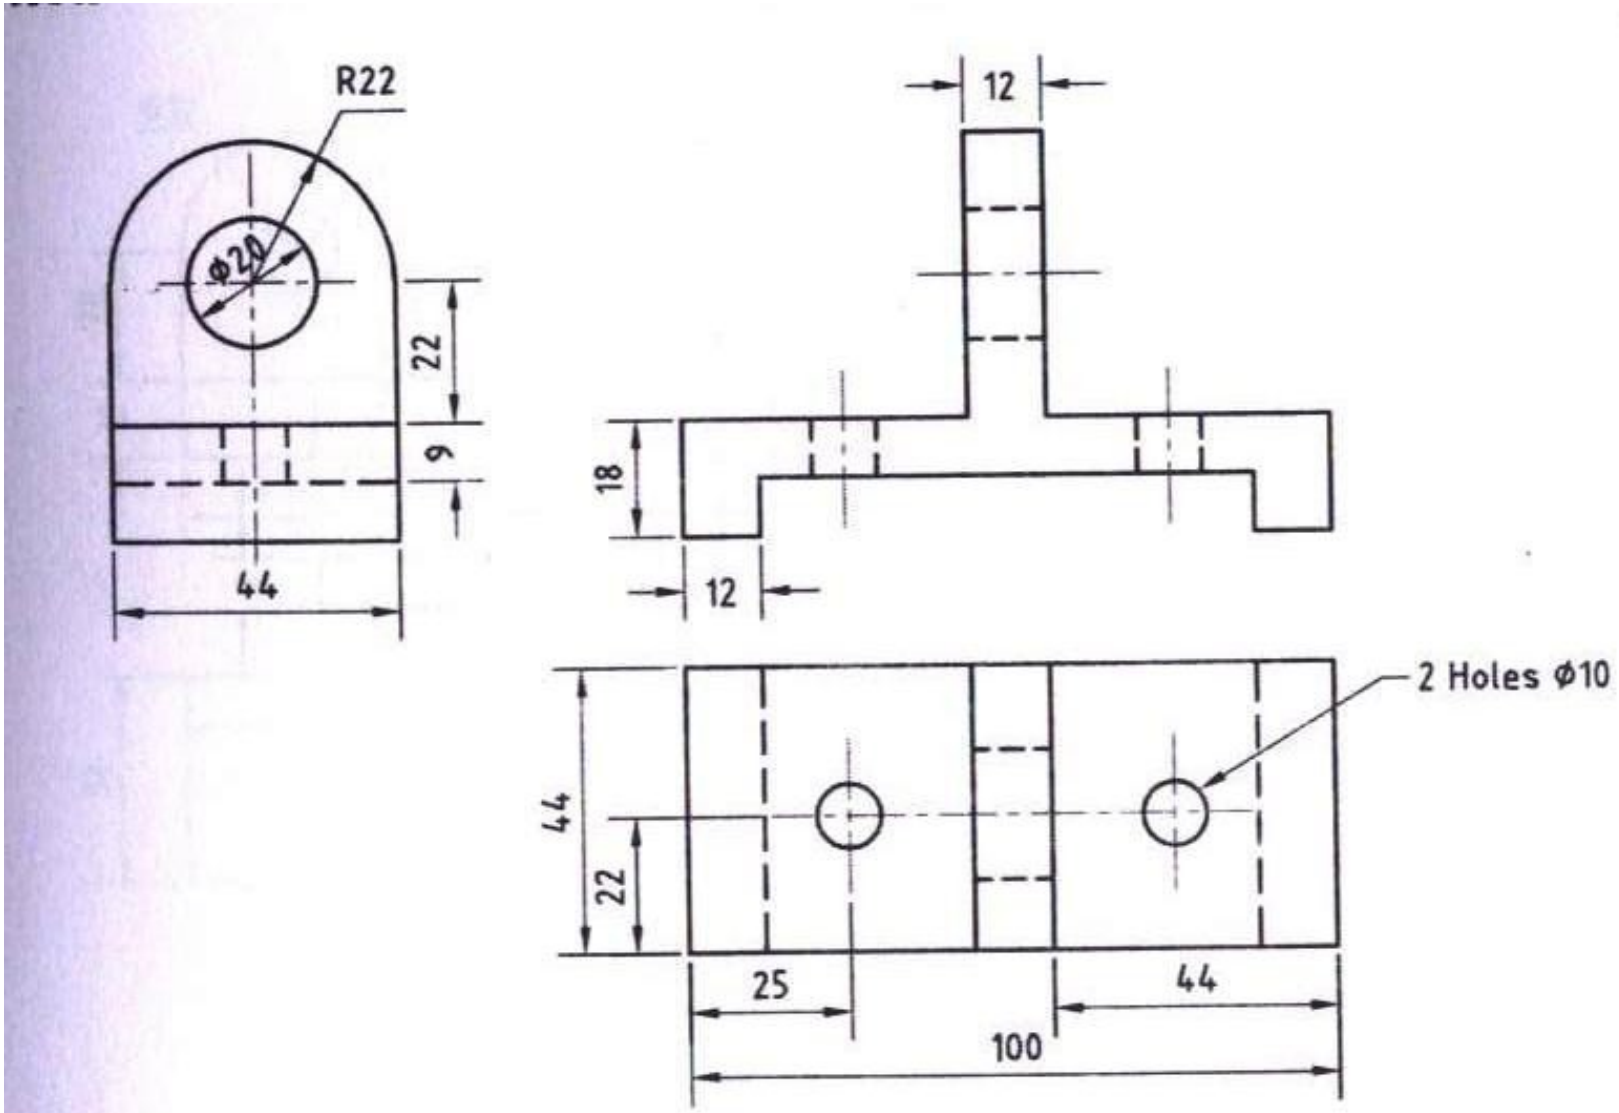
R22
ϕ20
22
9
44
12
18
12
2 Holes ϕ10
44
22
25
44
100

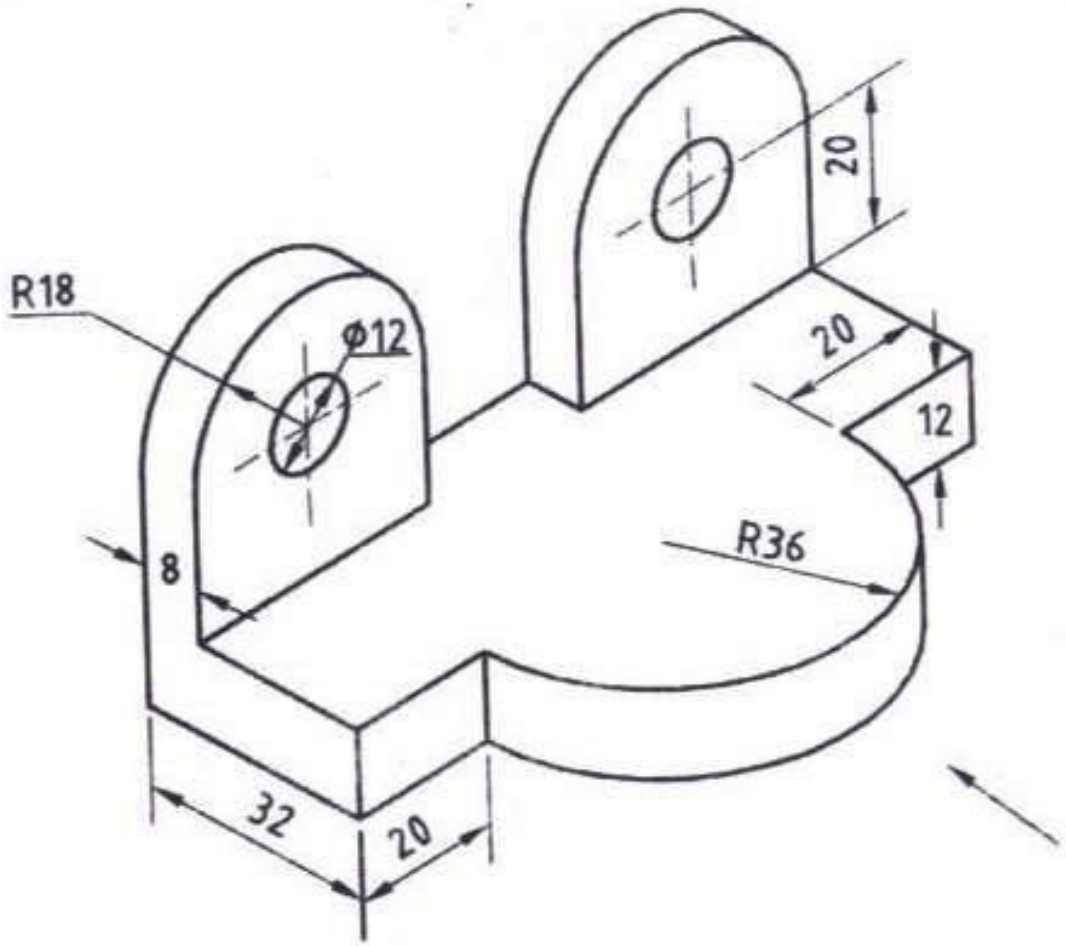
R18
Ø12
20
20
12
R36
8
32
20

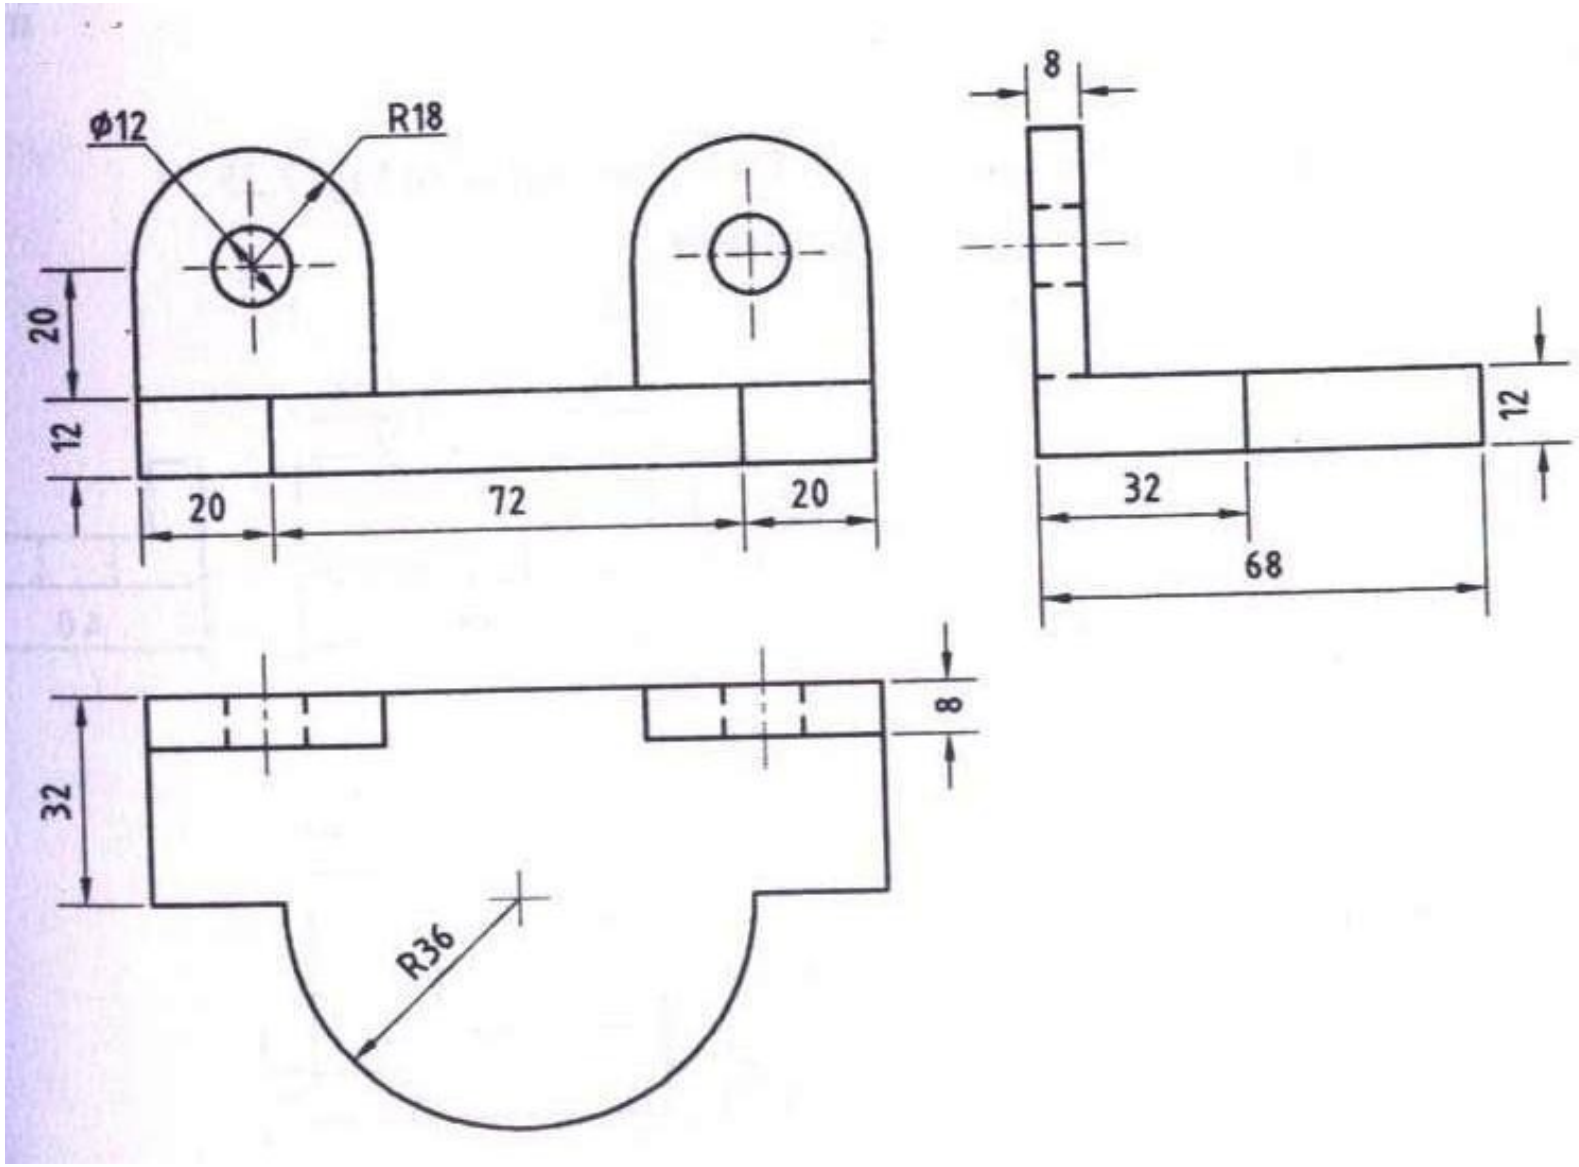

Ø12
R18
20
12
20
72
20
8
12
32
68
8
32
R36


Draw the front view, top view and left-side v

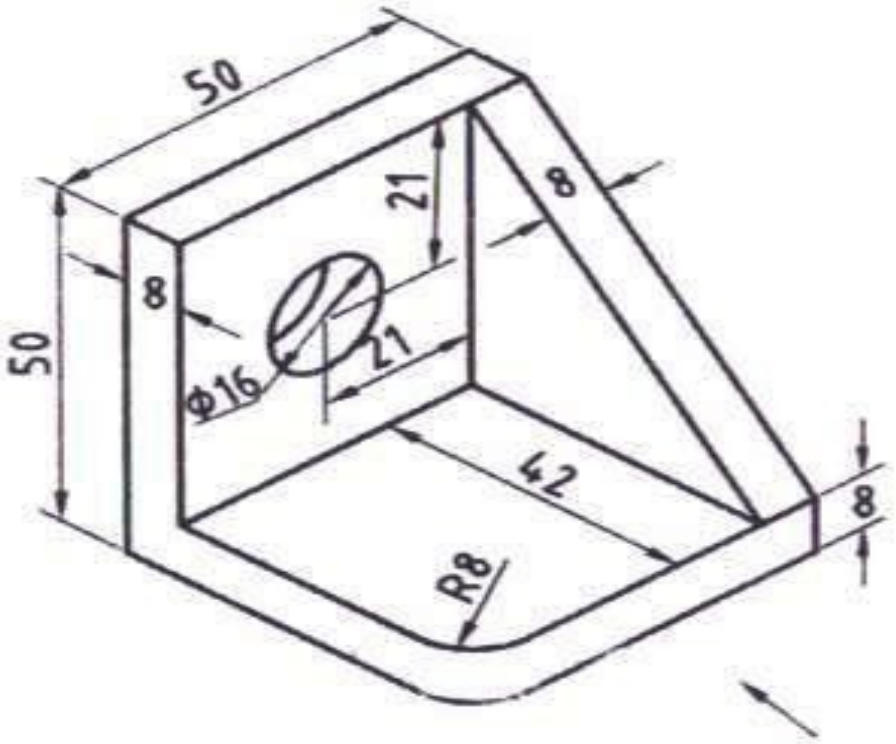



view of the object given in Fig. 7.24.


Solution

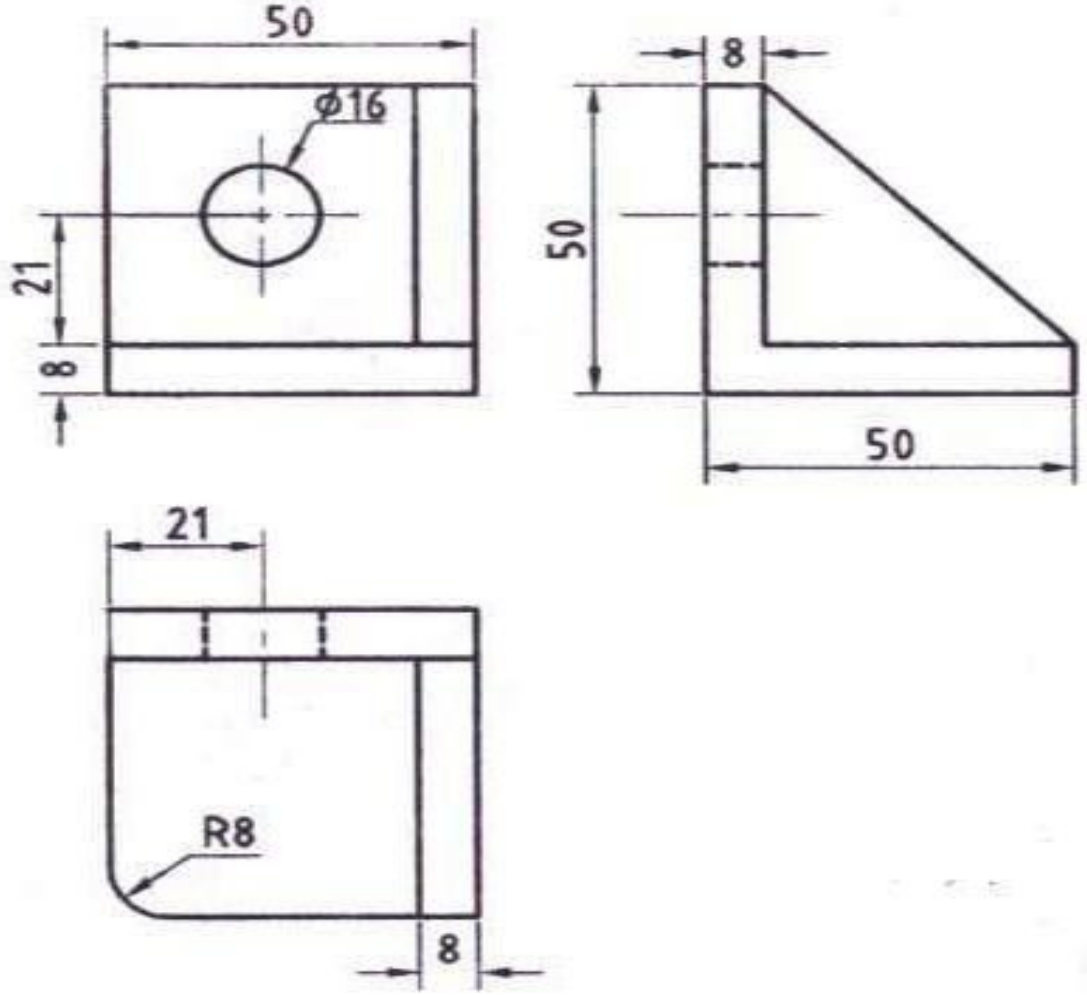


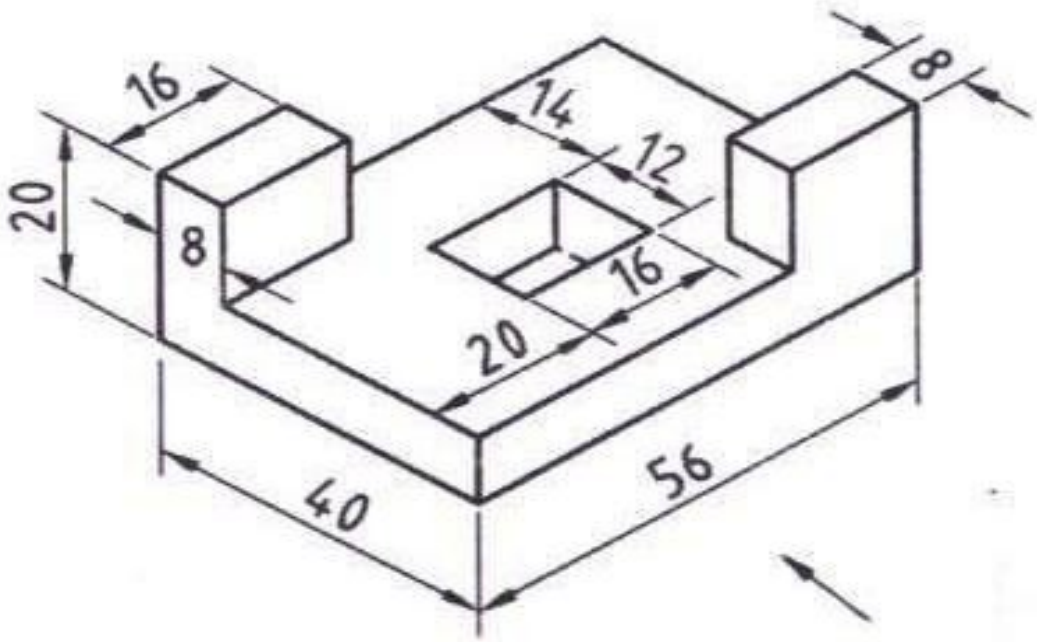
16
14
8
12
20
8
16
20
40
56

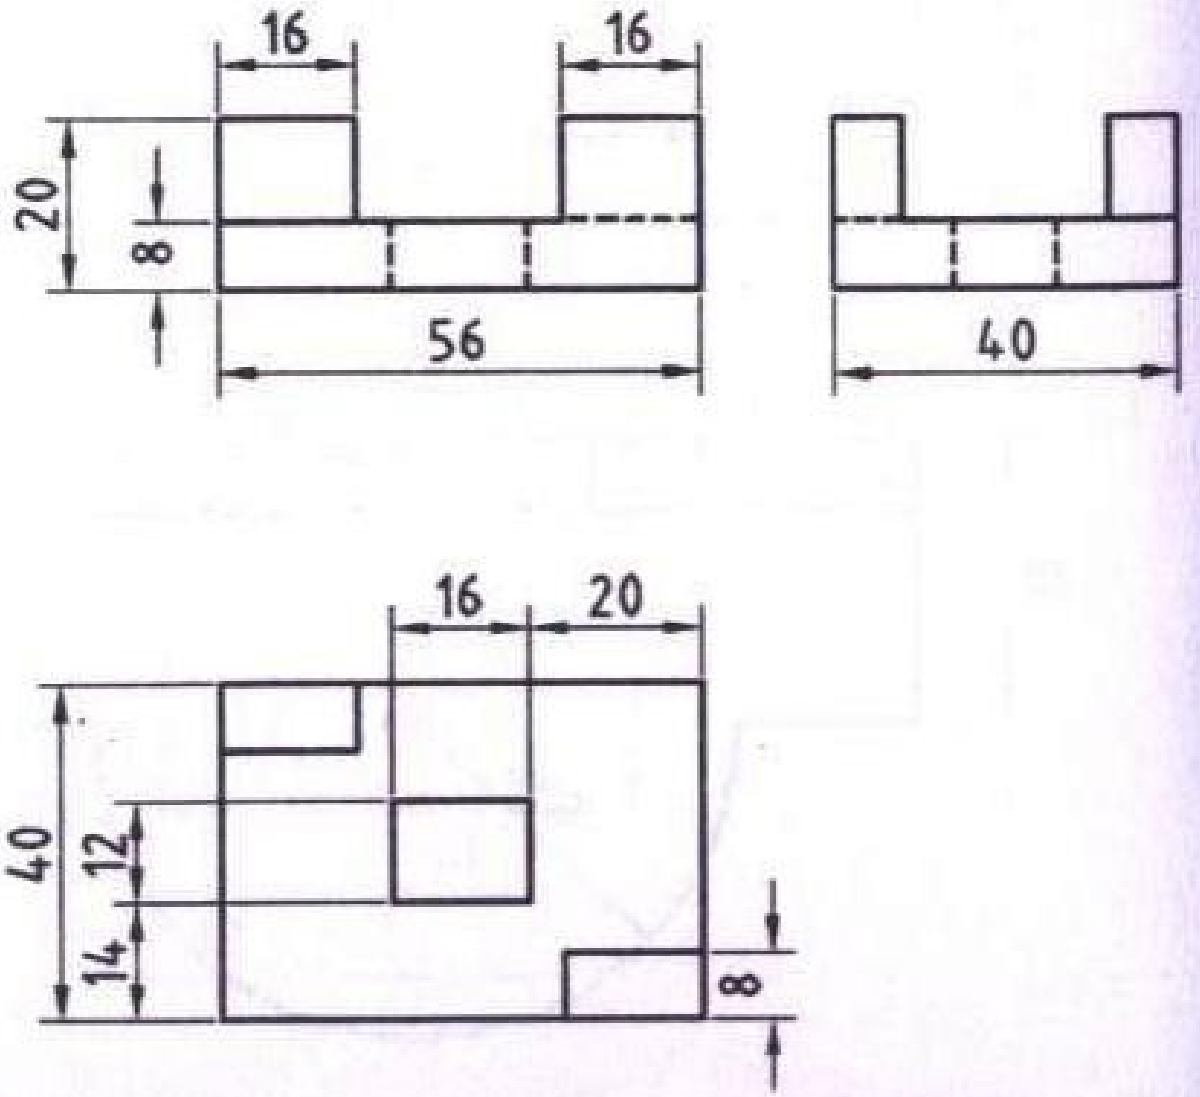

16
16
20
8
56
40
16
20
40
12
14
8

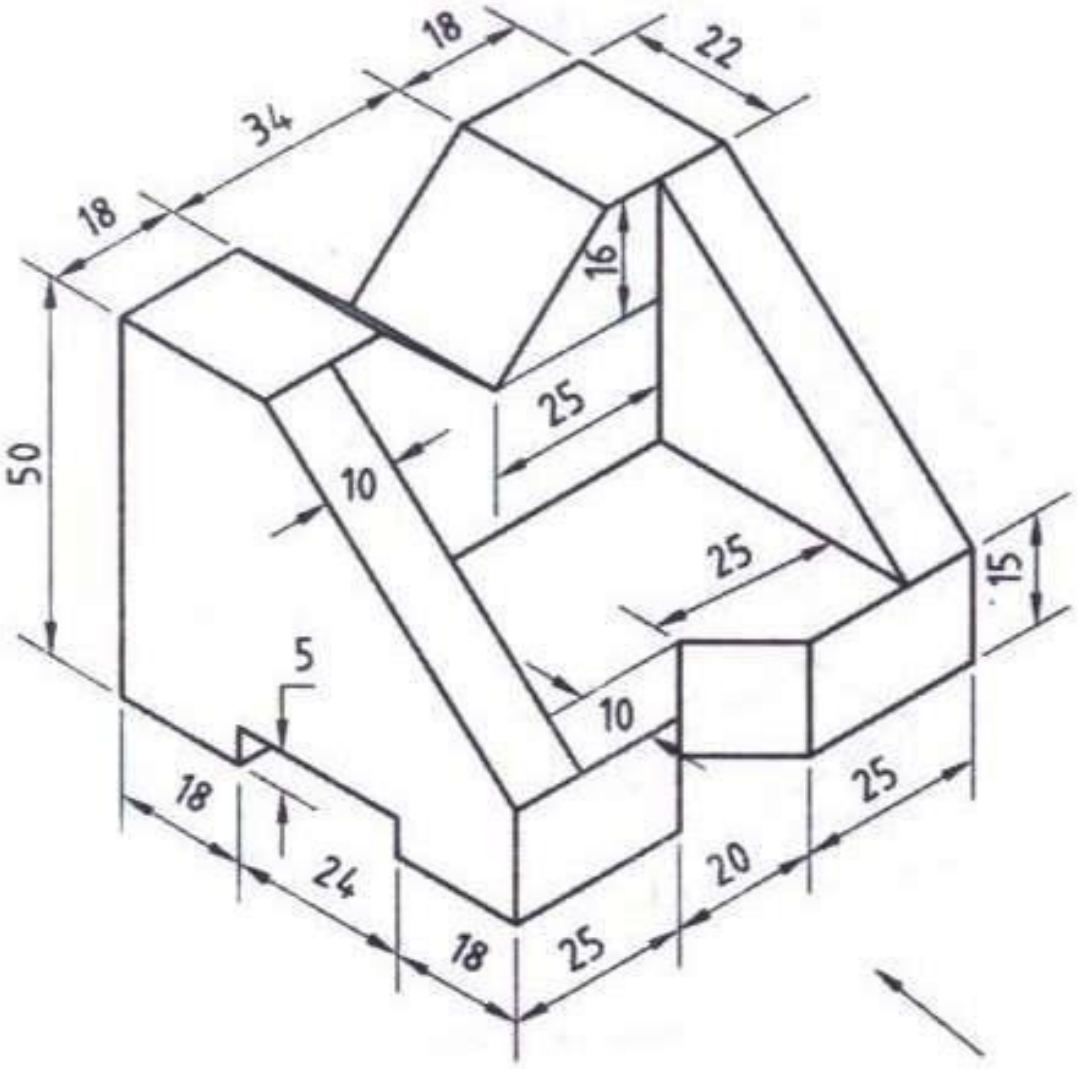

18
22
34
18
16
50
25
10
25
15
5
10
18
24
18
25
20
25

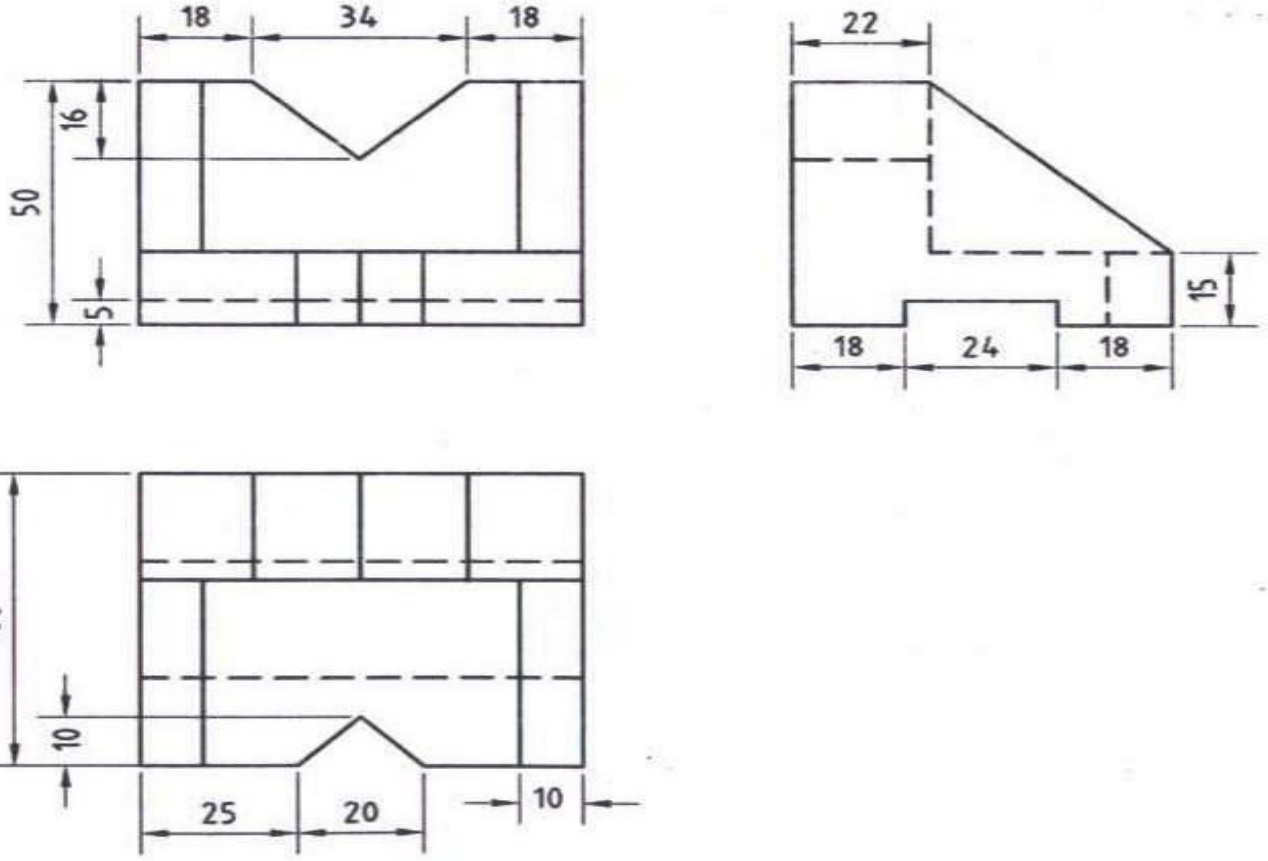

18
34
18
16
50
5
22
15
18
24
18
60
10
25
20
10

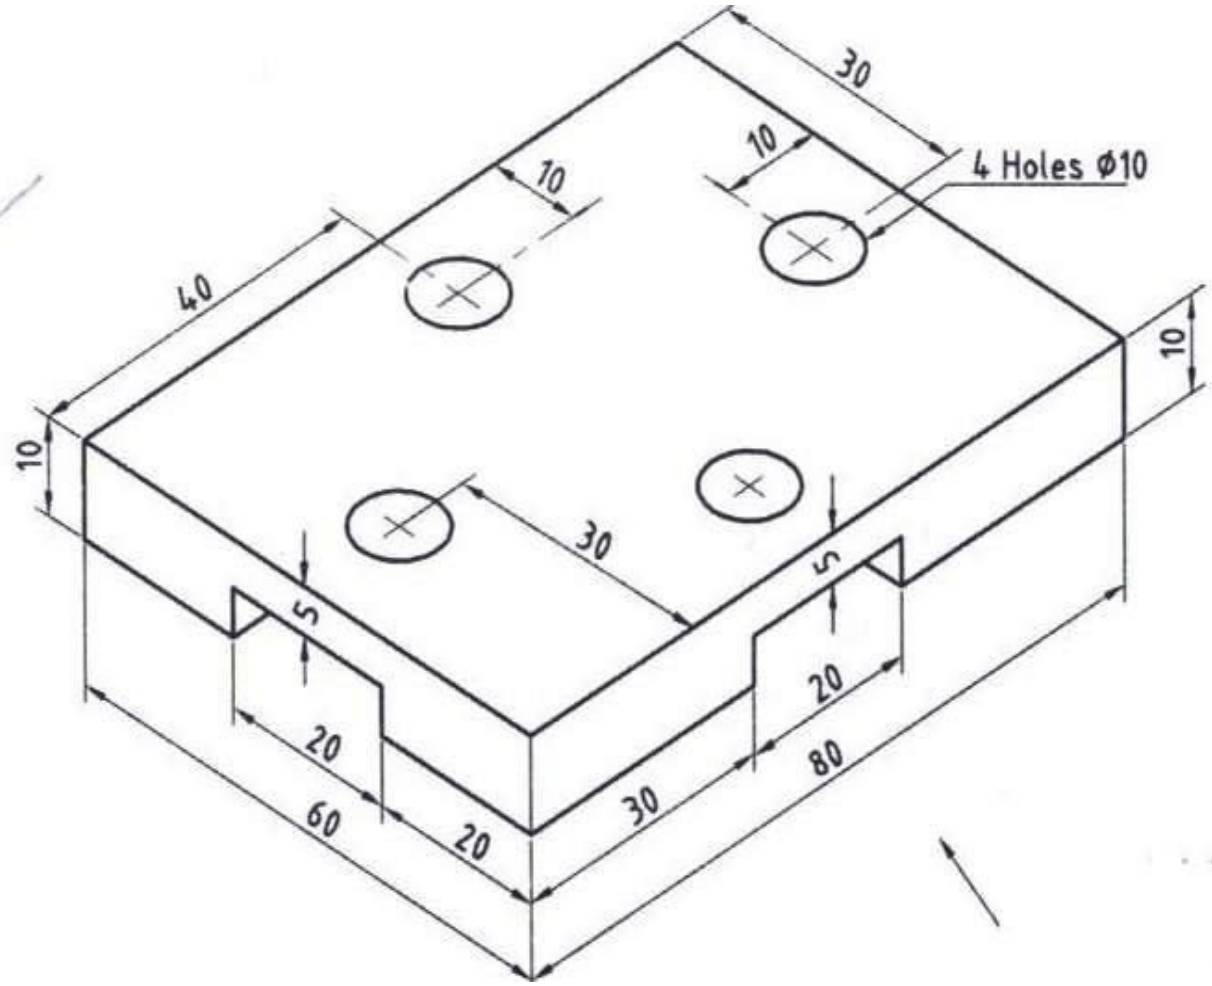

30
10
10
4 Holes Ø10
40
10
10
30
5
5
20
20
60
20
30
80


Solution

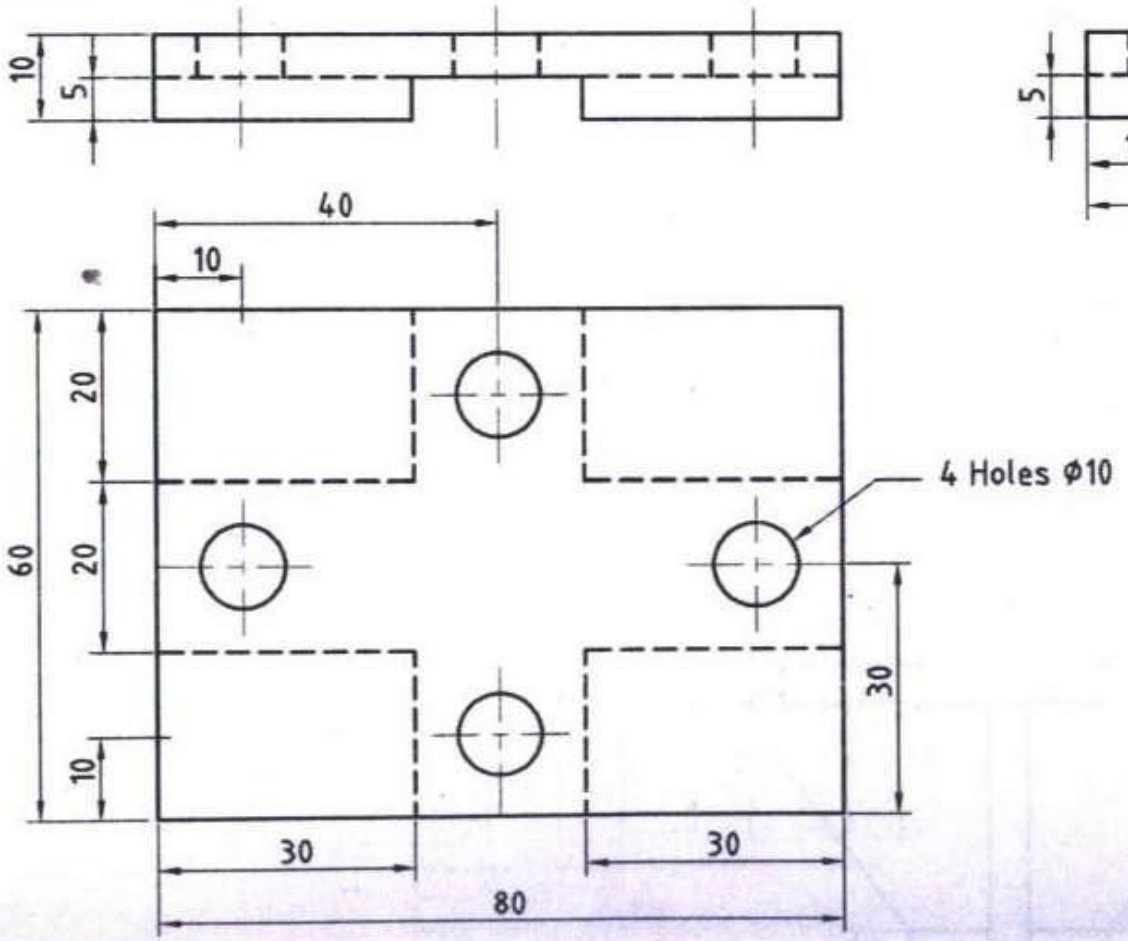

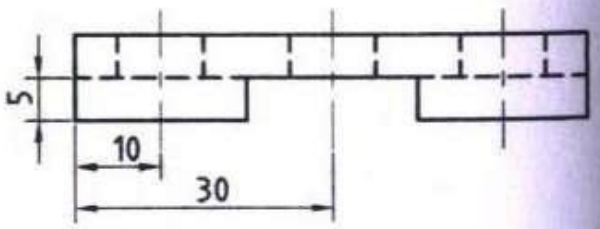

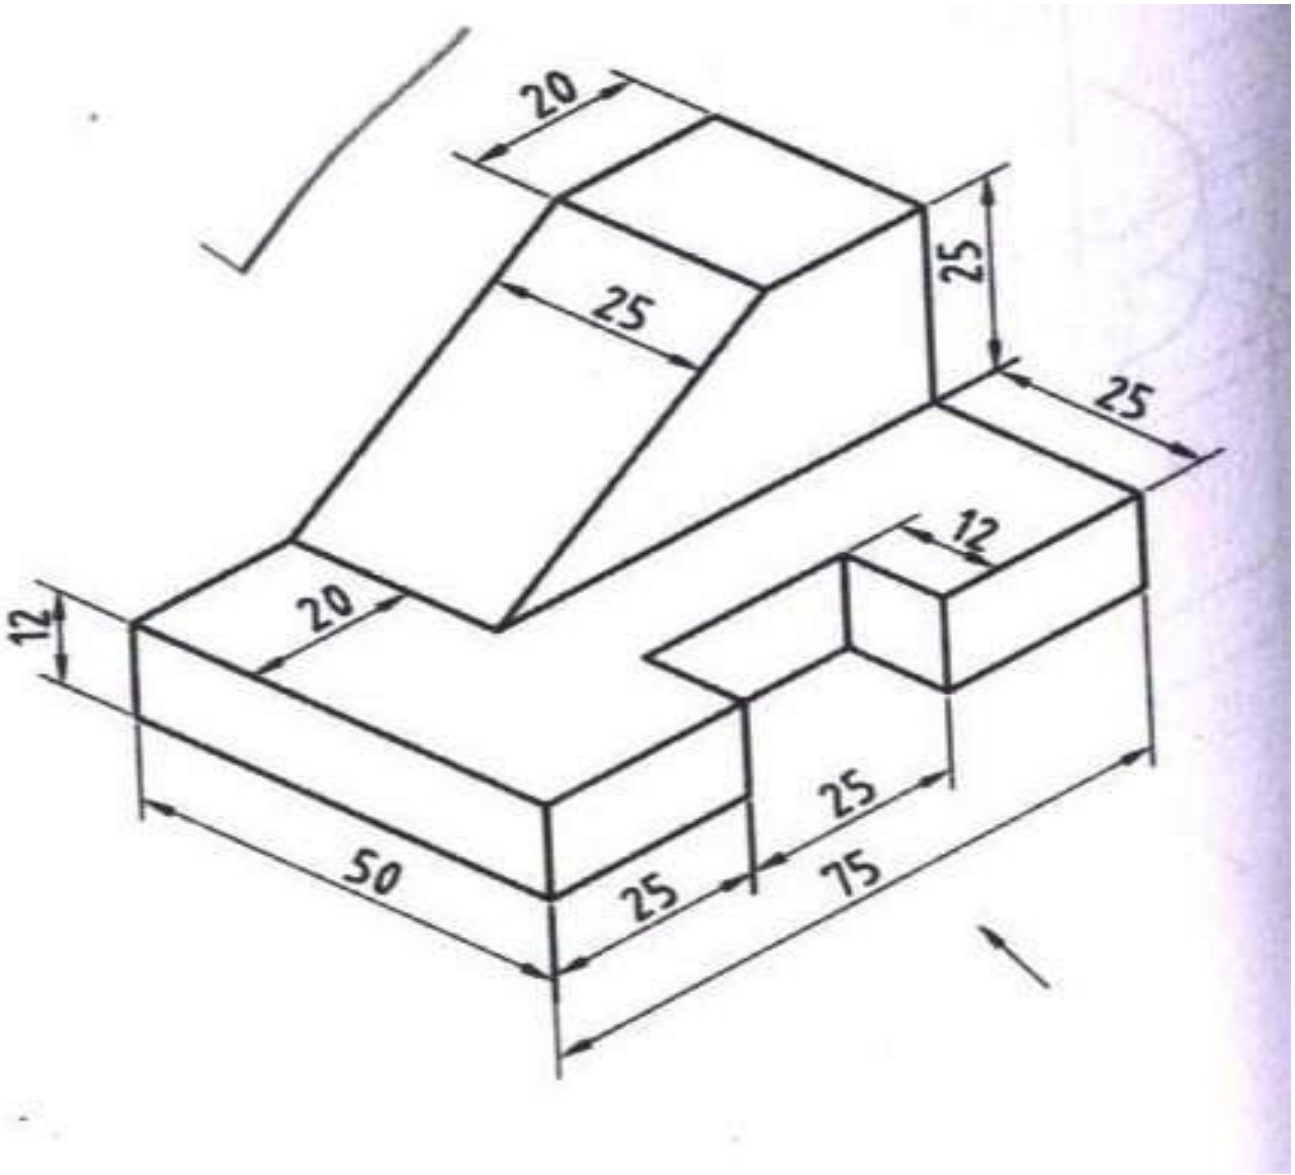
20
25
25
25
12
20
12
50
25
25
75

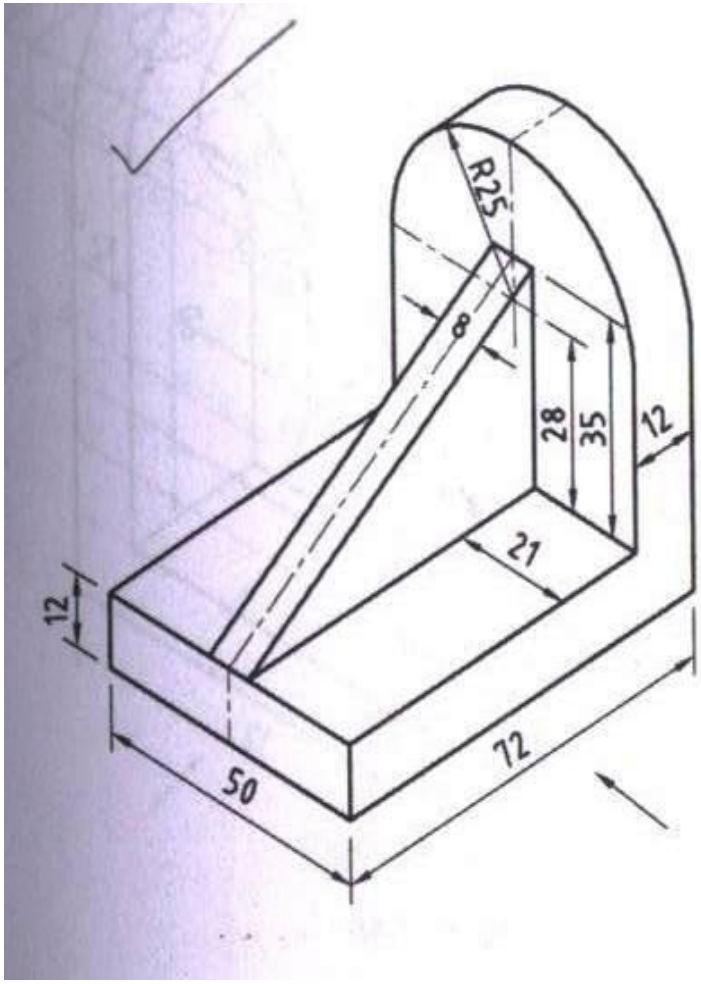
R25
8
28
35
12
21
12
50
72

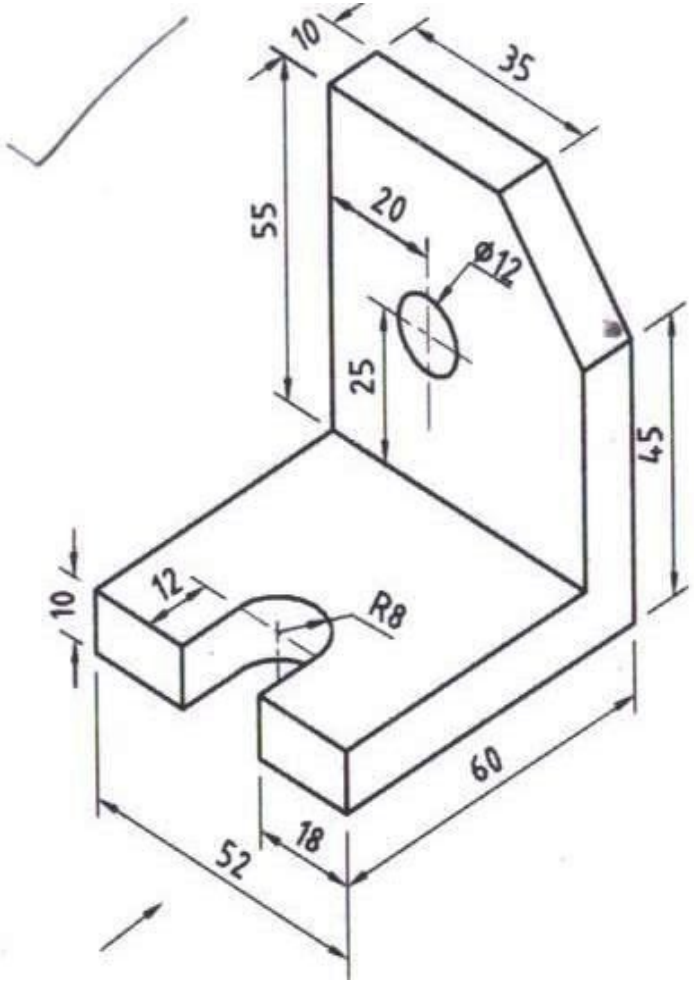
10
35
55
20
Ø12
25
45
10
12
R8
60
52
18

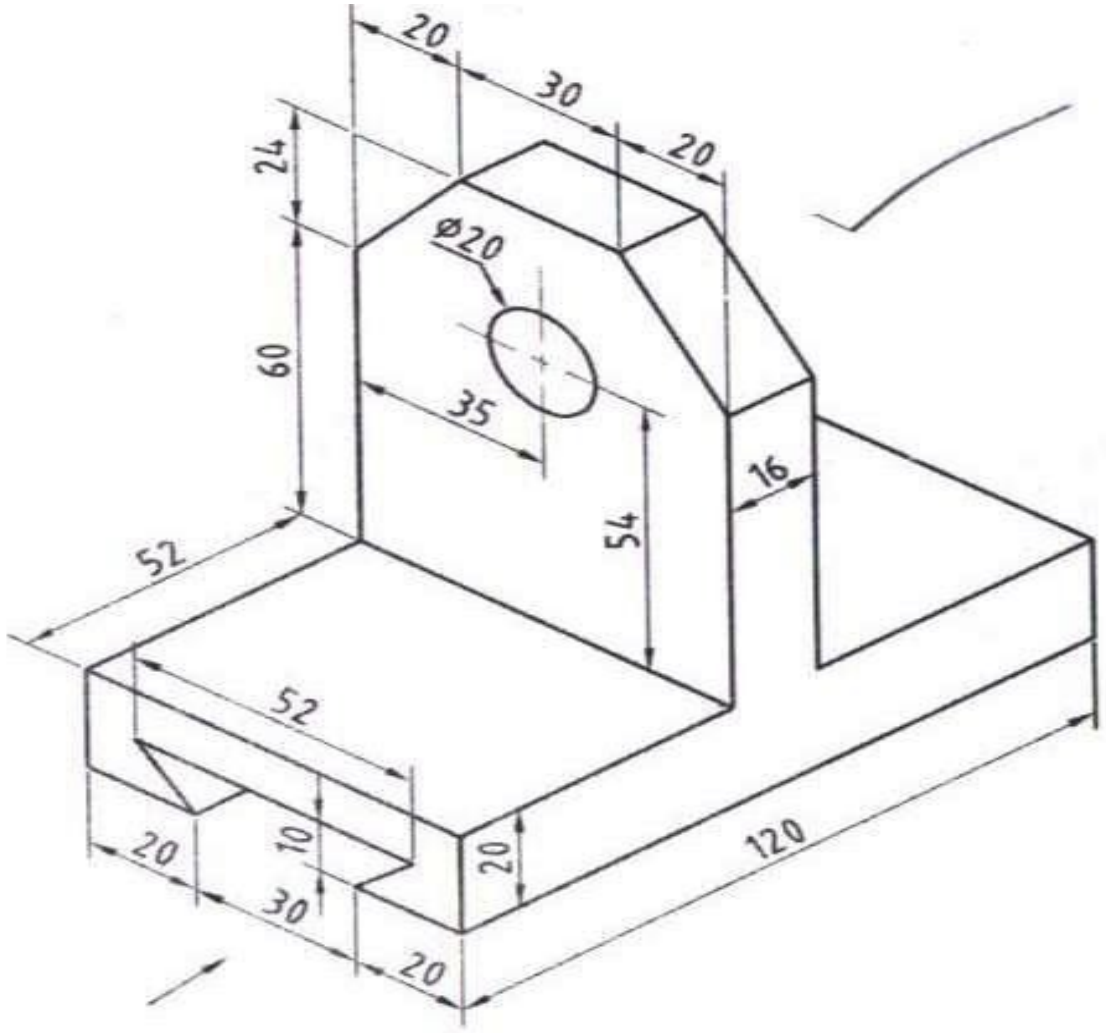
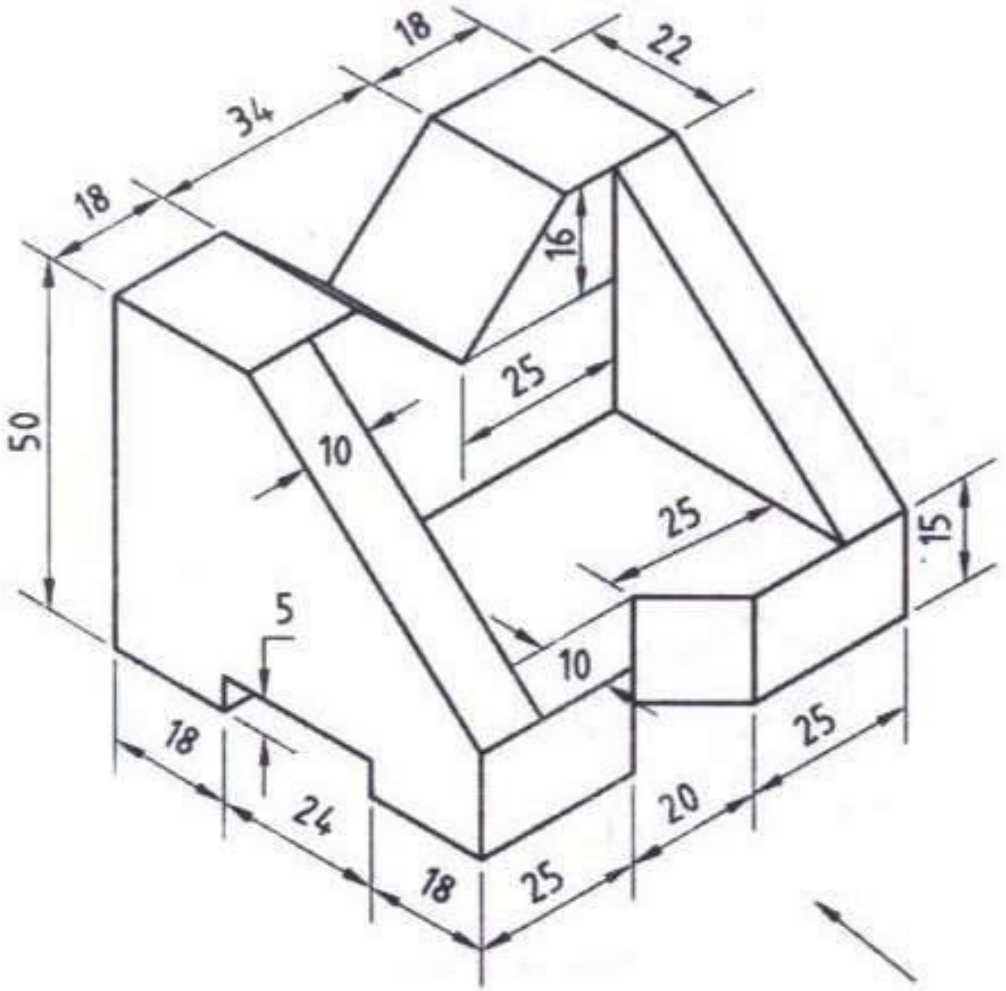


Figure 7.71


18
22
34
18
16
50
25
10
25
15
5
10
18
24
18
25
20
25

ple 7.11

the front view, top view and right-side view of the object shown in Fig. 7.21.

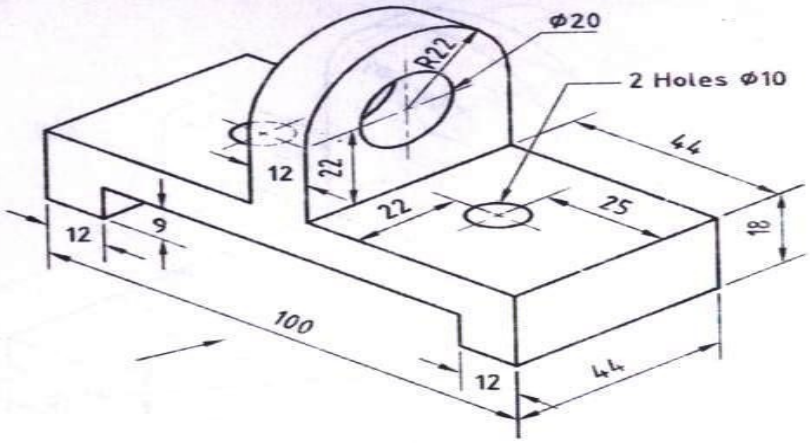


Figure 7.21

tion

