


Meditec 1100

Portable Emergency Ventilator

Meditec 1100 Portable emergency ventilator supports reliable performance in daily challenge of saving people's life, no matter where the calls take you. The Meditec 1100 is suitable for use in ground emergency, Ambulance, Military Medical Services, Air Rescue Services. The multiple modes are suitable for patients with varied needs. The user friendly design and user interface makes the Meditec 1100 suitable for use in Emergency.

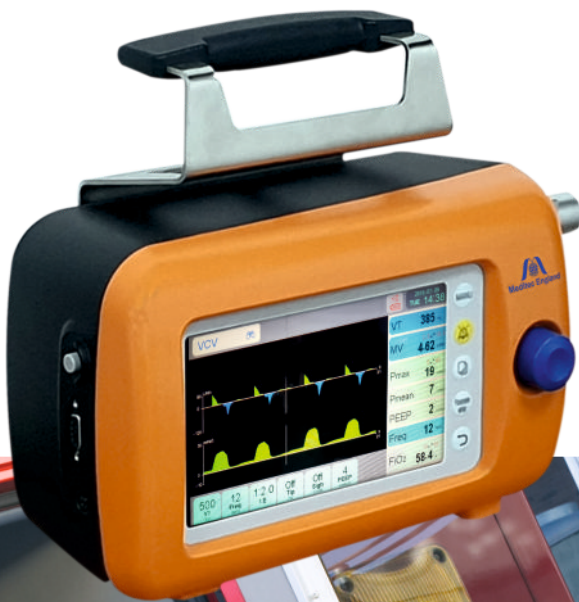

Meditec England

Features

- Pneumatically Driven, Electronically controlled
- Suitable for Adult and Pediatric patients
- Suitable for both Invasive & Non Invasive ventilation
- Volume control delivery with multiple working modes
- User friendly interface for easy operation
- Ventilation parameters monitoring with proximal flow sensor
- Optimized alarm system
- Built-in rechargeable Li-battery with upto 4hrs backup
- Mountings available for vehicle or portable stretcher
- Sturdy, encased in a solid housing designed to withstand the shock of being dropped
- Emergency fluorescent keypad to highlight in dark condition

Technical Specifications

Display	7 inch LCD
Drive	Gas driven
Patient Mode	Adult or Pediatric (weight >5kg)
Gas Source	Medical grade oxygen/ Medical grade compressed air
Operation	Electronically controlled
Ventilation Modes	Invasive Modes : VCV, SIMV, A/C, SIGH, MANUAL, CPAP Non Invasive Modes : CPAP, S/T, S-mode, T-mode, PSV (optional)
Monitoring Parameters	Tidal volume, Minute volume, Breathing rate, Airway Pressure
Tidal Volume	20–1500ml
I:E Ratio	4:1–1:8
Breathing Rate	4-99/min, 4–65/min under SIMV
FiO ₂	40%–100% constantly adjustable
Pressure Trigger Sensitivity	(-)2–0kPa
PEEP/ Electronic	0–20cmH ₂ O
Alarms	No VT, MV too high (low), Airway pressure too high (low), AC power off, back-up battery too low
Power	Battery, AC Power 220V/50Hz
Battery	≥ 4 hours

Physical Specifications

Dimensions (L x W x H)	280mm x 130mm x 240mm
Weight	1.2 kgs. (main unit with battery)

Environmental Requirements

Storage Temperature	(-)10°C–50°C
Relative Humidity	10–90%
Operation Temperature	0°C–50°C

Standard Accessories

- Ventilator Main Unit
 - 3 Ltr. O₂ Cylinder
 - Safety belt to fasten the O₂ cylinder
 - Breathing Valve
 - Face mask
 - Regulator cum Flowmeter
- Cylinder Refilling Attachment
 - Dust Proof Carry Bag

Optional

 - Trolley
 - Ambulance Attachment
 - Stretcher Mounting Attachment



Meditec International England Limited
8, Pinner View, Harrow, Middx,
HA1 4QA, United Kingdom
Tel: +44 203 6423808
E-mail : sales@meditecengland.co.uk
Website : www.meditecengland.co.uk



*In view of continued product improvement Meditec International England Limited reserves the right to make changes in the equipment which may affect the information contained in this leaflet without giving any prior notice. Pictures are representative, accessories are optional and may vary at the time of supply.