
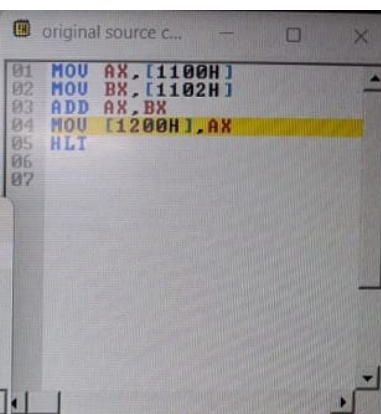


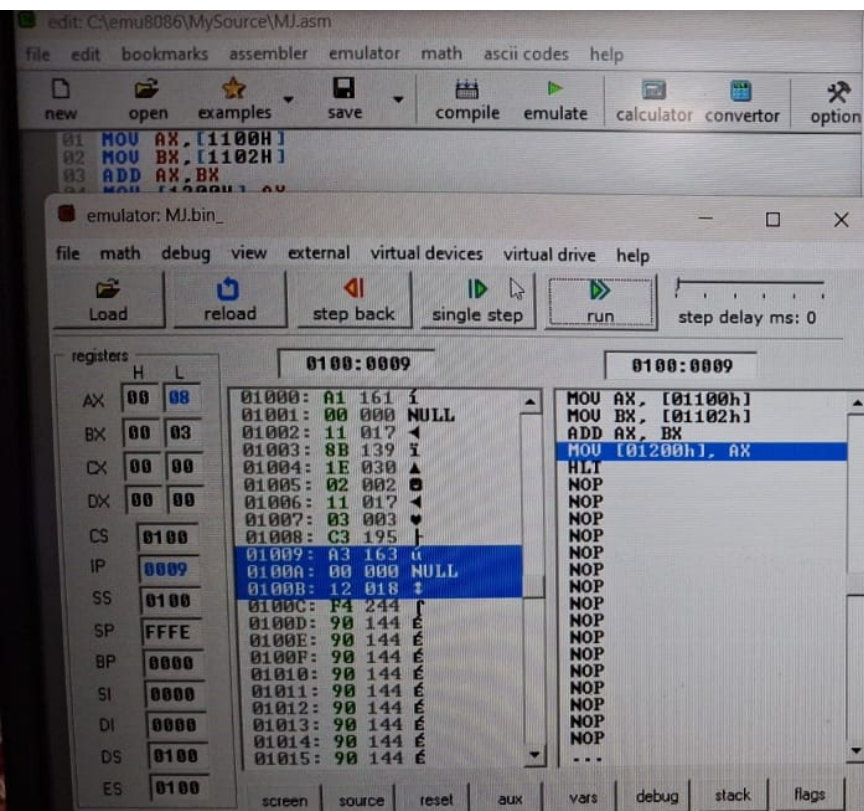

edit: C:\emu8086\MySource\MJ.asm
file edit bookmarks assembler emulator math ascii codes help
new open examples save compile emulate calculator convertor option

```
01 MOV AX,[1100H]
02 MOV BX,[1102H]
03 SUB AX,BX
04 MOV [1200H],AX
05 HLT
```

original source c...

```
01 MOV AX,[1100H]
02 MOV BX,[1102H]
03 SUB AX,BX
04 MOV [1200H],AX
05 HLT
```

emulator: MJ.bin_

file math debug view external virtual devices virtual drive help

Load reload step back single step run step delay ms: 0

registers

	H	L
AX	00	05
BX	00	02
CX	00	00
DX	00	00
CS	0100	
IP	0009	
SS	0100	
SP	FFFE	
BP	0000	
SI	0000	
DI	0000	
DS	0100	
ES	0100	






0100:0009

Address	Hex	Dec	Comment
01000: A1	161	i	
01001: 00	000		NULL
01002: 11	017	◀	
01003: 8B	139	i	
01004: 1E	030	▲	
01005: 02	002	◼	
01006: 11	017	◀	
01007: 2B	043	+	
01008: C3	195	↓	
01009: A3	163	u	
0100A: 00	000		NULL
0100B: 12	018	↑	
0100C: F4	244	↑	
0100D: 90	144	é	
0100E: 90	144	é	
0100F: 90	144	é	
01010: 90	144	é	
01011: 90	144	é	
01012: 90	144	é	
01013: 90	144	é	
01014: 90	144	é	
01015: 90	144	é	

0100:0009

```
MOV AX, [01100h]
MOV BX, [01102h]
SUB AX, BX
MOV [01200h], AX
HLT
NOP
NOP
NOP
NOP
NOP
NOP
NOP
NOP
NOP
NOP
NOP
NOP
NOP
NOP
...
```

screen source reset aux vars debug stack flags

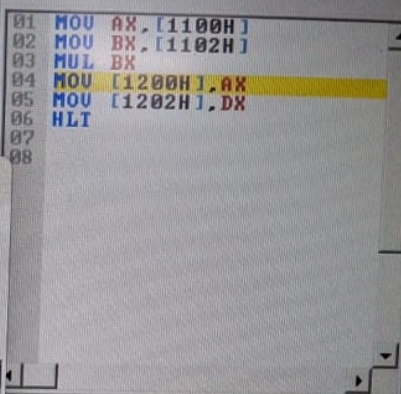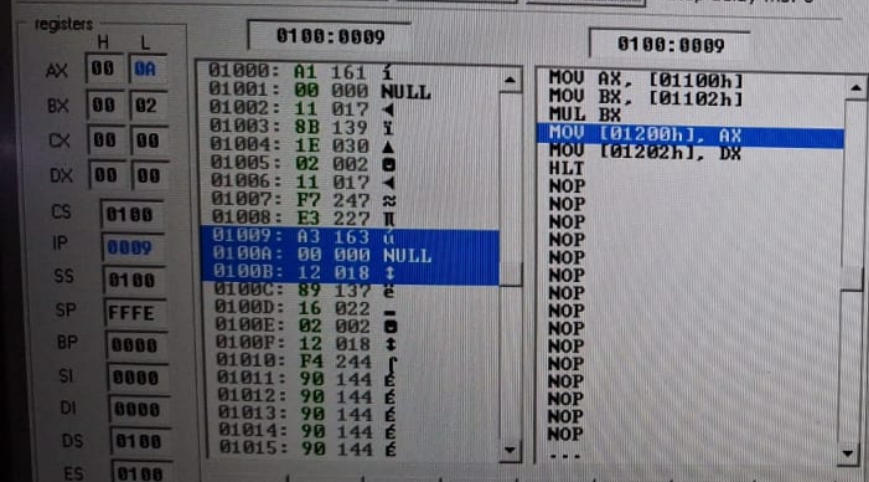

FileResetAssemblerDebugHelp

Registers

A	F7
BC	00 00
DE	00 00
HL	00 00
PSW	00 00
PC	42 08
SP	FF FF
Int-Reg	00

Flag

S	0
Z	0
AC	0
P	0
C	0

Load me at

1 LDA 8050
2 CMA
3 STA 8051
4 HLT

Decimal - Hex Conversion

Decimal	Hex
0	0
To Hex	To Dec

I/O Ports

0	-	+	00
Update Port Value			

Memory

8050	-	+	08
Update Memory			

GNUSim8085 - 8085 Microprocessor Simulator


DataStackKeyPadMemoryI/O Ports

Start8051OK

Address (Hex)	Address	Data
1F73	8051	247
1F74	8052	0
1F75	8053	0
1F76	8054	0
1F77	8055	0
1F78	8056	0
1F79	8057	0
1F7A	8058	0
1F7B	8059	0
1F7C	8060	0
1F7D	8061	0
1F7E	8062	0
1F7F	8063	0
1F80	8064	0

Line NoAssembler Message

0Program assembled successfully



Registers			Flag
<i>A</i>	07		<i>S</i> 0
<i>BC</i>	03	00	<i>Z</i> 0
<i>DE</i>	00	00	<i>AC</i> 0
<i>HL</i>	00	00	<i>P</i> 0
<i>PSW</i>	00	00	<i>C</i> 0
<i>PC</i>	42	0C	
<i>SP</i>	FF	FF	
<i>Int-Reg</i>	00		

Load me at

```
1 LDA 8050
2 MOV B,A
3 LDA 8051
4 ADD B
5 STA 8052
6 HLT
```

💡 Decimal - Hex Conversion

Decimal	Hex
0	0
→ To Hex	← To Dec

I/O Ports

0

-

+

00

Ⓢ Update Port Value


Memory



8051 - + 04
Update Memory

The screenshot shows the Keil IDE interface with the 'Memory' window active. The 'Start' address is set to 8050. The memory window displays a list of addresses and their corresponding data values.

Address (Hex)	Address	Data
1F72	8050	3
1F73	8051	4
1F74	8052	7
1F75	8053	0
1F76	8054	0
1F77	8055	0
1F78	8056	0
1F79	8057	0
1F7A	8058	0
1F7B	8059	0
1F7C	8060	0
1F7D	8061	0
1F7E	8062	0
1F7F	8063	0

Line No	Assembler Message
0	Program assembled successfully

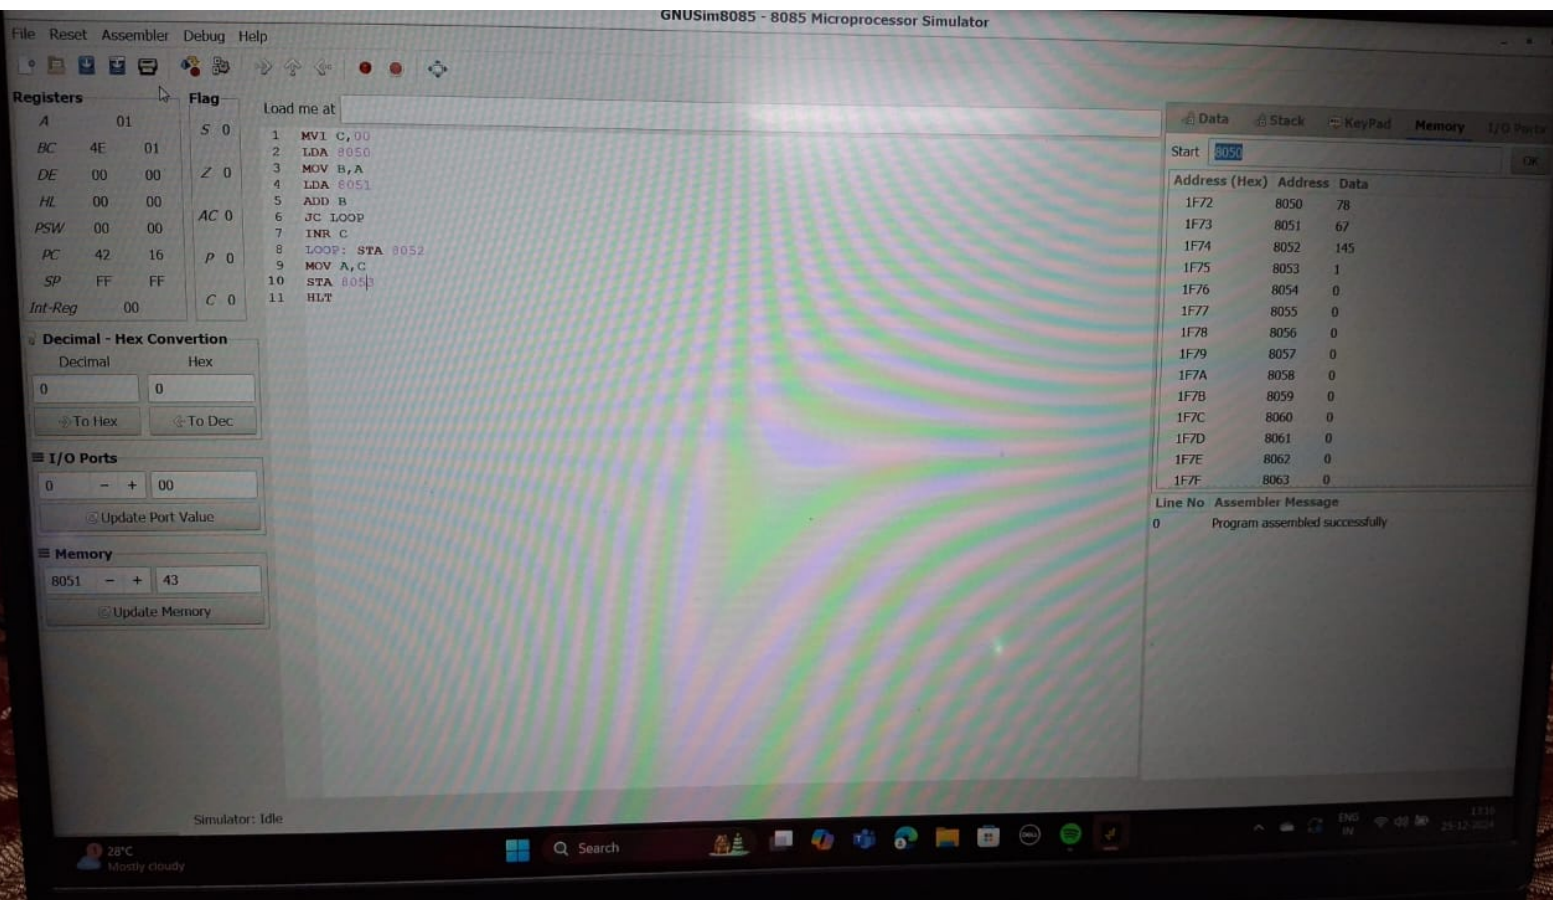

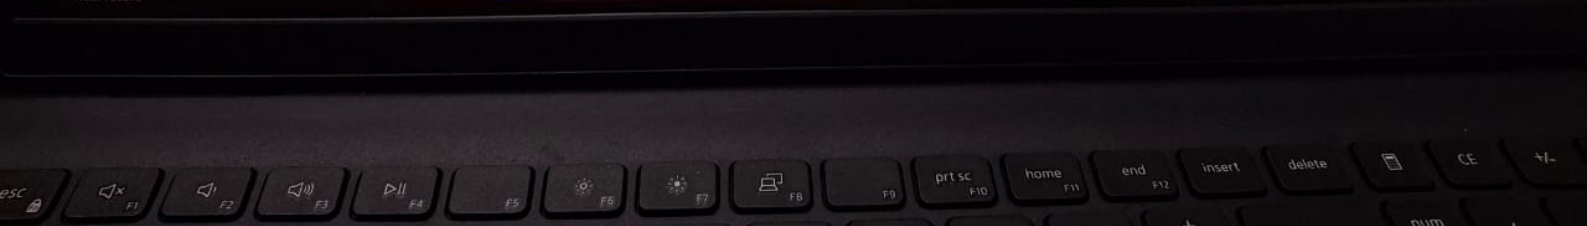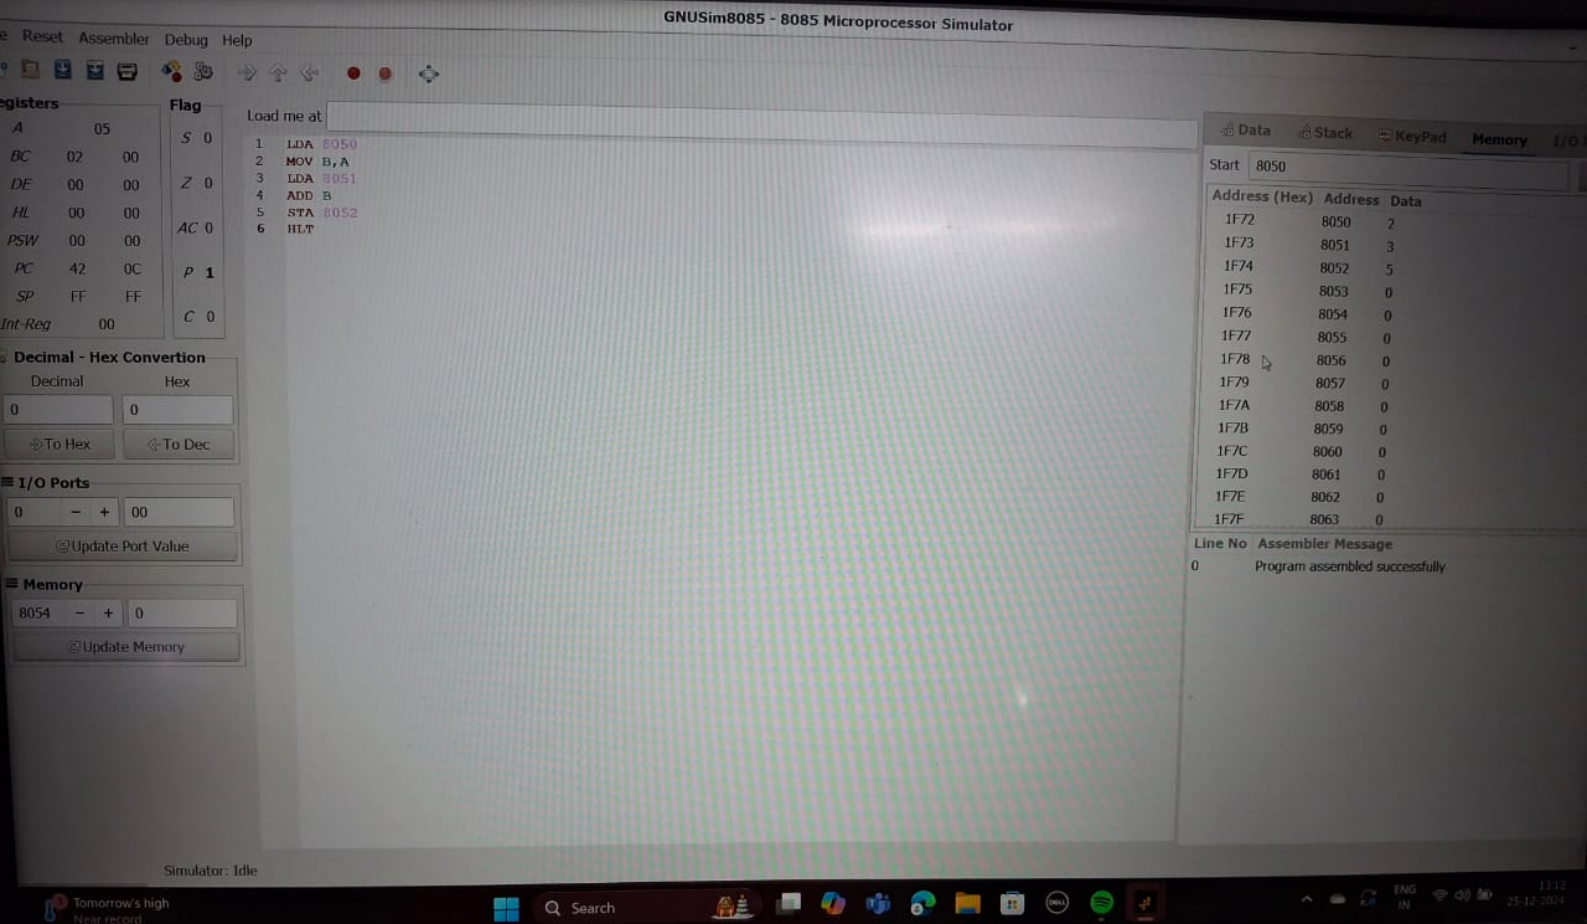


```
Load me at [ ]
1  LDA 8500
2  MOV B,A
3  LDA 8501
4  MVI C,00
5  LOOP: CMP B
6  JC LOOP1
7  SUB B
8  INR C
9  JMP LOOP
10 LOOP1: STA 8502
11 MOV A,C
12 STA 8503
13 HLT
```

Decimal	Hex
0	00
1	01
2	02
3	03
4	04
5	05
6	06
7	07
8	08
9	09
10	0A
11	0B
12	0C
13	0D
14	0E
15	0F
16	10
17	11
18	12
19	13
20	14
21	15
22	16
23	17
24	18
25	19
26	1A
27	1B
28	1C
29	1D
30	1E
31	1F
32	20
33	21
34	22
35	23
36	24
37	25
38	26
39	27
40	28
41	29
42	2A
43	2B
44	2C
45	2D
46	2E
47	2F
48	30
49	31
50	32
51	33
52	34
53	35
54	36
55	37
56	38
57	39
58	3A
59	3B
60	3C
61	3D
62	3E
63	3F
64	40
65	41
66	42
67	43
68	44
69	45
70	46
71	47
72	48
73	49
74	4A
75	4B
76	4C
77	4D
78	4E
79	4F
80	50
81	51
82	52
83	53
84	54
85	55
86	56
87	57
88	58
89	59
90	5A
91	5B
92	5C
93	5D
94	5E
95	5F
96	60
97	61
98	62
99	63
100	64
101	65
102	66
103	67
104	68
105	69
106	6A
107	6B
108	6C
109	6D
110	6E
111	6F
112	70
113	71
114	72
115	73
116	74
117	75
118	76
119	77
120	78
121	79
122	7A
123	7B
124	7C
125	7D
126	7E
127	7F
128	80
129	81
130	82
131	83
132	84
133	85
134	86
135	87
136	88
137	89
138	8A
139	8B
140	8C
141	8D
142	8E
143	8F
144	90
145	91
146	92
147	93
148	94
149	95
150	96
151	97
152	98
153	99
154	9A
155	9B
156	9C
157	9D
158	9E
159	9F
160	A0
161	A1
162	A2
163	A3
164	A4
165	A5
166	A6
167	A7
168	A8
169	A9
170	AA
171	AB
172	AC
173	AD
17	

→ To Hex

450

0 - + 00
Update Port Value

8501 - + 05
Update Memory

Simulator: Idle


Start 8500 OK

Address (Hex)	Address	Data
2134	8500	25
2135	8501	5
2136	8502	5
2137	8503	0
2138	8504	0
2139	8505	0
213A	8506	0
213B	8507	0
213C	8508	0
213D	8509	0
213E	8510	0
213F	8511	0
2140	8512	0
2141	8513	0

Line No	Assembler Message
0	Program assembled successfully

GNUSim8085 - 8085 Microprocessor Simulator

Reset Assembler Debug Help



Registers	Flag
A 0C	S 0
BC 03 00	Z 1
DE 00 00	AC 0
HL 00 00	P 1
PSW 00 00	C 0
PC 42 12	
SP FF FF	
Int-Reg 00	

Load me at

```

1 LDA 8050
2 MOV B,A
3 LDA 8051
4 MOV C,A
5 XRA A
6 LOOP: ADD B
7 DCR C
8 JNZ LOOP
9 STA 8052
10 HLT
    
```

Decimal - Hex Conversion

Decimal	Hex
0	0

I/O Ports

0 - + 00

Memory

8051 - + 04

Data Stack KeyPad Memory I/O Ports


Start 8050 OK


Address (Hex)	Address	Data
1F72	8050	3
1F73	8051	4
1F74	8052	12
1F75	8053	1
1F76	8054	0
1F77	8055	0
1F78	8056	0
1F79	8057	0
1F7A	8058	0
1F7B	8059	0
1F7C	8060	0
1F7D	8061	0
1F7E	8062	0
1F7F	8063	0

Line No Assembler Message

0 Program assembled successfully

Simulator: Idle

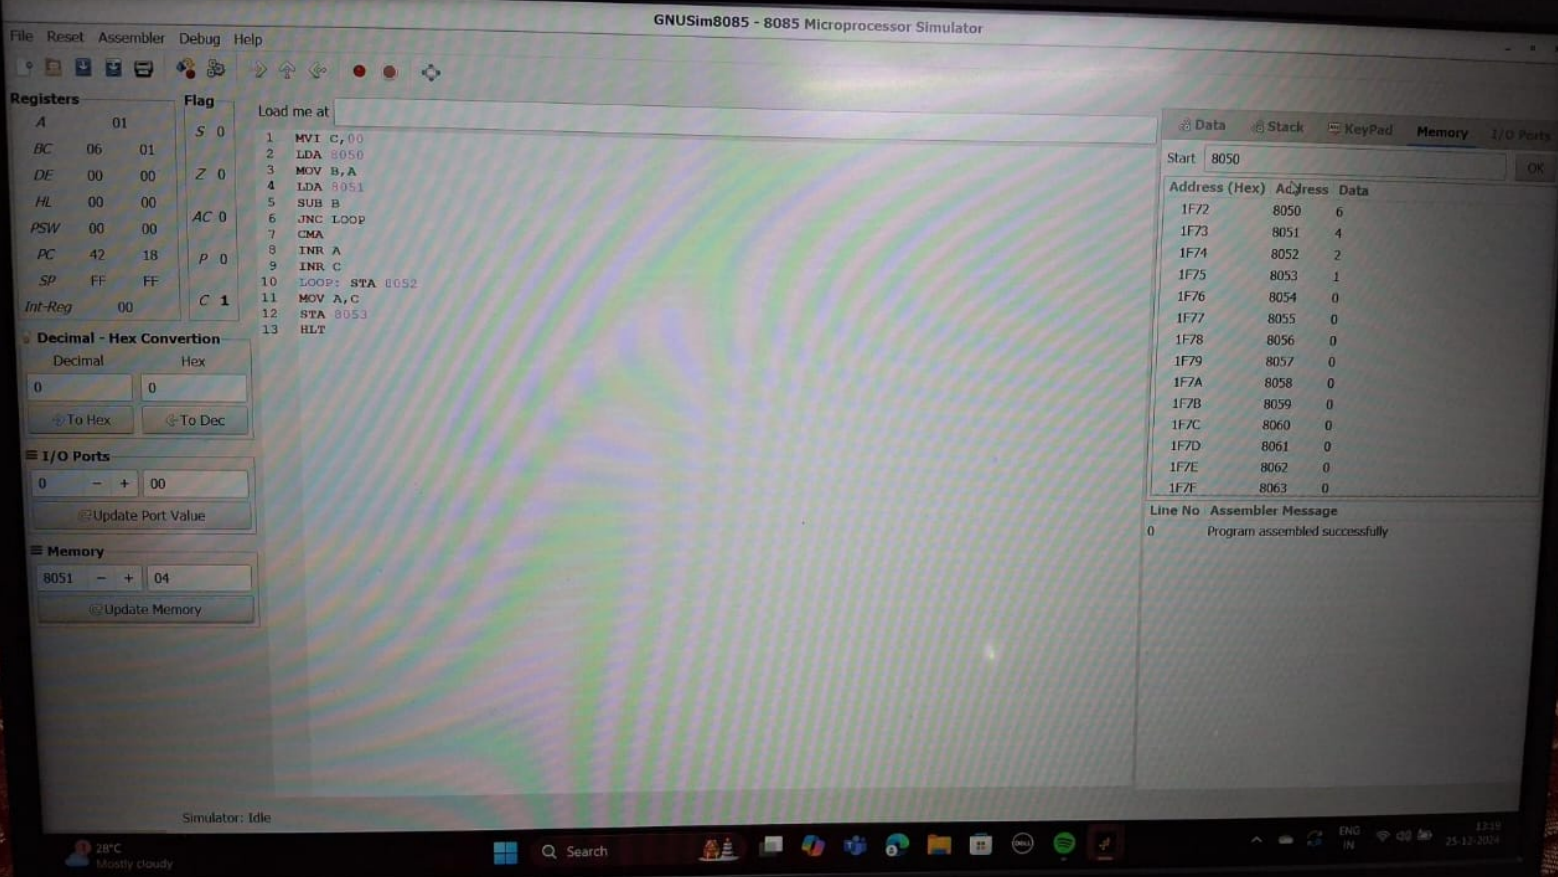



Registers			Flag
<i>A</i>		03	<i>S</i> 1
<i>BC</i>	00	<i>FE</i>	<i>Z</i> 0
<i>DE</i>	<i>FE</i>	00	<i>AC</i> 0
<i>HL</i>	1F	74	<i>P</i> 0
<i>PSW</i>	00	00	<i>C</i> 1
<i>PC</i>	42	1D	
<i>SP</i>	FF	FF	
<i>Int-Reg</i>	00		

💡 Decimal - Hex Conversion

Decimal	Hex
0	0
→ To Hex	← To Dec

I/O Ports

0

-

+

00

Ⓢ Update Port Value

Memory

8055 - + 9
Update Memory

Load me at

```

1 LXT H, R050
2 MOV C,M
3 DCR C
4 LOOP3: MOV D,C
5 LXI H, R051
6 LOOP2: MOV A,M
7 INX H
8 CMP M
9 JC LOOP1
10 MOV B,M
11 MOV M,A
12 DCX H
13 MOV M,B
14 INX H
15 LOOP1: DCR D
16 JZ LOOP2
17 DCR C
18 JZ LOOP3
19 HLT

```

 Data
  Stack
  KeyPad
 Memory
 I/O Ports

Start 8051 OK

Address (Hex)	Address	Data
1F73	8051	2
1F74	8052	4
1F75	8053	6
1F76	8054	8
1F77	8055	9
1F78	8056	0
1F79	8057	0
1F7A	8058	0
1F7B	8059	0
1F7C	8060	0
1F7D	8061	0
1F7E	8062	0
1F7F	8063	0
1F80	8064	0

Line No	Assembler Message
0	Program assembled successfully


Logisim interface showing the circuit components list on the left and the circuit diagram on the right.

Components List:

- Logic Gates:
 - NOT Gate
 - Buffer
 - AND Gate
 - OR Gate
 - NAND Gate
 - NOR Gate
 - XOR Gate
 - XNOR Gate
 - Odd Parity
 - Even Parity
 - Controlled Buffer
 - Controlled Inverter
- Pinners
- Arithmetic
- Memory
- Input/Output
- Basic

Circuit: main

Property	Value
Circuit Name	main
Label Facing	East
Label Font	San serif Plain 12

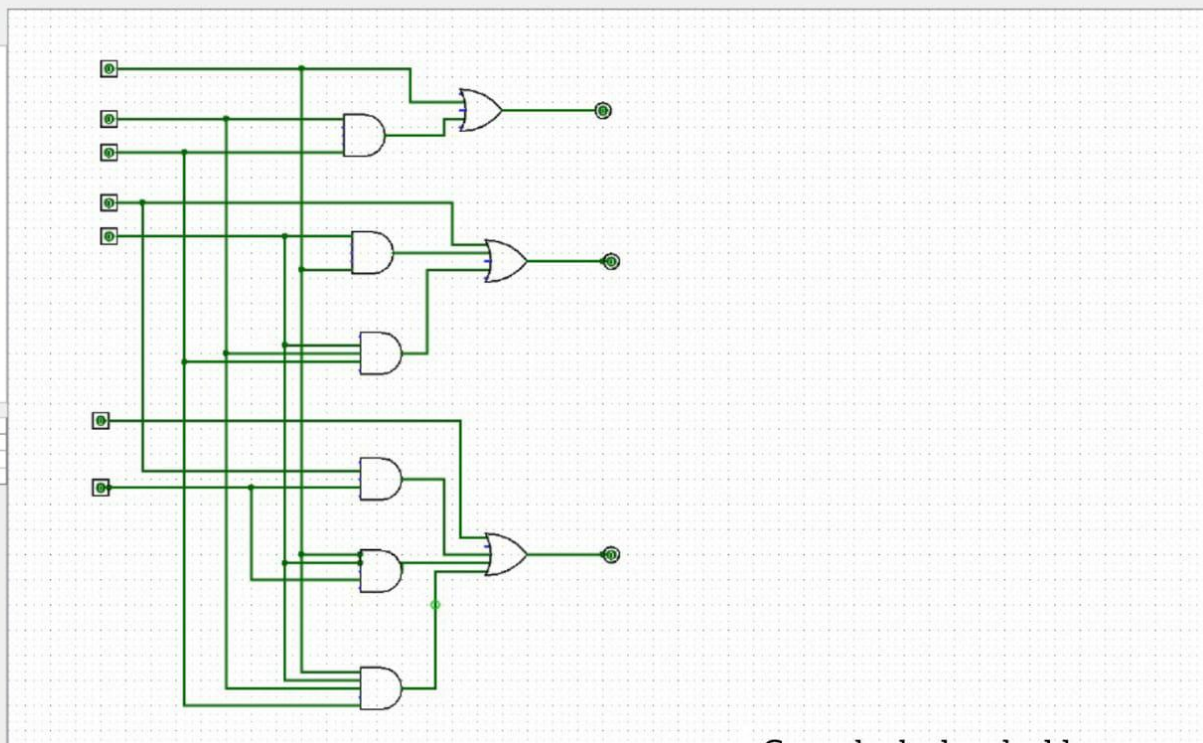

Count look ahead adder

Registers			Flag
<i>A</i>	4E		<i>S</i> 0
<i>BC</i>	1A	00	<i>Z</i> 0
<i>DE</i>	00	00	<i>AC</i> 0
<i>HL</i>	08	04	<i>P</i> 1
<i>PSW</i>	00	00	<i>C</i> 0
<i>PC</i>	42	0D	
<i>SP</i>	FF	FF	
<i>Int-Reg</i>	00		

Load me at

```

1  LXI  H, 2050
2  MOV  A, M
3  ADD  A
4  MOV  B, A
5  ADD  A
6  ADD  B
7  INX  H
8  ADD  M
9  INX  H
10 MOV  M, A
11 HLT

```

💡 Decimal - Hex Conversion

Decimal	Hex
0	00
1	01
2	02
3	03
4	04
5	05
6	06
7	07
8	08
9	09
10	0A
11	0B
12	0C
13	0D
14	0E
15	0F
16	10
17	11
18	12
19	13
20	14
21	15
22	16
23	17
24	18
25	19
26	1A
27	1B
28	1C
29	1D
30	1E
31	1F
32	20
33	21
34	22
35	23
36	24
37	25
38	26
39	27
40	28
41	29
42	2A
43	2B
44	2C
45	2D
46	2E
47	2F
48	30
49	31
50	32
51	33
52	34
53	35
54	36
55	37
56	38
57	39
58	3A
59	3B
60	3C
61	3D
62	3E
63	3F
64	40
65	41
66	42
67	43
68	44
69	45
70	46
71	47
72	48
73	49
74	4A
75	4B
76	4C
77	4D
78	4E
79	4F
80	50
81	51
82	52
83	53
84	54
85	55
86	56
87	57
88	58
89	59
90	5A
91	5B
92	5C
93	5D
94	5E
95	5F
96	60
97	61
98	62
99	63
100	64
101	65
102	66
103	67
104	68
105	69
106	6A
107	6B
108	6C
109	6D
110	6E
111	6F
112	70
113	71
114	72
115	73
116	74
117	75
118	76
119	77
120	78
121	79
122	7A
123	7B
124	7C
125	7D
126	7E
127	7F
128	80
129	81
130	82
131	83
132	84
133	85
134	86
135	87
136	88
137	89
138	8A
139	8B
140	8C
141	8D
142	8E
143	8F
144	90
145	91
146	92
147	93
148	94
149	95
150	96
151	97
152	98
153	99
154	9A
155	9B
156	9C
157	9D
158	9E
159	9F
160	A0
161	A1
162	A2
163	A3
164	A4
165	A5
166	A6
167	A7
168	A8
169	A9
170	AA
171	AB
172	AC
173	AD
17	

0	0
---	---

→ To Hex

I/O Ports

0 - + 00

Ⓢ Update Port Value

Memory

2051	-	+	00
------	---	---	----

Update Memory

 Data
  Stack
  KeyPad
 Memory
 I/O Ports

Start 2050

Address (Hex)	Address	Data
0802	2050	13
0803	2051	0
0804	2052	78
0805	2053	0
0806	2054	0
0807	2055	0
0808	2056	0
0809	2057	0
080A	2058	0
080B	2059	0
080C	2060	0
080D	2061	0
080E	2062	0
080F	2063	0

Line No	Assembler Message
0	Program assembled successfully

GNUSim8085 - 8085 Microprocessor Simulator

FileResetAssemblerDebugHelp

Registers

A09

BC0900

DE0000

HL1F74

PSW0000

PC421D

SPFFFF

Int-Reg00

Flag

S0

Z1

AC0

P1

C0

Decimal - Hex Conversion

Decimal

Hex

00

To Hex

To Dec

I/O Ports

0-+00

Update Port Value

Memory

8055-+02

Update Memory

Load me at

1LXI H, 8050

2MOV C, M

3DCR C

4LOOP3: MOV D, C

5LXI H, 8051

6LOOP2: MOV A, M

7INX H

8CMP M

9JNC LOOP1

10MOV B, M

11MOV M, A

12DCX H

13MOV M, B

14INX H

15LOOP1: DCR D

16JNZ LOOP2

17DCR C

18JNZ LOOP3

19HLT

DataStackKeyPadMemoryI/O Ports

Start8051OK

Address (Hex)AddressData

1F7380519

1F7480527

1F7580535

1F7680543

1F7780552

1F7880560

1F7980570

1F7A80580

1F7B80590

1F7C80600

1F7D80610

1F7E80620

1F7F80630

1F8080640

Line NoAssembler Message

0Program assembled successfully

Simulator: Idle

Search

1:18 PM12/24/2024

FileResetAssemblerDebugHelp

Registers

A	18	S	0
BC	00 00		
DE	18 00	Z	1
HL	1F 73	AC	0
PSW	00 00		
PC	42 10	P	1
SP	FF FF		
Int-Reg	00	C	0

Flag

Load me at

```
1 LXT H,8050
2 MOV B,M
3 MVI D,01H
4 FACT: CALL MUL
5 DCR B
6 JNZ FACT
7 INX H
8 MOV M,D
9 HLT
10 MUL: MOV E,B
11 XRA A
12 ML: ADD D
13 DCR E
14 JNZ ML
15 MOV D,A
16 RET
17 HLT
```

Decimal - Hex Conversion

Decimal

Hex

0

0

To Hex

To Dec

I/O Ports

0

-

+

00

Update Port Value

Memory

8050

-

+

04

Update Memory

GNUSim8085 - 8085 Microprocessor Simulator

DataStackKeyPadMemoryI/O Ports

Start

8050

OK

Address (Hex)	Address	Data
1F72	8050	4
1F73	8051	24
1F74	8052	0
1F75	8053	0
1F76	8054	0
1F77	8055	0
1F78	8056	0
1F79	8057	0
1F7A	8058	0
1F7B	8059	0
1F7C	8060	0
1F7D	8061	0
1F7E	8062	0
1F7F	8063	0

Line No

Assembler Message

0

Program assembled successfully

Simulator: Idle

29°C

Haze


Search

ENG

IN

16:25

31-12-2024

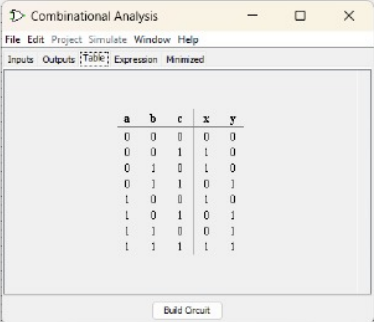

Combinational Analysis

File Edit Project Simulate Window Help


Inputs Outputs **Table** Expression Minimized

a	b	c	x	y
0	0	0	0	0
0	0	1	0	1
0	1	0	0	1
0	1	1	1	0
1	0	0	0	1
1	0	1	1	0
1	1	0	1	0
1	1	1	1	1

Build Circuit

Selection: Pin

Facing	West
Output?	Yes
Delta Bits	1
Three-state?	Yes
Pull Behavior	Unchanged
Label	
Label Location	East
Label Font	SansSerif Plain 12

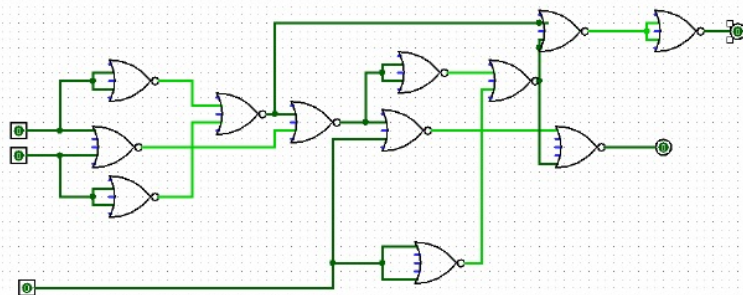

Combinational Analysis

File Edit Project Simulate Window Help


Inputs Outputs **Table** Expression Minimized

a	b	c	x	y
0	0	0	0	0
0	0	1	1	0
0	1	0	1	0
0	1	1	0	1
1	0	0	1	0
1	0	1	0	1
1	1	0	0	1
1	1	1	1	1

Build Circuit

Selection: Pin

Facing	West
Output?	Yes
Delta Bits	1
Three-state?	Yes
Pull Behavior	Unchanged
Label	
Label Location	East
Label Font	SansSerif Plain 12

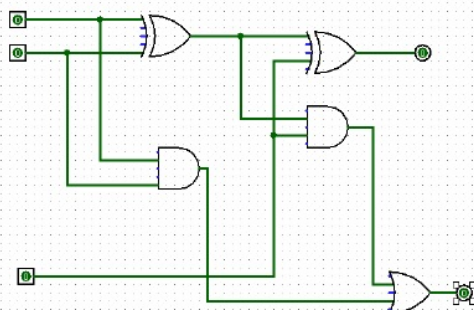

Decimal - Hex Conversion	
Decimal	Hex
0	0
To Hex	To Dec

Memory

8052 - + 00

 Update Memory

Start 8500 OK

Line No	Assembler Message
---------	-------------------

GNUSim8085 - 8085 Microprocessor Simulator

FileResetAssemblerDebugHelp

Registers

A00

BC0C00

DE0000

HL2134

PSW0000

PC4217

SPFFFF

Int-Reg00

Flag

S0

Z1

AC0

P1

C1

Decimal - Hex Conversion

DecimalHex

00

To HexTo Dec

I/O Ports

0-+00

Update Port Value

Memory

8054-+10

Update Memory

Load me at

1LXI H, 8050

2MOV C, M

3INX H

4MOV B, M

5DCR C

6LOOP: INX H

7MOV A, M

8CMP B

9JC SKIP

10MOV B, A

11SKIP: DCR C

12JNZ LOOP

13LXI H, 8500

14MOV M, B

15HLT


DataStackKeyPadMemoryI/O Ports

Start8500OK

Address (Hex)	Address	Data
2134	8500	12
2135	8501	0
2136	8502	0
2137	8503	0
2138	8504	0
2139	8505	0
213A	8506	0
213B	8507	0
213C	8508	0
213D	8509	0
213E	8510	0
213F	8511	0
2140	8512	0
2141	8513	0

Line NoAssembler Message

0Program assembled successfully

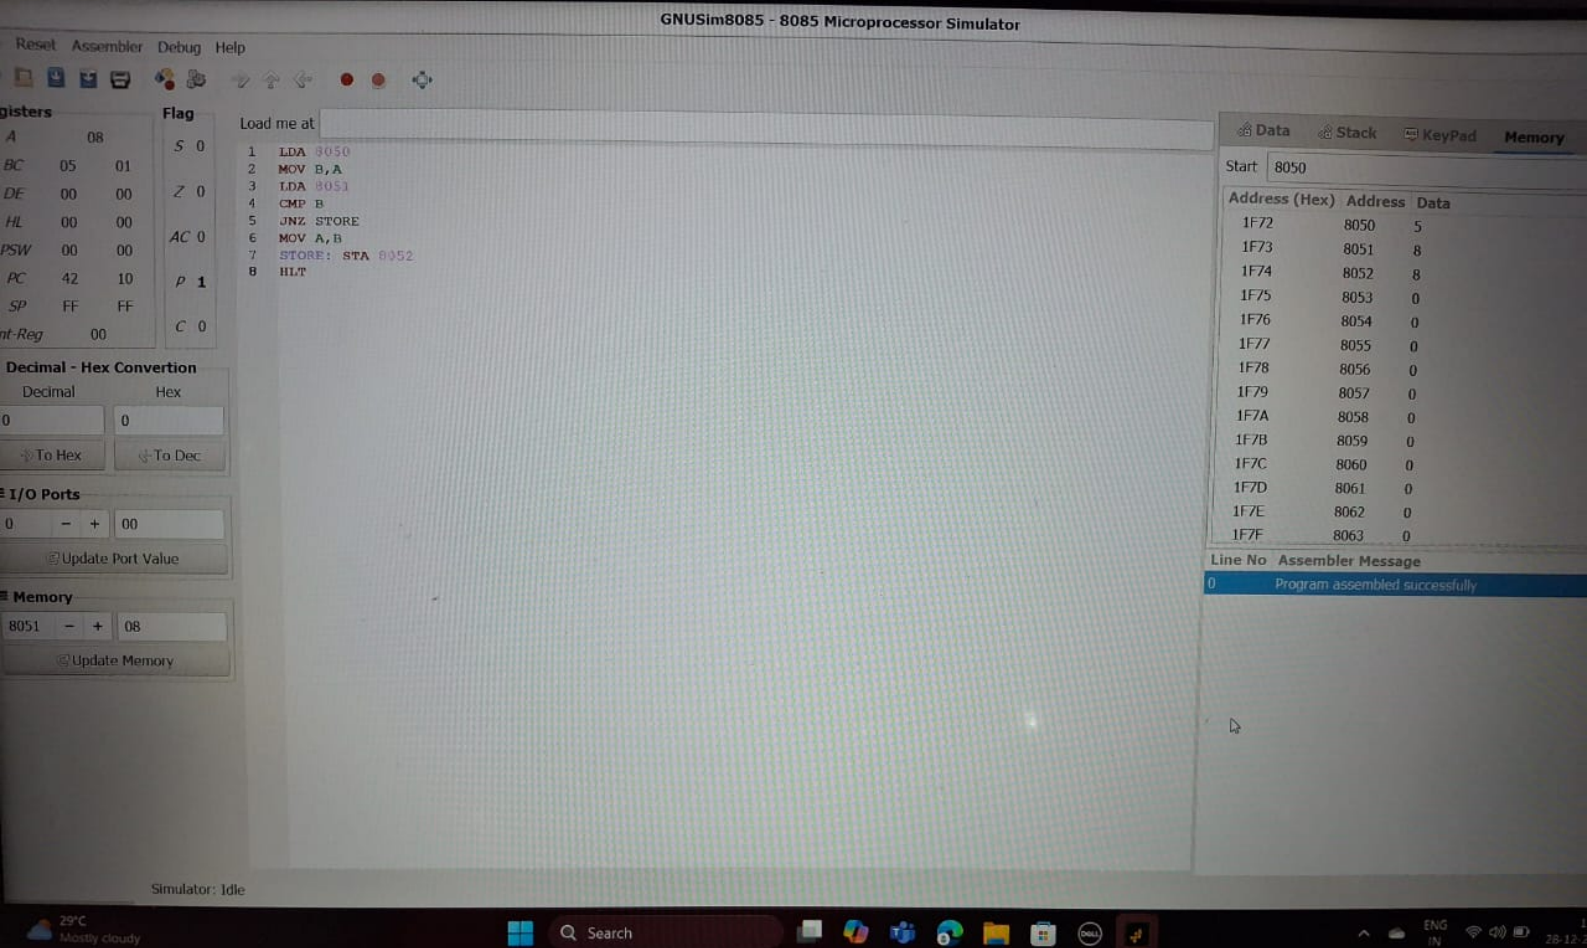

Combinational Analysis

File Edit Project Simulate Window Help


Inputs Outputs **Table** Expression Minimized

a	b	x	y
0	0	0	0
0	1	1	0
1	0	1	0
1	1	0	1

Build Circuit

Selection: Pin

Facing	West
Output?	Yes
Data Bits	1
Three-state?	Yes
Pull Behavior	Unchanged
Label	
Label Location	East
Label Font	SansSerif Plain 12

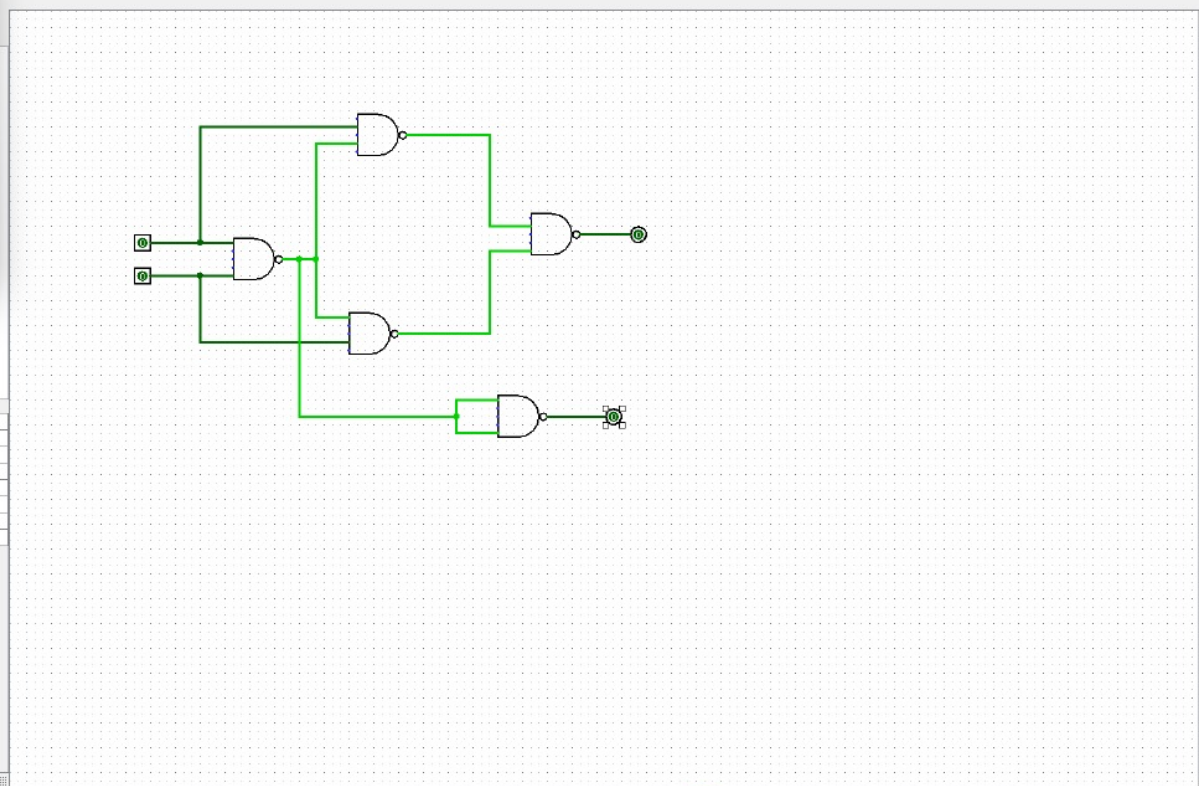

Combinational Analysis

File Edit Project Simulate Window Help


Inputs Outputs **Table** Expression Minimized

a	b	x	y
0	0	0	0
0	1	0	1
1	0	0	1
1	1	1	0

Build Circuit

Selection: Pin

Facing	West
Output?	Yes
Delta Bits	1
Three-state?	Yes
Pull Behavior	Unchanged
Label	
Label Location	East
Label Font	SansSerif Plain 12

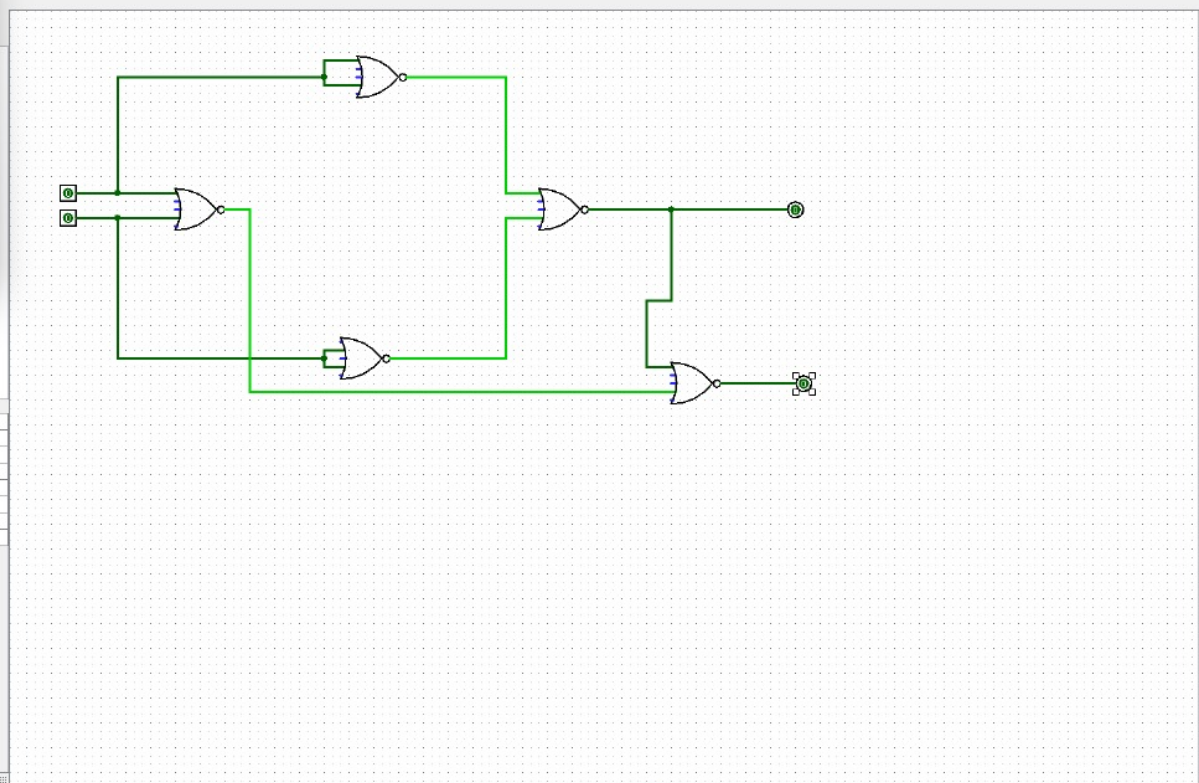

Combinational Analysis

File Edit Project Simulate Window Help

Inputs Outputs **Table** Expression Minimized


a	b	x	y
0	0	0	0
0	1	1	0
1	0	1	0
1	1	0	1

Build Circuit

ArithmeticMemoryInput/OutputBase

Selection: Pin

Facing	West
Output?	Yes
Delta Bits	1
Three-state?	Yes
Pull Behavior	Unchanged
Label	
Label Location	East
Label Font	SansSerif Plain 12

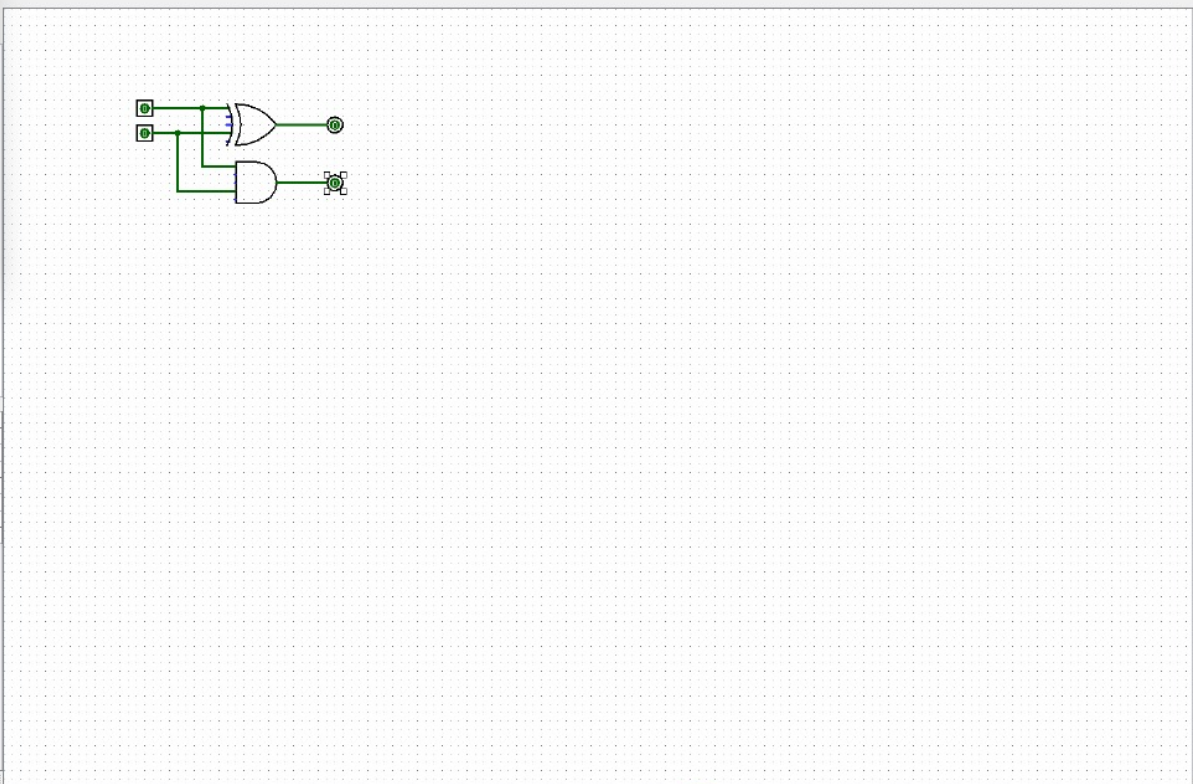

GNUSim8085 - 8085 Microprocessor Simulator

File Reset Assembler Debug Help

Registers

Register	Value
A	00
BC	00 2D
DE	FF C4
HL	00 B4
PSW	00 00
PC	42 2D
SP	FF FF
Int-Reg	00

Flag

Flag	Value
S	0
Z	1
AC	0
P	1
C	0

Load me at

```
1 LXI H, 8000
2 MOV C, M
3 MVI B, 00
4 INX H
5 MOV A, M
6 CMA
7 MOV E, A
8 MVI D, 0FFH
9 MOV A, B
10 CMA
11 MOV D, A
12 INX D
13 LXI H, 0000
14 NEXT: DAD B
15 SHLD 8010
16 LOOP: DAD D
17 JNC SKIP
18 MOV A, H
19 ORA L
20 JZ EXIT
21 JMP LOOP
22 SRIP: LHLD 8010
23 JMP NEXT
24 EXIT: LHLD 8010
25 HLT
```

Decimal - Hex Conversion

Decimal	Hex
0	0

I/O Ports

Port	Value
0	00

Memory

Address	Value
8001	3C

Start: 8000

Address (Hex)	Address	Data
1F40	8000	45
1F41	8001	60
1F42	8002	0
1F43	8003	0
1F44	8004	0
1F45	8005	0
1F46	8006	0
1F47	8007	0
1F48	8008	0
1F49	8009	0
1F4A	8010	180
1F4B	8011	0
1F4C	8012	0
1F4D	8013	0

Line No Assembler Message

```
0 Program assembled successfully
```

Simulator: Idle

Registers		Flag
<i>A</i>	16	<i>S</i> 0
<i>BC</i>	00 00	<i>Z</i> 1
<i>DE</i>	00 00	<i>AC</i> 1
<i>HL</i>	00 00	<i>P</i> 1
<i>PSW</i>	00 00	<i>C</i> 0
<i>PC</i>	42 13	
<i>SP</i>	FF FF	
<i>Int-Reg</i>	00	

Load me at

```

1  LDA 8050
2  ANI 01
3  JZ LOOP1
4  MVI A,11
5  JMP LOOP2
6  LOOP1: MVI A,22
7  LOOP2: STA 8051
8  HLT

```

Decimal - Hex Conversion

Decimal	Hex
0	0
 To Hex	 To Dec

I/O Ports

0 - + 00
Update Port Value

Memory

8050 - + 08
Update Memory



Memory

Start

Address (Hex)	Address	Data
1F73	8051	22
1F74	8052	0
1F75	8053	0
1F76	8054	0
1F77	8055	0
1F78	8056	0
1F79	8057	0
1F7A	8058	0
1F7B	8059	0
1F7C	8060	0
1F7D	8061	0
1F7E	8062	0
1F7F	8063	0
1F80	8064	0

Line No	Assembler Message
---------	-------------------

```
0 Program assembled successfully
```

FileResetAssemblerDebugHelp

Registers

A	16
BC	00 00
DE	00 00
HL	00 00
PSW	00 00
PC	42 13
SP	FF FF
Int-Reg	00

Flag

S	0
Z	0
AC	1
P	0
C	0

Decimal - Hex Conversion

Decimal

Hex

00

00

To Hex

To Dec

I/O Ports

0

-

+

00

Update Port Value

Memory

8050

-

+

05

Update Memory

GNUSim8085 - 8085 Microprocessor Simulator

Load me at

1 LDA 8050

2 ANI 01

3 JZ LOOP1

4 MVI A,22

5 JMP LOOP2

6 LOOP1: MVI A,11

7 LOOP2: STA 8051

8 HLT

DataStackKeyPadMemoryI/O Ports

Start8050OK

Address (Hex)	Address	Data
1F72	8050	5
1F73	8051	22
1F74	8052	0
1F75	8053	0
1F76	8054	0
1F77	8055	0
1F78	8056	0
1F79	8057	0
1F7A	8058	0
1F7B	8059	0
1F7C	8060	0
1F7D	8061	0
1F7E	8062	0
1F7F	8063	0

Line No

Assembler Message

0

Program assembled successfully

FileResetAssemblerDebugHelp

Registers

A	05
BC	02 FE
DE	00 00
HL	21 34
PSW	00 00
PC	42 17
SP	FF FF
Int-Reg	00

Flag

S	1
Z	0
AC	0
P	0
C	0

Decimal - Hex Conversion

Decimal

Hex

0

0

To Hex

To Dec

I/O Ports

0

-

+

00

Update Port Value

Memory

8055

-

+

06

Update Memory

Load me at

1

TXI

H,

8050

2

MOV

C,

M

3

INX

H

4

MOV

B,

M

5

DCR

C

6

LOOP:

INX

H

7

MOV

A,

M

8

CMP

B

9

JNZ

SRIP

10

MOV

B,

A

11

SKIP:

DCR

C

12

JZ

LOOP

13

TXI

H,

8500

14

MOV

M,

B

15

HLT

DataStackKeyPadMemoryI/O Ports

Start

8500

OK

Address (Hex)	Address	Data
2134	8500	2
2135	8501	0
2136	8502	0
2137	8503	0
2138	8504	0
2139	8505	0
213A	8506	0
213B	8507	0
213C	8508	0
213D	8509	0
213E	8510	0
213F	8511	0
2140	8512	0
2141	8513	0

Line No

Assembler Message

0

Program assembled successfully

FileResetAssemblerDebugHelp

Registers

A	07	
BC	07	0A
DE	FF	EB
HL	00	78
PSW	00	00
PC	42	10
SP	FF	FF
Int-Reg	00	

Flag

S	0
Z	0
AC	0
P	0
C	0

Load me at

1

LDA 8050

2

MOV B,A

3

LDA 8051

4

CMP B

5

JNZ STORE

6

STORE: MOV A,B

7

STA 8052

8

HLT

Decimal - Hex Conversion

Decimal

Hex

0

0

To Hex

To Dec

I/O Ports

0

-

+

00

Update Port Value

Memory

8051

-

+

09

Update Memory

GNUSim8085 - 8085 Microprocessor Simulator

DataStackKeyPadMemoryI/O Ports

Start8050OK

Address (Hex)	Address	Data
1F72	8050	7
1F73	8051	9
1F74	8052	7
1F75	8053	0
1F76	8054	0
1F77	8055	0
1F78	8056	0
1F79	8057	0
1F7A	8058	0
1F7B	8059	0
1F7C	8060	0
1F7D	8061	0
1F7E	8062	0
1F7F	8063	0

Line NoAssembler Message

0Program assembled successfully

FileResetAssemblerDebugHelp

Registers

A	04
BC	00 00
DE	00 00
HL	00 00
PSW	00 00
PC	42 0F
SP	FF FF
Int-Reg	00

Flag

S	0
Z	0
AC	0
P	0
C	0

Decimal - Hex Conversion

Decimal

Hex

0

0

To Hex

To Dec

I/O Ports

0

-

+

00

Update Port Value

Memory

8051

-

+

04

Update Memory

Load me at

1

LDA

8050

2

MOV

B,A

3

LDA

8051

4

STA

8050

5

MOV

A,B

6

STA

8051

7

HLT

DataStackKeyPadMemoryI/O Ports

Start

8050

OK

Address (Hex)

Address

Data

1F72

8050

8

1F73

8051

4

1F74

8052

0

1F75

8053

0

1F76

8054

0

1F77

8055

0

1F78

8056

0

1F79

8057

0

1F7A

8058

0

1F7B

8059

0

1F7C

8060

0

1F7D

8061

0

1F7E

8062

0

1F7F

8063

0

Line No

Assembler Message

0

Program assembled successfully