

SYSTEVO CALL ACKERMANN

May 2024 – Product catalogue | Intelligent Life Care

Honeywell

Contents

General Hints **2**

General Instructions 2

Systevo Call Ackermann **4-110**

System Description 4-5
System Overview 6-9
Central components 10-35
Systevo components for duty room 36-41
Systevo Room terminals 42-51
Systevo electronic modules and corridor lamps 52-57
Systevo Call Easy 75-100
Special call units 101-103
Systevo Corridor components 104-105
Components for installation / accessories 106-110

Systevo Mobile **112-116**

System description 112

Systevo Guard **118-121**

System description 118
Central components 119
Transponder 120
Accessories 121

Systevo DECT **124-130**

System description 124
Central components 125-128
Mobile units 129-130

Appendix **132**

Part No. Index 133
Keyword Index 134-136

Symbols used

 = List of contents which the part number includes

 = Information, important notice such as special versions, dependencies etc.



= Packing unit

 = Available starting on

IP type of protection

The type of protection indicates the suitability of electric operating materials (for example, devices, lights and installation material) against solid foreign objects and for various ambient conditions.

Levels of protection from contact and foreign bodies (first digit)

Digit	Protection from contact	Protection from foreign bodies
0	No protection	No protection
1	Protection from large-sized body parts (diameter 50 mm)	Large foreign bodies (diameter from 50 mm)
2	Finger protection (diameter 12 mm)	Medium-size foreign bodies (diameter from 12.5 mm)
3	Tools and wires (diameter from 2.5 mm)	Small foreign matter (diameter from 2.5 mm)
4	Tools and wires (diameter from 1 mm)	Granular foreign matter (diameter from 1 mm)
5 (K)	Wire protection (as IP 4) dust-protected	Dust accumulation
6 (K)	Wire protection (as IP 4) dust-proof	No ingress of dust

Levels of protection from water (second digit)

Digit	Protection from water
0	No protection
1	Protection from vertically dripping water
2	Protection from diagonally (15°) falling drip water
3	Protection from falling spray water up to 60°, against the vertical
4	Protection against splashing water
5	Protection from hose water (nozzle) from any angle
6	Protection from strong hose water (flooding)
7	Protection from temporary submersion
8	Protection from permanent submersion

Example:
IP64: Completely dust-proof - protected against splashing water - nearly leak-proof.

Environmental class:
If not specified otherwise in the product details, the products are class I compliant and adequate for use in dry rooms.



Systevo Call Ackermann

System Description	4-5
System Overview	6-9
Central components	10-35
Systevo components for duty room	36-41
Systevo Room terminals	42-51
Systevo electronic modules and corridor lamps	52-57
Systevo Call Easy	75-100
Special call units	101-103
Systevo Corridor components	104-105
Components for installation / accessories	106-110

Systevo Call Ackermann – designed as an intelligent communication platform for state-of-the-art care facilities

Patient safety and efficient workflow processes in care facilities are key elements of the new system generation of Systevo Call Ackermann. With the state-of-the-art architecture, the system allows process flows to be set up in a customer- oriented, flexible manner and supports the care staff in daily patient care.

With a focus on the correct process workflows in care, the system connects patients, residents and wards with the responsible care staff and contributes to safely and efficiently structuring the steps in daily care. In simple and smooth-running workflow steps, information and alarms are intelligently forwarded with the correct priority to the right people, which contributes to a reduction of alarm fatigue in the care environ-ment. Various safety devices, such as Track&Trace („Patient and device monitoring“), medical monitoring, fire alarm and hazard management systems, are easily integrated and escalation procedures are defined by the care facility. Coordinated procedures make a sustainable contribution to the avoidance of errors and the reduction of inefficient work processes.

Future-proof system infrastructure and sustainable upgrade options

With Systevo Call Ackermann, the functions of a nurse call system are seamlessly networked with additional monitoring systems and mobile communication solutions, so that customized and high-performance solutions are offered for the transmission of time-critical information. Through the intelligent integration of the individual systems, care facilities have the opportunity to improve the internal workflows and the coordination of the processes and thereby achieve higher productivity. The individual packages are defined within the scope of project planning and can be upgraded during the running operation. The required functional scope is coordinated with the respective requirements and ensures long-term economical use of the investments made in the infrastructure. In order to close gaps between the technical requirements for the integration of clinical and non-clinical workflows, the system is based on a modular and scalable software model. The platform essentially uses standardized IT services (DHCP, VLAN, SIP, i.a.) and ensures compatibility with existing infrastructures.

In order to fulfill the requirements for Cyber Security, Software Maintenance and Service Ability, new functionalities were added to system release V12 and existing system functions re-engineered. These are activated within the scope of software/firmware updates in conjunction with the required system license, so that care facilities can access a wide range of services.Examples of this are the integration of forward-looking touch IP devices, clinical WIFI smartphones and state-of-the-art patient hand-sets, which offer opportunities for improving the employee cooperation. The simplified communication between care staff and patients or residents is realized at the push of a button“, additional features, such as dynamic call forwarding, also avoid unnecessary disturbances. Future services are gradually made available with appropriate system licenses.

Regulatory requirements and a state-of-the-art concept in unison

Older systems do not completely fulfil the present requirements of DIN VDE 0834-1: 2016-06, which leads to increased liability risk for the care institutions or responsible party in the event of a fault. Systevo Call Ackermann particularly fulfils all of the requirements of VDE 0834 and offers long-term safety – from the basic nurse call system, right up to the fully-integrated care management system. Within the scope of planning the system, the operator, planner, installation company and additional manufacturers coordinate and specify the system parameters. The required components must fulfil all the criteria, which guarantee the safe operation of a nurse call system and are integrated transparently into the safety concept for the care institutions. Within the scope of the development of Systevo Call Ackermann, the long-term migration of existing installations was taken into consideration, i.e. existing infrastructures are used and meaningfully supplemented. With the focus on the issues of patient and functional safety, the stations or living areas are renewed.

Components of the system are supplied via long-lasting 24 V DC power supply units, which are fitted with integrated surge devices and the appropriate functional indicator. Safety modules are used for monitoring the SELV direct voltage network of the nurse call system for earth faults and hazardous external voltages, in order to fulfill the increased safety requirements of VDE 0834. The power supplies are designed in accordance with EN 60601 (leakage current and insulation voltage in accordance with EN 60601-1, 2MOPP) and fulfil the EMC in accordance with EN 61204-3 (plus: EN 62368-1). A potential power failure is buffered by the uninterrupted power supplies.

System concept

The system technology of Systevo Call Ackermann is designed such that it is downwards-compatible and enables migration and upgrading of the product lines, Clino Opt 99, Clino Phon 99 and also Clino Phon 95. The migration concept is applicable to smaller units and also entire building complexes. It is comprised of the display of system messages, call answering and call forwarding, personnelspeaking, announcement functions and freely programmable services (so-called „interconnections“).

The specific software and hardware modules of the system offers flexible and two-way communication. The open and scalable communication platform supports the well-proven fieldbus technology of classic nurse call systems, as well as open IP-based IT structures for state-of-the-art communication and alarm management solutions. Entertainment, as well as innovative care management solutions, are also taken into consideration. With Systevo Call Ackermann, care facilities take advantage of a homogeneous system platform, which supports the allocation of responsibilities, priorities and escalation routines by the respective service/care situation. The simple commissioning and flexible networking of stations via IP networks and the connection to the telecommunication network (ITC) are important features of the platform. The system has been developed for a high degree of safety and error tolerance and is divided into several physical installation stages. The system functions are made available through appropriate software licenses.

Future-proof system infrastructure using IP technologies

Standardized IP based infrastructure, network and data services as well as IP devices

The Systevo Call Ackermann IT infrastructure is based on the modular requirements for software, hardware and system services. The structured wiring takes place using ETH-LAN and/or fiber optic LAN, i.e. according to the standards of a conventional network design. All IP devices, such as central units, (Systevo Control), IP-touch terminals, patient handsets (Systevo Com) and control units (workstation, e.g. also VM) are networked via appropriate switches/routers (ETH LAN: IEEE802.3), which recognize an automatic transfer rate (10, 100, 1000 Mbit, wireless). VLAN network components with QoS / ToS simplify the prioritization of the services of a nurse call system via voice services. For safety reasons, all IP components (control panels, servers, VM) operate with fixed IP addresses (10.1.x.y), which are not used by other components (e.g. BMS, medical devices etc.) In order to set up different IP addresses (e.g. .192.168.x.y), the configuration takes place via an optional DHCP server. In total, up to 64 control units can be networked in one system, so that a theoretical system size of more than 8,000 rooms is possible, split into 250 groups (maximum of 6 logical groups per control units).

System components are monitored and synchronized over the entire IP or fieldbus infrastructure of the Systevo Call Ackermann platform: the monitoring is based on the DIN VDE 0834-1: 2016-06DIN standard, in which faults are displayed and escalated promptly. The voice communication is based on TCP / IP via defined communication protocols, as well as VoIP/SIP, furthermore standard services, such as Telnet and FTP are used for remote access and data transmission. For the system security and possible analysis of stored log data, additional network applications (Syslog, firewall etc.) are used. The system workstation (and/or VM solution) can be integrated into the network environment of the care facility via the ETH LAN interface. In this case intelligent IP routing between various IP segments (internal/external) and risk management must be taken into consideration. The design of the IT addressing and IP routing of various components/systems must be designed accordingly. In order to fulfill the high safety requirements of the system, all LAN components / controllers are monitored cyclically. In case of network interruption, the segments run in local mode.

Third-party provider systems are connected to one another via secure IP gateways, in order to fulfill the corresponding cyber security standards. These include the following systems, ITC infrastructures, Hospital Information System: HIS, IP-TC system (IPPABX), Fire Allocation System: FAS), Building Management System: BMS, Messaging, Track & Trace solutions.

To integrate existing system control panels (Systevo Control), an upgrade to the current system software V12 is required for compatibility reasons. Contact us to work out the options for migrating an existing system and to check the possible compatibility of an existing system installation. Clino System 95 installations that have already been migrated, in which the Systevo Control control center with the FBC 95 fieldbus card is used to connect up to 50 bus components per ward, can be integrated with limited device functions.

Components at the floor level

In order to be able to use value-added functions at the „Point of Care“ (PoC), up to 40 IP touch terminals (surface-mounted versions for patient rooms and as desktop devices in duty rooms) are integrated via the IT infrastructure for each central unit (Systevo Control). During the configuration of a central unit, the IP terminals are configured in combination with an electronic module. With Systevo Call Ackermann, IP touch terminals can alternatively be integrated into „Full-IP Clusters“. Thus, different design approaches are available for care facilities to be able to use IP terminals.

Alternatively, IP touch terminals as well as conventional room electronics and floor-related components such as corridor displays, directional lamps, interface units, etc. are connected to the fieldbus card of the respective control center via the corridor databus. Up to 127 modules such as information displays, electronic modules and room terminals can be connected to the corridor databus. The total number of addressable modules per corridor databus is limited to a maximum of 255. Up to 40 IP touch terminals may be allocated to one central unit in combination with an electronic module, within the scope of the configuration.

Components at the room level

Operating, control and display elements (display module, call button, cancel button, bed module, room signal lamp, etc.) assigned to individual rooms are connected directly or via the data bus (DBUS) to the respective room electronics such as IP touch terminals, room terminals or electronic modules.


The Systevo bed units, call/control units (SCU) and future device units are connected via the multifunctional data bus (DBUS). The bed bus connects active components in the rooms, e.g. the bed modules, the call modules and display modules with the room electronics. In addition to simple installation, this enables configurable individual identification of messages and calls. Passive call elements such as normally closed circuit (NCC) call buttons and cancel buttons are connected directly to the room electronics (IP touch terminals, electronic modules and room terminals).

Systevo Call Ackermann provides users with simple to multifunctional handheld devices that meet the hygiene requirements in care facilities. The handsets are used to control various room and device functions (TV, lighting and blinds), and optional voice communication with nursing staff is also possible.

Cover plates program in a timeless design for more hygiene

Through the use of antimicrobial materials and surfaces that are level and easy to clean, the new cover panel design of Systevo Call Ackermann covers the requirements from the care sector. The use of antimicrobial material verifiably reduces the ability of hazardous microorganisms to multiply.Cover plates in the Clino System 99 design are still available. The article numbers can be found in the compatibility list


Central components and Networking according to DIN VDE 0834-1: 2016-06

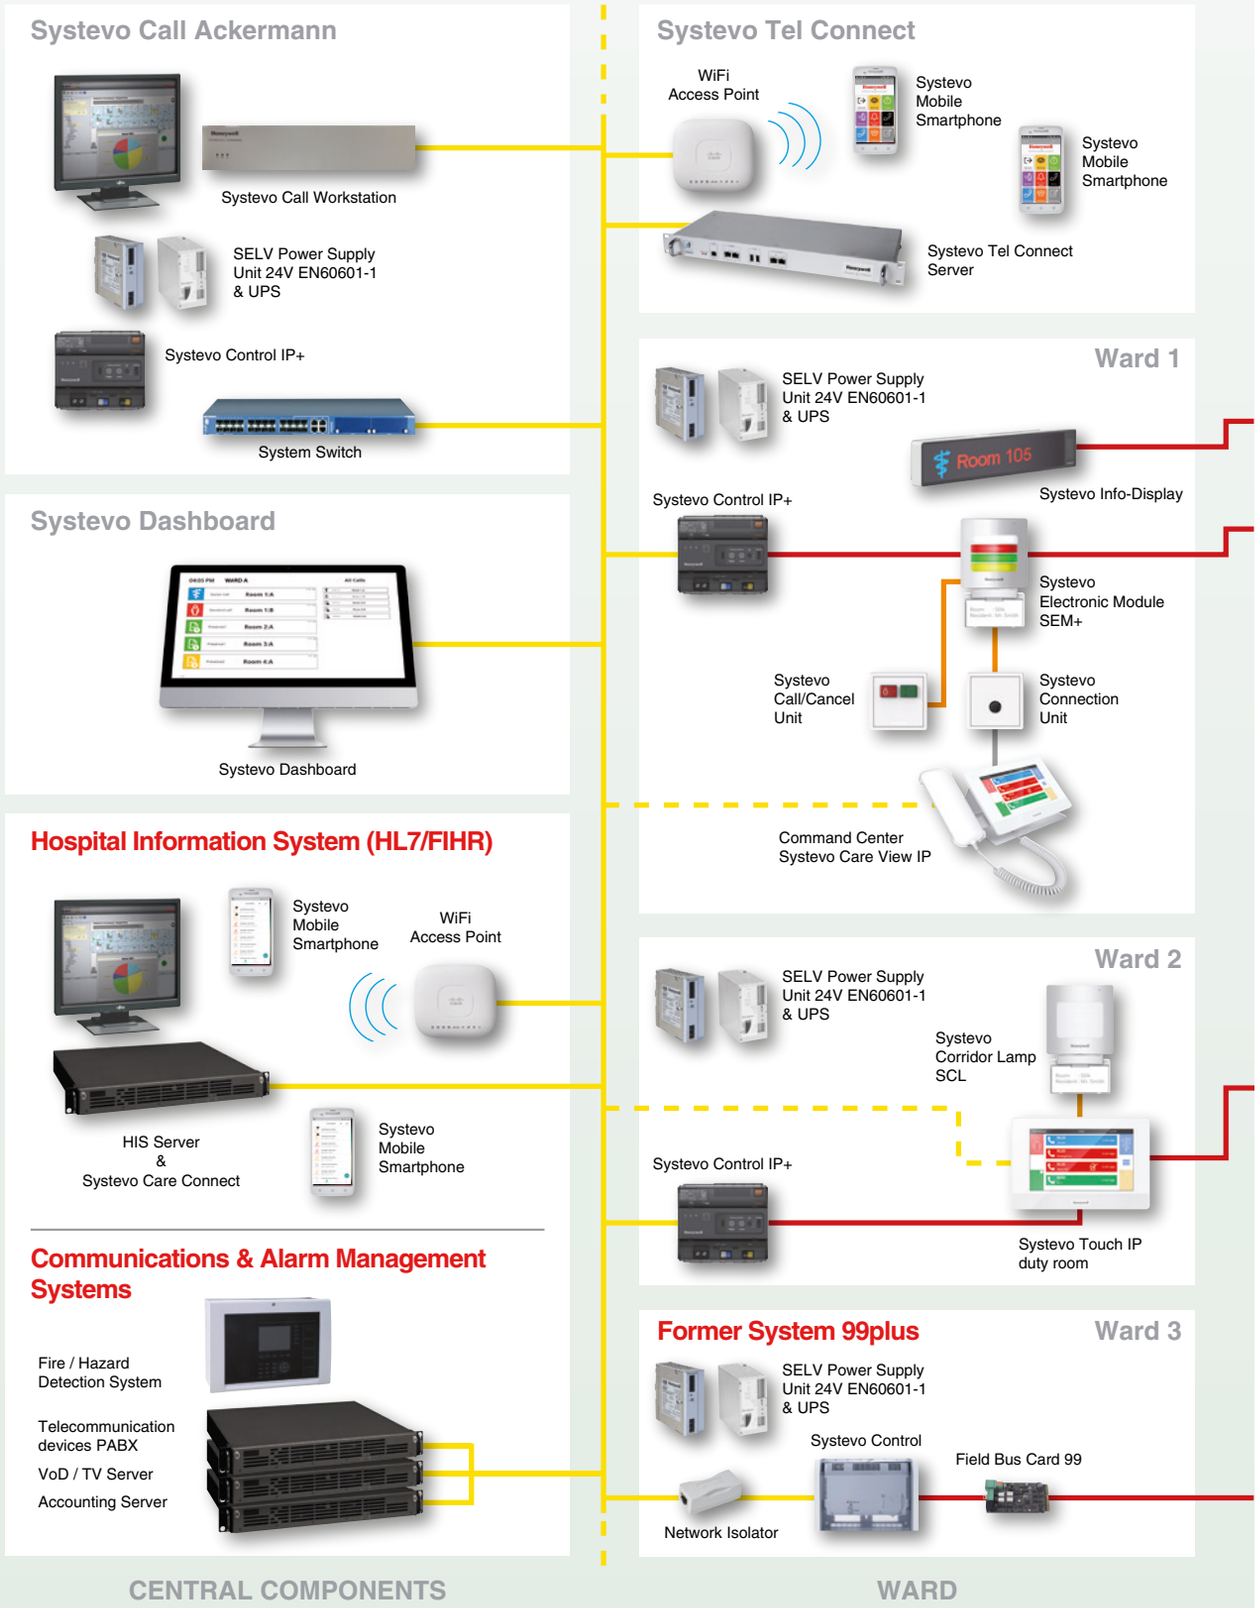

Ethernet / LAN
Corridor databus
Direct connection
Bed databus
DBUS

Systevo Call Ackermann

System Overview

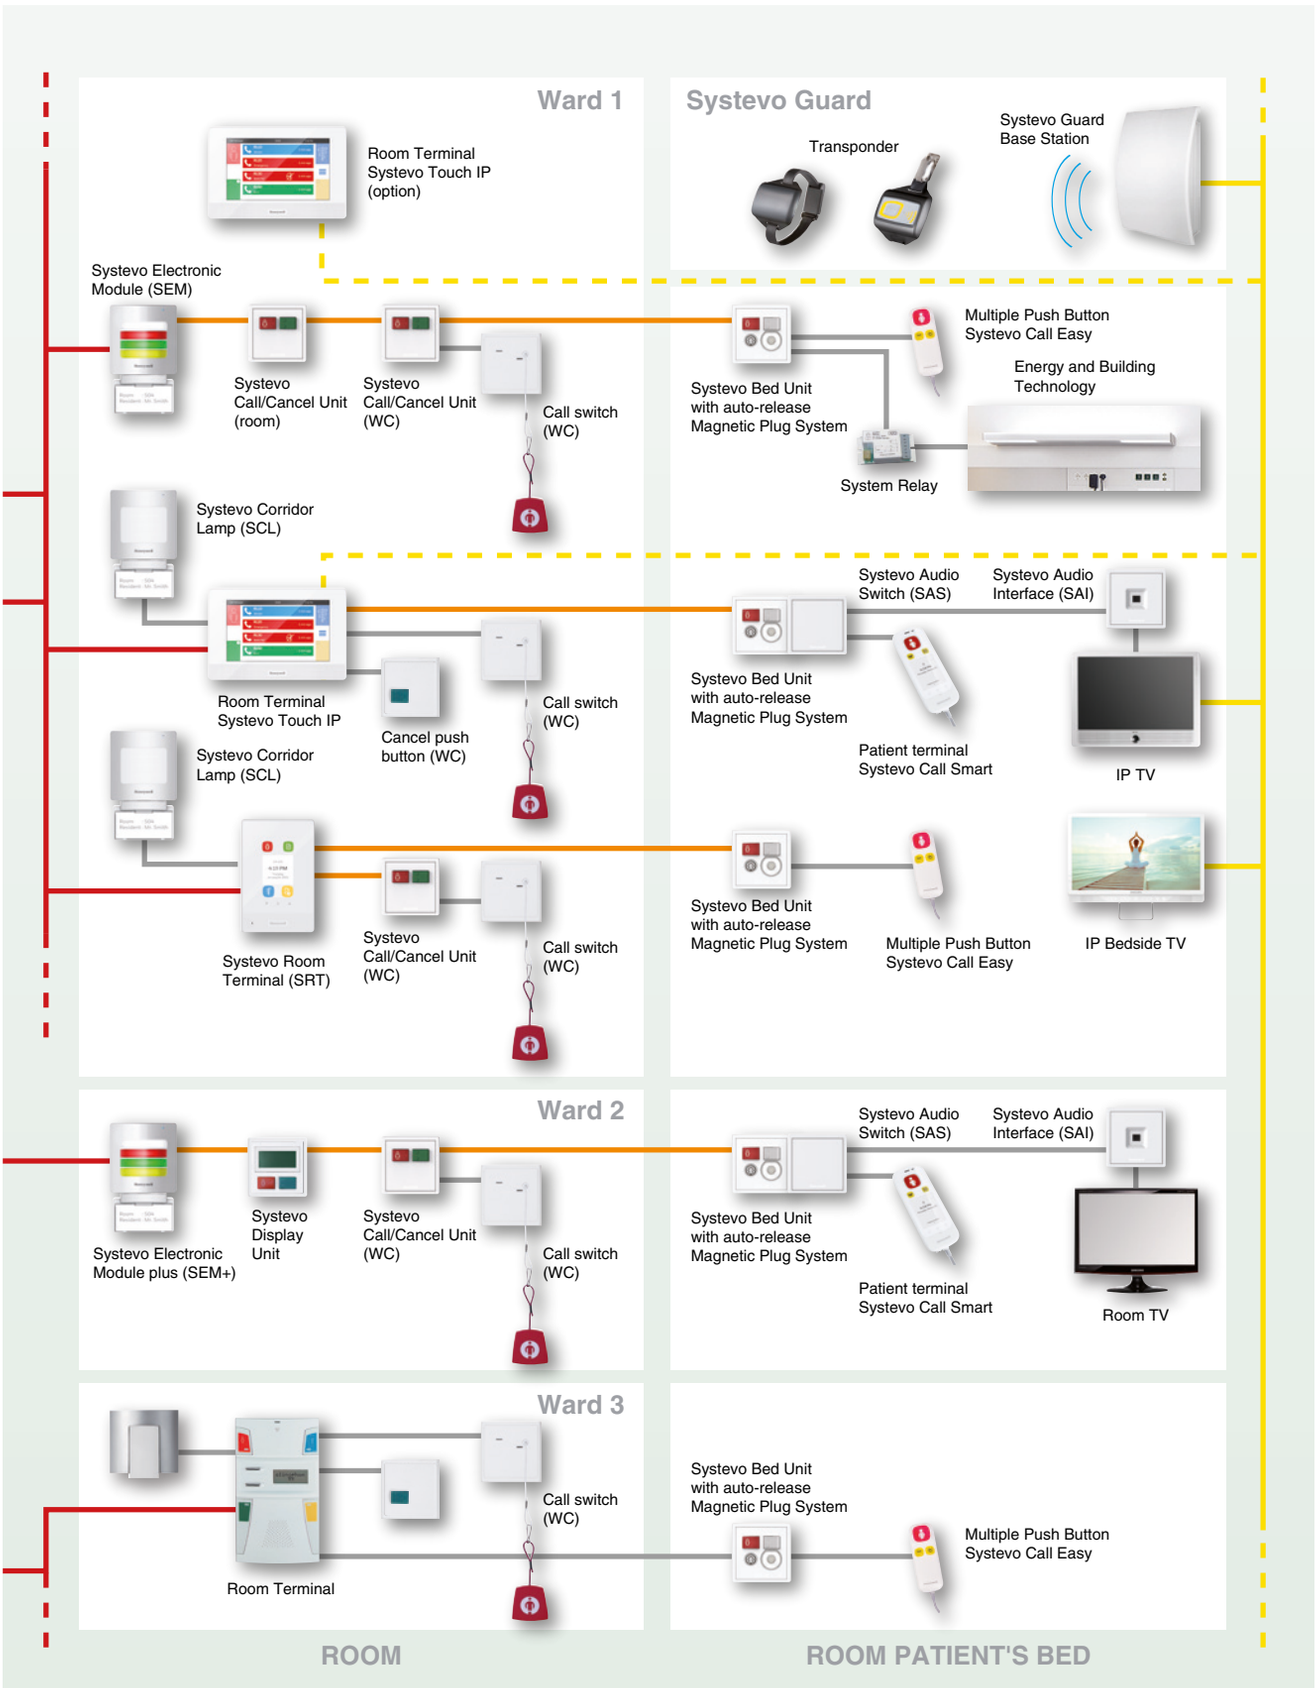


Ethernet / LAN
Corridor databus


Direct connection
Bed databus

DBUS

with speech

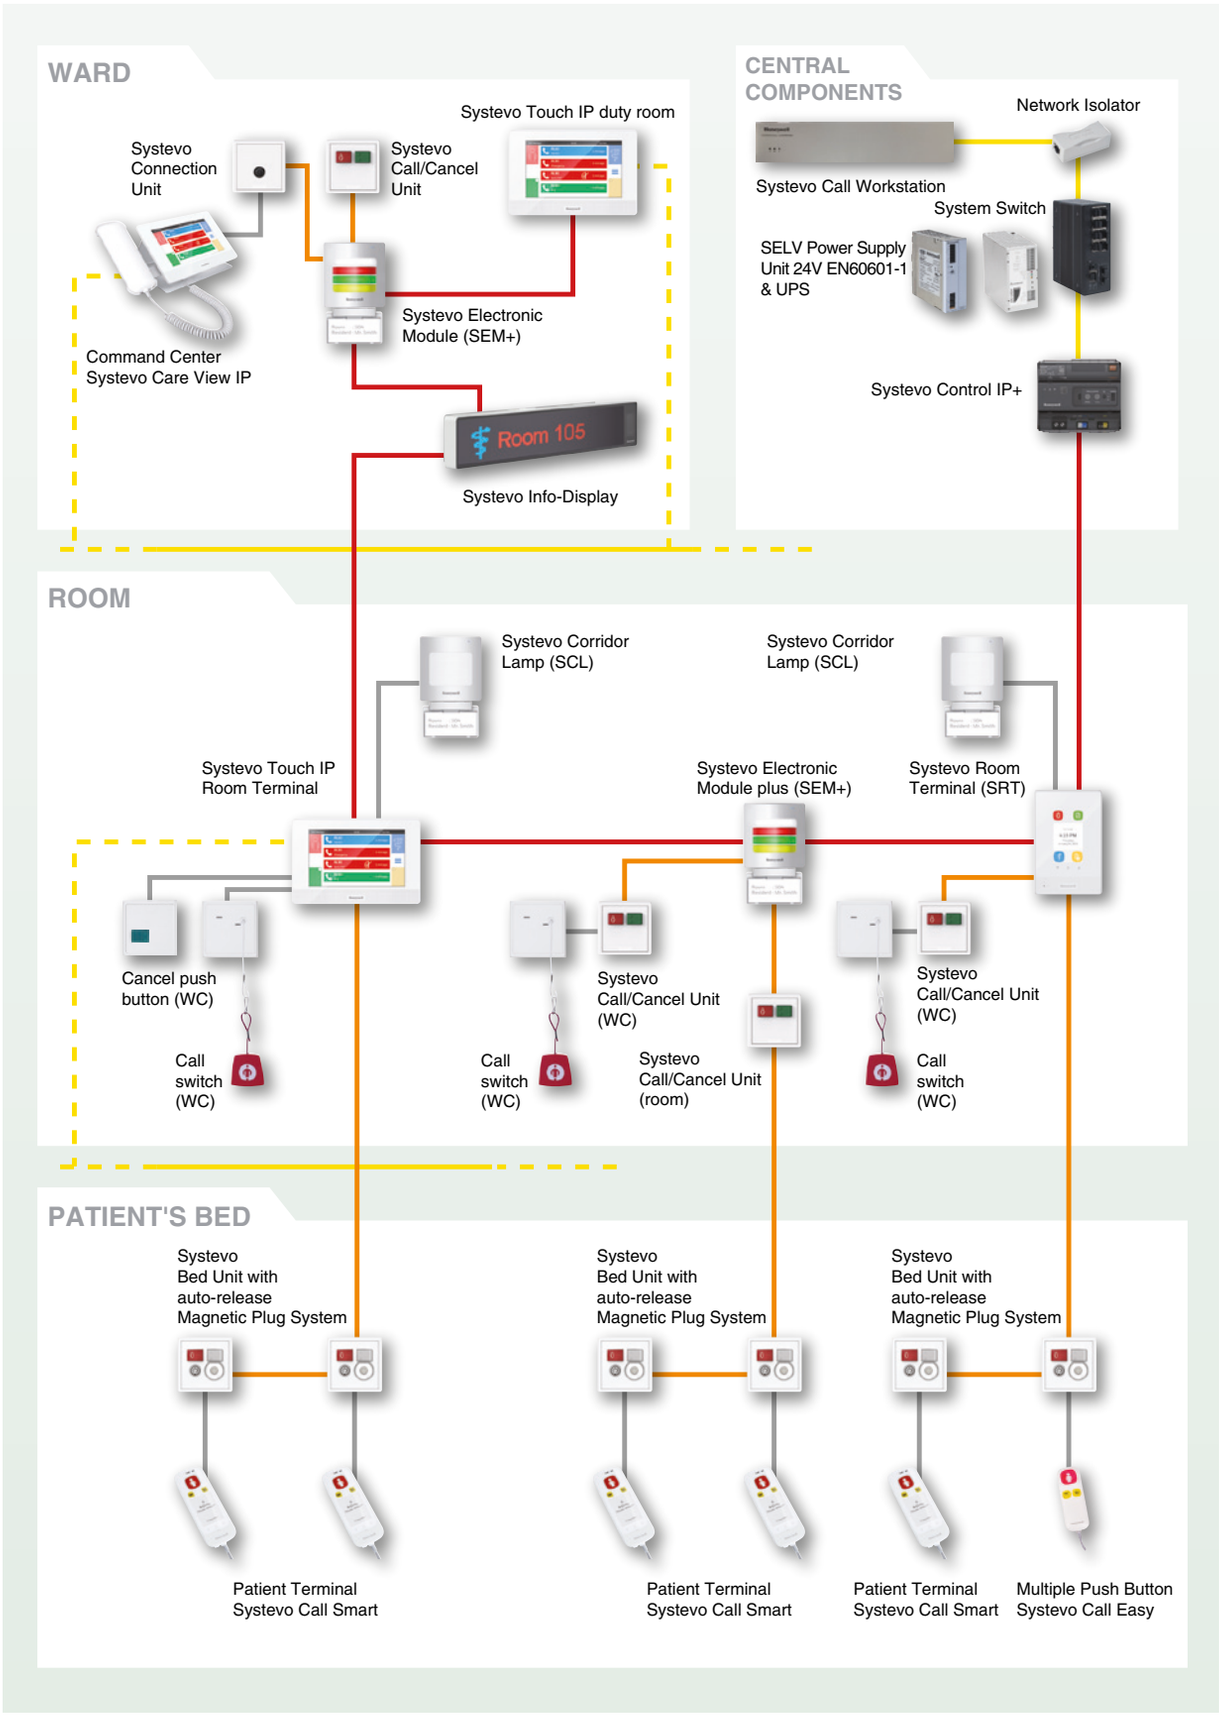
WARD
Systevo Touch IP duty room
Systevo Connection Unit
Systevo Call/Cancel Unit
Systevo Electronic Module (SEM+)
Command Center Systevo Care View IP
Room 105
Systevo Info-Display
CENTRAL COMPONENTS
Network Isolator
Systevo Call Workstation
System Switch
SELV Power Supply Unit 24V EN60601-1 & UPS
Systevo Control IP+
ROOM
Systevo Corridor Lamp (SCL)
Systevo Corridor Lamp (SCL)
Systevo Touch IP Room Terminal
Systevo Electronic Module plus (SEM+)
Systevo Room Terminal (SRT)
Cancel push button (WC)
Call switch (WC)
Systevo Call/Cancel Unit (WC)
Call switch (WC)
Systevo Call/Cancel Unit (room)
Systevo Call/Cancel Unit (WC)
Call switch (WC)
PATIENT'S BED
Systevo Bed Unit with auto-release Magnetic Plug System
Systevo Bed Unit with auto-release Magnetic Plug System
Systevo Bed Unit with auto-release Magnetic Plug System
Patient Terminal Systevo Call Smart
Patient Terminal Systevo Call Smart
Patient Terminal Systevo Call Smart
Multiple Push Button Systevo Call Easy
Ethernet / LAN
Corridor databus
Direct connection
DBUS

without speech

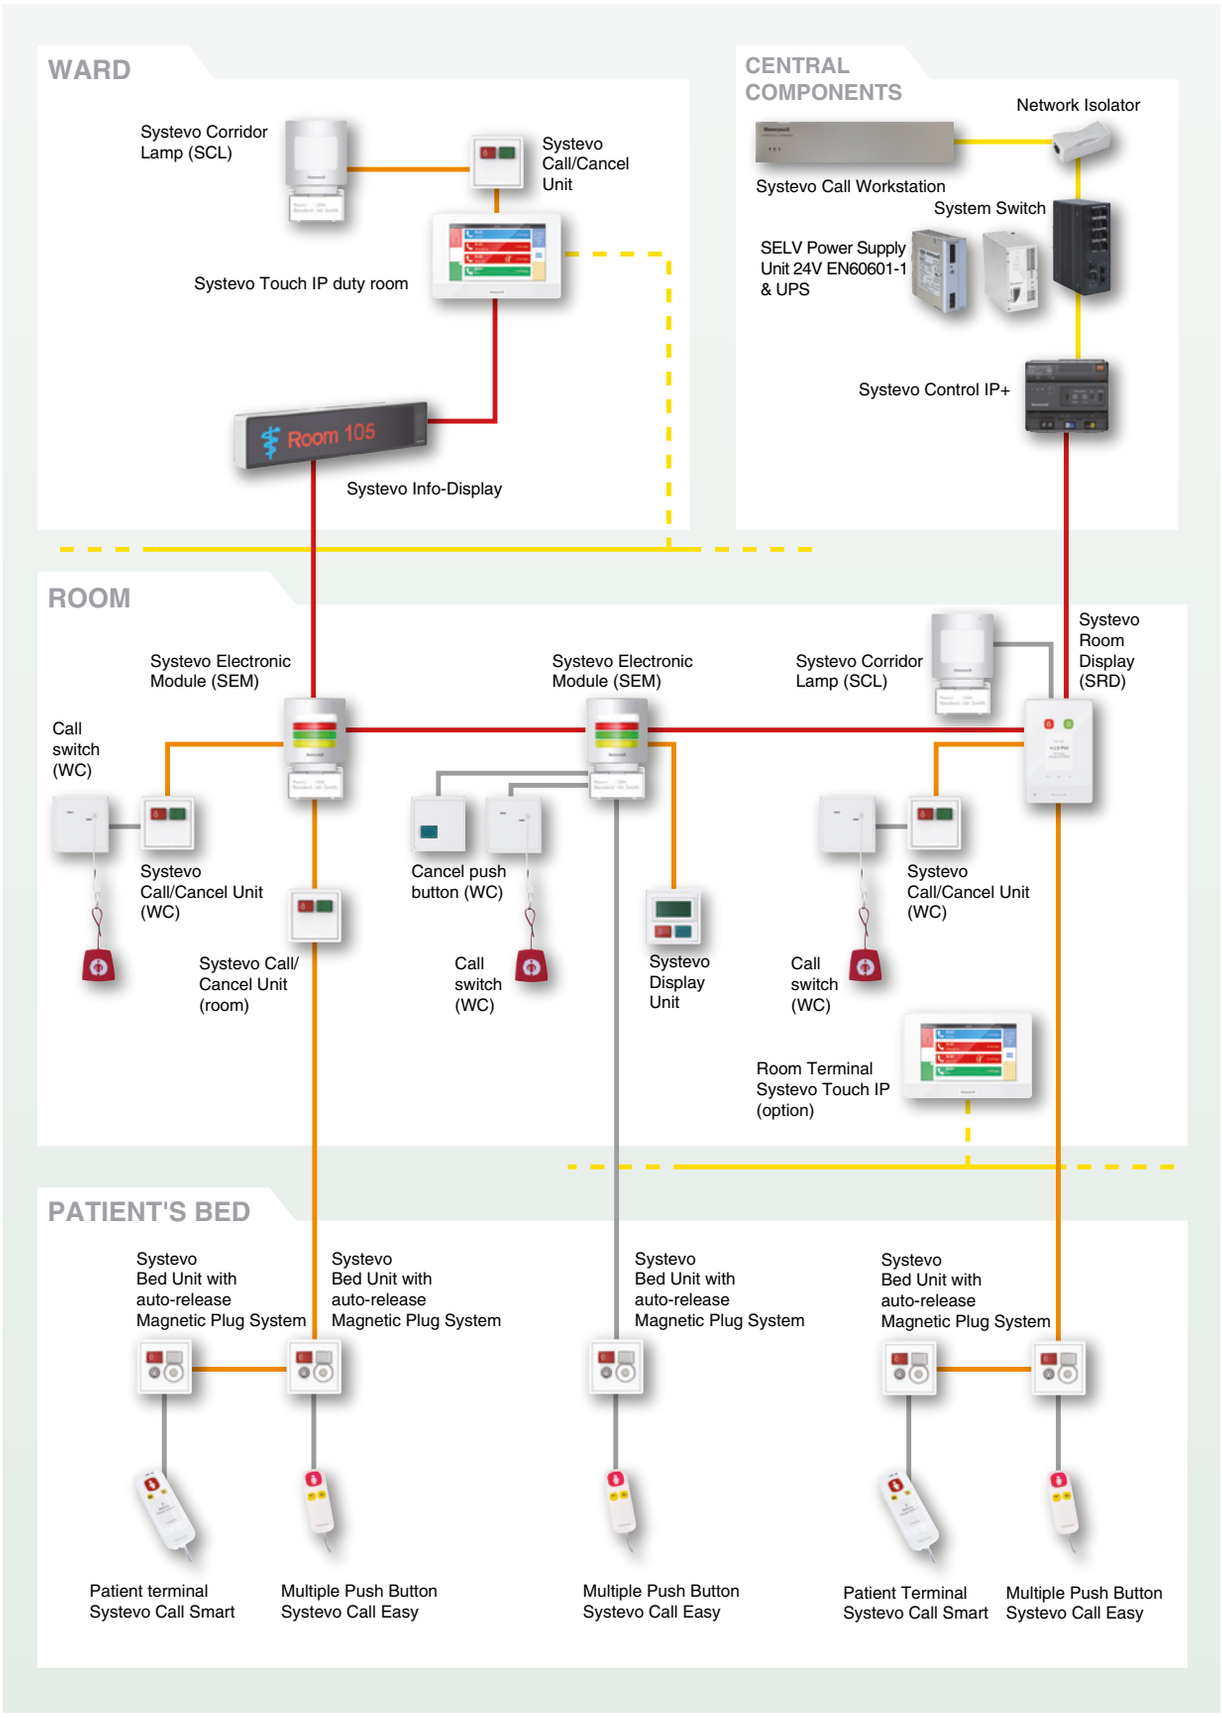

Configuration / system workstations

83MM450 Systevo Software System-Release V12



Systevo Software, release V12, for configuration, display, operation and logging for Systevo Call Ackermann.
System license required, depending on the system functions/size.Optionally as an interface to third-party systems, such as DECT system, fire detection system.
Comprised of a high-quality system computer with mouse, SSD, interfaces (RS232, LAN).

Features


Minimum hardware equipment:
- Universal housing, as desktop or installation frame for 19" rack
- Mainboard with Quad-Core µP J5005, 1.5/2.8 GHz or equivalent, min. 8 GB RAM
- 1* Solid-State HDD (SSD) min. 240 GB
- DisplayPort graphics card
- 2* RS232, USB
- 2* LAN Ethernet (min 10/100 MBit)
- Mouse/keyboard
- Windows 10 IoT or Windows 10 pro
- Backup/user software
- Continuous operation: 24/7

Equipped with user software with system release V12:
- Configuration tool Systevo Call Ackermann for databus/IP/hybrid mode
- Allocation of the room configuration: Electronic Modules, Room Terminals, Systevo Touch IP/ Systevo Care View IP etc.
- Definition of functions/parameters of the call system in accordance with DIN VDE 0834-1: 2016-06
- Set-up of the call types, call type groups, call type upgrades
- Set-up of the VoIP/SIP channel for mobile call querying via DECT/WIFI (separate license/SIP license required)
- Configuration of input/output events for controlling external systems: Light/blind/TV
- Setting of radio and TV channel
- System management tools, database management system
- Network functions for system access
- Freely configurable services (interconnection)
- Allocation of timed services
- Selection of call type groups for services
- Configuration of the volume of the acoustic call forwarding (day/night)
- Definition of target-oriented forwarding between stations (call types)
- Freely configurable announcement functions
- Selection of destinations for announcements
- Fault monitoring and reporting (in accordance with DIN VDE 0834-1: 2016-06)
- Graphic / tabular display of messages according to priority/call type/time
- Presence/call messages
- Access control via user ID (if necessary)
- Database management system to operate IP/hybrid mode

Optional (separate licenses required):
- Message transmission to a wireless messaging system (e.g. WIFI-/DECT system or Paging)
- Freely configurable recipient addresses for messages from groups of the call system
- Definition of the display format for the messages to be transmitted
- Set-up of various services (e.g. day, night service)
- Allocation of repetition times, acoustic call tones, etc.

765M440

Systevo Workstation (230 VAC) System-Release V12 Standard



System Workstation for configuration, display, operation and logging for Systevo Call Ackermann, equipped with system release V12.
System license required, depending on the system functions/size.Optionally as an interface to third-party systems, such as DECT system, fire detection system.
Comprised of a high-quality system computer with mouse, SSD, interfaces (RS232, LAN).

Features

Minimum equipment:

- Universal housing, as desktop or installation frame for 19" rack
- Mainboard with Quad-Core µP J5005, 1.5/2.8 GHz or equivalent, min. 8 GB RAM
- 1* Solid-State HDD (SSD) min. 240 GB
- DisplayPort graphics card
- 2* RS232, USB
- 2* LAN Ethernet (min 10/100 MBit)
- Mouse
- Hardened operating system Windows 10 IoT Entry
- Backup/user software
- Support of max. 200 IP-devices
- Continuous operation: 24/7

Equipped with user software with system release V12:

- Configuration tool Systevo Call Ackermann
- Allocation of the room configuration
- Definition of functions/parameters of the call system in accordance with DIN VDE 0834-1: 2016-06
- Set-up of the call types, call type groups, call type upgrades
- Set-up of the VoIP/SIP channel for mobile call querying via DECT/WIFI (separate license/SIP license required)
- Configuration of input/output events for controlling external systems: Light/blind/TV
- Setting of radio and TV channel
- System management tools, database management system
- Network functions for system accesses
- Freely configurable services (interconnection)
- Allocation of timed services
- Selection of call type groups for services
- Configuration of the volume of the acoustic call forwarding (day/night)
- Definition of target-oriented forwarding between stations (call types)
- Freely configurable announcement functions
- Selection of destinations for announcements
- Fault monitoring and reporting (in accordance with DIN VDE 0834-1: 2016-06)
- Graphic / tabular display of messages according to priority/call type/time
- Presence/call messages
- Access control via user ID (if necessary)
- Hyper-V database management system

Optional:

- Message transmission to a wireless messaging system (e.g. WIFI-/DECT system or Paging)
- Freely configurable recipient addresses for messages from groups of the call system
- Definition of the display format for the messages to be transmitted
- Set-up of various services (e.g. day, night service)
- Allocation of repetition times, acoustic call tones, etc.


Technical Data

Operating voltage	24V DC with external 230V AC power supply (included)
Power consumption	100 W max.
Ambient temperature	10 °C ... 35 °C
Storage temperature	0 °C ... 50 °C
Air humidity	< 20 %
Weight	approx. 4,05 kg (workstation)
Dimensions	W: 440 mm H: 230 mm D: 90 mm (H: 2HE)

EN 55022/55024/61000-3/60950-1
2004/108/EC, 2006/95/EC, 2005/32/EC
2003/95/EC, Regulation (EC)1275/2008

765M430

Systevo Workstation Mini System-Release V12 for max. 200 rooms

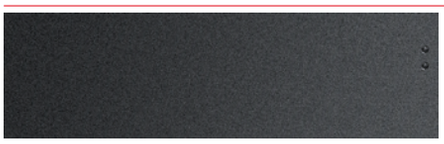

System-Workstation Mini, equipped with operating system Windows 10 IoT for configuration and call logging of a Systevo Call Ackermann nurse call system with max. 200 rooms, using system-release V12. System license for max. 200 rooms required, depending on the system functions. Optionally as an interface to third-party systems, such as DECT system.
Consisting of a high-quality mini system PC (24/7 operation) for wallmounting including interface (RS232, LAN), SSD, RAM.

Features

Minimum equipment:

- Compact housing for wall-mounting with adaptor (included)
- Mainboard: Quad-Core Celeron µP J4105 2.5 GHz or similar
- min. 8 GB RAM
- 1* Solid-State HDD (SSD) min. 240GB
- Displayport-interface
- 2* RS232, USB
- 2* LAN Ethernet (min 10/100 MBit)
- 24V DC power supply
- Windows 10IoT Basic
- Continuous operation: 24/7

Austattung der Anwendersoftware:

- Configuration tool Systevo Call for max. 200 rooms (IP devices are not supported)
- Allocation of the room configuration: Elektronic modules, room terminals, Systevo Touch IP in databus mode
- Definition of functions/parameters of the call system in accordance with DIN VDE 0834-1: 2016-06
- Set-up of the call types, call type groups, call type upgrades
- Set-up of the VoIP/SIP channel for mobile call querying via DECT/WIFI (separate license/SIP license req.)
- Configuration of input/output events for controlling external systems: Lights/blinds
- System management tools, database management system
- Network functions for system access
- Independant configurable services (zone concentration)
- Allocation of timed services
- Selection of call type groups for services
- Configuration of the volume of the acoustic call forwarding (day/night)
- Definition of target-oriented forwarding between wards (call types)
- Independant config. announcements
- Selection of targets f. announcements
- Fault monitoring and reporting (in accordance w. DIN VDE 0834-1:2016-06)

Optional software (License required):

- Messaging feature in conjunction with a wireless paging system (e.g. WIFI-/DECT-system or -PSA-
- Independant configurable addresses of receivers, for messages with the call type groups
- Definition of the display format for the messages to be transmitted
- Set-up of various services (e.g. day or night shift)
- Assignment of repetition times, acoustic call tones


Technical Data

Rated voltage	24V DC with external 230V AC power supply (included)
Power consumption	90 W
Ambient temperature	10 °C ... 35 °C
Storage temperature	0 °C ... 50 °C
Air humidity	< 20 %
Weight	approx. 3,2 kg
Dimensions	W: 254 mm H: 88 mm D: 220 mm

Only for the operation of a nurse call system in data bus mode.
No devices in IP mode/hybrid mode are supported.
EN 55022/55024/61000-3/60950-1
2004/108/EG, 2006/95/EG, 2005/32/EG
2003/95/EG, (EG)1275/2008

765M450

Systevo Server (230 VAC) System-Release V12 Standard



System server for configuration, display, operation and logging for Systevo Call Ackermann, equipped with system release V12, especially for larger system installations/IP-systems.
System license required, depending on the system functions/size.Optionally as an interface to third-party systems, such as DECT system, fire detection system.
Comprised of a high-quality system computer with mouse, SSD, interfaces (RS232, LAN).

Features

Minimum equipment:

- Universal housing, as desktop or installation frame for 19" rack
- Mainboard with Quad-Core µP J5005, 1.5/2.8 GHz or equivalent, min. 16 GB RAM
- 1* Solid-State HDD (SSD) min. 480 GB
- DisplayPort graphics card
- 2* RS232, USB
- 2* LAN Ethernet (min 10/100 MBit)
- Mouse
- Hardened operating system Windows 10 IoT Enterprise-Entry
- Backup/user software
- Continuous operation: 24/7

Equipped with user software with system release V12:

- Configuration tool Systevo Call Ackermann
- Allocation of the room configuration
- Definition of functions/parameters of the call system in accordance with DIN VDE 0834-1: 2016-06
- Set-up of the call types, call type groups, call type upgrades
- Set-up of the VoIP/SIP channel for mobile call querying via DECT/WIFI (separate license/SIP license required)
- Configuration of input/output events for controlling external systems: Light/blind/TV
- Setting of radio and TV channel
- System management tools, database management system
- Network functions for system accesses
- Freely configurable services (interconnection)
- Allocation of timed services
- Selection of call type groups for services
- Configuration of the volume of the acoustic call forwarding (day/night)
- Definition of target-oriented forwarding between stations (call types)
- Freely configurable announcement functions
- Selection of destinations for announcements
- Fault monitoring and reporting (in accordance with DIN VDE 0834-1: 2016-06)
- Graphic / tabular display of messages according to priority/call type/time
- Presence/call messages
- Access control via user ID (if necessary)
- Hyper-V database management system

Optional:

- Message transmission to a wireless messaging system (e.g. WIFI-/DECT system or Paging)
- Freely configurable recipient addresses for messages from groups of the call system
- Definition of the display format for the messages to be transmitted
- Set-up of various services (e.g. day, night service)
- Allocation of repetition times, acoustic call tones, etc.

Technical Data

Operating voltage	24V DC with external 230V AC power supply (included)
Power consumption	100 W max.
Ambient temperature	10 °C ... 35 °C
Storage temperature	0 °C ... 50 °C
Air humidity	< 20 %
Weight	approx. 4,05 kg (server)
Dimensions	W: 440 mm H: 230 mm D: 90 mm workstation

EN 55022/55024/61000-3/60950-1
2004/108/EC, 2006/95/EC, 2005/32/EC
2003/95/EC, Regulation (EC)1275/2008

89954C10

Single-phase UPS Module 230 VAC 19" installation (2 HE) / desktop unit



Features

Input voltage: Range of 180-240VAC 45-65 Hz
Recommended circuit breaker: 16A (B,C) (Charact.)
Connection input: IEC C14
Output voltage: 230VAC +/- 1%
Max. Output current (per phase): 3,9A
Output power: 0,9KW
Power dissipation at 100% load: 90 W (230 VAC)
Efficiency: typically 90%
Number of batteries: 3x7 Ah
Autonomy time at 75% load: 8 min.
Battery replacement hot-swap: Yes
Required cooling air volume: 50m³

Modern, flexible, efficient and microcontroller managed 230VAC online UPS for constant uninterruptible power supply of critical loads such as workstation or server of the nurse call system.
Replacement of the batteries in hot-swap possible.
Stable and compact 19" housing with 3 IEC C13 sockets to connect external devices, use as desktop unit possible.
Monitoring of the electronics and of the batteries and with intelligent battery management incl. status display to indicate the battery charging status and battery load / voltage / capacity as well as temperature and system status messages.
Equipped with serial link (RS232) to connect a workstation or server using the management software for Windows operating systems. With intgrated relay card to indicate individual status messages to external systems (UPS mode, malfunction etc.).
Use of modern converter technology, to provide 100% continous sine wave power, independent of input voltage, frequency and of the connected devices.

Technical Data

Output voltage	230 V AC
Storage temperature	-40 °C ... 85 °C
Air humidity	< 20 %
Type of protection	IP 20 (IEC 60529)
Installation	for installation in 19" rack
Weight	approx. 12 kg
Approval	VDE 0558EN 50091-3 (VFI-SS-111)EN 62040-1, 62040-2, 62040-3EMC class C1/C2, Class ACE, UL
Dimensions	W: 440 mm H: 88 mm D: 405 mm (2U, battery box D = 430)

Systevo Licenses for System Release from V12.10

79SW400 — System License for up to 100 rooms



System license required for firmware V12.10 and higher, for systems up to 100 rooms and described additional functions and features. The system licence for system Systevo Call Ackermann is used to activate associated parameters of the ward management controller and should be installed on the Systevo Control/Systevo Control IP+. The system license is required to upload the system configuration.
Functions:
- Supports up to 100 rooms
- Prepared for VDE 0834-2016
- "Dynamic acoustical call transfer" (based upon active zone linkage/concentration)
- Access to new releases of firmware-updates
- Compatible with VLAN etc.
- Supports up to 100 IP room devices
- IP-based intercom

Only 1 of this System Licenses can be purchased per system
System cannot be configured without a valid license
System licence is not supported by older versions of the firmware (< V12.10)

Features

- 1 x Staff account included
  - Activation of firmware V12
  - In accordance with DIN VDE 0834-1: 2016-06
  - Allocation of the room configuration
  - Definition of functions and parameters of the resident rooms and work stations
  - Set-up of the call types/groups
  - Configuration of I/O profiles for the call and presence funct. (Call units, signal components)
  - Freely configurable services (interconnection)
  - "Dynamic call forwarding" function (also usable for services)
  - Allocation of timed services
  - Selection of call type groups for services
  - Definition of target-oriented forwarding of messages between groups of Systevo Call Ackermann

79SW401 — System License for up to 250 rooms



System license required for firmware V12.10 and higher, for systems up to 250 rooms and described additional functions and features. The system licence for system Systevo Call Ackermann is used to activate associated parameters of the ward management controller and should be installed on the Systevo Control/Systevo Control IP+. The system license is required to upload the system configuration.
Functions:
- Supports up to 250 rooms
- Prepared for VDE 0834-2016
- "Dynamic acoustical call transfer" (based upon active zone linkage/concentration)
- Access to new releases of firmware-updates
- Compatible with VLAN etc.
- Supports up to 250 IP room devices
- IP-based intercom

Only 1 of this System Licenses can be purchased per system
System cannot be configured without a valid license
System licence is not supported by older versions of the firmware (< V12.10)

Features

- 1 x Staff account included
  - Activation of firmware V12
  - In accordance with DIN VDE 0834-1: 2016-06
  - Allocation of the room configuration
  - Definition of functions and parameters of the resident rooms and work stations
  - Set-up of the call types/groups
  - Configuration of I/O profiles for the call and presence funct. (Call units, signal components)
  - Freely configurable services (interconnection)
  - "Dynamic call forwarding" function (also usable for services)
  - Allocation of timed services
  - Selection of call type groups for services
  - Definition of target-oriented forwarding of messages between groups of Systevo Call Ackermann

79SW402 System License for up to 500 rooms



System license required for firmware V12.10 and higher, for systems up to 500 rooms and described additional functions and features. The system licence for system Systevo Call Ackermann is used to activate associated parameters of the ward management controller and should be installed on the Systevo Control/Systevo Control IP+. The system license is required to upload the system configuration.
Functions:
- Supports up to 500 rooms
- Prepared for VDE 0834-2016
- "Dynamic acoustical call transfer" (based upon active zone linkage/concentration)
- Access to new releases of firmware-updates
- Compatible with VLAN etc.
- Supports up to 500 IP room devices
- IP-based intercom

Only 1 of this System Licenses can be purchased per system
System cannot be configured without a valid license
System licence is not supported by older versions of the firmware (< V12.10)

Features

- 1 x Staff account included
  - Activation of firmware V12
  - In accordance with DIN VDE 0834-1: 2016-06
  - Allocation of the room configuration
  - Definition of functions and parameters of the resident rooms and work stations
  - Set-up of the call types/groups
  - Configuration of I/O profiles for the call and presence funct. (Call units, signal components)
  - Freely configurable services (interconnection)
  - "Dynamic call forwarding" function (also usable for services)
  - Allocation of timed services
  - Selection of call type groups for services
  - Definition of target-oriented forwarding of messages between groups of Systevo Call Ackermann

79SW403 System License for more than 500 rooms



System license required for firmware V12.10 and higher, for systems with more than 500 rooms and described additional functions and features. The system licence for system Systevo Call Ackermann is used to activate associated parameters of the ward management controller and should be installed on the Systevo Control/Systevo Control IP+. The system license is required to upload the system configuration.
Functions:
- Supports more than 500 rooms
- Prepared for VDE 0834-2016
- "Dynamic acoustical call transfer" (based upon active zone linkage/concentration)
- Access to new releases of firmware-updates
- Compatible with VLAN etc.
- Supports more than 500 IP room devices
- IP-based intercom

Only 1 of this System Licenses can be purchased per system
System cannot be configured without a valid license
System licence is not supported by older versions of the firmware (< V12.10)
Project-specific planning of the control equipment for systems with more than 500 rooms

Features

- 1 x Staff account included
  - Activation of firmware V12
  - In accordance with DIN VDE 0834-1: 2016-06
  - Allocation of the room configuration
  - Definition of functions and parameters of the resident rooms and work stations
  - Set-up of the call types/groups
  - Configuration of I/O profiles for the call and presence funct. (Call units, signal components)
  - Freely configurable services (interconnection)
  - "Dynamic call forwarding" function (also usable for services)
  - Allocation of timed services
  - Selection of call type groups for services
  - Definition of target-oriented forwarding of messages between groups of Systevo Call Ackermann

79SW410 Extension License for 50 additional rooms



Extension license to increase the system size with up to 50 additional rooms.

An existing System License (p.n. 79SW40x) is mandatory to be present and installed on system
Can be used multiple times for step by step system extensions

79SW411 Extension License for 2 callback channels



Extension license to provide up to 2 incoming SIP channels for 3rd party intercom (Wi-Fi / DECT), allowing callback intercom functionality for process optimization, improving caregiver workflows in care facilities.

An existing System License (p.n. 79SW40x) is mandatory to be present and installed on system
Recommended for systems with up to 250 rooms
Can be used multiple times for step by step system extensions

Features

Configuration of up to 2 SIP voice channels for the "Callback" function

79SW412 Extension License for 4 callback channels



Extension license to provide up to 4 incoming SIP channels for 3rd party intercom (Wi-Fi / DECT), allowing callback intercom functionality for process optimization, improving caregiver workflows in care facilities.

An existing System License (p.n. 79SW40x) is mandatory to be present and installed on system
Recommended for systems with up to 400 rooms
Can be used multiple times for step by step system extensions

Features

Configuration of up to 4 SIP voice channels for the "Callback" function

79SW413 Extension License for 8 callback channels



Extension license to provide up to 8 incoming SIP channels for 3rd party intercom (Wi-Fi / DECT), allowing callback intercom functionality for process optimization, improving caregiver workflows in care facilities.

An existing System License (p.n. 79SW40x) is mandatory to be present and installed on system
Recommended for systems with up to 600 rooms
Can be used multiple times for step by step system extensions

Features

Configuration of up to 8 SIP voice channels for the "Callback" function

79SW414 Extension License for 16 callback channels



Extension license to provide up to 16 incoming SIP channels for 3rd party intercom (Wi-Fi / DECT), allowing callback intercom functionality for process optimization, improving caregiver workflows in care facilities.

An existing System License (p.n. 79SW40x) is mandatory to be present and installed on system
Recommended for systems with more than 600 rooms
Can be used multiple times for step by step system extensions

Features

Configuration of up to 16 SIP voice channels for the "Callback" function

79SW415 Extension License to support enhanced CP95 migration functionality



Extension license to provide enhanced migration Clino Phon 95 functionality (I/O profiles configuration).

Valid only for Systevo Control (p.n. 72700A1/B1) in combination with FBC95 (p.n. 72700D1) and running firmware version V12.10R or higher
An existing System License (p.n. 79SW40x) is mandatory to be present and installed on system

Features

Activation of the I/O profiles within the scope of migration of Clino Phon 95

79SW450 Systevo Care Plan system interface License



Features

System-level license for the following features:
- Activation of the connection and data synchronization with the exsiting Care Plan software of the center
- Works as a data gateway between the Care Plan software and the room terminals enabled to represent that information (no patient data is stored in the system, to fulfill GPDR regulations)
- Enables the possibility of managing care tasks directly in the patient/resident's room
- Allows managing the identification of caregivers, as well as evaluating their authorization to register a specific task, according to the profiles defined in the Care Plan software
- Available in hybrid/IP/IP+ mode

Interface for the integration of existing Care Plan software with the Systevo Call Ackermann system, allowing management of care tasks directly in the patient/resident's room, thus ensuring a proper documentation of activities is carried out, and adequately supporting daily care processes.
This integration allows automatic synchronization with the care and tasks planner in bi-directional mode. By using the Systevo Touch IP room terminal in the patient room, staff uses a RFID card or PIN-Code for a secure authentication, in accordance with GPDR specifications, getting access to the list of tasks or activities planned for the patient in the room (or even tasks assigned to the room, ex. cleaning room or change bed sheets, …), as well as evaluating whether the caregiver is authorized to carry out these activities or not.
Authorized personnel can register the executed activities directly on the room's touch terminal, as well as enter values related to patient monitoring or control tasks (temperature, blood pressure, patient weight, etc…). Likewise, it is also possible to add other unplanned tasks or activities.
Information entered via the room's touch terminal is automatically synchronized and exported to the care and tasks planner for immediate registration, along with the identification of the caregiver who has carried out those activities.
Entering information directly on the Systevo Touch IP room terminal reduces staff walking time, optimizes productivity and provides an efficient flow of information regarding care tasks, while minimizing risk of errors on patient's/resident's health records.

Usage of the license in conjunction with the items 765M440, 765M450 and 83MM450 from System Release V12.10
Not available for Databus working mode
Interface availability with specific Care Plan software needs to be confirmed in advance
Time limited license (1 year)

79SW451 License to access Care Plan for Systevo Touch IP (10 dev.)



Features

- 10 x Staff accounts included

License for up to 10 devices for the following features:
- Enable RFID reader on the selected devices
- Activation of the functions for access to the care planner of the center and assignment to a Systevo Touch IP room terminal
- Facilitates management of care tasks directly in the patient/resident room
- Available in hybrid/IP/IP+ mode

Functions associated with the possibilities offered by the existing care planner (to be confirmed with Care Plan supplier):
- Access to the list of tasks or activities planned for the patient occupying the room, after secure identification of the assistance staff and evaluation of the authorization level
- Recording of the activities carried out directly on the touch terminal in the room
- Entering values related to patient monitoring or control tasks (temperature, blood pressure, weight control, etc…)
- Possibility to add other tasks or unplanned activities (if the associated care planner software allows it)
- Automatic synchronization and export to the care/task planner of the information entered via the touch terminal in the room

License for activation, in up to 10 Systevo Touch IP room terminals of the Systevo Call Ackermann system, of the client for access to the extra functions provided by the link with the Care Plan software of the care facility, allowing access and registration of the activities planned for the patient/resident directly at the point of care.
The available care plan access features are assigned to selected Systevo Touch IP room terminals as part of the system configuration.
The license is activated/managed by the system workstation/server.

An existing Systevo Care Plan system interface License (p.n. 79SW450) is mandatory to be present and installed on system
Time limited license (1 year)

79SW452 License to access Care Plan for Systevo Touch IP (25 dev.)



License for activation, in up to 25 Systevo Touch IP room terminals of the Systevo Call Ackermann system, of the client for access to the extra functions provided by the link with the Care Plan software of the care facility, allowing access and registration of the activities planned for the patient/resident directly at the point of care.
The available care plan access features are assigned to selected Systevo Touch IP room terminals as part of the system configuration.
The license is activated/managed by the system workstation/server.

An existing Systevo Care Plan system interface License (p.n. 79SW450) is mandatory to be present and installed on system
Time limited license (1 year)

Features

- 25 x Staff accounts included

License for up to 25 devices for the following features:
- Enable RFID reader on the selected devices
- Activation of the functions for access to the care planner of the center and assignment to a Systevo Touch IP room terminal
- Facilitates management of care tasks directly in the patient/resident room
- Available in hybrid/IP/IP+ mode

Functions associated with the possibilities offered by the existing care planner (to be confirmed with Care Plan supplier):
- Access to the list of tasks or activities planned for the patient occupying the room, after secure identification of the assistance staff and evaluation of the authorization level
- Recording of the activities carried out directly on the touch terminal in the room
- Entering values related to patient monitoring or control tasks (temperature, blood pressure, weight control, etc...)
- Possibility to add other tasks or unplanned activities (if the associated care planner software allows it)
- Automatic synchronization and export to the care/task planner of the information entered via the touch terminal in the room

79SW453 Systevo Staff account extension license (+50 usr.)



License for extending the number of staff accounts (nr. of identified users, either by RFID or PIN code, allowed to reach certain system features) beyond those already created in the system.
Possibility of assigning different services/functions to the different staff accounts, e.g. access to the browser function of the Systevo Touch IP or Systevo Care View IP as well as presence management (e.g. set Pres1/Pres2 automatically).
Use in conjunction with the System Release version V12.10 or higher and as of firmware 12.10 of the central control units.
The license is activated/managed by the system workstation/server.

Usage of the license in conjunction with the items 765M440, 765M450 and 83MM450 from System Release V12.10
Not available for Databus working mode

Features

License for up to 50 additional staff accounts for the following functions:
- Enabling of the configuration of the user/profile/RFID transponder
- Definition of functions and duty settings of the user (caregiver)
- Configuration of the area assignment
- Management of RFID communication services in connection with Systevo Touch IP/Care View IP
- Processing of XML configuration data (RFID) of the Systevo Call system
- Activation of the RFID function in the Systevo Touch IP/Systevo Care View IP required (for RFID identification)
- Available in hybrid/IP/IP+ mode

79SW454 Duty room functions license for STIP (1 dev.)



License for 1 Systevo Touch IP to activate the extended duty room functions of Systevo Call.
The available duty room functions are assigned to the Systevo Touch IP room terminal(s) during the configuration of the care communication system.
Use in conjunction with the System Release version V12.10 or higher and as of firmware 12.10 of the central control units.
The license is activated/managed by the system workstation/server.

Usage of the license in conjunction with the items 765M430, 765M440, 765M450 and 83MM450 from System Release V12.10 (for item 765M430 in data bus mode only)
Not required for Systevo Care View IP (this device includes duty license enabled by default)

Features

License per device for the following functions:
- Activation of the extended duty room functions and assignment to a Systevo Touch IP
- Available functions in data bus mode:
1) Execution of predefined voice announcements
2) Buzzer off function for pending calls, call types are configurable on system level

- Available functions in Hybrid/IP mode:
1) Execution of predefined voice announcements
2) Buzzer off function for pending calls, call types are configurable on system level (version 12.06 required)
3) Intercom to room/bed without pending nurse call
4) Set/clear bed priority for room/bed (list config.)
The features duties/zone concentration are available for forwarding of alarms, calls and presences according to the predefined workflows to other wards, zones or services as of system release 12.05 without purchasing this license.

79SW455 Duty room functions license for STIP (10 dev.)



License for up to 10 Systevo Touch IP to activate the extended duty room functions of Systevo Call.
The available duty room functions are assigned to the Systevo Touch IP room terminal(s) during the configuration of the care communication system.
Use in conjunction with the System Release version V12.10 or higher and as of firmware 12.10 of the central control units.
The license is activated/managed by the system workstation/server.

Usage of the license in conjunction with the items 765M430, 765M440, 765M450 and 83MM450 from System Release V12.10 (for item 765M430 in data bus mode only)
Not required for Systevo Care View IP (this device includes duty license enabled by default)

Features

License per 10 devices for the following functions:
- Activation of the extended duty room functions and assignment to a Systevo Touch IP
- Available functions in data bus mode:
1) Execution of predefined voice announcements
2) Buzzer off function for pending calls, call types are configurable on system level

- Available functions in Hybrid/IP mode:
1) Execution of predefined voice announcements
2) Buzzer off function for pending calls, call types are configurable on system level (version 12.06 required)
3) Intercom to room/bed without pending nurse call
4) Set/clear bed priority for room/bed (list config.)
The features duties/zone concentration are available for forwarding of alarms, calls and presences according to the predefined workflows to other wards, zones or services as of system release 12.05 without purchasing this license.

79SW456 Wireless Extension license for STIP/SCVIP (10 dev.)



Features

License per 10 devices for the following functions:
- Activation of all wireless interfaces (WiFi, RFID)

License for 10 Systevo Touch IP or Systevo Care View IP for using the integrated wireless hardware (RFID, WiFi).
Can be used To enable IP+ working mode for Databus based systems (ex. those using STIP connection board 79CM307Z1), allowing value added features on top (e.g. care plan interfacing, SIP telephony, ...)
The feature is assigned to the Systevo Touch IP and Systevo Care View IP during the configuration of the care communication system.
Use in conjunction with the System Release version V12.10 or higher and as of firmware 12.10 of the central control units.
The license is activated/managed by the system workstation/server.

Usage of the license in conjunction with the items 765M440, 765M450 and 83MM450 from System Release V12.10
Note: Wireless is not intended to provide Nurse Call over WiFi, but added features over existing Databus Nurse Call

79SW457 Wireless Extension license for STIP/SCVIP (25 dev.)



Features

License per 25 devices for the following functions:
- Activation of all wireless interfaces (WiFi, RFID)

License for 25 Systevo Touch IP or Systevo Care View IP for using the integrated wireless hardware (RFID, WiFi).
Can be used To enable IP+ working mode for Databus based systems (ex. those using STIP connection board 79CM307Z1), allowing value added features on top (e.g. care plan interfacing, SIP telephony, ...)
The feature is assigned to the Systevo Touch IP and Systevo Care View IP during the configuration of the care communication system.
Use in conjunction with the System Release version V12.10 or higher and as of firmware 12.10 of the central control units.
The license is activated/managed by the system workstation/server.

Usage of the license in conjunction with the items 765M440, 765M450 and 83MM450 from System Release V12.10
Note: Wireless is not intended to provide Nurse Call over WiFi, but added features over existing Databus Nurse Call

79SW458 SIP telephony license for STIP/SCVIP (10 dev.)



Features

License for up to 10 devices for the following functions:
- Activation of IP telephony via SIP/VoIP (separate SIP license for IP PBX required)
- Available in hybrid/IP/IP+ mode

License for up to 10 Systevo Touch IP to use the integrated IP telephony services via SIP/VoIP (separate SIP license of the IP PBX required).
The IP telephony function is assigned to the Systevo Touch IP during the configuration of the care communication system.
Use in conjunction with the System Release version V12.10 or higher and as of firmware 12.10 of the central control units.
The license is activated/managed by the system workstation/server.

Usage of the license in conjunction with the items 765M440, 765M450 and 83MM450 from System Release V12.10
Not available for Databus working mode

79SW459 Systevo Dashboard license (10 dev.)



Features

License for up to 10 devices for the following functions:
- Activation of Systevo Dasboard feature set (integrated web browser required)
- Available in all databus/hybrid/IP/IP+ modes

License for up to 10 IP connected devices using web browser (e.g. Smart Monitors or similar) for using the Systevo Dashboard feature set, to provide access to centralized system notification data, allowing caregivers to have an overview of the ward situation at a glance. All system messages (alarms, calls and presences, etc.) are displayed with the highest priority on top, in color and prioritized sequence in a simple and comprehensible manner, with the corresponding acoustic call notification. For easier identification, system messages are displayed in conjuntion with corresponding icons as well as time of release.

Usage of the license in conjunction with the items 765M440, 765M450 and 83MM450 from System Release V12.10
Not available for item 765M430
Time limited license (1 year)

79SW460 Browser license for STIP/SCVIP (10 dev.)



License for up to 10 Systevo Touch IP or Systevo Care View IP for using the integrated browser function, to provide access to predefined web pages directly from the room terminal touch screen, for authorized staff users.
The browser function is activated on the Systevo Touch IP or Systevo Care View IP as part of the configuration of the nurse call system.
Use in conjunction with the System Release version V12.10 or higher and as of firmware 12.10 of the central control units.
The license is activated/managed by the system workstation/server.

Features

- 10 x Staff accounts included

License for up to 10 devices for the following functions:
- Activation of the browser function
- Activation of RFID reader (for user identification)
- Available in hybrid/IP/IP+ mode

Usage of the license in conjunction with the items 765M440, 765M450 and 83MM450 from System Release V12.10
Not available for Databus working mode
Time limited license (1 year)

79SW461 Browser license for STIP/SCVIP (25 dev.)



License for up to 25 Systevo Touch IP or Systevo Care View IP for using the integrated browser function, to provide access to predefined web pages directly from the room terminal touch screen, for authorized staff users.
The browser function is activated on the Systevo Touch IP or Systevo Care View IP as part of the configuration of the nurse call system.
Use in conjunction with the System Release version V12.10 or higher and as of firmware 12.10 of the central control units.
The license is activated/managed by the system workstation/server.

Features

- 25 x Staff accounts included

License for up to 25 devices for the following functions:
- Activation of the browser function
- Activation of RFID reader (for user identification)
- Available in hybrid/IP/IP+ mode

Usage of the license in conjunction with the items 765M440, 765M450 and 83MM450 from System Release V12.10
Not available for Databus working mode
Time limited license (1 year)

79SW470 Licence for 1 Systevo room terminal for enabling the extended duty room functions



Licence for 1 Systevo room terminal for enabling the extended duty room functions (interconnections, announcements) of Systevo Call.
The available duty room functions are assigned to the Systevo room terminal(s) during configuration of the care communication system.
Use in combination with the system release from version V12.14 and from firmware 12.14 of the central control units.
The licence is activated/managed via the system workstation/server.

79SW471 Licence for 10 Systevo room terminals for enabling the extended duty room functions



Licence for 10 Systevo room terminals for enabling the extended duty room functions (interconnections, announcements) of Systevo Call.
The available duty room functions are assigned to the Systevo room terminal(s) during configuration of the care communication system.
Use in combination with the system release from version V12.14 and from firmware 12.14 of the central control units.
The licence is activated/managed via the system workstation/server.

Licences for system workstations

83WE140 **Software module for DECT/Paging system connection via ESPA 4.4.4.**



Software module as basic software for connecting an external communication system (e.g. DECT) to the Systevo Workstation via ESPA 4.4.4 or an alternative protocol. Option to adapt the settings to the project-specific requirements of the care facility. Call messages from the call system are transmitted in accordance with the configuration to the connected system and displayed by the configured end devices (e.g. DECT telephones).
Administrator access rights required in order to e.g. adapt the serial interface to the system environment of the call system.

CD with user software for the following functions:
- Configuration tool with database-management-system for data storage
- Setting of serial interface (RS232/RS422)
- Interface spanning the system software of the call system (IPC)
- Recipient addresses are freely configurable per light call group and call type group
- Allocation of call types to higher level call type groups
- Configuration of different shifts (e.g. day or night shifts)
- Assignment of repetition times
- Adaption of acoustic ringtones
- Filter options for recipient addresses
- Configuration of distinct escalations per call type group
- Definition of display format of the message to be transmitted
- Textual message transfer of system messages to the external system
- Service functions
- Simple system management tools for system analysis (Sys-log etc.)
- Creation of a list of recipients (file)
- Password protected access

Requirements:
- Operating computer with free serial interface RS232
- Serial connection cable

Inspection of hardware/software compatibility required!

83WE145 **Software module for communication system connection via ESPA-X**



Software module as basic software for connecting an external communication system (e.g. alarm-server for WIFI/DECT system) to the Systevo Workstation via ESPA-X (XML record). Option to adapt the settings to the project-specific requirements of the care facility. Call/cancel messages from the call system are transmitted in accordance with the configuration to the connected system and displayed by the configured end devices (e.g. WIFI/DECT telephones).
Administrator access rights required in order to e.g. adapt the serial interface to the system environment of the call system.

CD with user software for the following functions:
- Configuration tool with database-management-system for data storage
- Setting of IP-interface (TCP/IP)
- Interface spanning the system software of the call system (IPC)
- Recipient addresses are freely configurable per nurse call group and call type group
- Allocation of call types to higher level call type groups
- Configuration of different shifts (e.g. day or night shifts)
- Assignment of repetition times
- Adaption of acoustic ringtones
- Filter options for recipient addresses
- Configuration of distinct escalations per call type group
- Definition of display format of the message to be transmitted
- Textual message transfer of system messages to the external system (incl. cancel information)
- Service functions
- Simple system management tools for system analysis (Sys-log etc.)
- Creation of a list of recipients (file)
- Password protected access

Requirements:
- Operating computer with ETH-LAN interface

Information on compatible third-party systems on request.

83WE130 Systevo DECT coupling



Software module as basic software for connecting the Systevo DECT system to the Systevo Workstations. Option to adapt the settings to the project-specific requirements of the care facility. Call messages from the call system are transmitted in accordance with the configuration to the connected Systevo DECT system and displayed by the configured DECT telephones.Administrator access rights required, in order to e.g. adapt the serial interface to the system environment of the call system.

User software for the following functions:

- Configuration tool with Database Management System for data storage
- Setting of the serial interfaces (RS232/RS422)
- Interface to comprehensive system software of the call system (IPC)
- Freely configurable recipient addresses per light call group and call type group
- Allocation of call types to overriding call type groups
- Set-up of various services (e.g. daytime, night-time duty)
- Allocation of repetition times
- Adaptation of the acoustic ring tones
- Filtering options for recipient addresses
- Configuration of various escalations per call type group
- Definition of the display format of the messages to be transmitted
- Textual message transmission of system messages to Systevo DECT
- Service functions
- Basic System Management Tools for system analysis (Sys-Log etc.)
- Creation of a recipient list (file)
- Password-protected access

Requirement:

- Systevo Workstation with free serial interface RS232
- Serial connection cable

Inspection of hardware/software compatibility required!

83WE200 Software module for VITAL function monitoring



Software module as basic software for use of the Systevo Call Ackermann call system for monitoring the vitality of the residents in care facilities.
Option to define a monitoring period, in which interaction by a resident is required, e.g. a dedicated key activation.
Alternative contact actions by opening or closing doors can be evaluated as a vitality notification.
Automatic triggering of an alarm call in the monitored rooms, if no vitality has been determined after the monitoring period. Signalling of the alarm call via the Systevo Workstation, the call system (if supported) and optionally on mobile DECT devices of a telecom system (separate software required).

User software for the following functions:

- Configuration tool with Database Management System for data storage
- Interface to comprehensive system software of the call system (IPC)
- Freely configurable monitoring period
- Evaluation per light call group or priority configuration
- Set-up of the various call types
- Service functions

Requirement:

- Systevo Workstation

The restrictions of the respective systems are to be taken into consideration. Inspection of hardware-software compatibility required!

83WE150 Software FTC module for ESSER



Software module as basic software for unidirectional data coupling of an ESSER fire detection system (FDS) to a Systevo Call Ackermann call system via FAT 3000 (ESPA 4.4.4.). As a media gateway, the software module implements incoming data information of the FDS into call information for further processing (e.g. display) in the call system.
Configuration of the necessary display texts in FAT, which are transmitted in clear text (coming and going message), as will as the option of allocating unique ID codes in the call system.
Received messages of the FDS are passed on for secondary alerting to the call system and to other system software, e.g. a graphic user interface.

Requirements:

- Systevo Workstation with free serial interface RS232
- FAT3000 or FAT with compatible transmission protocol ESPA 4.4.4.
- ESSER fire detection system, which supports the FAT3000
- serial connection cable

The restrictions of the respective systems are to be taken into consideration. Inspection of hardware-software compatibility required!

83WE160 Software FTC module for NOTIFIER



Software module as basic software for unidirectional data coupling of a fire detection system (FDS) to a Systevo Call Ackermann call system via FAT 3000 (ESPA 4.4.4.). As a media gateway, the software module implements incoming data information of the FDS into call information for further processing (e.g. display) in the call system.
Configuration of the necessary display texts in FAT, which are transmitted in clear text (coming and going message), as will as the option of allocating unique ID codes in the call system.
Received messages of the FDS are passed on for secondary alerting to the call system and to other system software, e.g. a graphic user interface.

Requirements:

- Operating computer with available RS232 serial interface
- FAT3000 or FAT with compatible communication protocol ESPA 4.4.4.
- BMA-System, which supports the FAT3000
- Serial connection cable

The restrictions of the respective systems are to be taken into consideration. Inspection of hardware-software compatibility required!

83WE170 Software FTC module for FAT of other brands



Software module as basic software for unidirectional data coupling of an detection system (FDS) to a Systevo Call Ackermann call system via FAT 3000 (ESPA 4.4.4.). As a media gateway, the software module implements incoming data information of the FDS into call information for further processing (e.g. display) in the call system.
Configuration of the necessary display texts in FAT, which are transmitted in clear text (coming and going message), as will as the option of allocating unique ID codes in the call system.
Received messages of the FDS are passed on for secondary alerting to the call system and to other system software, e.g. a graphic user interface.

Requirements:

- Operating computer with available RS232 serial interface
- FAT3000 or FAT with compatible communication protocol ESPA 4.4.4.
- BMA-System, which supports the FAT3000
- Serial connection cable

The restrictions of the respective systems are to be taken into consideration. Inspection of hardware-software compatibility required!

Network components

79823C3 System-Switch, 8-port, 24 V DC



Gigabit Ethernet switch for a high degree of data throughput and flexibility in the central and station area. Administrable switch with 8 ports and automatic identification of the 10/100/1000 Mbps network interfaces for the wired connections, QoS control for all connections.
Fitted with two GBIC slots in shape factor “small” (SFP) for the optional fibre optic connection for Gigabit Ethernet, use as a fault-tolerant fibre optic ring. Integrated security features, such as IEEE 802.1x port-based authentication and access control lists for assuring that only authorised devices / applications have access to the LAN.

Technical Data

Rated voltage	12-48 V DC, Option of redundant power supply
Power consumption	15 W
Ambient temperature	-40 °C ... 75 °C
Air humidity	< 20 %
Mounting	top-hat rail mounting
Color	black
Weight	approx. 0,84 kg (without plug)
Dimensions	W: 56 mm H: 42 mm D: 99 mm

Features

- Stack configuration possible (max. 6 switches)
- Forwarding mode: Store-and-forward
- High-performance: 48 Gbps
- 8 RJ-45 10/100/1000 port with Auto-Uplink
- Max. 64 VLAN ID & 802.1Q
- VLAN & Port Based
- Multicast IGMP v1, v2
- 2 shared SFP ports for fibre optic
- Gigabit interfaces (redundant ring)
- Web-based configuration
- Backup/ restoration (configuration)
- Password access control
- Firmware upgrade-capable (via USB)

79823C2 System switch GS724Tv4 Layer 2, 24-Port



Layer 2 system switch with 24 manageable ports and automatic identification of the 10/100/1000 Mbps network interfaces, QoS control for all connections. Equipped with two GBIC slots in form factor “small” (SFP). 52 Gbps data throughput, for up to 256 VLANs and 512 Multicast groups, Auto-VoIP/Video function. Low power consumption of less than 18 W.

Technical Data

Rated voltage	230 V AC
Rated frequency	50 Hz ... 60 Hz
Power consumption	17,4 W
Ambient temperature	0 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 %
Mounting	cabinet (19 ")
Material	metal
Color	blue
Weight	approx. 2,7 kg (without plug)
Dimensions	W: 440 mm H: 43 mm D: 204 mm (1HE 19")

Power cable, rack installation kit, installation manual

Features

- Stack configuration possible (max. 6 switches)
- Forwarding mode Store and forward
- High performance: 52 Gbps
- IEEE 802,3u/ab/z/x
- 10BASE-T
- 100BASE-TX
- 1000BASE-T/X
- IEEE 802,3x Flow Control
- 24 RJ-45 10/100/1000 Ports with auto uplink
- 2 shared SFP ports for fiberglass Gigabit interfaces
- Web based configuration
- Backup / recovery (config.)
- Password access control
- Firmware upgradeable

Accessories

79823B1 GBIC module, type multimode
79823F1 Multimode fibre SC-LC Sx

79823B1 GBIC (GigaBit Interface Converter) module, type multimode



GBIC module AGM731F as plug-in module for a standard SFP-GBIG slot. A 1000Base-SX connector will be provided for multimode fibre optic (FO) with gigabit-speed smart switches and managed switches.

Technical Data

Mounting	Plug-in card for switch

Features

- Plug-in module for system switch
- SFP GBIC fibre module
- 1000BASE-SX Standard
- LC connector
- Supported 50 µm (Length: 550 m) and 62.5 µm (Length: 260 m)
- Multimode fibre (MMF) cable

79823F1 Multimode Fiber SC-LC Sx



High-quality Fiber Optic patch cable Multimode 50/125 µm, Duplex, LC on SC, length 2 m. To connect the GBIC module (SC) with a Patch Panel (LC).

Features

- 1000BASE Standard
- SC/LC connector
- 50 µm Multimode fibre (MMF)cable
- Fibre type: Multimode 50 µm
- Speed: 1000 Base SX
- Length: 2 m
- Plug 1: LC
- Plug 2: SC

79823D1 Network isolator EN 60601-1



Network isolator for the galvanic separation of the call system from external systems, in accordance with the standard IEC EN 60601-1. Implementation as an integral part of a medical-electrical system, in order to ensure the protection of patients from hazardous leakage currents. Flexible and simple installation for the isolation of medical devices, areas of a call system and critical applications in the patient environment.

Features

- Return loss min. 10 dB
- Insertion loss max. 1.1 dB
- (connectors 2xRJ45 input/output)
- 5 kV AC proof voltage
- 8.5 kV DC proof voltage

Technical Data

Ambient temperature	-10 °C ... 85 °C
Storage temperature	0 °C ... 60 °C
Air humidity	< 20 %
Color	light gray
Weight	approx. 50 g
Dimensions	W: 29 mm H: 23 mm L: 65 mm

Systevo Control IP+

72800A **Systevo Control IP+**



Features

- Operation as master/slave controller, depending on the addressing/configuration
- Communication (data/audio) with other controllers via ETH-LAN (max. 64)
- Max. number of (logical) groups: 250/6 (per system/ per controller)
- Max. number of IP devices (STIP/SCVIP): 40 (per controller)
- License dependent features can be extended anytime

Service functions:

- Software download for system components (where possible), firmware updating, remote maintenance/ SNMP-functions (with PC), basic commissioning
- Compact design
- DIN-rail mounted
- Centralized and decentralized installation

Security features:

- Data preservation in case of power failure in accordance with DIN VDE 0834-1: 2016-06 (UPS required)
- Local emergency operation mode in case of failure of the system master controller
- Sequential monitoring of the connected active components, additional controllers in the system network and the system workstation communication, in accordance with DIN VDE 0834-1: 2016-06
- Galvanic separation from other controller units through ETH-LAN (2 x MOPP)
- Status display via LEDs
- Flash memory for data storage of the system configuration

Systevo central unit for an organizational unit, such as a ward or residential area. Use of system release V12 and above, for operation of the system in accordance with DIN VDE 0834-1: 2016-06, in conjunction with overriding system license (min. 1 system license per system required).
Systevo Control IP+ supports all system operating modes depending on the installation topologies (IP, IP+, Hybrid, Databus).
Support for up to max. 40 Systevo Touch IP per controller (when working with IP, IP+, Hybrid mode). Possibility to set up workflow-relevant system parameters (dynamic call forwarding, services, escalations). Support of care workflows by using mobile call processing via VoIP interface / SIP, as well as activation of additional system functions (separate software license extension required).
Monitoring and synchronization of the entire data traffic and the audio connections (calls, announcements) within the organizational unit and coordination of the communication with other controllers via IP interface (ETH-LAN). Also, control of displays and acoustic call messages, according to specified priorities/services (interconnections) within a system installation. Flexible configuration options via the Systevo Workstation with convenient Windows GUI for call types, groups, services, collective announcements, display texts, device parameters, system language etc. based on the customer requirements. Use of a maximum of 64 controllers with up to 250 logical groups (sub-groups). The networking takes place via the ETH-LAN IP interface (data/audio). The wiring via LAN takes place depending on the specifications of the classic network design. The ward-by-ward networking takes place via appropriate switches/routers (ETH-LAN: IEEE802.3), which automatically identify the necessary transmission rates (10, 100, 1000MBit). Port-based VLAN network components with QoS / ToS enable the prioritization of the nurse call data services with respect to the voice services. For safety reasons (VDE 0834-1: 2016-06), all IP components (controllers, Systevo Workstation) operate in a uniform IP address range (10.1.x.y), which is not used by other components (e.g. BMS, medical equipment etc.). To use a deviating IP address range (e.g. 192.168.x.y), the configuration takes place via an optional DHCP server. The communication takes place on the basis of TCP/IP via defined nurse call protocols. Service programs (such as Telnet, FTP, etc.) are used for remote access and data transmission. Additional network applications (Syslog, Firewall, etc.) are used for system security and the possible analysis of stored log data.
With an integrated gateway function for forwarding the data/audio signals of the overriding network interfaces (ETH-LAN) to the room bus.
Support of the compatibility mode for existing system installations with Systevo Control controller panels 72700A1/B1 (firmware update to v12.xx necessary).
Prepared for future licensable firmware updates and to use additional service features.
Centralized or decentralized installation (DIN-rail mounted design) in environments with environmental class I.
Includes a user-friendly installation technology with color-coded connection terminals for each individual device and control functions, for a more efficient cabling and for an optimized commissioning process.
Support of the cyber security requirements of modern data bus and IP infrastructures.
Project-specific planning of the control equipment from 500 rooms.

Technical Data


Operating voltage	24 V DC + / -10 %
Quiescent current @ 24 V DC	approx. 80 mA
Current consumption	< 170 mA
Contact load relay	1A/30VDC
Storage temperature	-20 °C ... 70 °C
Air humidity	< 10 %
Mounting	Top-hat rail mounting
Type of protection	IP20
Material	PC+ABS-FR/PC
Color	dark gray
Weight	approx. 310 g
Dimensions	W: 137 mm H: 122 mm D: 58 mm

For system release V12.10 and above

Systevo Control IP+, connection terminals and protection front cover

Accessories
72800Z1 19” rack mounting accessory
72800Z2 Spare set (transparent cover & wiring terminals)

72800Z1 — 19” rack mounting accessory for 3 Systevo Control IP+



System rack for mounting a maximum of 3 Systevo Control IP+ in a 19" distribution cabinet. Integrates a Top-Hat Rail and cabling routing ducts. Supplied as a kit.

Technical Data

Material	steel (ducts in PVC)
Installation	19" distribution cabinet
Color	black
Weight	approx. 3150 g
Dimensions	W: 480 mm H: 222 mm D: 250 mm (5 HU)

72800Z2 — Spare set for Systevo Control IP+



Spare parts set for Systevo Control IP+, containing a complete set of color-coded connection terminals and a translucent protection front cover.

Technical Data

Weight	approx. 96 g
Dimensions	W: 310 mm H: 165 mm D: 5 mm (package)

Bag including a complete set of connection terminals and a translucent front cover

72642D — Corridor databus splitter / repeater / terminator -active-



Bus-switch/repeater facilitate the bifurcation at the corridor databus and can be used as an amplifier for this purpose.

Technical Data

Operating voltage	24 V DC +/-10 %
Current consumption	35 mA
Ambient temperature	5 °C ... 55 °C
Storage temperature	-20 °C ... 70 °C
Mounting	in flush-mounting box, DIN 49073
Type of protection	IP20, when installed incl. suitable cover plate
Weight	approx. 50 g
Dimensions	W: 71 mm H: 71 mm D: 25 mm (installation depth)

Features

- Max. 64 participants per segment, then repeater necessary
- Length "corridor databus" max. 500 m, then repeater necessary

Accessories

88885H3 Blind cover plate for Systevo units

88885H3 — Blind cover plate for Systevo units

Blind cover plate for Systevo units.
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

Technical Data

Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Installation	Snap fastening
Color	white (RAL 9016)
Dimensions	W: 68 mm H: 68 mm

Product available from September 2021.

Features

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire prot class V0)
- Halogen free

Accessories

88914A5 Frame for cover plate (single)
88914B5 Frame for cover plate (double)
88914C5 Frame for cover plate (triple)

Interface unit

72641A2 Contact interface



Interface unit for connecting the system to an existing light call system and of external systems via potential-free contacts. Depending on the configuration, up to 4 inputs and 4 outputs can be used. In the systems, these units also have the purpose of controlling group signal lamps.

Technical Data

Mounting	surface mounting or top-hat rail mounting
Material	PC + ABS - FR
Color	white, similar to RAL 9016
Dimensions	W: 110 mm H: 182 mm D: 34 mm

Accessories
72641Z1 Connection board for contact interface

72641Z1 Connection board for contact interface



Connection board for contact interface including connecting terminals

Accessories
88899A Additional fastener for top-hat rail mounting

89371D Electronic relay 1 changeover contact



Electronic relay for switching external consumers to connect the call system in accordance with the requirements of IEC 60601-1 and DIN VDE 0834-1: 2016-06.Fitted with break contact and normally open contact (trigger) with increased requirements for operating and interference resistance, as well as an potential separation (2xMOPP).
Secure switching properties, even with long control lines and in an environment of electromagnetic fields.
Potential-bound control via constant level using keys or relays (24 V DE) via the supply of the call system (max. 24 V DC), no free-wheeling diode required.Prepared for screw-fastening in medical supply units (MSU), the low-noise operation exists.

Features

- Rated switching capacity 6 A / 250 V AC
- 1 changeover contact
- Connector (plug-in terminals): 6-pole for wires up to 2.5mm²
- Control line: Detachable plug-in terminal (double-pole)

Technical Data

Power consumption	0,4 W
Ambient temperature	0 °C ... 50 °C
Storage temperature	0 °C ... 60 °C
Air humidity	< 20 %
Color	light gray
Weight	approx. 60 g
Dimensions	W: 85 mm H: 42 mm D: 32 mm

IEC 60601-1, 2xMOPP
DIN VDE 0834-1: 2016-06

Power supply units and UPS modules

89954R4

Single-phase power supply unit 24 V DC (5 A)



Single-phase power supply unit (5 A) for the constant DC power supply of the call system in accordance with DIN VDE 0834-1: 2016-06, fulfilment of EN60601-1, 2xMOPP. UL/CSA 60601-1 (E213214) certified. Very compact design due to fully-integrated primary-clocked switching technology. Parallel-switchable and series-switchable for flexible power supply of the call system and its components. Voltage range adjustable, for adaptation to local requirements. DC-OK-Signal (LED/relay) for further interference processing in accordance with DIN VDE 0834-1: 2016-06. Fitted with "push-in" connectors for simple wiring (max. 2.5 mm²). Suitable for top-hat rail mounting in the sub-distribution.

Technical Data

Rated voltage	230 V AC
Nominal frequency	50 Hz
Rated current	1,24 A
Output voltage	11,8 V DC ... 27,5 V DC 24 V DC
Output current	5A (24V) continuous load
Ambient temperature	-25 °C ... 70 °C natural convection cooling (20-80% relative humidity)
Storage temperature	-40 °C ... 85 °C
Protection class	acc to EN 61140
Weight	approx. 650 g
Version	for Wall-mounting
Dimensions	W: 42 mm H: 127 mm D: 136 mm (Depth incl. top-hat rail)

Features

Connectors output:
- Push-In, max 2.5 mm²
- earth leakage current:

Signalling DC-OK:
- Uout > 11,2 V DC (LED)
- Uout > 16 V (typ.) max. 30 V/1A (relay)

Recommended circuit breaker:
- 6 A (characteristic B/C)

Switch-on current limitation:
- < 30 A, NTC

IEC 60364-4-41 (DIN VDE 0100-410)
SELV: EN 60601-1, 2xMOPP
EN 61558-1 /-2-16, EN 60950-1
AAMI/ANSI ES 60601-1: 2005
CSA C22.2 No. 60601-1 (2008)
EMC: EN 61204-3
IEC 60601-1-2
CE: in accordance with 2014/30/EU and 2014/35/EU
UL: UL/CSA 60601-1 (E213214)

89954R5

Single-phase power supply unit 24 V DC (10 A)



Single-phase power supply unit (10 A) for the constant DC power supply of the call system in accordance with DIN VDE 0834-1: 2016-06, fulfilment of EN60601-1, 2xMOPP. UL/CSA 60601-1 (E213214) certified. Very compact design due to fully-integrated primary-clocked switching technology. Parallel-switchable and series-switchable for flexible power supply of the call system and its components. Voltage range adjustable, for adaptation to local requirements. DC-OK-Signal (LED/relay) for further interference processing in accordance with DIN VDE 0834-1: 2016-06. Fitted with "push-in" connectors for simple wiring (max. 2.5 mm²). Suitable for top-hat rail mounting in the sub-distribution.

Technical Data

Rated voltage	230 V AC
Nominal frequency	50 Hz
Rated current	1,24 A
Output voltage	23 V DC ... 28,5 V DC +/- 1 % 24 V DC +/- 1 %
Output current	10A (24V) continuous load
Ambient temperature	-25 °C ... 70 °C natural convection cooling (20-80% relative humidity)
Storage temperature	-40 °C ... 85 °C
Protection class	acc to EN 61140
Weight	approx. 1 kg
Dimensions	W: 55 mm H: 127 mm D: 171 mm (Depth incl. top-hat rail)

Features

Connectors output:
- Push-In, max 2.5 mm²
- earth leakage current:

Signalling DC-OK:
- Uout > 21,5 V DC (LED)
- Uout > 21,5 V (typ.) max. 30 V/1A (relay)

Recommended circuit breaker:
- 10 A (characteristic B/C)

Switch-on current limitation:
- < 30 A, NTC

IEC 60364-4-41 (DIN VDE 0100-410)
SELV: EN 60601-1, 2xMOPP
EN 61558-1 /-2-16, EN 60950-1
AAMI/ANSI ES 60601-1: 2005
CSA C22.2 No. 60601-1 (2008)
EMC: EN 61204-3
IEC 60601-1-2
CE: in accordance with 2014/30/EU and 2014/35/EU
UL: UL/CSA 60601-1 (E213214)

89954R6 Single-phase power supply 24 V DC (20 A)



Single-phase power supply unit (20 A) for constant direct current supply to the nurse call system. Compact construction using modern primary clocked circuit technology (according to EN 6100-3-2) suitable for top-hat rail mounting in sub-distribution. Using the assembly kit (safety cover) 89954 MC, wall mounting is also possible outside sub-distribution. The output of the power supply unit is idle-, overload- and short-circuit proof.

Technical Data

Rated voltage	230 V AC
Nominal frequency	50 Hz
Rated current	2,23 A
Output voltage	23 V DC ... 28,5 V DC (adjustable) 24 V DC (adjustable)
Output current	24 V / 20 A, 28 V / 18 A
Operation temperature	0 °C - 60 °C at free convection cooling
Ambient temperature	-25 °C ... 70 °C
Storage temperature	-40 °C ... 85 °C
Air humidity	< 20 %
Type of protection	IP20 (IEC 60529)
Protection low voltage	SELV
Weight	approx. 1,7 kg
Version	for top-hat rail mounting in sub-distribution
Dimensions	W: 95 mm H: 127 mm D: 169 mm

Features

Connectors output:
- Push-In, max 2.5 mm² for input
- Push-In, max 6.0 mm² for output
- earth leakage current:

Signalling DC-OK:
- Uout > 21,5 V DC (LED)
- Uout > 21,5 V (typ.) max. 30 V/1A (relay)

Recommended circuit breaker:
- 20 A (characteristic B/C)

Switch-on current limitation:
- < 30 A, NTC

Accessories

89954C8 UPS module 24 V DC (20 A) for 20 A power supply unit

89954CB Earth fault detector DIN VDE 0834-1: 2016-06



Earth fault detector for monitoring the SELV constant voltage network of the call system for earth faults and hazardous third-party voltages, due to, inter alia, isolation faults and faulty wiring. Implementation as an integral part of a medical-electrical system, in order to ensure the protection of patients from hazardous leakage currents.
Installation of the earth fault detector in conjunction with the single-phase network device (5/10 A) for constant monitoring of the safe supply of the call systems in accordance with SELV standard (2xMOPP).
Status display of the device via LED displays: Operation and fault. To fulfil the requirements of DIN VDE 0834-1: 2016-06 to a distributed SELV installation, the fault message is issued by the integrated relay contact (change-over) until the fault is rectified. Connection to a Hazard Management System required, as well as the initiation of escalation routines for restoring uninterrupted operation of the call system. Simulation of the earth fault by operating the integrated test button.
Setting of the trigger threshold in eight levels via coding switch from 48-480k Ohm: i.e. a leakage current of between 50 µA and 500 µA.

Technical Data

Operating voltage	19 ... 30 V DC
Current consumption @ 24 V DC	approx. 20 mA
Ambient temperature	0 °C ... 40 °C
Storage temperature	0 °C ... 60 °C
Air humidity	< 20 %
Color	light gray
Weight	approx. 100 g
Dimensions	W: 45 mm H: 70 mm D: 105 mm

Features

Trigger threshold for leakage current:
- 50-500 µA (after PE)

Trigger threshold third-party voltage:
- 14-19 V AC/DC
- (from 24 V DC/GND to PE)

Signal contact:
- Switch potential-free
- Load 30 V DC, max. 1 A

EN 60950-1
EN 55022 class B
EN 61000-3-2/-4-2, 3, 4, 5, 6, 8, 11

89954C6 UPS module 24 V DC (5 A) for 5 A power supply unit



Uninterrupted power supply 24 V DC / 5 A (Online DC-UPS) as supplement to the 24 V DC power supply unit. The UPS device is designed for set-up in a secure, absolutely uninterrupted 24-V constant voltage power supply and takes over the uninterrupted power supply of the connected call system (RA) in the system network with the 24-V DC power supply unit in case of a power failure by activating a battery module. Power failures and faults are reported in accordance with DIN VDE 0834-1: 2016-06. With available mains voltage, the consumers are supplied by the power supply unit and the batteries of the UPS device are charged at the same time.

Technical Data

Input voltage	22.5 ... 30 V DC
Output voltage	19,5 V DC ... 26,5 V DC
battery capacity	7 Ah
Bridging time	60 min (for 80 % load @ 20 °C)
Ambient temperature	0 °C ... 50 °C
Mounting	terminal for top-hat rail assembly (UPS module) wall mounting (battery)
Type of protection	IP 20
Weight	approx. 0,4 kg (UPS module)
Dimensions	W: 47 mm H: 138 mm D: 115 mm (UPS module) W:160 mm H: 180 mm D: 110 mm (battery)

Wall mounting of the battery within sub-distribution.
For maximum system up time the battery has to be replaced every 4 years.

Accessories

89954CA Housing surface-mounted for power supply unit / UPS 5 A
89954C6E Replacement rechargeable battery for DC-UPS 5 A / 7 Ah

89954C7 UPS module 24 V DC (10 A) for 10 A power supply unit



Uninterrupted power supply 24 V DC / 10 A (Online DC-UPS) as supplement to the 24 V DC power supply unit. The UPS device is designed for set-up in a secure, absolutely uninterrupted 24-V constant voltage power supply and takes over the uninterrupted power supply of the connected call system (RA) in the system network with the 24-V DC power supply unit in case of a power failure by activating a battery module. Power failures and faults are reported in accordance with DIN VDE 0834-1: 2016-06. With available mains voltage, the consumers are supplied by the power supply unit and the batteries of the UPS device are charged at the same time.

Technical Data

Input voltage	22.5 ... 30 V DC
Output voltage	19,5 V DC ... 26,5 V DC
battery capacity	15 Ah
Bridging time	60 min (for 70 % load @ 20 °C)
Ambient temperature	0 °C ... 50 °C
Mounting	terminal for top-hat rail assembly (UPS module) wall mounting (battery)
Type of protection	IP 20
Weight	approx. 0,4 kg (UPS module)
Dimensions	W: 47 mm H: 138 mm D: 115 mm (UPS module) W:250 mm H: 180 mm D: 159 mm (UPS module)

Wall mounting of the battery within sub-distribution.
For maximum system up time the battery has to be replaced every 4 years.

Accessories

89954CA Housing surface-mounted for power supply unit / UPS 5 A-10 A
89954C7E Replacement rechargeable battery for DC-UPS 10 A / 15 Ah

89954C8 UPS module 24 V DC (20 A) for 20 A power supply unit



Uninterrupted power supply 24 V DC / 20 A (Online DC-UPS) as supplement to the 24 V DC power supply unit. The UPS device is designed for set-up in a secure, absolutely uninterrupted 24-V constant voltage power supply and takes over the uninterrupted power supply of the connected call system (RA) in the system network with the 24-V DC power supply unit in case of a power failure by activating a battery module. Power failures and faults are reported in accordance with DIN VDE 0834-1: 2016-06. With available mains voltage, the consumers are supplied by the power supply unit and the batteries of the UPS device are charged at the same time.

Technical Data

Input voltage	22.5 ... 30 V DC
Output voltage	19,5 V DC ... 26,5 V DC
battery capacity	24 Ah
Bridging time	60 min (for 60 % load @ 20 °C)
Ambient temperature	0 °C ... 50 °C
Mounting	screwing terminal (UPS module) wall mounting (battery)
Type of protection	IP 20
Weight	approx. 0,4 kg (UPS module)
Dimensions	W: 47 mm H: 138 mm D: 115 mm (UPS module) W:405 mm H: 140 mm D: 173 mm (battery)

Wall mounting of the battery within sub-distribution.
For maximum system up time the battery has to be replaced every 4 years.

Accessories
89954C8E Replacement rechargeable battery for DC-UPS 20 A / 24 Ah

89954CA Housing sm for power supply / UPS 5 A-10 A



Control cabinet for device combination from single-phase power supply unit 5 A or 10 A and related DC-UPS system for the constant DC power supply of a call system (RA). The pre-wired housing is equipped for top-hat rail mounting of a power supply unit, as well as a UPS and includes a control module for system messages of the UPS. The lid contact (change-over) can be evaluated using the control module. The housing lid is secured with a lock. The battery compartment holds a rechargeable battery with a capacity of max. 15 Ah. Power failures and faults are reported in accordance with DIN VDE 0834-1: 2016-06. The status display of the device takes place using a LED display: mains mode, power failure (UPS mode).

Technical Data

Mounting	wall mounting
Material	metal, painted
Color	gray
Weight	approx. 6,5 kg
Dimensions	W: 412 mm H: 320 mm D: 252 mm

For maximum system up time the battery has to be replaced every 4 years.

89954C6E Replacement rechargeable battery for DC-UPS 5 A / 7 Ah

Replacement battery module for uninterruptible power supply 24 V DC / 5 A (Online DC-UPS) battery capacity 7 Ah.

Technical Data

battery capacity	7 Ah
Bridging time	60 min (for 80 % load @ 20 °C)
Ambient temperature	0 °C ... 50 °C
Mounting	wall mounting (battery)
Weight	approx. 5,6 kg
Dimensions	W: 160 mm H: 180 mm D: 110 mm

89954C7E Replacement rechargeable battery for DC-USPS10 A / 15 Ah

Replacement battery module for uninterruptible power supply 24 V DC / 10 A (Online DC-UPS) battery capacity 15 Ah.

Technical Data

battery capacity	15 Ah
Bridging time	60 min (for 70 % load @ 20 °C)
Ambient temperature	0 °C ... 50 °C
Mounting	wall mounting (battery)
Weight	approx. 12,7 kg
Dimensions	W: 250 mm H: 180 mm D: 159 mm

89954C8E Replacement rechargeable battery for DC-UPS 20 A / 24 Ah

Replacement battery module for uninterruptible power supply 24 V DC / 20 A (Online DC-UPS) battery capacity 24 Ah.

Technical Data

battery capacity	24 Ah
Bridging time	60 min (for 60 % load @ 20 °C)
Ambient temperature	0 °C ... 50 °C
Mounting	wall mounting (battery)
Weight	approx. 23,3 kg
Connection	screwing terminal (UPS module)
Dimensions	W: 405 mm H: 178 mm D: 135 mm

89954C9 Power Supply /UPS 230 V AC-24 V DC 0.8 A



Devices combination made up of single-phase power supply unit (0.8 A) for the constant DC power supply and uninterruptible power supply (On-line DC-UPS) of selective units of the patient-call system. Compact design thanks to modern primary clocked circuit technology with integrated battery module, prepared for DIN rail mounting in sub-distribution. The output of the power supply is no-load, overload and short-circuit proof.

Technical Data

Rated voltage	230 V AC
Rated frequency	47 Hz ... 63 Hz
Output voltage	24 V DC ... 27 V DC
Output current	800 mA
battery capacity	1,2 Ah
Ambient temperature	0 °C ... 60 °C
Storage temperature	-25 °C ... 85 °C
Air humidity	< 20 %
Mounting	for top-hat rail mounting in sub-distribution
Weight	approx. 1,2 kg
Dimensions	W: 131 mm H: 107.5 mm D: 137 mm



REDUCTION OF ALARM FATIGUE THROUGH FLEXIBLE WORKFLOWS USING SYSTEVO CARE VIEW IP

Optimised for duty rooms and modern care workstations: as an all-in-one command centre, Systevo Care View IP offers the simplest way to access nurse call information and pending alarm escalations. Staff flexibly switches between Full-Duplex hands-free and discrete intercom and select all functions such as comfort SIP telephone services via the touch terminal. The desktop device offers flexible and smooth integration to ICT system infrastructures and is typically connected through Ethernet (with Power-over-Ethernet).

Systevo Care View IP provides a user-friendly operating interface to support the daily care processes in care facilities: The full IP command center helps to streamline alerts, shortening response times and enabling smarter management of care communication. It features a full color, touch screen display: system messages (alarms, calls and presence etc.) are displayed color-coded in prioritised order, allowing “one touch” speech intercom between care staff and patients. The built-in echo-cancellation technology ensures a full-duplex and exceptional intercom functionality which enables an outstanding communication up to several meters away. Systevo Care View IP enables querying calls and selective calling of patients easily, in two-way communication either in hands-free or discrete mode using the integrated handset. Care givers simply select the room or patient from a preconfigured list to establish communication and to prioritize rooms/beds to adjust the escalation workflows of incoming alarm messages. With just a few simple steps, care givers trigger announcements, for quick information of staff, patients and visitors. To extend call forwarding and escalation to other wards or services, Systevo Care View IP supports workflow-relevant processes by displaying and selecting relevant zone concentrations. The telephony SIP-function completes the overall package of the device.

The command center integrates seamlessly into existing ICT infrastructure, according cyber security requirements, as well as in existing legacy Systevo Call Ackermann nurse call systems. Offering added features through the IP connectivity and providing a future proof investment for a smooth migration., either ethernet infrastructure or WIFI infrastructure of the care facility is used. To ensure telephony capabilities, VoIP features are provided using a SIP-client offering a high level of compatibility to almost all IP-telephone systems.

79CM407 Systevo Care View IP station with 7" Display



Features

- High-quality, hardened mineral glass with its surface integrated into the device housing (flat surface, without gaps nor dust edges) for easy cleaning/disinfection of the device.
- Plastic surface with antimicrobial compound for reduction of existing microorganisms and prevent their reproduction.
- Good mechanical properties with high resistance to daily use (operation, cleaning, disinfection, impacts, etc.).
- Suitable for use in care facilities with high standards of hygiene, stability, longevity and durability.
- Temporary switch-off of the touch display for cleaning mode to disinfect the surface / the housing
- Plastic (PC + ABS-FR), matt
- UV-resistant, impact-resistant
- Heat-resistant, stability
- Longevity, durability, Halogen-free
- Flame protection (fire protection class V0)

System architecture:

- Processor: Cortex A53 Quad-Core, 1.2GHz
- Memory: 1GB DDR3, 8 GB Flash
- Operating system: Linux
- Cyber Security: Firewall, VNC (SSH), secured bootloader function
- VoIP/SIP: Digital, Codec G.711, P2P
- Configuration: via web service
- LAN: RJ45, 10/100Base-TX/IEEE 802.3
- ETH for digital data/audio (WIFI opt.)

Control element (touch display):

- Panel size: 17 cm, 16:9
- Technology: TFT LCD, LED lighting
- Resolution: 1024x600, 16.7 million colors
- Touch technology: capacitive, multi
- glass: hardened mineral glass/hardness 7 H
- Cleaning mode for 10 s activatable

Loudspeaker/Acoustics:

- Output power: 2W (normal), 2,5W (max.)
- Frequency range: 380Hz-20kHz

Optimized as all-in-one command center, the desktop IP-device is designed for duty rooms in care facilities. It is equipped with a 7" touch display, supports hands-free full duplex voice communication and discrete intercom using the handset, including optimized echo cancellation. Intuitive handling via the convenient operating interface to support the daily care processes in care facilities. Robust touch terminal with backlit display, a high color brilliance and good readability even in different ambient conditions (brightness, distance). User-friendly display and design of runtime-critical and relevant data and process flows, for user groups such as nursing staff and medical service to reduce travel times, optimize productivity and a efficient flow of information for processing upcoming events. Use of RFID technology/PIN code for audit-proof authentication, timely registration of processes and for access control according to GDPR requirements, depending on the requirement in care facilities, allowing access to the duty room specific functions. Herewith, the efficient process of workflows helps to relieve the workload of routine tasks and supports the daily care processes in a suitable manner. With set presence, system messages (alarms, calls and presence etc.) are displayed with the highest priority on top, in color and prioritized sequence. Set presence enables acoustic call forwarding and the possibility of triggering additional calls and escalation. Support of workflow-relevant processes by displaying as well as selecting/deselecting services (interconnections/zone linkage), for extending call forwarding and escalation to other wards. "One touch" speech intercom between care staff and patients, for querying calls or addressed communication, in free two-way communication (full duplex) either hands-free or in discrete mode via the integrated handset (switching between modes is possible). Selective addressing of rooms/beds for communication (without call/presence) via preconfigured rooms/beds list. In addition, there's also option to prioritize rooms/beds to adjust the escalation workflows of incoming alarm messages. Announcement function (send/receive) via IP communication or bus technology, as well as connection with VoIP/SIP interface (ETH, WIFI), for communication via the PBX. It includes as a telephony client (SIP) for duty rooms and nurse stations.

Security features:

Monitoring/synchronization of all data traffic as well as audio communication (conversations, announcements) to other rooms within the organizational unit, coordination of communication with the central units and other IP participants via IP interface (ETH-LAN, WIFI). The configuration data of a room is managed via the management server, made available through the use of standardized web services and stored locally. Support of the cyber security requirements of modern IT infrastructures. Upgradable to future system firmware thanks to future-oriented flash memory technology to ensure automated software updates during operation. Multi-stage security concept enables local call signalling in case of missing communication with the central unit of the system. Activation of licensed system functions by separate software licenses required: RFID funct., IP funct. (ETH-LAN/WIFI/BT), care documentation (HIS interface required).

Technical Data

Operating voltage	PoE 24 V DC
Power consumption	5 W max. 7,2 W
Ambient temperature	5 °C ... 40 °C
Storage temperature	-20 °C ... 70 °C
Air humidity	< 20 %
Type of protection	IP 20
Material	mineral glass 7H (front) PC+ABS-FR (housing frame)
Color	white, similar to RAL 9016 (front) white (frame)
Weight	approx. 2040 g
Dimensions	W: 313 mm H: 130 mm D: 134 mm

Operation either on fieldbus or IP infrastructure

Accessories

73091G Systevo Connection Unit for SCVIP
88885G3 Cover plate for Systevo Connection Unit for SCVIP

73091G Connection Unit for Systevo Care View IP



Systevo connection unit, to provide the required nurse call and control functions at duty room. For connection of the multifunctional IP communication center Systevo Care View IP (SCVIP). Connected to the higher-level room controller (IP), such as a room electronic module, via the data bus (DBUS).

Technical Data

Operating voltage	24 V DC
Ambient temperature	5 °C ... 55 °C
Storage temperature	-20 °C ... 70 °C
Type of protection	IP20
Weight	approx. 90 g
Dimensions	W: 70 mm H: 70 mm D: 33 mm

Systevo Connection Unit, screw connection terminals

Features

Equipment:
- 1 plug-in socket for connection of multifunctional IP communication center (SCVIP)

Inputs / outputs:
- Power supply 24V DC
- Data bus (DBUS)
- Audio bus (ABUS)

Accessories
88885G3 Coverplate connection unit SCVIP, buttons red and grey, design Systevo Call
88914A5 Frame single for 1 coverplate design Systevo Call
88914B5 Frame double for 2 coverplates design Systevo Call
88914C5 Frame triple for 3 coverplates design Systevo Call

88885G3 Cover plate for Systevo Connection Unit for SCVIP

Cover plate, with a plug opening, for Systevo Connection Unit for IP communication center for duty room (SCVIP).

Technical Data

Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Color	Color cover plate: white (RAL 9016)
Dimensions	W: 68 mm H: 68 mm


Accessories
88914A5 Frame for cover plate (single)
88914B5 Frame for cover plate (double)
88914C5 Frame for cover plate (triple)

Features

Special material properties:
- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- Impact resistance
- Heat resistance
- Strength
- Longevity
- Durability
- Flame protection (fire protection class V0)
- Halogen free

72591D

Systevo Electronic Module plus (SEM+)



Systevo electronic module with integrated corridor lamp, to provide the required nurse call system and control functions in the resident and patient room or duty room according to the VDE 0834 nurse call standards.
4 light segments with RGB-LEDs using the pre-defined color white, red, green an yellow. Alternative color selections possible, after software update and activation by corresponding software license.
Separate frontcover in color white or silver required. Option: nameplate.
Serves as a control unit for additional functions in the corresponding room and as a gateway to the overriding central control unit.
Monitoring and synchronization of the entire data tranmission and audio connections (intercom, announcements) to rooms within the organizational unit, and coordination of communication with the central control units and other room devices via data bus.
Configuration data of the room and used profiles (functions, I/O, device services) are stored locally (flash memory).
Associated multifunctional room units and an additional corridor lamp, are connected to the room controller via the integrated data bus (DBUS) as well as using the integrated call inputs (I/O).
Supports bed-wise intercom in combination with an the bed unit and patient handset.
Includes an user-friendly installation technology with color-coded connection terminals for each individual device and control functions, for a more efficient cabling and for an optimized commissioning process.
Upgradable to future system firmware thanks to advanced flash storage technologies. Includes the option for automated software update during operation.
A multi-level security concept enables local call signaling in the case of a lack of communication with the central unit of the system. Support of the cyber security requirements of modern data bus infrastructures.
System functions subject to license are provided by corresponding software licenses.

Features

Special material properties:
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant, halogen free
- Antimicrobial surface, matt finish
- Impact and heat resistance
- Strength, longevity, durability
- Flame protection (fire prot class V0)

Technical Data

Operating voltage	24 V DC +/-10 %
Current consumption	ca. 110-150mA
Ambient temperature	5 °C ... 40 °C
Storage temperature	-20 °C ... 70 °C
Air humidity	< 20 %
Protection class	IP20
Installation	with flush-mounted backbox
Color	white
Weight	approx. 120 g
Dimensions	W: 110 mm H: 118 mm D: 27 mm W:115 mm H: 118 mm D: 46 mm with cover

Accessories

72590L1 Frontcover for SEM/SCL (silver) Systevo Call Ackermann
72590L2 Frontcover for SEM/SCL (white) Systevo Call Ackermann
72590T1 Systevo Nameplate (silver) Systevo Call Ackermann
72590T2 Systevo Nameplate (white) Systevo Call Ackermann

72590L1 Frontcover for SEM/SCL (silver)



Front cover in silver color for Systevo electronic module and connection unit corridor lamp. For snapping onto the SEM / SCL. With translucent illuminated field for 4 lamp segments.

Technical Data

Ambient temperature	5 °C ... 40 °C
Storage temperature	-20 °C ... 70 °C
Air humidity	< 20 %
Protection class	IP20
Installation	snap-on to SEM/SCL
Color	silver
Weight	approx. 83 g
Dimensions	W: 115 mm H: 118 mm D: 35 mm

Features

Special material properties:
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs. Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.). Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant, halogen free
- Antimicrobial surface, matt finish
- Impact and heat resistance
- Strength, longevity, durability
- Flame protection (fire prot class V0)

72590L2 Frontcover for SEM/SCL (white)



Front cover in white color for Systevo electronic module and connection unit corridor lamp. For snapping onto the SEM / SCL. With translucent illuminated field for 4 lamp segments.

Technical Data

Ambient temperature	5 °C ... 40 °C
Storage temperature	-20 °C ... 70 °C
Air humidity	< 20 %
Protection class	IP20
Installation	snap-on to SEM/SCL
Color	white
Weight	approx. 83 g
Dimensions	W: 115 mm H: 118 mm D: 35 mm

Features

Special material properties:
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs. Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant, halogen free
- Antimicrobial surface, matt finish
- Impact and heat resistance
- Strength, longevity, durability
- Flame protection (fire prot class V0)

72590L0 Insert for front cover for SEM (white) (5pcs)

Insert (5 pcs.) to replace the translucent light segment in the frontcover (white) of the Systevo Electronic module. Deactivation of the RGB-LEDs in the SEM required.

Technical Data

Ambient temperature	5 °C ... 40 °C
Storage temperature	-20 °C ... 70 °C
Air humidity	< 20 %
Protection class	IP20
Installation	in the frontcover SEM
Color	white
Dimensions	W: 79 mm H: 61 mm D: 18 mm

5 pieces

73091C

Systevo Care Unit (Call/Cancel fct.) with call / presence buttons



Systevo call/cancel unit, to provide the suitable nurse call functions in patient/resident/duty and other rooms.
Equipped with call and presence button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation and cancellation.
Controlled by a superordinated room controller (IP) via the data bus (DBUS) such as a room terminal or a room electronic module.
In data bus mode: connection of an external call unit to the call input (I/O).
Additional firmware licenses required to deploy new device functionalities.

Technical Data

Operating voltage	24 V DC +/-10 %
Current consumption	50 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 10 % (non condensing)
Type of protection	IP20
Weight	approx. 90 g
Dimensions	W: 70 mm H: 70 mm D: 33 mm

Systevo Care Unit, screw connection terminals

Features

Equipment:
- connection of multifunctional handset
- 1 call button (with red LED)
- 1 presence button (with green LED)

Inputs / outputs:
- Power supply 24V DC
- Data bus (DBUS)
- Call input / output (I/O)

Features:
- Call triggering, call cancellation
- Cancellation of malfunctions (5s)
- Configurable system funct. (Input)

Accessories

88885C3 Cover plate Systevo call/cancel unit, call button red, cancel button green, design Systevo Call
88914A5 Frame single for 1 coverplate design Systevo Call
88914B5 Frame double for 2 coverplates design Systevo Call
88914C5 Frame triple for 3 coverplates design Systevo Call

88885C3

Cover plate Systevo call/cancel unit Call button red/cancel button green



Cover plate for Systevo call/cancel unit, fitted with call button red and cancel button green. Use in conjunction with seal kit for increasing the IP protection class (IP x4).
Special material properties:
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

Technical Data

Dimensions	W: 68 mm H: 68 mm

Features

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire prot class V0)
- Halogen free

Accessories

88914A5 Frame for cover plate (single)
88914B5 Frame for cover plate (double)
88914C5 Frame for cover plate (triple)

Systevo Touch IP



STREAMLINING OF CARE WORKFLOWS WITH SYSTEVO TOUCH IP

The central hub of information and data gathering right at the point of care: Systevo Touch IP is helping to streamline daily tasks and alerts, shorten response times, and enable smarter management of care communication and documentation. It represents a full IP room-terminal with an easy-to-use touchscreen display, exceptional intercom functionality and excellent audio quality. Integrated RFID and Bluetooth® technology enables workflow automation and smart connectivity of in-room equipment. Systevo Touch IP supports Ethernet, POE and Wi-Fi.

Systevo Touch IP provides a user-friendly operating interface to support the daily care processes in care facilities. System messages (alarms, calls and presence etc.) are displayed color-coded in prioritised order, allowing “one touch” speech intercom between care staff and patients to manage inhouse communication more efficiently. The built-in echo-cancellation technology ensures a full-duplex and exceptional intercom functionality which enhances querying calls of patients easily, in hands-free two-way communication.
Using the optional duty features care givers simply select the room or patient from a preconfigured list to establish communication and to prioritize rooms/beds to adjust the escalation workflows of incoming alarm messages. With just a few simple steps, care givers trigger announcements, for quick information of staff, patients and visitors. To extend call forwarding and escalation to other wards or services, relevant zone concentrations are selected. With the optional SIP license, the Systevo Touch IP Terminal is upgraded to a full-fledged telephone.

For secure authentication, the nursing staff uses access via RFID cards to support an audit-proof authentication and access control according to GDPR requirements. Care givers are having access for timely registration of care processes, ensuring task documentation is executed, helping to relieve the workload of routine tasks and supporting the daily care processes in a suitable manner. Allowing access to patient data directly in the room, identification and execution of nursing tasks/activities, as well as the documentation for the respective patient is guaranteed. Care services are registered immediately after provision (gathering of vital sign data, nursing activities, medication, other information requiring documentation) to reduce errors on patient’s health records. An appropriate interface to the hospital information system is required.

79CM307 Systevo Touch IP, 7" Display



IP-Terminal with 7" capacitive touch-display to support the daily care processes in care facilities. User-friendly operating interface to ensure runtime-critical and relevant data and process flows for user groups such as nursing staff, medical service as well as supporting personnel (including IT department, technical service). Reduction of movement times to optimize productivity and efficient information flow of nursing tasks. Use of RFID technology/PIN code for audit-proof authentication/ time-accurate registration of processes and for access control in accordance with GDPR specifications, depending on the requirements in care facilities.

Designed as an IP communication unit for full-duplex operation, in a high-quality surface-mounting housing for residents'/patients' rooms/office rooms, as well as a control unit for additional functions in the respective room and as a gateway to mobile terminals. Intuitive operation via the backlit touch-display with high colour brilliance and good readability in different environmental parameters (brightness, distance). Intercom communication in hands-free intercom (full duplex) and announcement function (send/receive) via IP communication or bus technology as well as connection with VoIP/SIP interface (ETH, WIFI), for communication via the PBX. Optional extension with telephony client (SIP) for duty rooms and function rooms.

Display of system messages with set presence (alarms, calls and presences, etc.) with the highest priority in colour, prioritised order, including time / date. Acoustic call forwarding when set presence and possibility of triggering further calls. Option for configuring the after mode for switching off the display to fulfil the after rest for residents/patients. Support of workflow-relevant processes through display as well as selecting/de-selecting of services (zone concentrations), for extended call forwarding to further wards. Use of RFID technology for identification at the touch terminal for access to patient data directly in the patient's room as well as documentation of care processes. Hereby efficient design of care tasks / activities as well as documentation for the respective patient to relieve the burden of routine work and support the daily care processes in a suitable way. Nursing services are documented immediately after provision: Recording of vital data, care activities, medication and other information requiring documentation, to reduce the number of incorrect records. Energy saving and optimized domotic control functions are provided by a local user interface.

Security features: Monitoring/synchronization of all data traffic as well as audio communication (conversations, announcements) to other rooms within the organizational unit, coordination of communication with the central units and other IP participants via IP interface (ETH-LAN, WIFI). The configuration data of a room is managed via the management server, made available through the use of standardized web services and stored locally. Support of the cyber security requirements of modern IT infrastructures. Upgradable to future system firmware thanks to future-oriented flash memory technology to ensure automated software updates during operation. Multi-stage security concept enables local call signalling in case of missing communication with the central unit of the system.

Activation of licensed system functions by separate software licenses required:
RFID funct., IP funct. (ETH-LAN/WIFI/BT) duty room funct. (zone concentrations, announcements, room/bed prioritisation), telephony (SIP client), care documentation (HIS interface required).

Features

- High-quality, hardened mineral glass with a surface integrated into the surface-mounted plastic housing for each cleaning / disinfection of the device.
- Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
- Good mechanical properties with high resistance to daily stress (operation, cleaning, disinfection, jolts etc.).
- Suitable for use in care facilities with high standards of hygiene, stability, longevity and durability (continuous operation).
- Temporary switch-off of the touch display for cleaning mode to disinfect the surface / the housing
- UV-resistant, impact-resistant
- Heat-resistant, stability
- Longevity, durability, Halogen-free
- Flame protection (fire protection class V0)

System architecture:

- Processor: Cortex A64 Quad-Core, 1.2GHz
- Memory: 1GB DDR3, 8 GB Flash
- Operating system: Linux
- Cyber Security: Firewall, VNC (SSH), secured bootloader function
- VoIP/SIP: Digital, Codec G.711, P2P
- Configuration: via web service
- LAN: RJ45, 10/100Base-TX/IEEE 802.3
- ETH for digital data/audio (WIFI opt.)

Control element (touch display):

- Panel size: 17 cm, 16:9
- Technology: TFT LCD, LED lighting
- Resolution: 1024x600, 16.7 million colors
- Touch technology: capacitive, multi
- glass: hardened mineral glass/hardness 7 H
- Cleaning mode for 10 s activatable

Loudspeaker/Acoustics:

- Output power: 2W (normal), 2,5W (max.)
- Frequency range: 380Hz-20kHz

Technical Data

Operating voltage	24 V DC
Power consumption	4 W
Ambient temperature	5 °C ... 40 °C
Storage temperature	-20 °C ... 70 °C
Air humidity	< 20 %
Material	mineral glass 7H (front) PC + ABS-FR
Color	white, similar to RAL 9016 (front) white (frame)
Dimensions	W: 216 mm H: 144 mm D: 25 mm


Operation either on fieldbus or IP infrastructure.
Installation in duty rooms by using corresponding licences.

Accessories

79CM307Z1	Systevo connection board for IP-Touch terminal, Databus
79CM307Z2	Systevo connection board for IP-Touch terminal, Databus / IP (ETH-LAN)
79CM307Z3	Systevo connection board for IP-Touch terminal, IP (ETH/PoE)
79CM307Z4	Systevo connection board for IP-Touch terminal, IP (ETH/PoE), Databus

79CM307Z1

Systevo Connection Board for Systevo Touch IP terminal, Databus



Connection board for IP touch terminal, to provide the required nurse call system and control functions in the resident/patient room or duty room according to the nurse call standards. Serves as a control unit for additional functions in the corresponding room and as a gateway to the overriding central unit (via Data bus).
Monitoring and synchronization of the entire data traffic and audio connections (calls, announcements) to other rooms within the organizational unit, and coordination of communication with the central units and other room devices via data bus.
Configuration data of the room and used profiles (functions, I/O, device services) are managed via the management server and stored locally (redundant local flash storage), for increased safety.
Associated multifunctional room units as well as the corridor lamp, can be connected to the room controller via the integrated data bus (DBUS) as well as using the integrated call inputs (I/O).
Integration into the corridor data bus (ZBUS) and connection of the bed bus (BBUS) in backward compatibility mode (for bed call modules).
Includes an user-friendly installation technology with colour-coded connection terminals for each individual device and control functions, for a more efficient cabling and for an optimized commissioning process.
Supports bed-wise speaking in combination with an optional bed/speech unit and hand-held device at the bed.
Upgradable to future system firmware thanks to advanced flash storage technologies. Possibility for automated software update during operation.
A multi-level security concept enables local call signaling in the case of a lack of communication with the central unit of the system.
Support of the cyber security requirements of modern data bus infrastructures.
Integrates an electromechanical lock feature to secure the IP touch terminal.
System functions subject to license are provided by corresponding software licenses.

Features

Special material properties:
- High quality plastic surface with antimicrobial compound for reduction of existing microorganisms and prevent their reproduction.
- Good mechanical properties with high resistance to daily use (operation, cleaning, disinfection, impacts, etc.).
- Suitable for use in care facilities with high demands on hygiene, stability, longevity and durability.
- Plastic (PC + ABS-FR), matt
- UV-resistant, impact-resistant
- Heat resistance, stability
- Longevity, durability, halogen free
- Flame protection (fire protection class V0)

System architecture:
- Processor/OS: Embedded µC system
- Cyber-Security: Firewall, secured boot loader function
- Configuration: via data service


Inputs/Outputs:
- 24V DC power supply
- DBUS: 2x RS487 (200 m each) for up to 4 participants each
- ABUS/ZBUS: 1x RS487 (500 m) each
- BBUS: 1x RS485 (200 m)
- Call input/output: 4x I/O
- Connection terminals: color-coded for up to 3x 0.8 mm (0.6 mm) wires (rigid)
- Galvanic isolation of the control functions according to EN 60601.1.1 through external protective measures

Technical Data

Operating voltage	24 V DC
Current consumption	max. 300mA (with IP Touch-Terminal, without: 30-40mA)
Current consumption @ 24 V DC	approx. 180 mA
Ambient temperature	5 °C ... 55 °C
Storage temperature	-20 °C ... 70 °C
Type of protection	IP20
Installation	flush mounted (back box)
Dimensions	W: 100 mm D: 10 mm L: 170 mm

79CM307Z2

Systevo Connection Board for Systevo Touch IP terminal, Databus / IP (ETH-LAN)



Connection board for IP touch terminal, to provide the required nurse call system and control functions in the resident/patient room or duty room according to the nurse call standards. Serves as a control unit for additional functions in the respective room and as a gateway to the higher-level central unit (via Ethernet LAN and/or Data bus).
Value-added services are routed to the touch terminal via the ETH-LAN interface (optional license may be required).
Monitoring and synchronization of the entire data traffic and audio connections (calls, announcements) to other rooms within the organizational unit, and coordination of communication with the central units and other room devices via data bus.
Configuration data of the room and used profiles (functions, I/O, device services) are managed via the management server and stored locally (redundant local flash storage), for increased safety.
Associated multifunctional room units as well as the corridor lamp, can be connected to the room controller via the integrated data bus (DBUS) as well as using the integrated call inputs (I/O).
Integration into the corridor data bus (ZBUS) and connection of the bed bus (BBUS) in backward compatibility mode (not available in full IP mode).
Includes an user-friendly installation technology with color-coded connection terminals for each individual device and control functions, for a more efficient cabling and for an optimized commissioning process.
Supports bed-wise speaking in combination with an optional bed/speech unit and hand-held device at the bed.
Upgradable to future system firmware thanks to advanced flash storage technologies. Possibility for automated software update during operation.
A multi-level security concept enables local call signaling in the case of a lack of communication with the central unit of the system.
Support of the cyber security requirements of modern IT infrastructures.
Integrates an electromechanical lock feature to secure the IP touch terminal.
System functions subject to license are provided by corresponding software licenses.

Features

Special material properties:
- High quality plastic surface with antimicrobial compound for reduction of existing microorganisms and prevent their reproduction.
- Good mechanical properties with high resistance to daily use (operation, cleaning, disinfection, impacts, etc.).
- Suitable for use in care facilities with high demands on hygiene, stability, longevity and durability.
- Plastic (PC + ABS-FR), matt
- UV-resistant, impact-resistant
- Heat resistance, stability
- Longevity, durability, halogen free
- Flame protection (fire protection class V0)

System architecture:
- Processor/OS: Embedded µC system
- Cyber-Security: Firewall, secured boot loader function
- Configuration: via data service

Inputs/Outputs:


- LAN: Ethernet Cat5 F/UTP, 802.3a
- 24V DC power supply
- DBUS: 2x RS487 (200 m each) for up to 4 participants each
- ABUS/ZBUS: 1x RS487 (500 m) each
- BBUS: 1x RS485 (200 m)
- Call input/output: 4x I/O
- Connection terminals: color-coded for up to 3x 0.8 mm (0.6 mm) wires (rigid)
- Galvanic isolation of the control functions according to EN 60601.1.1 through external protective measures

Technical Data

Current consumption	max. 300mA (with IP Touch-Terminal, without: 30-40mA)
Current consumption @ 24 V DC	approx. 215 mA
Ambient temperature	5 °C ... 55 °C
Storage temperature	-20 °C ... 70 °C
Type of protection	IP20
Installation	surface mounting, in combination with flush-mounted backbox
Dimensions	W: 100 mm D: 10 mm L: 170 mm

79CM307Z3

Systevo Connection Board for Systevo Touch IP terminal, IP (ETH/PoE)



Connection board for IP touch terminal, to provide the required nurse call system and control functions in the resident/patient room or duty room according to the nurse call standards. Serves as a control unit for additional functions in the corresponding room and as a gateway to the overriding central unit (via Data bus).
Monitoring and synchronization of the entire data traffic and audio connections (calls, announcements) to other rooms within the organizational unit, and coordination of communication with the central units and other room devices via data bus.
Configuration data of the room and used profiles (functions, I/O, device services) are managed via the management server and stored locally (redundant local flash storage), for increased safety.
Associated multifunctional room units as well as the corridor lamp, can be connected to the room controller via the integrated data bus (DBUS) as well as using the integrated call inputs (I/O).
Integration into the corridor data bus (ZBUS) and connection of the bed bus (BBUS) in backward compatibility mode (for bed call modules).
Includes an user-friendly installation technology with colour-coded connection terminals for each individual device and control functions, for a more efficient cabling and for an optimized commissioning process.
Supports bed-wise speaking in combination with an optional bed/speech unit and hand-held device at the bed.
Upgradable to future system firmware thanks to advanced flash storage technologies. Possibility for automated software update during operation.
A multi-level security concept enables local call signaling in the case of a lack of communication with the central unit of the system.
Support of the cyber security requirements of modern data bus infrastructures.
Integrates an electromechanical lock feature to secure the IP touch terminal.
System functions subject to license are provided by corresponding software licenses.

Features

Special material properties:
- High quality plastic surface with antimicrobial compound for reduction of existing microorganisms and prevent their reproduction.
- Good mechanical properties with high resistance to daily use (operation, cleaning, disinfection, impacts, etc.).
- Suitable for use in care facilities with high demands on hygiene, stability, longevity and durability.
- Plastic (PC + ABS-FR), matt
- UV-resistant, impact-resistant
- Heat resistance, stability
- Longevity, durability, halogen free
- Flame protection (fire protection class V0)

System architecture:
- Processor/OS: Embedded µC system
- Cyber-Security: Firewall, secured boot loader function
- Configuration: via data service

Inputs/Outputs:
- LAN: Ethernet/PoE Cat5 F/UTP, 802.3af
- PoE power supply
- DBUS: 2x RS487 (200 m each) for up to 4 participants each
- ABUS/ZBUS: 1x RS487 (500 m) each
- Call input/output: 4x I/O
- Connection terminals: color-coded for up to 3x 0.8 mm (0.6 mm) wires (rigid)
- Galvanic isolation of the control functions according to EN 60601.1.1 through external protective measures

Systevo Connection Board for Systevo Touch IP terminal, IP (ETH/PoE)


Connection board for IP touch terminal, to provide the required nurse call system and control functions in the resident/patient room or duty room according to the nurse call standards. Serves in Full IP mode as a control unit for additional functions in the respective room and as a gateway to the higher-level central unit (via Ethernet LAN).
All services are routed to the touch terminal via the ETH-LAN interface (optional license may be required).
Monitoring and synchronization of the entire data traffic and audio connections (calls, announcements) to other rooms within the organizational unit, and coordination of communication with the central units and other room devices via data bus.
Configuration data of the room and used profiles (functions, I/O, device services) are managed via the management server and stored locally (redundant local flash storage), for increased safety.
Associated multifunctional room units as well as the corridor lamp, can be connected to the room controller via the integrated data bus (DBUS) as well as using the integrated call inputs (I/O).
Includes an user-friendly installation technology with color-coded connection terminals for each individual device and control functions, for a more efficient cabling and for an optimized commissioning process.
Supports bed-wise speaking in combination with an optional bed/speech unit and hand-held device at the bed.
Upgradable to future system firmware thanks to advanced flash storage technologies. Possibility for automated software update during operation.
A multi-level security concept enables local call signaling in the case of a lack of communication with the central unit of the system.
Support of the cyber security requirements of modern IT infrastructures.
Integrates an electromechanical lock feature to secure the IP touch terminal.
System functions subject to license are provided by corresponding software licenses.

Technical Data

Current consumption	max. 300mA (with IP Touch-Terminal, without: 30-40mA)
Current consumption @ 24 V DC	approx. 215 mA
Power consumption	7,2 W
Ambient temperature	5 °C ... 55 °C
Storage temperature	-20 °C ... 70 °C
Type of protection	IP20
Installation	surface mounting, in combination with flush-mounted backbox
Dimensions	W: 100 mm D: 10 mm L: 170 mm

79CM307Z4

Systevo Connection Board for Systevo Touch IP terminal, IP (ETH/PoE), Databus



Features

Special material properties:
- High quality plastic surface with antimicrobial compound for reduction of existing microorganisms and prevent their reproduction.
- Good mechanical properties with high resistance to daily use (operation, cleaning, disinfection, impacts, etc.).
- Suitable for use in care facilities with high demands on hygiene, stability, longevity and durability.
- Plastic (PC + ABS-FR), matt
- UV-resistant, impact-resistant
- Heat resistance, stability
- Longevity, durability, halogen free
- Flame protection (fire protection class V0)

System architecture:
- Processor/OS: Embedded µC system
- Cyber-Security: Firewall, secured boot loader function
- Configuration: via data service

Inputs/Outputs:
- LAN: Ethernet/PoE Cat 5 F/UTP, 802.3af
- 24V DC / PoE power supply
- DBUS: 2x RS487 (200 m each) for up to 4 participants each
- ABUS/ZBUS: 1x RS487 (500 m) each
- BBUS: 1x RS485 (200 m)
- Call input/output: 4x I/O
- Connection terminals: color-coded for up to 3x 0.8 mm (0.6 mm) wires (rigid)
- Galvanic isolation of the control functions according to EN 60601.1.1 through external protective measures

Connection board for IP touch terminal, to provide the required nurse call system and control functions in the resident/patient room or duty room according to the nurse call standards. Serves as a control unit for additional functions in the corresponding room and as a gateway to the overriding central unit (via Data bus).
Monitoring and synchronization of the entire data traffic and audio connections (calls, announcements) to other rooms within the organizational unit, and coordination of communication with the central units and other room devices via data bus.
Configuration data of the room and used profiles (functions, I/O, device services) are managed via the management server and stored locally (redundant local flash storage), for increased safety.
Associated multifunctional room units as well as the corridor lamp, can be connected to the room controller via the integrated data bus (DBUS) as well as using the integrated call inputs (I/O).
Integration into the corridor data bus (ZBUS) and connection of the bed bus (BBUS) in backward compatibility mode (for bed call modules).
Includes an user-friendly installation technology with colour-coded connection terminals for each individual device and control functions, for a more efficient cabling and for an optimized commissioning process.
Supports bed-wise speaking in combination with an optional bed/speech unit and hand-held device at the bed.
Upgradable to future system firmware thanks to advanced flash storage technologies. Possibility for automated software update during operation.
A multi-level security concept enables local call signaling in the case of a lack of communication with the central unit of the system.
Support of the cyber security requirements of modern data bus infrastructures.
Integrates an electromechanical lock feature to secure the IP touch terminal.
System functions subject to license are provided by corresponding software licenses.

Connection board for IP touch terminal, to provide the required nurse call system and control functions in the resident/patient room or duty room according to the nurse call standards. Serves as a control unit for additional functions in the respective room and as a gateway to the higher-level central unit (via Ethernet LAN and/or Data bus).
Value-added services are routed to the touch terminal via the ETH-LAN interface (optional license may be required).
Monitoring and synchronization of the entire data traffic and audio connections (calls, announcements) to other rooms within the organizational unit, and coordination of communication with the central units and other room devices via data bus.
Configuration data of the room and used profiles (functions, I/O, device services) are managed via the management server and stored locally (redundant local flash storage), for increased safety.
Associated multifunctional room units as well as the corridor lamp, can be connected to the room controller via the integrated data bus (DBUS) as well as using the integrated call inputs (I/O).
Integration into the corridor data bus (ZBUS) and connection of the bed bus (BBUS) in backward compatibility mode (not available in full IP mode).
Includes an user-friendly installation technology with color-coded connection terminals for each individual device and control functions, for a more efficient cabling and for an optimized commissioning process.
Supports bed-wise speaking in combination with an optional bed/speech unit and hand-held device at the bed.
Upgradable to future system firmware thanks to advanced flash storage technologies. Possibility for automated software update during operation.
A multi-level security concept enables local call signaling in the case of a lack of communication with the central unit of the system.
Support of the cyber security requirements of modern IT infrastructures.
Integrates an electromechanical lock feature to secure the IP touch terminal.
System functions subject to license are provided by corresponding software licenses.

Technical Data

Current consumption	max. 300mA (with IP Touch-Terminal, without: 30-40mA)
Current consumption @ 24 V DC	approx. 215 mA
Ambient temperature	5 °C ... 55 °C
Storage temperature	-20 °C ... 70 °C
Type of protection	IP20
Installation	surface mounting, in combination with flush-mounted backbox
Dimensions	W: 100 mm D: 10 mm L: 170 mm

74920A1 Systevo Room Terminal (SRT)



Room terminal with 2,8” capacitive touch color display to support the daily care processes in care facilities. User-friendly user interface to ensure runtime-critical and relevant data and process flows for user groups such as nursing staff and supporting personnel (including IT department, technical service). Reduction of travel times to optimize productivity and efficient information flow of care tasks.
Designed as communication unit for full-duplex operation, in a high-quality surface-mounting housing for residents'/patients' rooms, the Systevo Room Terminal serves as well as the central control unit for the functions in the respective room and as a gateway to the overriding central unit (via data bus).
Intuitive operation via the backlit touch-display with high color brilliance and good readability in different environmental parameters (brightness, distance), and the color-coded pushbuttons marked with symbols.
Display of system messages with set presence (alarms, calls and presences, etc.) with the highest priority in color, prioritized order. Acoustic call forwarding when presence is set and possibility of triggering further calls.
Display of system time / date.
Built-in loudspeaker and microphone for two-way intercom communication in hands-free mode (full duplex) and announcements reception, via bus technology.
Supports bed-wise speech communication in combination with an optional bed unit and patient handset.
The Systevo Room Terminal consists of a terminal housing with integrated electronics that can be snapped onto the associated connection board, for integration on the corridor data bus (ZBUS).
Associated multifunctional room units as well as the corridor lamp, can be connected to the room controller via the integrated data bus (DBUS) as well as using the integrated call inputs (I/O).
Includes a user-friendly installation technology with color-coded connection terminals for each individual device and control functions, for a more efficient cabling and for an optimized commissioning process.
Monitoring/synchronization of all data traffic as well as audio communication (conversations, announcements) to other rooms within the organizational unit, coordination of communication with the central units and other data bus participants.
The configuration data of the room and associated profiles (functions, I/O, device services) are stored locally (flash memory).
Support of the cyber security requirements of modern data bus infrastructures.
Upgradable to future system firmware thanks to advanced flash storage technologies.
Includes the option for automated software update during operation.
A multi-stage security concept enables local call signaling in case of missing communication with the central unit of the system.
Optional system functions subject to license are provided by corresponding software licenses.

Features

Special material properties:

- High-quality, hardened glass integrated into the surface-mounted plastic housing for easy cleaning / disinfection of the device.
- High quality plastic compound with antimicrobial surface for reduction of existing bacteria and to prevent their reproduction.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, impacts, etc.).
- Suitable for use in care facilities with high requirements in terms of hygiene, stability, longevity and durability (continuous operation).
- Plastic compound (PC + ABS-FR), matt finish
- UV-resistant, impact-resistant
- Heat-resistant, stability
- Longevity, durability, Halogen-free
- Flame protection (fire protection class V0)

Control elements (touch display):

- Panel size: 2.8”
- Technology: TFT LCD, LED lighting
- Resolution: 240x320
- Touch technology: capacitive
- Glass: Gorilla™ glass 3rd gen.
- Touch buttons: 2 x backlighted capacitive for Call and Presence
- Soft buttons (optional feature): 2 x integrated on the capacitive touch display for Doctor Call and Presence 2

Technical Data

Quiescent current @ 24 V DC	approx. 31 mA
Current consumption	120-180 mA
Ambient temperature	5 °C ... 40 °C
Storage temperature	-20 °C ... 70 °C
Air humidity	< 10 %
Protection class	IP 20 (completely installed with associated connection board)
Material	PC+ABS-FR
Installation	surface mounting (with associated flush-mounted backbox)
Color	white
Weight	approx. 136 g
Dimensions	W: 100 mm H: 152 mm D: 15 mm

Accessories

74920Z1 Room Terminal Connection board for SRT/SRD
74920Z2 Room Unit Connection board for SRT/SRD
74920Z3 Adaptor for flush mounting ZT99/95

74920Z1 Room Terminal Connection board for SRT



Connection board for Systevo Room Terminal (SRT) to provide the required nurse call system and control functions in the resident/patient room according to the nurse call standards. Serves as a control unit for additional functions in the corresponding room and as a gateway to the overriding central unit (via Data bus).
Monitoring and synchronization of the entire data traffic to other rooms within the organizational unit, and coordination of communication with the central units and other room devices via data bus.
Configuration data of the room and used profiles (functions, I/O, device services) are managed via the system workstation/server and stored locally (redundant local flash storage), for increased safety.
Associated multifunctional room units as well as the corridor lamp, can be connected to the room controller via the integrated data bus (DBUS) as well as using the integrated call inputs (I/O).
Integration into the corridor data bus (ZBUS).
Includes a user-friendly installation technology with color-coded connection terminals for each individual device and control functions, for a more efficient cabling and for an optimized commissioning process.
In combination with SRT, supports bed-wise speech communication in combination with an optional bed/speech unit and hand-held device at the bed.
Upgradable to future system firmware thanks to advanced flash storage technologies. Possibility for automated software update during operation.
A multi-level security concept enables local call signaling in the case of a lack of communication with the central unit of the system.
Support of the cyber security requirements of modern data bus infrastructures.
System functions subject to license are provided by corresponding software licenses.

Features

Special material properties:

- High quality plastic surface with antimicrobial compound for reduction of existing microorganisms and prevent their reproduction.
- Good mechanical properties with high resistance to daily use (operation, cleaning, disinfection, impacts, etc.).
- Suitable for use in care facilities with high demands on hygiene, stability, longevity and durability.
- Plastic (PC + ABS-FR), matt
- UV-resistant, impact-resistant
- Heat resistance, stability
- Longevity, durability, halogen free
- Flame protection (fire protection class V0)

System architecture:

- Processor/OS: Embedded µC system
- Cyber-Security: Firewall, secured boot loader function
- Configuration: via data service

Inputs/Outputs:

- 24V DC power supply
- DBUS: 2x RS487 (200 m each) for up to 4 participants each
- ABUS/ZBUS: 1x RS487 (500 m) each
- Call input/output: 1x I/O
- Connection terminals: color-coded for up to 3x 0.6 mm (2 x 0.8 mm) wires (rigid)
- Galvanic isolation of the control functions according to EN 60601.1.1 through external protective measures

Technical Data

Quiescent current @ 24 V DC	approx. 21 mA
Current consumption	< 21 mA
Ambient temperature	5 °C ... 40 °C
Storage temperature	-20 °C ... 70 °C
Air humidity	< 10 %
Material	PC+ABS-FR
Color	white
Weight	approx. 111 g
Dimensions	W: 94.3 mm H: 146 mm D: 25,5 mm

Connection board, connection terminals

74920Z2 Room Unit Connection board for SRT



Basic connection board for Systevo Room Terminal (SRT) to be used as a room unit, to provide the required nurse call functions in the resident/patient room according to the nurse call standards.
Connection to the overriding room controller via the data bus (DBUS), such as a room electronic module (SEM/SEM+). For speech capability (STR only), SEM+ is required
Connected SRT/SRD are monitored by the superordinated room controller according to the specifications of VDE 0834 using an interactive data bus.
Includes a user-friendly installation technology with color-coded connection terminals for each individual device and control functions, for a more efficient cabling and for an optimized commissioning process.

Technical Data

Ambient temperature	5 °C ... 40 °C
Storage temperature	-20 °C ... 70 °C
Air humidity	< 10 %
Material	PC+ABS-FR
Color	white
Weight	approx. 72 g
Dimensions	W: 94.3 mm H: 146 mm D: 25,5 mm

Connection board, connection terminals

Features

Special material properties:

- High quality plastic surface with antimicrobial compound for reduction of existing microorganisms and prevent their reproduction.
- Good mechanical properties with high resistance to daily use (operation, cleaning, disinfection, impacts, etc.).
- Suitable for use in care facilities with high demands on hygiene, stability, longevity and durability.
- Plastic (PC + ABS-FR), matt
- UV-resistant, impact-resistant
- Heat resistance, stability
- Longevity, durability, halogen free
- Flame protection (fire protection class V0)

Inputs/Outputs:

- 24V DC power supply
- DBUS/RABUS: 1x RS487 (200 m each)
- Connection terminals: color-coded for up to 3x 0.6 mm (2 x 0.8 mm) wires (rigid)
- Galvanic isolation of the control functions according to EN 60601.1.1 through external protective measures

74920Z3 Sm-Adaptor for flush mounting ZT99/95



Surface mounting adapter for installing the Systevo Touch IP or Systevo room terminal while retaining an existing Sm/Cavity-wall-connection board ZT99/ZT95. Use of the adapter for simplified migration of the existing cabling within the room.

Technical Data

Dimensions	W: 174 mm H: 280 mm D: 10 mm

74920CJ Systevo Protect Room Terminal



Features

- Calls: Normal call, emergency call
- Other calls: Sabotage alarm
- Cancellation and presence: Combined cancellation/ presence, PR 1 (green)
- Acoustic call forwarding
- Control of optical signals: WC call lamp - white,room call lamp (red), PR lamps – green and yellow
- Security function: Short-circuit resilient, call circuit monitoring

Vandal-proof Systevo room terminal in IP54 design with additional sabotage monitoring and integrated call button for secure call release. The V2A stainless steel housing serves as a control unit for rooms with speech function and as a gateway to the higher-level central unit (data/audio bus). Designed as a communication unit for duplex voice operation, voice communication via the integrated loudspeaker and the microphone in free intercom mode (duplex) and announcement function (receive) via bus technology.
Acoustic call forwarding when presence is set and the option of triggering further calls.
Use of the room controller in conjunction with the uP installation box (V2A stainless steel) to connect the multifunctional room units via the data bus (DBUS) and use the input/output (I/O), as well as integration into the data bus and audio bus, ZBUS/ABUS.
Monitoring and synchronization of the entire data tranmission and audio connections (intercom, announcements) to rooms within the organizational unit, and coordination of communication with the central control units and other room devices via data bus.
Configuration data of the room and used profiles (functions, I/O, device services) are stored locally (flash memory).
Includes an user-friendly installation technology with color-coded connection terminals for each individual device and control functions, for a more efficient cabling and for an optimized commissioning process.
Upgradable to future system firmware thanks to advanced flash storage technologies. Includes the option for automated software update during operation.
A multi-level security concept enables local call signaling in the case of a lack of communication with the central unit of the system. Support of the cyber security requirements of modern data bus infrastructures.
System functions subject to license are provided by corresponding software licenses.

Technical Data

Ambient temperature	5 °C ... 40 °C
Storage temperature	-20 °C ... 70 °C
Air humidity	< 10 %
Type of protection	IP 54
Material	stainless steel V2A
Color	silver
Weight	approx. 1400 g
Dimensions	W: 185 mm H: 249 mm D: 45 mm

Installation box not included in the delivery.

74920ZJ UP installation box for Systevo Protect Room Terminal



Vandalism-proof installation box for the Systevo Protect room terminal. Design including rubber seal for IP 54 protection. Installation flush plaster and with special screws for protection against sabotage. Equipped with cable inlets for the required wiring. Designed with connectable screw terminals for power supply for a line cross-section of up to 2 x 2.5 mm 2 Cu wire with end sleeves. Separately shielded supply to components (e.g. call unit) in the room using connectable miniature terminals.

Technical Data

Type of protection	IP 54 (built in 76920BJ)
Material	stainless steel V2A
Color	silver
Weight	approx. 2000 g
Dimensions	W: 190 mm H: 255 mm D: 65 mm W:215 mm H: 255 mm D: 65 mm (incl. steel brackets)

76919JP Plastering Cover for Flash-mounting box

Plastering cover for the flush mounting box of the Systvo Protect room terminal .

5 pieces

Systevo Electronic Modules



SYSTEVO ELECTRONIC MODULE - STATE OF THE ART NURSE CALL CONTROLLER

The Systevo Electronic Module (SEM) represents the central room controller for classic nurse call systems: it can be used in conjunction with the entire Systevo Call Ackermann portfolio. Thanks to the appealing design the unit ingrates smoothly to care facilities where it illuminates the pending call status outside the patient's or duty room using high-efficiency and multi-color LED lights. It is available in silver or white and can also feature the optional name plate.

The Systevo Corridor Lamp (SCL) is part of the same product family and allows achievement of an homogeneous environment in corridors: it connects with the Systevo Touch IP room-terminal or is used as 2nd corridor lamp for a patient room.

Of course, the different types of units guarantee both smooth migration and use in future care communication systems: with its future-proof software and hardware architecture, software updates are being performed during operation without impacting the system uptime. Software licenses are available to support individual market requirements (e.g. code blue, service call).


Multi-bedded rooms are managed by the SEM using a flexible databus technology where standard call points are connected to basic input/outputs of the unit. Thanks to secured data communication, messages are transmitted to the overriding Systevo Control in fractions of a second and pending alarms are processed in time. The normative requirements of VDE 0834 / UL 1069 are fulfilled.

The well thought-out product concept ensures the use of Systevo Electronic Modules in both intercom and non-intercom systems. Having the extended SEM+ installed, intercom per room and bed is supported and systems can be upgraded accordingly. In duty rooms, the device operates as gateway for the Systevo Care View IP command center to offer a comprehensive set of workflow-relevant processes (e.g. displaying and selection of relevant zone concentrations and voice-announcements).

In patient rooms, the SEM+ supports the Systevo Touch IP room-terminal and the Systevo Call Smart patient handset for secured nurse call operation and intercom function to streamline alerts, shorten response times, and enable smarter management of care communication.

72591D

Systevo Electronic Module plus (SEM+)



Features

Special material properties:

High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.

Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).

Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant, halogen free
- Antimicrobial surface, matt finish
- Impact and heat resistance
- Strength, longevity, durability
- Flame protection (fire prot class V0)

Systevo electronic module with integrated corridor lamp, to provide the required nurse call system and control functions in the resident and patient room or duty room according to the VDE 0834 nurse call standards.
4 light segments with RGB-LEDs using the pre-defined color white, red, green an yellow. Alternative color selections possible, after software update and activation by corresponding software license.
Separate frontcover in color white or silver required. Option: nameplate.
Serves as a control unit for additional functions in the corresponding room and as a gateway to the overriding central control unit.
Monitoring and synchronization of the entire data tranmission and audio connections (intercom, announcements) to rooms within the organizational unit, and coordination of communication with the central control units and other room devices via data bus.
Configuration data of the room and used profiles (functions, I/O, device services) are stored locally (flash memory).
Associated multifunctional room units and an additional corridor lamp, are connected to the room controller via the integrated data bus (DBUS) as well as using the integrated call inputs (I/O).
Supports bed-wise intercom in combination with an the bed unit and patient handset.
Includes an user-friendly installation technology with color-coded connection terminals for each individual device and control functions, for a more efficient cabling and for an optimized commissioning process.
Upgradable to future system firmware thanks to advanced flash storage technologies. Includes the option for automated software update during operation.
A multi-level security concept enables local call signaling in the case of a lack of communication with the central unit of the system. Support of the cyber security requirements of modern data bus infrastructures.
System functions subject to license are provided by corresponding software licenses.

Technical Data

Operating voltage	24 V DC +/-10 %
Current consumption	ca. 110-150mA
Ambient temperature	5 °C ... 40 °C
Storage temperature	-20 °C ... 70 °C
Air humidity	< 20 %
Protection class	IP20
Installation	with flush-mounted backbox
Color	white
Weight	approx. 120 g
Dimensions	W: 110 mm H: 118 mm D: 27 mm W:115 mm H: 118 mm D: 46 mm with cover

Accessories

72590L1 Frontcover for SEM/SCL (silver) Systevo Call Ackermann
72590L2 Frontcover for SEM/SCL (white) Systevo Call Ackermann
72590T1 Systevo Nameplate (silver) Systevo Call Ackermann
72590T2 Systevo Nameplate (white) Systevo Call Ackermann

72590D

Systevo Electronic Module (SEM)



Features

Special material properties:
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant, halogen free
- Antimicrobial surface, matt finish
- Impact and heat resistance
- Strength, longevity, durability
- Flame protection (fire prot class V0)

Systevo electronic module with integrated corridor lamp, to provide the required nurse call system and control functions in the resident and patient room or duty room according to the VDE 0834 nurse call standards.
4 light segments with RGB-LEDs using the pre-defined color white, red, green an yellow. Alternative color selections possible, after software update and activation by corresponding software license.
Separate frontcover in color white or silver required. Option: nameplate.
Serves as a control unit for additional functions in the corresponding room and as a gateway to the overriding central control unit.
Monitoring and synchronization of the entire data tranmission to other rooms within the organizational unit, and coordination of communication with the central control units and other room devices via data bus.
Configuration data of the room and used profiles (functions, I/O, device services) are stored locally (flash memory).
Associated multifunctional room units and an additional corridor lamp, are connected to the room controller via the integrated data bus (DBUS) as well as using the integrated call inputs (I/O).
Includes an user-friendly installation technology with color-coded connection terminals for each individual device and control functions, for a more efficient cabling and for an optimized commissioning process.
Upgradable to future system firmware thanks to advanced flash storage technologies. Includes the option for automated software update during operation.
A multi-level security concept enables local call signaling in the case of a lack of communication with the central unit of the system. Support of the cyber security requirements of modern data bus infrastructures.
System functions subject to license are provided by corresponding software licenses.

Technical Data

Operating voltage	24 V DC +/-10 %
Current consumption	ca. 110-150mA
Ambient temperature	5 °C ... 40 °C
Storage temperature	-20 °C ... 70 °C
Air humidity	< 20 %
Protection class	IP20
Installation	with flush-mounted backbox
Color	white
Weight	approx. 120 g
Dimensions	W: 110 mm H: 118 mm D: 27 mm W:115 mm H: 118 mm D: 46 mm with cover

Accessories

72590L1 Frontcover for SEM/SCL (silver) Systevo Call Ackermann
72590L2 Frontcover for SEM/SCL (white) Systevo Call Ackermann
72590T1 Systevo Nameplate (silver) Systevo Call Ackermann
72590T2 Systevo Nameplate (white) Systevo Call Ackermann

72592D

Systevo Corridor Lamp (SCL)



Systevo corridor lamp to indicate the status in the resident/patient room or duty room according to the VDE 0834 nurse call standards.
4 light segments with RGB-LEDs using the pre-defined color white, red, green an yellow. Alternative color selections possible, after software update and activation by corresponding software license.
Separate frontcover in color white or silver required. Option: nameplate.
Connection to the overriding multifunctional room unit via the data bus (DBUS) or in compatibility mode to the control outputs PR1/2, CL, CLWC.
Includes an user-friendly installation technology with color-coded connection terminals for each individual device and control functions, for a more efficient cabling and for an optimized commissioning process.
Upgradable to future system firmware thanks to advanced flash storage technologies. Includes the option for automated software update during operation.
A multi-level security concept enables local call signaling in the case of a lack of communication with the central unit of the system. Support of the cyber security requirements of modern data bus infrastructures.
System functions subject to license are provided by corresponding software licenses.

Features

Special material properties:
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant, halogen free
- Antimicrobial surface, matt finish
- Impact and heat resistance
- Strength, longevity, durability
- Flame protection (fire prot class V0)

Technical Data

Operating voltage	24 V DC +/-10 %
Current consumption	ca. 90-110mA
Ambient temperature	5 °C ... 40 °C
Storage temperature	-20 °C ... 70 °C
Air humidity	< 20 %
Protection class	IP20
Installation	with flush-mounted backbox
Color	white
Weight	approx. 100 g
Dimensions	W: 110 mm H: 118 mm D: 27 mm W:115 mm H: 118 mm D: 46 mm with cover

Accessories

72590L1 Frontcover for SEM/SCL (silver) Systevo Call Ackermann
72590L2 Frontcover for SEM/SCL (white) Systevo Call Ackermann
72590T1 Systevo Nameplate (silver) Systevo Call Ackermann
72590T2 Systevo Nameplate (white) Systevo Call Ackermann

72590L1

Frontcover for SEM/SCL (silver)



Front cover in silver color for Systevo electronic module and connection unit corridor lamp. For snapping onto the SEM / SCL. With translucent illuminated field for 4 lamp segments.

Technical Data

Ambient temperature	5 °C ... 40 °C
Storage temperature	-20 °C ... 70 °C
Air humidity	< 20 %
Protection class	IP20
Installation	snap-on to SEM/SCL
Color	silver
Weight	approx. 83 g
Dimensions	W: 115 mm H: 118 mm D: 35 mm

Features

Special material properties:
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant, halogen free
- Antimicrobial surface, matt finish
- Impact and heat resistance
- Strength, longevity, durability
- Flame protection (fire prot class V0)

72590L2 Frontcover for SEM/SCL (white)



Front cover in white color for Systevo electronic module and connection unit corridor lamp. For snapping onto the SEM / SCL. With translucent illuminated field for 4 lamp segments.

Technical Data

Ambient temperature	5 °C ... 40 °C
Storage temperature	-20 °C ... 70 °C
Air humidity	< 20 %
Protection class	IP20
Installation	snap-on to SEM/SCL
Color	white
Weight	approx. 83 g
Dimensions	W: 115 mm H: 118 mm D: 35 mm

Features

Special material properties:
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant, halogen free
- Antimicrobial surface, matt finish
- Impact and heat resistance
- Strength, longevity, durability
- Flame protection (fire prot class V0)

72590L0 Insert for front cover for SEM (white) (5pcs)

Features

Special material properties:
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant, halogen free
- Antimicrobial surface, matt finish
- Impact and heat resistance
- Strength, longevity, durability
- Flame protection (fire prot class V0)

Insert (5 pcs.) to replace the translucent light segment in the frontcover (white) of the Systevo Electronic module. Deactivation of the RGB-LEDs in the SEM required.

Technical Data

Ambient temperature	5 °C ... 40 °C
Storage temperature	-20 °C ... 70 °C
Air humidity	< 20 %
Protection class	IP20
Installation	in the frontcover SEM
Color	white
Dimensions	W: 79 mm H: 61 mm D: 18 mm

5 pieces

72590T1 Systevo Nameplate (silver)



Nameplate in color silver for Systevo Electronic module and Systevo Corridor lamp. To be plugged onto the SEM / SCL.
With transparent field for insertion of a label (paper).
Connection of the unit via a flat cable to the SEM or SCL.
With integrated LED-illumination (white).
Upgradable to future system firmware thanks to advanced flash storage technologies.
Includes the option for automated software update during operation.

Features

Special material properties:
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant, halogen free
- Antimicrobial surface, matt finish
- Impact and heat resistance
- Strength, longevity, durability
- Flame protection (fire prot class V0)

Technical Data

Ambient temperature	5 °C ... 40 °C
Storage temperature	-20 °C ... 70 °C
Air humidity	< 20 %
Protection class	IP20
Installation	with SEM/SCL
Color	silver
Weight	approx. 86 g
Dimensions	W: 105 mm H: 76 mm D: 52 mm

72590T2 Systevo Nameplate (white)



Nameplate in color white for Systevo Electronic module and Systevo Corridor lamp. To be plugged onto the SEM / SCL.
With transparent field for insertion of a label (paper).
Connection of the unit via a flat cable to the SEM or SCL.
With integrated LED-illumination (white).
Upgradable to future system firmware thanks to advanced flash storage technologies.
Includes the option for automated software update during operation.

Features

Special material properties:
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant, halogen free
- Antimicrobial surface, matt finish
- Impact and heat resistance
- Strength, longevity, durability
- Flame protection (fire prot class V0)

Technical Data

Ambient temperature	5 °C ... 40 °C
Storage temperature	-20 °C ... 70 °C
Air humidity	< 20 %
Protection class	IP20
Installation	with SEM/SCL
Color	white
Weight	approx. 86 g
Dimensions	W: 105 mm H: 76 mm D: 52 mm

Systevo Call Ackermann

Systevo Room Units



SYSTEVO BED UNITS OFFER HIGH FLEXIBILITY AND COMPATIBILITY

The Systevo bed units can be used in conjunction with the entire Systevo Call Ackermann portfolio. Thanks to data communication, messages are transmitted to the room controller like the Systevo Touch IP or Systevo Electronic Module in fractions of a second and pending alarms are processed. Of course, the bed units are compatible with all known electronic modules and room terminals from Honeywell, as well as the room terminal ZT99. The normative requirements of VDE 0834 / UL 1069 are fulfilled. Systevo bed units guarantee both smooth migration and use in future communication systems.

The well thought-out design simplifies the use of Systevo bed units by the care personnel. The styling and colours of the buttons and the connection sockets are simple and easy to understand. Systevo handsets are logged off at the touch of a button, e.g. to conduct cleaning.

When using the modern Systevo handset family, in particular the Systevo Call Smart, it is possible to comfortably control device functions (light, TV set, blinds) in the patients‘ direct environment. In addition, nursing staff can establish voice communication in order to respond quickly to requests for help.

Thanks to the magnetic connector system, a secure connection between the Systevo bed unit and the handset is guaranteed. The magnetic system socket ensures a stabile mechanical fixation: if the defined tensile force on the handset cable is exceeded, it is disconnected from the bed unit to prevent damage.

The use of colour-coded wiring terminals makes wiring and commissioning of the bed units extremely user-friendly. Fast address coding makes the units easy to commission and can be programmed in data communication mode.

The Systevo bed units were developed for the tough daily care routine and are characterised by a high degree of durability. The units are constructed of anti-microbial and UV-resistant material to help prevent the spread of bacteria and protect against potential fading or discoloration from UV rays.

Systevo Call Ackermann

Systevo Room Units

74910D1

Systevo Display Unit with Call- and Cancel buttons



Display unit with high-quality LC-display to indicate system messages of the local ward and if zone linkage is active from other wards. Integrated call and cancel buttons for presence marking and call activation by care givers.
Equipped with two line (each 8-digits) alphanumeric display with backlight.
Messages can be identified from a larger distance/low ambient brightness.
With set presence, display of messages (alarms, calls and presence etc.) with the highest priority, scrolling if several messages of identical priority are present. Acoustic call forwarding with set presence and the possibility of triggering additional calls.
Controlled by a superordinated room controller (IP) via the data bus (DBUS) such as a room terminal or a room electronic module.
Upgradable to future system firmware thanks to future-oriented flash memory technology to ensure automated software updates during operation.

Technical Data

Operating voltage	24VDC +/- 10%
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 10 % (non condensing)
Type of protection	IP 40
Installation	Snap fastening with adaptor in backbox according DIN 49073
Color	white (RAL 9016)
Weight	approx. 100 g
Dimensions	W: 68 mm H: 68 mm D: 40 mm

Accessories
88914A5 Frame for cover plate (single)
88914B5 Frame for cover plate (double)
88914C5 Frame for cover plate (triple)

Features

Special material properties:
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire prot class V0)
- Halogen free

Equipped with:

- 2 x 8-charcters alphanumeric LC-display with backlight, readable from min. 3 m distance (reading angle 130 degree)
- 1 call button (with red LED)
- 1 presence button (with green LED)
- Buzzer for acoustical call indication
- Connection: Datenbus (DBUS)

Inputs / outputs:

- Power supply 24V DC
- Data bus (DBUS)

Features:

- Call triggering, call cancellation
- Cancellation of malfunctions (5s)
- Display of system messages

Systevo Call Ackermann

74170A9 **Systevo Call Smart**



Systevo Call Smart patient handset with ergonomic design, for easy operation by patients and residents in care facilities. Designed with high-quality color touch graphic display (2.8 inch) incl. backlight for controlling of individual devices in the patient room (2 x light sources, TV-set, blinds).
User-guided voice communication with caregivers in hands-free mode or discrete voice mode.
Equipped with large call button with easily recognizable as well as tactile pressure point is the device prepared for safe call initiation.
Ergonomic design of the device for easy handling by different user groups and age groups.
User guidance via the touch display by using configurable display elements, services and visualisation of icons for intuitive handling by users in care facilities.
Transmission of the TV sound via the integrated loudspeaker or headphones.
Monitoring/synchronisation of data tranmission and audio connections (conversations) by the master room controller, incl. managing of configuration data.
Upgradable to future system firmware thanks to advanced flash storage technologies. Includes the option for automated software update during operation. Fulfilment of cyber security requirements of modern data bus infrastructures.
System functions requiring a license are provided by corresponding software licenses.

Equipped with plug for magnetic auto-release plug system:
by exceeding the predefined pulling force, the system plug is automatically disconnected from the bed unit to prevent mechanical damages (bed unit, cable).
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities.
Equipped with anti-microbial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage.

Accessories:
Suspension of the patient handset in an associated bracket on the wall or at the bedside table.
Attachment with a clip on the blanket or on the garment of the patient / resident.

Features

- Plastic housing in antimicrobial compound, colored in white, IP54
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Touch graphic display (2.8 inch) with capacitive touch operation
- Color-coded light touch buttons
- Control of light sources
- Menu and function selection keys for TV control via IR transmitter
- Integrated microphone for intercom in discrete or handsfree mode
- Earphone capsule / hands-free loudspeaker
- Surrounding rubber coating for shock-proof and safe handling
- Plug for magnetic auto-release plug system

Special material properties:
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free

System infrastructure:

- Processor/OS: Embedded µC System
- Cyber Security: Firewall, protected Boot-Loader function
- Configuration: using databus-service

Technical Data

Ambient temperature	10 °C ... 40 °C
Storage temperature	0 °C ... 50 °C
Type of protection	IP 54
Material	PC+ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 350 g
Dimensions	W: 60 mm H: 160 mm D: 23 mm

Systevo Call Ackermann

74170Z1 — Cradle for Systevo Call Smart



Wall mounting kit for Systevo Call Smart with ergonomic design, for easy hang-up of the handset to the wall or bed container. Option to attach headphone. Equipped with holes for fixation by screws.
Easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities. Equipped with anti-microbial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

Features

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- with adhesive tape

Technical Data

Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 10 % (non condensing)
Material	Plastic compound (PC + ABS-FR)
Color	white
Weight	approx. 25 g

Product available from September 2021.

73091A — Systevo Bed Unit, with magnetic plug system, DIN-7 call socket, call and cancel buttons



Systevo Bed Unit, magn. system socket DIN7 call socket, call / cancel buttons Systevo Bed unit, to provide the suitable nurse call and domotic control funct. at the patient or resident bed.
Connection of a multifunctional handset using the auto-release magnetic system socket.
By exceeding the predefined pulling force, the system plug is automatically disconnected from the bed unit to prevent mechanical damages (bed unit, cable).
Equipped with call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation. Also equiped with call button (in data bus operating mode only) as well as to unsubscribe a connected handset. With integrated DIN7 socket for alternative handset or authorised device for call initiation.
Option: Bed intercom in combination with a multifunctional patient handset for communication with nursing staff.
Controlled by a superordinated room controller (IP) via the data bus (DBUS) or call input (I/O), such as a room terminal or a room electronic module. In data bus mode: connection of an ext. call unit to the call input (I/O).
Handsets are monitored by the bed units according the specifications of VDE 0834 using an interactive data bus.
The bed unit is equipped with 2 control outputs for managing up to 2 light sources.
Additional firmware licenses required to deploy new device functionalities.

Features

Equipment:

- 1 magnetic system socket for connection of multifunctional handset
- 1 DIN7 socket
- 1 call button (red LED)
- 1 cancel button (green LED)
- Galvanic isolation req. to control 3rd party device (acc. EN 60601.1.1)

Inputs / outputs:

- Power supply 24V DC
- Data bus (DBUS)
- Call input / output (I/O)
- 2 control outputs
- TV sound input, galvanic isolation required according to EN 60601.1.1

Features:

- Call triggering, local call cancellation, available via the data bus (DBUS)
- Unsubscription of connected handset
- Control function for 2 light sources
- Control function for nurse call
- Configurable system funct. (Input)

Accessories:

- Cover plate, frame, buttons f. medical supply unit (grey with icon)

Technical Data

Operating voltage	24 V DC +/-10 %
Current consumption	50 mA
Ambient temperature	5 °C ... 55 °C
Storage temperature	-20 °C ... 70 °C
Mounting	in flush-mounting box, DIN 49073
Type of protection	IP20, when installed incl. suitable cover plate
Weight	approx. 90 g
Dimensions	W: 71 mm H: 71 mm D: 33 mm D: 25 mm (installation depth)

Systevo Bed Unit, screw connection terminals

Accessories

88885A3 Coverplate bed unit, mag. system plug. DIN7, buttons red and grey, design Systevo Call
88914A5 Frame single for 1 coverplate design Systevo Call
88914B5 Frame double for 2 coverplates design Systevo Call
88914C5 Frame triple for 3 coverplates design Systevo Call

Systevo Call Ackermann

88885A3

Cover plate Systevo bed unit w/ mag socket and DIN7, button red/cancel button grey



Cover plate for Systevo bed unit with magnetic plug system and DIN 7 socket. Fitted with call button red and cancel button grey.
Special material properties:
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

Technical Data

Dimensions	W: 68 mm H: 68 mm

Features

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire prot class V0)
- Halogen free

Accessories

88885AC Call button grey/red icon 25pcs
88914A5 Frame for cover plate (single)
88914B5 Frame for cover plate (double)
88914C5 Frame for cover plate (triple)

73091B

Systevo Bed Unit, DIN-7 call socket, call and cancel buttons



Systevo Bed Unit, to provide the suitable nurse call and domotic control funct. at the patient or resident bed.
Connection of a patient handset or authorised device for call initiation using the DIN7 socket.
Equipped with call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation. Also equiped with call button (in data bus operating mode only) as well as to unsubscribe a connected handset.
Option: Bed intercom in combination with a multifunctional patient handset for communication with nursing staff.
Controlled by a superordinated room controller (IP) via the data bus (DBUS) or call input (I/O), such as a room terminal or a room electronic module. In data bus mode: connection of an ext. call unit to the call input (I/O).
Handsets are monitored by the bed units according the specifications of VDE 0834 using an interactive data bus.
The bed unit is equipped with 2 control outputs for managing up to 2 light sources.
Additional firmware licenses required to deploy new device functionalities.

Technical Data

Operating voltage	24 V DC +/-10 %
Current consumption	50 mA
Ambient temperature	5 °C ... 55 °C
Storage temperature	-20 °C ... 70 °C
Mounting	in flush-mounting box, DIN 49073
Type of protection	IP20, when installed incl. suitable cover plate
Weight	approx. 90 g
Dimensions	W: 71 mm H: 71 mm D: 33 mm D: 25 mm (installation depth)

Systevo Bed Unit, screw connection terminals

Features

Equipment:

- 1 DIN7 socket for connection of patient handset
- 1 call button (red LED)
- 1 cancel button (green LED)
- Galvanic isolation req. to control 3rd party device (acc. EN 60601.1.1)

Inputs / outputs:

- Power supply 24V DC
- Data bus (DBUS)
- Call input / output (I/O)
- 2 control outputs
- TV sound input, galvanic isolation required according to EN 60601.1.1

Features:

- Call triggering, local call cancellation, available via the data bus (DBUS)
- Unsubscription of connected handset
- Control function for 2 light sources
- Control function for nurse call
- Configurable system funct. (Input)

Accessories:

- Cover plate, frame, buttons f. medical supply unit (grey with icon)

Accessories

88885B3 Cover plate Systevo bed unit, DIN7 Call button red/cancel button grey, design Systevo Call
88914A5 Frame single for 1 coverplate design Systevo Call
88914B5 Frame double for 2 coverplates design Systevo Call
88914C5 Frame triple for 3 coverplates design Systevo Call

Systevo Call Ackermann

88885B3 — Cover plate Systevo bed unit, DIN7 Call button red/cancel button grey



Cover plate for Systevo bed unit with DIN 7 socket. Fitted with call button red and cancel button grey.
Special material properties:
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

Technical Data

Dimensions	W: 68 mm H: 68 mm

Features

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire prot class V0)
- Halogen free

Accessories

88885AC Call button grey/red icon 25pcs
88914A5 Frame for cover plate (single)
88914B5 Frame for cover plate (double)
88914C5 Frame for cover plate (triple)

88885AC — Call Button grey/red icon 25pcs



Lot of 25 buttons (gray with red icon) to replace the red button on Systevo bed units, when installed on a bedhead unit.
High quality plastic surface with antimicrobial compound for reduction of existing microorganisms and prevent their reproduction.
Good mechanical properties with high resistance to daily use (operation, cleaning, disinfection, impacts, etc.).
Suitable for use in care facilities with high demands on hygiene, stability, longevity and durability.

Technical Data

Dimensions	W: 104 mm H: 100 mm D: 34 mm

25 buttons

73091C — Systevo Care Unit (Call/Cancel fct.) with call / presence buttons



Systevo call/cancel unit, to provide the suitable nurse call functions in patient/resident/duty and other rooms.
Equipped with call and presence button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation and cancellation.
Controlled by a superordinated room controller (IP) via the data bus (DBUS) such as a room terminal or a room electronic module.
In data bus mode: connection of an external call unit to the call input (I/O).
Additional firmware licenses required to deploy new device functionalities.

Technical Data

Operating voltage	24 V DC +/-10 %
Current consumption	50 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 10 % (non condensing)
Type of protection	IP20
Weight	approx. 90 g
Dimensions	W: 70 mm H: 70 mm D: 33 mm

Systevo Care Unit, screw connection terminals

Features

Equipment:
- connection of multifunctional handset
- 1 call button (with red LED)
- 1 presence button (with green LED)

Inputs / outputs:
- Power supply 24V DC
- Data bus (DBUS)
- Call input / output (I/O)

Features:
- Call triggering, call cancellation
- Cancellation of malfunctions (5s)
- Configurable system funct. (Input)

Accessories

88885C3 Cover plate Systevo call/cancel unit, call button red, cancel button green, design Systevo Call
88914A5 Frame single for 1 coverplate design Systevo Call
88914B5 Frame double for 2 coverplates design Systevo Call
88914C5 Frame triple for 3 coverplates design Systevo Call

Systevo Call Ackermann

88885C3 — Cover plate Systevo call/cancel unit Call button red/cancel button green



Cover plate for Systevo call/cancel unit, fitted with call button red and cancel button green. Use in conjunction with seal kit for increasing the IP protection class (IP x4).
Special material properties:
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

Technical Data

Dimensions	W: 68 mm H: 68 mm

Features

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire prot class V0)
- Halogen free

Accessories

88914A5 Frame for cover plate (single)
88914B5 Frame for cover plate (double)
88914C5 Frame for cover plate (triple)

73091E — Systevo Bed Unit, with magnetic plug system, 5 control outputs



Systevo Bed Unit, to provide the suitable nurse call and domotic control funct. at the patient or resident bed.
Connection of a patient handset or authorised device for call initiation using the auto-release magnetic system socket.
By exceeding the predefined pulling force, the system plug is automatically disconnected from the bed unit to prevent mechanical damages (bed unit, cable).
Option: Bed intercom in combination with a multifunctional patient handset for communication with nursing staff.
Controlled by a superordinated room controller (IP) via the data bus (DBUS) or call input (I/O), such as a room terminal or a room electronic module. In data bus mode: connection of an ext. call unit to the call input (I/O).
Handsets are monitored by the bed units according the specifications of VDE 0834 using an interactive data bus.
The bed unit is equipped with 5 control outputs for managing up to 5 external sources.
Additional firmware licenses required to deploy new device functionalities.

Technical Data

Operating voltage	24 V DC +/-10 %
Current consumption	50 mA
Ambient temperature	5 °C ... 55 °C
Storage temperature	-20 °C ... 70 °C
Mounting	in flush-mounting box, DIN 49073
Type of protection	IP20, when installed incl. suitable cover plate
Weight	approx. 90 g
Dimensions	W: 71 mm H: 71 mm D: 33 mm D: 25 mm (installation depth)

Systevo Bed Unit, screw connection terminals

Features

Equipment:

- 1 magnetic system socket for connection of multifunctional handset
- Galvanic isolation req. to control 3rd party device (acc. EN 60601.1.1)

Inputs / outputs:

- Power supply 24V DC
- Data bus (DBUS)
- Call input / output (I/O)
- 5 control outputs
- TV sound input, galvanic isolation required according to EN 60601.1.1

Features:

- Call triggering
- Control function for 5 ext. sources
- Control function for nurse call
- Configurable system funct. (Input)

Accessories:

- Cover plate, frame

Accessories

88885F3 Cover plate Systevo bed unit with magnetic plug system design Systevo Call
88914A5 Frame single for 1 coverplate design Systevo Call
88914B5 Frame double for 2 coverplates design Systevo Call
88914C5 Frame triple for 3 coverplates design Systevo Call

Systevo Call Ackermann

73091F — Systevo Bed Unit, with magnetic plug system, 2 control outputs



Systevo Bed Unit, to provide the suitable nurse call and domotic control funct. at the patient or resident bed.
Connection of a patient handset or authorised device for call initiation using the auto-release magnetic system socket.
By exceeding the predefined pulling force, the system plug is automatically disconnected from the bed unit to prevent mechanical damages (bed unit, cable).
Option: Bed intercom in combination with a multifunctional patient handset for communication with nursing staff.
Controlled by a superordinated room controller (IP) via the data bus (DBUS) or call input (I/O), such as a room terminal or a room electronic module. In data bus mode: connection of an ext. call unit to the call input (I/O).
Handsets are monitored by the bed units according the specifications of VDE 0834 using an interactive data bus.
The bed unit is equipped with 2 control outputs for managing up to 2 external sources.
Additional firmware licenses required to deploy new device functionalities.

Technical Data

Operating voltage	24 V DC +/-10 %
Current consumption	50 mA
Ambient temperature	5 °C ... 55 °C
Storage temperature	-20 °C ... 70 °C
Mounting	in flush-mounting box, DIN 49073
Type of protection	IP20, when installed incl. suitable cover plate
Weight	approx. 90 g
Dimensions	W: 71 mm H: 71 mm D: 33 mm D: 25 mm (installation depth)

Systevo Bed Unit, screw connection terminals

Accessories
88885F3 Cover plate Systevo bed unit with magnetic plug system design Systevo Call
88914A5 Frame single for 1 coverplate design Systevo Call
88914B5 Frame double for 2 coverplates design Systevo Call
88914C5 Frame triple for 3 coverplates design Systevo Call

Features

Equipment:
- 1 magnetic system socket for connection of multifunctional handset
- Galvanic isolation req. to control 3rd party device (acc. EN 60601.1.1)

Inputs / outputs:
- Power supply 24V DC
- Data bus (DBUS)
- Call input / output (I/O)
- 2 control outputs
- TV sound input, galvanic isolation required according to EN 60601.1.1

Features:
- Call triggering
- Control function for 2 ext. sources
- Control function for nurse call
- Configurable system funct. (Input)

Accessories:
- Cover plate, frame

88885F3 — Cover plate Systevo bed unit with magnetic plug system

Cover plate for Systevo bed unit with magnetic plug system.
Special material properties:
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

Technical Data

Dimensions	W: 68 mm H: 68 mm

Accessories
88914A5 Frame for cover plate (single)
88914B5 Frame for cover plate (double)
88914C5 Frame for cover plate (triple)

Features
- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire prot class V0)
- Halogen free

Systevo Call Ackermann

73091H — Systevo Audio Switch



Systevo Audio Switch for providing of either the TV audio tone, using the audio Interface Bus (AI-Bus), or the incoming intercom signal, using the room audio bus (R-Bus), to the bed units. Support of up to 3 bed units with 1 TV set.
In systems with intercom function the Systevo Audio Switch is required to transmit the discrete TV audio tone to the Systevo Call Smart handset.
When an intercom is established, the TV audio is interrupted and the intercom signal is routed to the patient bed. At other bed units, the TV audio tone is still audible.
Controlled by a superordinated room controller (IP) via the data bus (DBUS) such as a room terminal or a room electronic module.
Upgradable to future system firmware thanks to future-oriented flash memory technology to ensure automated software updates during operation.

Features

Inputs/otputs:
- Power supply 24V DC
- Room-Audiobus (R-ABUS)
- 3x Audio (outputs)
- Audio-Interface Bus (AI-Bus)

Technical Data

Operating voltage	24 V DC +/-10 %
Current consumption	55 mA
Ambient temperature	10 °C ... 55 °C
Storage temperature	0 °C ... 60 °C
Air humidity	< 20 %
Type of protection	IP20
Weight	approx. 60 g
Dimensions	W: 70 mm H: 70 mm D: 33 mm

Product available from September 2021.

Systevo Audio Switch, screw connection terminals

Accessories

88885H3 Cover plate Systevo Audio Interface design Systevo Call
88914A5 Frame single for 1 coverplate design Systevo Call
88914B5 Frame double for 2 coverplates design Systevo Call
88914C5 Frame triple for 3 coverplates design Systevo Call

88885H3 — Blind cover plate for Systevo units

Blind cover plate for Systevo units.
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

Features

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire prot class V0)
- Halogen free

Technical Data

Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Installation	Snap fastening
Color	white (RAL 9016)
Dimensions	W: 68 mm H: 68 mm

Product available from September 2021.

Accessories

88914A5 Frame for cover plate (single)
88914B5 Frame for cover plate (double)
88914C5 Frame for cover plate (triple)

Systevo Call Ackermann

73091I — Systevo Audio Interface (SPDIF)



Systevo Audio Interface for connecting a TV set via POF cable in SPDIF-format (PCM) within the patient room.
Designed with a TOS-Link socket for galvanic isolation of the input signal according to EN 60601.1.1 and for the conversion of the audio signal into the room audio bus (R-ABUS) format.
Maximum length of the POF cable (distance) of up to 10m.
Provision of the TV audio tone to the bed units for transmission via the Systevo Call Smart handset.
In systems with intercom function the Systevo Audio Switch is required.

Technical Data

Operating voltage	24 V DC +/-10 %
Current consumption	50 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Type of protection	IP20
Weight	approx. 60 g
Dimensions	W: 70 mm H: 70 mm D: 33 mm

Product available from September 2021.

Systevo Audio Interface, screw connection terminals

Features

Equipment:
- 1 SPDIF (TOSLink, PCM)
- 2 buttons to adjust the volume of the audio signal
- 1 switch to select the signal type (for future purposes)

Inputs:
- Power supply 24V DC
- Audio-Interface Bus (AI-BUS)

Features:
- Audio conversion SPDIF (PCM) into R-ABUS format

Accessories

88885I3 Blind cover plate for Systevo units, design Systevo Call
88914A5 Frame single for 1 coverplate design Systevo Call
88914B5 Frame double for 2 coverplates design Systevo Call
88914C5 Frame triple for 3 coverplates design Systevo Call

88885I3 — Cover plate Systevo Audio Interface



Cover plate for Systevo Audio Interface unit.
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

Technical Data

Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Material	white (RAL 9016)
Installation	Snap fastening
Dimensions	W: 68 mm H: 68 mm

Product available from September 2021.

Features

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire prot class V0)
- Halogen free

Accessories

88914A5 Frame for cover plate (single)
88914B5 Frame for cover plate (double)
88914C5 Frame for cover plate (triple)

73090A — Call unit with Call button



Call button for call triggering for connection to the electronics module or room terminal via a passive input.
Superordinate room identification signal displayed after call activation. Function monitoring is carried out by the electronic module or room terminal (call circuit monitoring).

Technical Data

Mounting	in flush-mounting box, DIN 49073
Type of protection	IP40, when installed incl. suitable cover plate
Dimensions	W: 71 mm H: 71 mm D: 25 mm (installation depth)

Features

- 1 call push-button
- 1 LED orientation and reassurance lamp (red)

Accessories

88881G3N Cover plate with button - rot
88881D3N Cover for call button (doctor call) - call button - blue

Systevo Call Ackermann

88881G3N — Cover plate with button - red -



Cover plate for call unit, fitted with call button - red -.
Use in conjunction with seal kit for increasing the IP protection class (IP x4).

Technical Data

Material	PC + ABS - FR
Installation	For flush-mounted installations, snap-in fastening
Color	white, similar to RAL 9016 Button: red, translucent
Dimensions	W: 68 mm H: 68 mm

Coated with an anti-microbial substance

Accessories
88160B Seal kit for standard installation units
88914A5 Frame for cover plate (single)
88914B5 Frame for cover plate (double)
88914C5 Frame for cover plate (triple)

88881D3N — Cover plate with button - blue -



Cover plate for call unit, fitted with call button - blue -.
Use in conjunction with seal kit for increasing the IP protection class (IP x4).

Technical Data

Material	PC + ABS - FR
Installation	For flush-mounted installations, snap-in fastening
Color	white, similar to RAL 9016 Button: blue, translucent
Dimensions	W: 68 mm H: 68 mm

Coated with an anti-microbial substance

Accessories
88160B Seal kit for standard installation units
88914A5 Frame for cover plate (single)
88914B5 Frame for cover plate (double)
88914C5 Frame for cover plate (triple)

73090D — Call unit for pull cord adaptor



Call unit, for combination with separate pull cord adaptor, for call triggering in bathroom, for connection to the electronics module or room terminal via a passive input (I/O).
Designed with integrated LED reassurance light / finding light. Superordinate room identification signal displayed after call activation.
Function monitoring is carried out by the associated electronic module or room terminal (call circuit monitoring).

Technical Data

Operating voltage	24 VDC + / -10 %
Mounting	in flush-mounting box, DIN 49073
Type of protection	IP40, when installed incl. suitable cover plate
Dimensions	W: 71 mm H: 71 mm D: 25 mm (installation depth)

Features
- 1 call push-button
- 1 LED orientation and reassurance lamp (red)

Replacement for item 70045A3, 70046A3 (in combination with pull cord adaptor 88880C5)

Systevo Call Ackermann

88880C5 — Adapter with pull cord and knob




Adapter with pull cord and knob to plug into call unit 73090D.

Accessories
88880A3N Cover plate for call button

Features

- Mechanism to plug into standard call units and -modules
- Usable in combination with sealing kit 88160B for improved moisture protection according to IP54
- suitable for ceiling mounting
- 2,10 m PVC-cord with red ABS-knob

88880A3N — Cover plate for call unit / pull function



Cover plate for call unit with pull-cord and knob.
Use in conjunction with seal kit for increasing the IP protection class (IP x4).


Technical Data

Material	PC + ABS - FR
Installation	For flush-mounted installations, snap-in fastening
Color	white, similar to RAL 9016 lens: uncolored, translucent
Dimensions	W: 68 mm H: 68 mm

Antimicrobial coated

Accessories
88160B Seal kit for standard installation units
88914A5 Frame for cover plate (single)
88914B5 Frame for cover plate (double)
88914C5 Frame for cover plate (triple)

74189A — Auto-release plug system - A-coded



A-coded auto-release plug device for connecting pear and multiple push-buttons with auto-release plugs, suitable for flush-mounted combination boxes and flush-mounted switch boxes, with 60 mm deep holes for fixing screws.

Technical Data

Mounting	in flush-mounting box, DIN 49073
Type of protection	IP40, when installed incl. suitable cover plate
Dimensions	W: 71 mm H: 71 mm D: 25 mm (installation depth)

Accessories
88910N3N Cover plate for auto-release plug system

88910N3N — Cover plate for auto release plug



Cover plate for auto-release plug system A-coded/ L-coded/ K-coded (Part No. 74189A/74189L).

Technical Data

Material	PC + ABS - FR
Installation	For flush-mounted installations, snap-in fastening
Color	white, similar to RAL 9016
Dimensions	W: 68 mm H: 68 mm

Coated with an anti-microbial substance

Accessories
88914A5 Frame for cover plate (single)
88914B5 Frame for cover plate (double)
88914C5 Frame for cover plate (triple)

Systevo Call Ackermann

74199A — Auto-release plug system



Auto-release plug system for connecting pear or multiple push-buttons with auto-release plug (Version x3), suitable for flush-mounting box, with 60 mm screw fastening groove.

Technical Data

Mounting	in flush-mounting box, DIN 49073
Type of protection	IP40, when installed incl. suitable cover plate
Dimensions	W: 71 mm H: 71 mm D: 25 mm (installation depth)

Accessories

88880D3 Cover plate for auto-release plug system (74199A)

88880D3 — Cover plate for auto-release plug system (74199A)



Technical Data

Material	PC + ABS - FR
Color	white, similar to RAL 9016
Dimensions	W: 68 mm H: 68 mm

Accessories

88914A5 Mounting frame for cover plate (single)
88914B5 Mounting frame for cover plate (double)
88914C5 Mounting frame for cover plate (triple)


70047A — Pullcord with cancel function



Technical Data

Operating voltage	24 V DC
Current consumption	max. 30 mA
Contact load	max. 125 mA
Ambient temperature	5 °C ... 55 °C
Storage temperature	-20 °C ... 70 °C
Air humidity	< 20 %
Type of protection	IP 66
Weight	approx. 130 g
Dimensions	W: 80 mm H: 80 mm D: 20 mm

70006D — Call button for pneumatic actuation

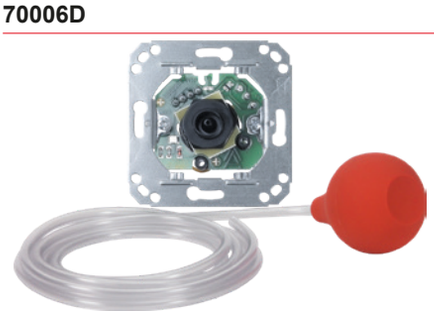

Call button for pneumatic actuation for connection to the electronics module or room terminal via a passive input.
Superordinate room identification signal displayed after call activation. Function monitoring is carried out by the electronic module or room terminal (call circuit monitoring).

Technical Data

Mounting	in flush-mounting box, DIN 49073
Type of protection	IP40, when installed incl. suitable cover plate
Weight	approx. 193 g
Version	for normally closed and open-circuit system
Dimensions	W: 71 mm H: 71 mm D: 40 mm (installation depth)

Features

- 4 m insulating material tube with rubber ball
- 1 reassurance lamp – red

Accessories

88880C3N Cover for pneumatic call buttons

Systevo Call Ackermann

88880C3N — Cover plate for pneumatic call unit



Cover plate for pneumatic call unit
Use in conjunction with seal kit for increasing the IP protection class (IP x4).


Technical Data

Material	PC + ABS - FR
Installation	For flush-mounted installations, snap-in fastening
Color	white, similar to RAL 9016 lens: uncolored, translucent
Dimensions	W: 68 mm H: 68 mm

Coated with an anti-microbial substance

Accessories
88160B Seal kit for standard installation units
88914A5 Frame for cover plate (single)
88914B5 Frame for cover plate (double)
88914C5 Frame for cover plate (triple)

73090B — Cancel push-button - PR 1 -



Cancel push-button with flush mount supporting ring and expanding/retaining clamps for flush-mounting boxes.

Technical Data

Mounting	in flush-mounting box, DIN 49073
Type of protection	IP40, when installed incl. suitable cover plate
Dimensions	W: 71 mm H: 71 mm D: 25 mm (installation depth)

Accessories
88881H3N Cover plate with push-button (green)

Features

- 1 cancel and presence push-button
- 1 LED reminder lamp (green)
- 1 sound source for call forwarding

88881H3N — Cover plate with button (green)



Cover plate for cancel button, fitted with cancel button, color green. Key position bottom left.
Use in conjunction with seal kit for increasing the IP protection class (IP x4).

Technical Data


Material	PC + ABS - FR
Installation	For flush-mounted installations, snap-in fastening
Color	white, similar to RAL 9016 Button: green, translucent
Dimensions	W: 68 mm H: 68 mm

Coated with an anti-microbial substance

Accessories
88160B Seal kit for standard installation units
88914A5 Frame for cover plate (single)
88914B5 Frame for cover plate (double)
88914C5 Frame for cover plate (triple)

Systevo Call Ackermann

88881M3N — Cover plate with button - yellow -



Cover plate for cancel button, fitted with cancel button - green.
Use in conjunction with seal kit for increasing the IP protection class (IP x4).


Technical Data

Material	PC + ABS - FR
Installation	For flush-mounted installations, snap-in fastening
Color	white, similar to RAL 9016 Button: yellow, translucent
Dimensions	W: 68 mm H: 68 mm

Coated with an anti-microbial substance

Accessories
88160B Seal kit for standard installation units
88914A5 Frame for cover plate (single)
88914B5 Frame for cover plate (double)
88914C5 Frame for cover plate (triple)

73090C — Call / cancel push-button



Cancel push-button with flush mount supporting ring and expanding/retaining clamps for flush-mounting boxes.

Technical Data

Mounting	in flush-mounting box, DIN 49073
Type of protection	IP40, when installed incl. suitable cover plate
Dimensions	W: 71 mm H: 71 mm D: 25 mm (installation depth)

Accessories
88882A3N Cover plate with red and green push-buttons
88882P3N Cover plate for the service room unit

Features

- 1 cancel and presence push-button
- 1 LED reminder lamp (green)
- 1 sound source for call forwarding
- 1 call push-button
- 1 LED orientation and reassurance lamp (red)

88882A3N — Cover plate with buttons - red-, - green -



Cover plate for call/cancel button, fitted with call button - red - and cancel button – green -.
Use in conjunction with seal kit for increasing the IP protection class (IP x4).

Technical Data

Material	PC + ABS - FR
Installation	For flush-mounted installations, snap-in fastening
Color	white, similar to RAL 9016 Button: red and green, translucent
Dimensions	W: 68 mm H: 68 mm

Coated with an anti-microbial substance

Accessories
88160B Seal kit for standard installation units
88914A5 Frame for cover plate (single)
88914B5 Frame for cover plate (double)
88914C5 Frame for cover plate (triple)

Systevo Call Ackermann

88882B3N — Cover plate with keys -yellow-, -green-



Cover plate for cancel button, fitted with cancel button, color yellow and cancel button green. Key position bottom.
Use in conjunction with seal kit for increasing the IP protection class (IP x4).

Technical Data

Material	PC + ABS - FR
Installation	For flush-mounted installations, snap-in fastening
Color	white, similar to RAL 9016 Button: yellow and green, translucent
Dimensions	W: 68 mm H: 68 mm

Coated with an anti-microbial substance

Accessories
88160B Seal kit for standard installation units
88914A5 Frame for cover plate (single)
88914B5 Frame for cover plate (double)
88914C5 Frame for cover plate (triple)

88914A5 — Frame for 1 cover plate (single)



Special material properties:
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

Technical Data

Dimensions	W: 81 mm H: 81 mm

Features
- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire prot class V0)
- Halogen free

88914B5 — Frame for cover plate (double)



Special material properties:
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

Technical Data

Dimensions	W: 152 mm H: 81 mm

Features
- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire prot class V0)
- Halogen free

Systevo Call Ackermann

88914C5 — Frame for cover plate (triple)



Special material properties:
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.


Technical Data

Dimensions	W: 81 mm H: 223 mm

Features

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire prot class V0)
- Halogen free

89371C — Electronic impulse switch 1 closer

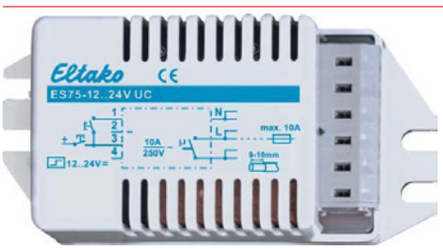

Electronic power surge relay for bed or room light switch in patient or resident room in accordance with the requirements of IEC 60601-1 and DIN VDE 0834-1: 2016-06.Fitted with break contact and normally open contact (trigger) with increased requirements for operating and interference resistance, as well as an potential separation (2xMOPP).
Secure switching properties, even with long control lines and in an environment of electromagnetic fields.
Pulse-shaped control using keys or relays (potential-free) or potential-bound via the supply of the call system (max. 24 V DC).
Fitted with its own internal voltage supply (self-supplying).Prepared for screw-fastening in medical supply units (MSU), the low-noise operation exists.

Technical Data


Rated voltage	230 V AC
Nominal frequency	50 Hz
Power consumption	0,75 W
Ambient temperature	0 °C ... 50 °C
Storage temperature	0 °C ... 60 °C
Air humidity	< 20 %
Color	light gray
Weight	approx. 60 g
Connection	7-pin for wires up to 2,5 mm2
Dimensions	W: 85 mm H: 42 mm D: 32 mm

IEC 60601-1, 2xMOPP
DIN VDE 0834-1: 2016-06

Features

- Light bulbs / fluorescent lamps up to 1 kW
- Control line: Detachable plug-in terminal (double-pole)

88160B — Sealing kit for standard installations



The sealing kit guarantees IP54 humidity protection for the call and cancel push-button device as well as for auto-release plugs. The sealing kit can also be used in areas requiring splash water protection. It can also be used to upgrade existing installations.

One sealing kit displayed here

5 sealing kits for up to 5 units.

Systevo Call Easy



SYSTEVO CALL EASY HANDSETS OFFER HIGH COMFORT AND SAFETY

The Systevo Call Easy (M) handsets have been developed in cooperation with caregivers: all functions have been optimised for use by patients and residents of all ages and also by caregivers. The design focuses on improved comfort and ergonomics to achieve our goal of making them easier to use for patients. The Systevo Call Easy are part of Systevo Call Ackermann, the intelligent care communication platform for modern care facilities.

Convenience and safety in harmony: the handset family is designed with a large call button with an easily recognizable and tactile pressure point and serves the user for safe call initiation and additional control of device functions in the direct patient environment.

The innovative Systevo magnetic plug system represents the key element of the future-oriented Systevo device generations for use with resident and patient beds. Handheld devices are connected to the bed units preferably using the magnetic plug system, which is designed for high robustness, a large number of plug-in operations and long-term availability!

To meet the requirements of the latest hygiene standards in care facilities, all components of Systevo Call Ackermann products are optimally matched, tested for cleaning or wipe disinfection and approved by hygiene laboratories (alcohols, aldehydes, quaternary ammonium compounds). In addition, the plastics used contain antimicrobial additives to reduce the reproduction of hazardous microorganisms.

Thanks to the auto-release magnetic plug system, the robust device design and the fulfilment of high hygiene requirements, the new Systevo generation of devices guarantees a long product life time.

74161B9 **Systevo Call Easy, for magnetic system connector, 3m, IP67**



Systevo Call Easy handset with ergonomic design, for easy operation by patients and residents in care facilities. Equipped with plug for magnetic system connector: if the predefined pulling force on the connection cable is exceeded, the system plug automatically disconnects from the bed unit to prevent mechanical damage (bed unit, cable). Equipped with large call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation.
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities. Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage.

Features

- Plastic housing in antimicrobial compound, colored in white/gray
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Buttons are colored according opera ting functions, with pressure point
- Version in IP67
- Surrounding rubber coating for shock-proof and safe handling
- Plug for magnetic system connector

Special material properties:

- High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
- Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- Max. Permissible cable tensile force: 40kg (Cable entry of housing: 20kg)
- Databus communication

Technical Data

Power supply	24VDC +/- 10%
Current consumption @ 24 V DC	approx. 30-50 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Type of protection	IP 67
Material	PC + ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 220 g
Cable length	3 m
CE certificate	VDE 0834, UL 1069
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 47 mm H: 133 mm D: 24 mm

Accessories

74160Z3 Wall mounting kit, Systevo Call Easy
74160Z1 Fixing-Clip, Systevo Call Easy

Systevo Call Ackermann

Systevo Call Easy

74163B9

Systevo Call Easy, 2 light buttons, for magnetic system connector, 3m, IP67



Systevo Call Easy handset with ergonomic design, for easy operation by patients and residents in care facilities. Equipped with plug for magnetic system connector: if the predefined pulling force on the connection cable is exceeded, the system plug automatically disconnects from the bed unit to prevent mechanical damage (bed unit, cable). Equipped with large call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation and for controlling device functions in direct environment (2 x light sources).
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities. Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage.

Technical Data

Power supply	24VDC +/- 10%
Current consumption @ 24 V DC	approx. 30-50 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Type of protection	IP 67
Material	PC + ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 250 g
Cable length	3 m
CE certificate	VDE 0834, UL 1069
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 47 mm H: 133 mm D: 24 mm

Features

- Plastic housing in antimicrobial compound, colored in white/gray
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Buttons are colored according opera ting functions, with pressure point
- Control of light sources
- Version in IP67
- Surrounding rubber coating for shock-proof and safe handling
- Plug for magnetic system connector

Special material properties:

- High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
- Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- Max. Permissible cable tensile force: 40kg (Cable entry of housing: 20kg)
- Databus communication

Accessories

74160Z3 Wall mounting kit, Systevo Call Easy
74160Z1 Fixing-Clip, Systevo Call Easy

74163C9

Systevo Call Easy, 2 light buttons, for magnetic system connector, 5m, IP67



Systevo Call Easy handset with ergonomic design, for easy operation by patients and residents in care facilities. Equipped with plug for magnetic system connector: if the predefined pulling force on the connection cable is exceeded, the system plug automatically disconnects from the bed unit to prevent mechanical damage (bed unit, cable). Equipped with large call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation and for controlling device functions in direct environment (2 x light sources).
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities. Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage.

Features

- Plastic housing in antimicrobial compound, colored in white/gray
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Buttons are colored according opera ting functions, with pressure point
- Control of light sources
- Version in IP67
- Surrounding rubber coating for shock-proof and safe handling
- Plug for magnetic system connector

Special material properties:

- High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
- Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- Max. Permissible cable tensile force: 40kg (Cable entry of housing: 20kg)
- Databus communication

Technical Data

Power supply	24VDC +/- 10%
Current consumption @ 24 V DC	approx. 30-50 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Type of protection	IP 67
Material	PC + ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 300 g
Cable length	5 m
CE certificate	VDE 0834, UL 1069
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 47 mm H: 133 mm D: 24 mm

Accessories

74160Z3 Wall mounting kit, Systevo Call Easy
74160Z1 Fixing-Clip, Systevo Call Easy

74165B9

Systevo Call Easy, 5 control buttons, for magnetic system connector, 3m, IP67



Systevo Call Easy handset with ergonomic design, for easy operation by patients and residents in care facilities. Equipped with plug for magnetic system connector: if the predefined pulling force on the connection cable is exceeded, the system plug automatically disconnects from the bed unit to prevent mechanical damage (bed unit, cable). Equipped with large call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation and for controlling device functions in direct environment (2 x light sources, 2 x blinds, 1 x on / off).
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities. Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage.

Features

- Plastic housing in antimicrobial compound, colored in white/gray
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Buttons are colored according opera ting functions, with pressure point
- Control of light sources
- Function selection buttons, On / Off
- Version in IP67
- Surrounding rubber coating for shock-proof and safe handling
- Plug for magnetic system connector

Special material properties:

- High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
- Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- Max. Permissible cable tensile force: 40kg (Cable entry of housing: 20kg)
- Databus communication

Technical Data

Power supply	24VDC +/- 10%
Current consumption @ 24 V DC	approx. 30-50 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Type of protection	IP 67
Material	PC + ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 280 g
Cable length	3 m
CE certificate	VDE 0834, UL 1069
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 47 mm H: 133 mm D: 24 mm

Accessories

74160Z3 Wall mounting kit, Systevo Call Easy
74160Z1 Fixing-Clip, Systevo Call Easy

74165C9

Systevo Call Easy, 5 control buttons, for magnetic system connector, 5m, IP67



Systevo Call Easy handset with ergonomic design, for easy operation by patients and residents in care facilities. Equipped with plug for magnetic system connector: if the predefined pulling force on the connection cable is exceeded, the system plug automatically disconnects from the bed unit to prevent mechanical damage (bed unit, cable). Equipped with large call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation and for controlling device functions in direct environment (2 x light sources, 2 x blinds, 1 x on / off).
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities. Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage.

Technical Data

Power supply	24VDC +/- 10%
Current consumption @ 24 V DC	approx. 30-50 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Type of protection	IP 67
Material	PC + ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 330 g
Cable length	5 m
CE certificate	VDE 0834, UL 1069
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 47 mm H: 133 mm D: 24 mm

Features

- Plastic housing in antimicrobial compound, colored in white/gray
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Buttons are colored according opera ting functions, with pressure point
- Control of light sources
- Function selection buttons, On / Off
- Version in IP67
- Surrounding rubber coating for shock-proof and safe handling
- Plug for magnetic system connector

Special material properties:

- High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
- Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- Max. Permissible cable tensile force: 40kg (Cable entry of housing: 20kg)
- Databus communication

Accessories

74160Z3 Wall mounting kit, Systevo Call Easy
74160Z1 Fixing-Clip, Systevo Call Easy

74160B1 **Systevo Call Easy, DIN-plug, 3m, IP54**



Systevo Call Easy handset with ergonomic design, for easy operation by patients and residents in care facilities. Equipped with large call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation.
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities. Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage.

Features

- Plastic housing in antimicrobial compound, colored in white/gray
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Buttons are colored according opera ting functions, with pressure point
- Version in IP54
- Surrounding rubber coating for shock-proof and safe handling
- 7-pole connector (DIN)

Special material properties:

- High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
- Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- Max. Permissible cable tensile force: 40kg (Cable entry of housing: 20kg)
- NCC

Technical Data

Power supply	24VDC +/- 10%
Current consumption @ 24 V DC	approx. 10-30 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Type of protection	IP 54
Material	PC + ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 210 g
Cable length	3 m
CE certificate	VDE 0834, UL 1069
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 47 mm H: 133 mm D: 24 mm

Accessories

74160Z3 Wall mounting kit, Systevo Call Easy
74160Z1 Fixing-Clip, Systevo Call Easy

74164B1 **Systevo Call Easy, DIN-plug, 3m, IP54, NOC**



Systevo Call Easy handset with ergonomic design, for easy operation by patients and residents in care facilities. Equipped with large call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation.
Suitable for normally open circuit systems (24VDC).
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities.
Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage.

Features

- Plastic housing in antimicrobial compound, colored in white/gray
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Buttons are colored according opera ting functions, with pressure point
- Version in IP54
- Surrounding rubber coating for shock-proof and safe handling
- 7-pole connector (DIN)

Special material properties:

- High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
- Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- Max. Permissible cable tensile force: 40kg (Cable entry of housing: 20kg)
- NCC

Technical Data

Power supply	24VDC +/- 10%
Current consumption @ 24 V DC	approx. 10-30 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Type of protection	IP 54
Material	PC + ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 210 g
Cable length	3 m
CE certificate	VDE 0834, UL 1069
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 47 mm H: 133 mm D: 24 mm

Accessories

74160Z3 Wall mounting kit, Systevo Call Easy
74160Z1 Fixing-Clip, Systevo Call Easy

74160C1 **Systevo Call Easy, DIN-plug, 5m, IP54**



Systevo Call Easy handset with ergonomic design, for easy operation by patients and residents in care facilities. Equipped with large call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation.
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities. Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage.

Features

- Plastic housing in antimicrobial compound, colored in white/gray
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Buttons are colored according opera ting functions, with pressure point
- Version in IP54
- Surrounding rubber coating for shock-proof and safe handling
- 7-pole connector (DIN)

Special material properties:

- High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
- Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- Max. Permissible cable tensile force: 40kg (Cable entry of housing: 20kg)
- NCC

Technical Data

Power supply	24VDC +/- 10%
Current consumption @ 24 V DC	approx. 10-30 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Type of protection	IP 54
Material	PC + ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 280 g
Cable length	5 m
CE certificate	VDE 0834, UL 1069
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 47 mm H: 133 mm D: 24 mm

Accessories

74160Z3 Wall mounting kit, Systevo Call Easy
74160Z1 Fixing-Clip, Systevo Call Easy

74162B1 **Systevo Call Easy, 2 light buttons, DIN-plug, 3m, IP54**



Systevo Call Easy handset with ergonomic design, for easy operation by patients and residents in care facilities. Equipped with large call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation and for controlling device functions in direct environment (2 x light sources).
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities. Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage. The keypad is equipped with color-coded control buttons (Light buttons).

Technical Data

Power supply	24VDC +/- 10%
Current consumption @ 24 V DC	approx. 10-30 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Type of protection	IP 54
Material	PC + ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 210 g
Cable length	3 m
CE certificate	VDE 0834, UL 1069
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 47 mm H: 133 mm D: 24 mm

Features

- Plastic housing in antimicrobial compound, colored in white/gray
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Buttons are colored according opera ting functions, with pressure point
- Control of light sources
- Version in IP54
- Surrounding rubber coating for shock-proof and safe handling
- 7-pole connector (DIN)

Special material properties:

- High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
- Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- Max. Permissible cable tensile force: 40kg (Cable entry of housing: 20kg)
- NCC

Accessories

74160Z3 Wall mounting kit, Systevo Call Easy
74160Z1 Fixing-Clip, Systevo Call Easy

74166B1 Systevo Call Easy, 2 light buttons, DIN-plug, 3m, IP54, NOC



Systevo Call Easy handset with ergonomic design, for easy operation by patients and residents in care facilities. Equipped with large call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation and for controlling device functions in direct environment (2 x light sources).
Suitable for normally open circuit systems (24VDC).
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities.
Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage. The keypad is equipped with color-coded control buttons (Light buttons).

Features

- Plastic housing in antimicrobial compound, colored in white/gray
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Buttons are colored according opera ting functions, with pressure point
- Control of light sources
- Version in IP54
- Surrounding rubber coating for shock-proof and safe handling
- 7-pole connector (DIN)

Special material properties:

- High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
- Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- Max. Permissible cable tensile force: 40kg (Cable entry of housing: 20kg)
- NCC

Technical Data

Power supply	24VDC +/- 10%
Current consumption @ 24 V DC	approx. 10-30 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Type of protection	IP 54
Material	PC + ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 210 g
Cable length	3 m
CE certificate	VDE 0834, UL 1069
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 47 mm H: 133 mm D: 24 mm

Accessories

74160Z3 Wall mounting kit, Systevo Call Easy
74160Z1 Fixing-Clip, Systevo Call Easy

74162C1 **Systevo Call Easy, 2 light buttons, DIN-plug, 5m, IP54**



Systevo Call Easy handset with ergonomic design, for easy operation by patients and residents in care facilities. Equipped with large call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation and for controlling device functions in direct environment (2 x light sources).
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities. Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage. The keypad is equipped with color-coded control buttons (Light buttons).

Features

- Plastic housing in antimicrobial compound, colored in white/gray
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Buttons are colored according opera ting functions, with pressure point
- Control of light sources
- Version in IP54
- Surrounding rubber coating for shock-proof and safe handling
- 7-pole connector (DIN)

Special material properties:

- High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
- Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- Max. Permissible cable tensile force: 40kg (Cable entry of housing: 20kg)
- NCC

Technical Data

Power supply	24VDC +/- 10%
Current consumption @ 24 V DC	approx. 10-30 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Type of protection	IP 54
Material	PC + ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 290 g
Cable length	5 m
CE certificate	VDE 0834, UL 1069
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 47 mm H: 133 mm D: 24 mm

Accessories

74160Z3 Wall mounting kit, Systevo Call Easy
74160Z1 Fixing-Clip, Systevo Call Easy

74161B1 Systevo Call Easy, DIN-plug, 3m, IP67



Systevo Call Easy handset with ergonomic design, for easy operation by patients and residents in care facilities. Equipped with large call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation.
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities. Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage.

Features

- Plastic housing in antimicrobial compound, colored in white/gray
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Buttons are colored according opera ting functions, with pressure point
- Version in IP67
- Surrounding rubber coating for shock-proof and safe handling
- 7-pole connector (DIN)

Special material properties:

- High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
- Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- Max. Permissible cable tensile force: 40kg (Cable entry of housing: 20kg)
- NCC

Technical Data

Power supply	24VDC +/- 10%
Current consumption @ 24 V DC	approx. 10-30 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Type of protection	IP 67
Material	PC + ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 210 g
Cable length	3 m
CE certificate	VDE 0834, UL 1069
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 47 mm H: 133 mm D: 24 mm

Accessories

74160Z3 Wall mounting kit, Systevo Call Easy
74160Z1 Fixing-Clip, Systevo Call Easy

74161B3 **Systevo Call Easy, auto-release plug, 3m, IP67**



Systevo Call Easy handset with ergonomic design, for easy operation by patients and residents in care facilities. Equipped with large call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation.
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities. Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage.

Features

- Plastic housing in antimicrobial compound, colored in white/gray
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Buttons are colored according opera ting functions, with pressure point
- Version in IP67
- Surrounding rubber coating for shock-proof and safe handling
- Auto-Release plug connector

Special material properties:

- High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
- Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- Max. Permissible cable tensile force: 40kg (Cable entry of housing: 20kg)
- NCC

Technical Data

Power supply	24VDC +/- 10%
Current consumption @ 24 V DC	approx. 10-30 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Type of protection	IP 67
Material	PC + ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 210 g
Cable length	3 m
CE certificate	VDE 0834, UL 1069
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 47 mm H: 133 mm D: 24 mm

Accessories

74160Z3 Wall mounting kit, Systevo Call Easy
74160Z1 Fixing-Clip, Systevo Call Easy

74161B4 Systevo Call Easy, auto-release plug -A-, 3m, IP67



Systevo Call Easy handset with ergonomic design, for easy operation by patients and residents in care facilities. Equipped with large call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation.
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities. Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage.

Features

- Plastic housing in antimicrobial compound, colored in white/gray
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Buttons are colored according opera ting functions, with pressure point
- Version in IP67
- Surrounding rubber coating for shock-proof and safe handling
- Auto-Release plug connector type "A"

Special material properties:

- High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
- Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- Max. Permissible cable tensile force: 40kg (Cable entry of housing: 20kg)
- NCC

Technical Data

Power supply	24VDC +/- 10%
Current consumption @ 24 V DC	approx. 10-30 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Type of protection	IP 67
Material	PC + ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 210 g
Cable length	3 m
CE certificate	VDE 0834, UL 1069
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 47 mm H: 133 mm D: 24 mm

Accessories

74160Z3 Wall mounting kit, Systevo Call Easy
74160Z1 Fixing-Clip, Systevo Call Easy

74163B1 **Systevo Call Easy, 2 light buttons, DIN-plug, 3m, IP67**



Systevo Call Easy handset with ergonomic design, for easy operation by patients and residents in care facilities. Equipped with large call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation and for controlling device functions in direct environment (2 x light sources).
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities. Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage. The keypad is equipped with color-coded control buttons (Light buttons).

Features

- Plastic housing in antimicrobial compound, colored in white/gray
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Buttons are colored according opera ting functions, with pressure point
- Control of light sources
- Version in IP67
- Surrounding rubber coating for shock-proof and safe handling
- 7-pole connector (DIN)

Special material properties:

- High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
- Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- Max. Permissible cable tensile force: 40kg (Cable entry of housing: 20kg)
- NCC

Technical Data

Power supply	24VDC +/- 10%
Current consumption @ 24 V DC	approx. 10-30 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Type of protection	IP 67
Material	PC + ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 210 g
Cable length	3 m
CE certificate	VDE 0834, UL 1069
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 47 mm H: 133 mm D: 24 mm

Accessories

74160Z3 Wall mounting kit, Systevo Call Easy
74160Z1 Fixing-Clip, Systevo Call Easy

74163C1 **Systevo Call Easy, 2 light buttons, DIN-plug, 5m, IP67**



Systevo Call Easy handset with ergonomic design, for easy operation by patients and residents in care facilities. Equipped with large call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation and for controlling device functions in direct environment (2 x light sources).
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities. Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage. The keypad is equipped with color-coded control buttons (Light buttons).

Features

- Plastic housing in antimicrobial compound, colored in white/gray
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Buttons are colored according opera ting functions, with pressure point
- Control of light sources
- Version in IP67
- Surrounding rubber coating for shock-proof and safe handling
- 7-pole connector (DIN)

Special material properties:

- High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
- Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- Max. Permissible cable tensile force: 40kg (Cable entry of housing: 20kg)
- NCC

Technical Data

Power supply	24VDC +/- 10%
Current consumption @ 24 V DC	approx. 10-30 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Type of protection	IP 67
Material	PC + ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 290 g
Cable length	5 m
CE certificate	VDE 0834, UL 1069
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 47 mm H: 133 mm D: 24 mm

Accessories

74160Z3 Wall mounting kit, Systevo Call Easy
74160Z1 Fixing-Clip, Systevo Call Easy

74163B3 **Systevo Call Easy, 2 light buttons, auto-release plug, 3m, IP67**



Systevo Call Easy handset with ergonomic design, for easy operation by patients and residents in care facilities. Equipped with large call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation and for controlling device functions in direct environment (2 x light sources).
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities. Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage. The keypad is equipped with color-coded control buttons (Light buttons).

Technical Data

Power supply	24VDC +/- 10%
Current consumption @ 24 V DC	approx. 10-30 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Type of protection	IP 67
Material	PC + ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 260 g
Cable length	3 m
CE certificate	VDE 0834, UL 1069
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 47 mm H: 133 mm D: 24 mm

Features

- Plastic housing in antimicrobial compound, colored in white/gray
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Buttons are colored according opera ting functions, with pressure point
- Control of light sources
- Version in IP67
- Surrounding rubber coating for shock-proof and safe handling
- Auto-Release plug connector

Special material properties:

- High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
- Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- Max. Permissible cable tensile force: 40kg (Cable entry of housing: 20kg)
- NCC

Accessories

74160Z3 Wall mounting kit, Systevo Call Easy
74160Z1 Fixing-Clip, Systevo Call Easy

74163C3 **Systevo Call Easy, 2 light buttons, auto-release plug, 5m, IP67**



Systevo Call Easy handset with ergonomic design, for easy operation by patients and residents in care facilities. Equipped with large call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation and for controlling device functions in direct environment (2 x light sources).
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities. Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage. The keypad is equipped with color-coded control buttons (Light buttons).

Technical Data

Power supply	24VDC +/- 10%
Current consumption @ 24 V DC	approx. 10-30 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Type of protection	IP 67
Material	PC + ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 340 g
Cable length	5 m
CE certificate	VDE 0834, UL 1069
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 47 mm H: 133 mm D: 24 mm

Features

- Plastic housing in antimicrobial compound, colored in white/gray
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Buttons are colored according opera ting functions, with pressure point
- Control of light sources
- Version in IP67
- Surrounding rubber coating for shock-proof and safe handling
- Auto-Release plug connector

Special material properties:

- High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
- Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- Max. Permissible cable tensile force: 40kg (Cable entry of housing: 20kg)
- NCC

Accessories

74160Z3 Wall mounting kit, Systevo Call Easy
74160Z1 Fixing-Clip, Systevo Call Easy

74163B4 **Systevo Call Easy, 2 light buttons, auto-release plug -A-, 3m, IP67**



Systevo Call Easy handset with ergonomic design, for easy operation by patients and residents in care facilities. Equipped with large call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation and for controlling device functions in direct environment (2 x light sources).
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities. Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage. The keypad is equipped with color-coded control buttons (Light buttons).

Features

- Plastic housing in antimicrobial compound, colored in white/gray
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Buttons are colored according opera ting functions, with pressure point
- Control of light sources
- Version in IP67
- Surrounding rubber coating for shock-proof and safe handling
- Auto-Release plug connector type "A"

Special material properties:

- High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
- Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- Max. Permissible cable tensile force: 40kg (Cable entry of housing: 20kg)
- NCC

Technical Data

Power supply	24VDC +/- 10%
Current consumption @ 24 V DC	approx. 10-30 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Type of protection	IP 67
Material	PC + ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 220 g
Cable length	3 m
CE certificate	VDE 0834, UL 1069
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 47 mm H: 133 mm D: 24 mm

Accessories

74160Z3 Wall mounting kit, Systevo Call Easy
74160Z1 Fixing-Clip, Systevo Call Easy

74163C4 **Systevo Call Easy, 2 light buttons, auto-release plug -A-, 5m, IP67**



Systevo Call Easy handset with ergonomic design, for easy operation by patients and residents in care facilities. Equipped with large call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation and for controlling device functions in direct environment (2 x light sources).
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities. Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage. The keypad is equipped with color-coded control buttons (Light buttons).

Features

- Plastic housing in antimicrobial compound, colored in white/gray
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Buttons are colored according opera ting functions, with pressure point
- Control of light sources
- Version in IP67
- Surrounding rubber coating for shock-proof and safe handling
- Auto-Release plug connector type "A"

Special material properties:

- High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
- Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- Max. Permissible cable tensile force: 40kg (Cable entry of housing: 20kg)
- NCC

Technical Data

Power supply	24VDC +/- 10%
Current consumption @ 24 V DC	approx. 10-30 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Type of protection	IP 67
Material	PC + ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 300 g
Cable length	5 m
CE certificate	VDE 0834, UL 1069
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 47 mm H: 133 mm D: 24 mm

Accessories

74160Z3 Wall mounting kit, Systevo Call Easy
74160Z1 Fixing-Clip, Systevo Call Easy

74163B7 **Systevo Call Easy, 2 light buttons, auto-release plug -L-, 3m, IP67**



Systevo Call Easy handset with ergonomic design, for easy operation by patients and residents in care facilities. Equipped with large call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation and for controlling device functions in direct environment (2 x light sources).
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities. Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage. The keypad is equipped with color-coded control buttons (Light buttons).

Technical Data

Power supply	24VDC +/- 10%
Current consumption @ 24 V DC	approx. 10-30 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Type of protection	IP 67
Material	PC + ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 220 g
Cable length	3 m
CE certificate	VDE 0834, UL 1069
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 47 mm H: 133 mm D: 24 mm

Features

- Plastic housing in antimicrobial compound, colored in white/gray
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Buttons are colored according opera ting functions, with pressure point
- Control of light sources
- Version in IP67
- Surrounding rubber coating for shock-proof and safe handling
- Auto-Release plug connector type "L"

Special material properties:

- High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
- Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- Max. Permissible cable tensile force: 40kg (Cable entry of housing: 20kg)
- NCC

Accessories

74160Z3 Wall mounting kit, Systevo Call Easy
74160Z1 Fixing-Clip, Systevo Call Easy

74163C7 Systevo Call Easy, 2 light buttons, auto-release plug -L-, 5m, IP67



Systevo Call Easy handset with ergonomic design, for easy operation by patients and residents in care facilities. Equipped with large call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation and for controlling device functions in direct environment (2 x light sources).
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities. Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage. The keypad is equipped with color-coded control buttons (Light buttons).

Features

- Plastic housing in antimicrobial compound, colored in white/gray
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Buttons are colored according opera ting functions, with pressure point
- Control of light sources
- Version in IP67
- Surrounding rubber coating for shock-proof and safe handling
- Auto-Release plug connector type "L"

Special material properties:

- High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
- Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- Max. Permissible cable tensile force: 40kg (Cable entry of housing: 20kg)
- NCC

Technical Data

Power supply	24VDC +/- 10%
Current consumption @ 24 V DC	approx. 10-30 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Type of protection	IP 67
Material	PC + ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 300 g
Cable length	5 m
CE certificate	VDE 0834, UL 1069
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 47 mm H: 133 mm D: 24 mm

Accessories

74160Z3 Wall mounting kit, Systevo Call Easy
74160Z1 Fixing-Clip, Systevo Call Easy

74165B3 **Systevo Call Easy, 5 control buttons, auto-release plug, 3m, IP67**



Systevo Call Easy handset with ergonomic design, for easy operation by patients and residents in care facilities. Equipped with large call button with easily recognizable as well sensible pressure point is the device prepared for safe call initiation and for controlling device functions in direct environment (2 x light sources, 2 x blinds, 1 x on / off).
Housings without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities. Equipped with antimicrobial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Robust housing with surrounding rubber coating for shock protection and safe handling during daily usage. The keypad is equipped with color-coded control buttons (Light and control buttons).

Technical Data

Power supply	24VDC +/- 10%
Current consumption @ 24 V DC	approx. 10-30 mA
Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Type of protection	IP 67
Material	PC + ABS-FR (AM, UV)
Color	front in white, similar to RAL 9003 housing back in gray, light gray cable
Weight	approx. 290 g
Cable length	3 m
CE certificate	VDE 0834, UL 1069
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 47 mm H: 133 mm D: 24 mm

Features

- Plastic housing in antimicrobial compound, colored in white/gray
- Front call button with pictogram and LED reassurance light / finding light in accordance with VDE 0834
- Buttons are colored according opera ting functions, with pressure point
- Control of light sources
- Function selection buttons, On / Off
- Version in IP67
- Surrounding rubber coating for shock-proof and safe handling
- Auto-Release plug connector

Special material properties:

- High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
- Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
- Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- Max. Permissible cable tensile force: 40kg (Cable entry of housing: 20kg)
- NCC

Accessories

74160Z3 Wall mounting kit, Systevo Call Easy
74160Z1 Fixing-Clip, Systevo Call Easy

74160Z1 Fixing-Clip, Systevo Call Easy



Fixing-clip for Systevo Call Easy with ergonomic design, for easy fixation of the handset to the blanket or at the garment of the user.
Designed without dust edges for avoiding the deposition of bacteria or dirt elements and with easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities.
Equipped with anti-microbial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds). Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

Features

- rubber compound
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free

Technical Data

Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 90 % (non condensing)
Material	rubber (AM, UV)
Color	gray
Weight	approx. 30 g
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 35 mm H: 35 mm D: 20 mm

Set a 10 pieces

74160Z3 Wall mounting kit, Systevo Call Easy



Wall mounting kit for Systevo Call Easy with ergonomic design, for easy hang-up of the handset to the wall or bed container. Equipped with holes for fixation by screws.
Easy to be cleaned and disinfected surface to fulfill the highest hygienic requirements in care facilities. Equipped with anti-microbial compound for reduction of existing bacteria or preventing their reproduction.
Suitable for cleaning or wipe disinfection according to specifications of quality systems of care facilities. Tested by hygiene labs and approved for the usage of listed disinfectants (alcohols, aldehydes Quaternary ammonium compounds).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

Features

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire protection class V0)
- Halogen free
- with adhesive tape

Technical Data

Ambient temperature	-10 °C ... 50 °C
Storage temperature	-20 °C ... 60 °C
Air humidity	< 10 % (non condensing)
Material	Plastic compound (PC + ABS-FR)
Color	white
Weight	approx. 20 g
Approval	MIL-STD-810G, 1.2m / 1.8m
Dimensions	W: 55 mm H: 55 mm D: 32 mm

73312C2 Radio receiver set with contact step mat



Comprising a pressure-sensitive mat P/N 73312C3 in heavy, self-laying design and matching radio receiver P/N 73310J2. Particularly suitable for use near a patient bed or in the door area. Trip protection via wireless radio connection and beveled edges. Wet-cleanable and disinfectable. The pressure mat power supply is a 3 V battery, power is supplied to the receiver via the 7-pin DIN plug in the call system.

Technical Data

Power supply	3 V battery (handheld transmitter) 24 V DC (radio receiver)
Type of protection	Receiver IP64, Sender IP68
Dimensions	W: 700 mm H: 9 mm L: 1100 mm (Tretmatte)

73310J2 Radio receiver
3 V battery

73312C3 Contact step mat with integrated radio transmitter



Pressure-sensitive mat in heavy, self-laying design. Particularly suitable for use near a patient bed or in the door area. Trip protection via wireless radio connection (868 MHz) and beveled edges. The pressure mat power supply is a 3 V battery. Wet-cleanable and disinfectable.

Technical Data

Power supply	3 V battery (handheld transmitter)
Dimensions	W: 700 mm H: 9 mm L: 1100 mm (Trittmatte)

3 V battery

Accessories
73310J2 Contact step mat with integrated radio transmitter

73312C1 Contact step mat wired



Pressure-sensitive mat in heavy, self-laying design. Particularly suitable for use near a patient bed. Beveled edges to provide trip protection. Wet-cleanable and disinfectable with 4 m connecting cable and 7-pin plug for Ackermann call units with auxiliary socket. Switchable to normally closed and normally open circuit.

Technical Data

Type of protection	IP 64
Dimensions	W: 700 mm H: 9 mm L: 1100 mm (Tretmatte)

73310F2 Radio receiver set 868 MHz



Comprises:
Radio receiver type 73310J2, with integrated call button, designed with an isolated switch contact output, programmable for call systems with call circuit monitoring or open-circuit current technology. Equipped with easy-to-read LED status indicators for power and for acknowledgement of incoming call alarms. Simple assignment of up to 64 units to the radio receiver, or for compatible radio units a master mode option can be set where the receiver responds independently of assignment (pairing) to all incoming alarms (e.g. in recreation rooms).
Handheld radio transmitter IP68 868 MHz type 73310G2 with red call button in waterproof casing. The handheld transmitter can be used either with an elastic armband and Velcro fastener, or with a lanyard. Power-saving electronics supported by smart battery monitoring that includes transmission of battery status to the radio receiver. Upon call initiation, an optical confirmation indicator is activated for a limited time for the person seeking assistance.

Technical Data

Power supply	3 V battery (handheld transmitter) 24 V DC (radio receiver)
Type of protection	IP20 (Receiver), IP68 (Sender)
Dimensions	W: 32 mm H: 53 mm D: 17 mm (handheld transmitter) W:40 mm H: 130 mm D: 24 mm (radio receiver)

Radio receiver, handheld radio transmitter, stretch band and neck strap

73310G2 Hand-held transmitter IP68, 868 MHz



Handheld radio transmitter with red call button in waterproof casing. The handheld transmitter can be used either with an elastic armband and Velcro fastener, or with a lanyard. Power-saving electronics supported by smart battery monitoring that includes transmission of battery status to the radio receiver. Upon call initiation, an optical confirmation indicator is activated for a limited time for the person seeking assistance.

Technical Data

Power supply	3-V-battery (CR2032 handheld transmitter)
Dimensions	W: 32 mm H: 53 mm D: 17 mm

Radio Transmitter, Stretch Band, Lanyard, 3V Battery

73310J2 Separate radio receiver, 868MHz



The radio receiver with integrated call button is designed with an isolated switch contact output, programmable for call systems with call circuit monitoring or open-circuit current technology. Equipped with easy-to-read LED status indicators for power and for acknowledgement of incoming call alarms. Radio receiver power supply via the call system's 7-pin auxiliary socket. Simple assignment of up to 64 units to the radio receiver. For compatible radio units a master mode can be set where the receiver responds independently of assignment (pairing) to all incoming alarms (e.g. in recreation rooms).

Technical Data

Power supply	24 V DC
Dimensions	W: 40 mm H: 130 mm D: 24 mm

70007A Pneumatic pear push-button (NCC) DIN plug, 1.9 m



Pneumatic pear push-button with 7-pin plug, 1.9 m insulating plastic tube with rubber ball and retaining clip.

Technical Data

Operating voltage	24 V DC
Color	white
Version	for normally closed circuit systems

Features

- 1.9 m insulation material tube, with rubber ball and retaining clip.

70007B Pneumatic breath call unit (NCC) DIN-plug



Pneumatic breath call unit with 7-pin plug, suitable for immobile patients. The unit is connected to the nurse call system via a 7-pin plug. The call is actuated pneumatically by forcefully breathing into the unit.

Technical Data

Operating voltage	24 V DC
Version	for normally closed circuit systems

Pneumatic breath call unit, spare tube

Accessories
70005BZ Spare tubes for pneumatic call unit

70005BZ Spare tubes for pneumatic call unit



Accessories for breath call unit 70007B

12 spare tubes with filter

74913EJ Vandalism-protected CALL Unit V2A



Vandal-proof call unit for providing the required call functions in the patient room.
Designed with integrated LED reassurance light / finding light. Use of a mechanical microswitch with tactile click signal on actuation.
Connection to the electronics module or room terminal via a passive input (I/O).
Superordinate room identification signal displayed after call activation.
Function monitoring is carried out by the associated electronic module or room terminal (call circuit monitoring).

Technical Data

Protection class	IP65
Material	stainless steel V2A
Weight	approx. 140 g

74913FJ Vandalism-protected cancel Unit V2A



Vandal-proof cancel unit for providing the required call functions in the patient room.
Designed with integrated LED light. Use of a mechanical microswitch with tactile click signal on actuation.
Connection to the electronics module or room terminal via a passive input (I/O).
Superordinate room identification signal displayed after presence activation.

Technical Data

Protection class	IP65
Material	stainless steel V2A
Weight	approx. 140 g

74913EJ1 Vandalism-protected CALL Unit V2B



Vandal-proof call unit, replacement for 71185E2, for providing the required call functions in the patient room.
Designed with integrated LED reassurance light / finding light. Use of a mechanical microswitch with tactile click signal on actuation.
Connection to the electronics module or room terminal via a passive input (I/O).
Superordinate room identification signal displayed after call activation.
Function monitoring is carried out by the associated electronic module or room terminal (call circuit

Technical Data

Protection class	IP65
Material	stainless steel V2A
Weight	approx. 210 g

74913FJ1 Vandalism-protected cancel Unit V2B



Vandal-proof cancel unit, replacement for 71185D2, for providing the required call functions in the patient room.
Designed with integrated LED light. Use of a mechanical microswitch with tactile click signal on actuation.
Connection to the electronics module or room terminal via a passive input (I/O).
Superordinate room identification signal displayed after presence activation.

Technical Data

Protection class	IP65
Material	stainless steel V2A
Weight	approx. 210 g

74659B1 Systevo Information Display (SINF)



Corridor information display, as a centralized point of real time information for nurse call systems, helping to streamline alerts displaying for shorter response times.
It's prepared for wall or ceiling-mounting and integrates a wide high-efficiency dot-matrix RGB LED graphic color display to provide a perfect visualization ratio, allowing system messages to be read and identified even from a long distance. The integrated loudspeaker can be also used for acoustic call forwarding to catch caregivers attention when required, as well as for voice announcements released from duty room.
- Display of system messages with room and bed identification in plain text, as well as pictogram for a quick call type identification (e.g. WC, doctor, fault).
- Priority-controlled display, with automatic scrolling function with several messages of the same priority. Optimum display of the time in digital format (e.g. 13:40) when iddle.
- Associated to a ward/zone and compatible with zone linkage (concentrations).
- Secured data communication, where messages are transmitted from the overriding Systevo Control in fractions of a second and pending alarms are processed, displayed and notified in time.
- Extended working mode (license based feature) allowing flexible customization of displayed messages format (configurable colors / icons, etc…).

Includes an user-friendly installation technology which does not requires opening of housing, for a more efficient cabling and for an optimized commissioning process.
Upgradable to future system firmware thanks to advanced flash storage technologies.
Includes the option for automated software update during operation.
Seamless integration into existing Systevo Call Ackermann infrastructure (data bus) and support of the cyber security requirements of modern data bus infrastructures.
Includes a backward compatibility mode for older system versions (V10/V11).
System functions subject to license are provided by corresponding software licenses (system release V12.10R and higher).

Features

- Built-in speaker
- Colour display with high-efficiency RGB LED panels
- Flexible mounting: wall / ceiling (requires adequate mounting accessory)
- Industrial grade components for 24/7 continuous operation
- Robust lightweight design
- Easy wiring: no opening of housing required, plugabble terminals
- RJ45-terminal for easy back-to-back display connection (double sided mounting)

Functional scope:
- Display with room and bed identification in plain text
- Display of the call type
- Display of the time configurable (e.g. if no messages are pending)
- Acoustic call forwarding (configurable)
- Announcements (configurable)

Sequence of the displays:
- The highest-priority messages (in the sequence of alarm call – emergency call – normal call) are displayed
- If several messages are pending with the same priority, these are signalised on a scrolling basis

Technical Data

Operating voltage	24 V DC +/- 10%
Current consumption	max. 0,9A
Display	RGB LED panel
Application temperature	5 °C ... 40 °C
Air humidity	< 90 % (non condensing)
Protection class	IP20
Material	plastic PC+ABS-FR3010
Color	Lyric white (similar to RAL 9003)
Weight	approx. 3,1 kg
Dimensions	W: 855 mm H: 155 mm D: 66 mm (mounting acc. not incl.)

Usage of Systevo Information Display (SINF) from System Release V12.10R400 and higher.
Special compatibility mode for older system versions (V10/V11).
Single-sided information display. 2 pieces (2 x 74659B1) are needed if double-sided information display is required (in combination with ceiling mounting kit p.n. 74659Z5)

Accessories

74659Z4 Wall mounting adapter for SINF
74659Z5 Ceiling mounting kit for SINF (single/double)
74659Z6 Spare parts set for SINF
79SW463 SINF License for extended display mode (1 dev.)

74659Z4 Wall mounting adapter for SINF



Wall mounting bracket for easy installation of Systevo Info-Display (SINF) over the wall. Includes a wall mount bracket for fixing over the wall for a simple and secure assembly of the SINF, with locking screws at the bottom to keep the device safe and secure.

Technical Data

Material	metal (galvanized steel plate)
Color	Lyric white (similar to RAL 9003), matte finish
Weight	approx. 0,8 kg
Dimensions	W: 600 mm H: 120 mm D: 11 mm

Wall mounting adapter, screws and dowels

74659Z5 **Ceiling mount. Systevo info-disp.**



Technical Data

Weight	approx. 3,5 kg
Dimensions	W: 140 mm H: 860 mm D: 140 mm

74659Z6 **Spare parts set for 74659B1**

72515Z1 **Labeling set for zone indicator lamp, 35 mm (accessories)**



Adhesive labeling set with numbers and letters up to a height of 35 mm. It includes digits 0-9 as well as the letters “EG,” “OG,” “DG.” Direction arrows and symbols for telephone and fire.

Contains 2 sets each

72515Z2 **Labelling set for zone indicator lamp, 50 mm (accessories)**



Labelling set a sticker with numbers and letters at a height of 50 mm. Includes numbers 0-9 and letters “EG”, “OG”, “DG”. Direction arrows and telephone, fire symbols.

Comprised of 2 sets each

89734AH1 Halogen-free system cable, 500 m cable drum



Halogen-free system cable (500 m cable drum) for power supply, time multiplex and speech transmission, 6-core (2 x 2 x0.6 mm / 1 x 1.5 mm^2).

Technical Data

Fire load	1200 kJ/m

500 m cable drum

89734AJ1 Halogen-free system cable, 100 m bundle



Halogen-free system cable (100 m bundle) for power supply, time multiplex and speech transmission, 6-core (2 x 2 x0.6 mm / 1 x 1.5 mm^2).

Technical Data

Fire load	1200 kJ/m

100 m bundle

89734AK1 Halogen-free system cable, 300 m cable drum



Halogen-free system cable (300 m cable drum) for power supply, time multiplex and speech transmission, 6-core (2 x 2 x0.6 mm / 1 x 1.5 mm^2).

Technical Data

Fire load	1200 kJ/m

300 m cable drum

88914A5 Frame for 1 cover plate (single)



Special material properties:
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

Technical Data

Dimensions	W: 81 mm H: 81 mm

Features

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire prot class V0)
- Halogen free

88914B5 Frame for cover plate (double)



Special material properties:
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

Technical Data

Dimensions	W: 152 mm H: 81 mm

Features

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire prot class V0)
- Halogen free

88914C5 Frame for cover plate (triple)



Special material properties:
High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

Technical Data

Dimensions	W: 81 mm H: 223 mm

Features

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire prot class V0)
- Halogen free


88914A3 Mounting frame for cover plate (single)



Technical Data

Material	PC + ABS - FR
Color	white, similar to RAL 9016
Dimensions	W: 81 mm H: 81 mm

73091Z1 Adaptor for BM99-connection board for bed head unit



MSU-adapter for holding up to 3 room units (e.g. Systevo bed unit/audio switch/call unit) for integration into a medical supply unit. Use of the adapter to replace the existing BM99 connection support (part no. 74174D1) while retaining the mechanical cut-out in the medical supply unit.

Technical Data

Material	PC + ABS – FR
Color	white
Dimensions	W: 218 mm H: 77 mm D: 33 mm

Not compatible with the Systevo display unit (part no. 74910D1).

With 2 support rings (for optional blind covers) and the appropriate fixing screws.

Accessories
88885H3
88914C5

88915A5 Surface mount base (single)



Surface-mounted base single for 1 Systevo component with frame/cover plate in Systevo Call design.

High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

Features

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire prot class V0)
- Halogen free

Technical Data

Installation	Fixing screws
Color	white (RAL 9016)
Dimensions	W: 81 mm H: 81 mm D: 35 mm (top) W:82,8 mm H: 82,8 mm D: 35 mm (bottom)

Successor for 88914A3N

88915B5 Surface mount base (double)



Surface-mounted base double for 2 Systevo components with frame/cover plate in Systevo Call design.

High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.

Features

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire prot class V0)
- Halogen free

Technical Data

Installation	Fixing screws
Color	white (RAL 9016)
Dimensions	W: 81 mm H: 81 mm D: 35 mm (top) W:82,8 mm H: 154 mm D: 35 mm (bottom)

88915C5 Surface mount base (triple)



Surface-mounted base triple for 3 Systevo component with frame/cover plate in Systevo Call design.

High quality plastic compound with antimicrobial surface for reduction of microorganisms and to inhibiting the growth of germs.
Good mechanical properties with high resistance to the daily stress (operation, cleaning, disinfection, shocks etc.).
Suitable for use in care facilities with high Requirements for hygiene, stability, Longevity and durability.


Features

- Plastic compound (PC + ABS-FR)
- UV-resistant
- Matt finish
- Antimicrobial surface
- impact resistance
- heat resistance
- Strength
- longevity
- durability
- Flame protection (fire prot class V0)
- Halogen free

Technical Data

Installation	Fixing screws
Color	white (RAL 9016)
Dimensions	W: 81 mm H: 223 mm D: 35 mm (top) W:82,8 mm H: 225 mm D: 35 mm (bottom)

88160B Sealing kit for standard installations




The sealing kit guarantees IP54 humidity protection for the call and cancel push-button device as well as for auto-release plugs. The sealing kit can also be used in areas requiring splash water protection. It can also be used to upgrade existing installations.

One sealing kit displayed here

5 sealing kits for up to 5 units.

89371C Electronic impulse switch 1 closer

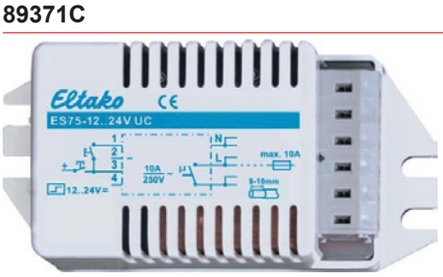

Electronic power surge relay for bed or room light switch in patient or resident room in accordance with the requirements of IEC 60601-1 and DIN VDE 0834-1: 2016-06.Fitted with break contact and normally open contact (trigger) with increased requirements for operating and interference resistance, as well as an potential separation (2xMOPP).
Secure switching properties, even with long control lines and in an environment of electromagnetic fields.
Pulse-shaped control using keys or relays (potential-free) or potential-bound via the supply of the call system (max. 24 V DC).
Fitted with its own internal voltage supply (self-supplying).Prepared for screw-fastening in medical supply units (MSU), the low-noise operation exists.

Features

- Light bulbs / fluorescent lamps up to 1 kW
- Control line: Detachable plug-in terminal (double-pole)

Technical Data

Rated voltage	230 V AC
Nominal frequency	50 Hz
Power consumption	0,75 W
Ambient temperature	0 °C ... 50 °C
Storage temperature	0 °C ... 60 °C
Air humidity	< 20 %
Color	light gray
Weight	approx. 60 g
Connection	7-pin for wires up to 2,5 mm2
Dimensions	W: 85 mm H: 42 mm D: 32 mm

IEC 60601-1, 2xMOPP
DIN VDE 0834-1: 2016-06

88894AL1 LED lamp, clear



Replacement LED lamp for room electronic modules (Part No. 72570P1, 72571P1).

Technical Data

Mounting	Bayonet
Color	transparent

Successor for 88894AL.

5 pcs

88894BL1 LED lamp, red



Replacement LED lamp for room electronic modules (Part No. 72570P1, 72571P1).

Technical Data

Mounting	Bayonet
Color	red

Successor for 88894BL.

5 pcs

88894CL1 LED lamp, green



Replacement LED lamp for room electronic modules (Part No. 72570P1, 72571P1).

Technical Data

Mounting	Bayonet
Color	green

Successor for 88894CL.

5 pcs

88894DL1 LED lamp, yellow



Replacement LED lamp for room electronic modules (Part No. 72570P1, 72571P1).

Technical Data

Mounting	Bayonet
Color	yellow

Successor for 88894DL.

5 pcs





SYSTEVO MOBILE - FLEXIBLE AND EFFICIENT COMMUNICATION IN CARE FACILITIES

Efficient communication between caregivers, their mobile accessibility, and ad-hoc access to patient information are becoming increasingly important in healthcare. Nursing facilities need to make patient care safer, more productive and more efficient to be able to perform routine tasks faster. The goal is to free up staff to spend more time on patient care.

Systevo Mobile provides in conjunction with Systevo Call Ackermann seamless integration between the mobile communication platform and the call system, making workflows and the coordination of alarm messages, their escalations and processing are made smoother. Communication between nursing staff and patients or residents takes place „at the touch of a button," while additional features such as dynamic call forwarding avoid disruptions in the wards and reduce the number of calls. disturbances in the wards and directly reduce alarm fatigue. As a result, walking distances are reduced and higher productivity is achieved.

Nursing staff exchange information easily within the team via „messenger functions" so that important information is available more quickly and without detours. Information requested is immediately documented in the patient file and is available again at later times. With the focus on the „5 Rights" - (information, time, place, patient, action) Systevo Mobile enables the nursing staff and medical service to access all important information (including tasks to be performed along the daily schedule). With a few simple steps, the staff can retrieve the required patient data (including vital signs) and document new data directly from the patient. Upcoming tasks such as daily medication checks are thus better coordinated. Depending on the requirements for clinical process flows, applications for bed and equipment logistics as well as hygiene management are integrated to eliminate inefficient work steps and reduce the error rate.

Thanks to open system interfaces (including HL7), the data required for mobile nursing documentation, vital data recording, and medication monitoring can be retrieved without detours and made available to the nursing staff. Based on Honeywell's modern technology platform, the Systevo Mobile terminals were developed for hygiene requirements in the clinical environment. The devices are the perfect combination of user-friendliness, durability, software compatibility and long runtimes.

The required functional scope of Systevo Mobile is adapted to the respective requirements of the care facility and ensures long-term economic use of the investments made in the infrastructure. To close possible gaps in the technical requirements for integrating clinical and non-clinical systems, the system is based on a modular and scalable software model so that extensions are possible at any time.

Systevo Mobile

Tel-Connect Gateway

790M150 — **Tel-Connect Gateway for 80 rooms**



Systevo Tel Connect system server as a gateway for connecting mobile communication systems. Basic platform designed for a facility size of 80 rooms, 4 wards and 5 nursing staff per ward (20 in total). Extension licences required depending on system functions/size. Equipped with interfaces to IP-PABX (ETH/LAN), DECT system, BMS system (partly optional). Gateway with different configuration options to adapt the system to the requirements of the care facility. Incl. logging function. Compatible with Systevo Call Ackermann, equipped with system release V12.

Hardware = STC-200 Server including accessories:

- 19"" rack mounting (1 U).
- Power supply from 24/48 VDC and 115/230VAC (simultaneously usable for redundant power supply).
- 2x serial port RS232/RS422.
- System error relay output.
- CF card for software, data and licenses.
- Accessories: Serial connection kit, AC/DC connection cable, USB cable and service CD.

Software/Licenses = Systevo Tel-Connect V1.0 basic license:

- SIP trunk to a PBX.
- SIP-based alarm calls, text transmission and confirmation option via DTMF (if supported by the PBX).
- Call control via ESPA-X by the Systevo Nurse Call System (= SNCS) and via telephone.
- 20 broadcast cgroups with up to 5 participants can be set up.
- 100 information (announcements/texts) can be set up.
- 8 parallel communication channels.
- Up to 10 broadcast call processes active simultaneously.
- NTP synchronization.
- SNMPv1/v3 agent software.

790M150S — **SWA for Tel-Connect for 80 rooms**



Systevo Tel Connect Software Assurance for product 790M150.
Minor and major software upgrades.
Yearly renewal required.

Lizenzen für Systevo Tel-Connect

790M151 — **Extension license for 10 rooms**



Extension licence for 10 additional rooms with the following additional functions and features.

- 1 additional communication channel.
- 5 additional broadcast groups can be set up.
- 10 addtional information (announcements/texts) can be set up.
- max. 22 licences can be used. In conjunction with SIP callback the max. number of licences is limited to 17.

790M151S — **SWA for extension license for 10 rooms**



Systevo Tel Connect Software Assurance for product 790M151.
Minor and major software upgrades.
Yearly renewal required.

Systevo Mobile

790M152 — Extension license for Advanced Call Forwarding process for 100 rooms



Extension licence for Advanced Call Forwarding process for up to 100 rooms with the following additional functions and features.
- Subscriber groups with up to 25 subscribers (instead of 5) configurable.
- 300 additional broadcast groups and 300 additional information configurable.
- 10 voice conferences with incoming and/or outgoing calls configurable.
- Up to 6 simultaneous independent voice conferences. (Note: 1 active voice conference simultaneously for every 5 communication channels).
- A maximum of 3 licences can be used.

790M152S — SWA for extension license for Advanced Call Forwarding process for 100 rooms



Systevo Tel Connect Software Assurance for product 790M152.
Minor and major software upgrades.
Yearly renewal required.

790M153 — Extension license for ESPA 4.4.4./ESPA-X



Extension licence for ESPA 4.4.4./ESPA-X interface with the following additional functions and features.
- Either serial connection via ESPA 4.4.4 or LAN-based via ESPA-X.
- Support of alarm calls triggered by the fire alarm system.
- A maximum of 1 licence can be used.

790M153S — SWA for extension license for ESPA 4.4.4./ESPA-X



Systevo Tel Connect Software Assurance for product 790M153.
Minor and major software upgrades.
Yearly renewal required.

790M160 — Extension license for SIP Callback (10 channels)



Extension licence for SIP-callback with the following additional functions and features.
- SIP connection to the SNCS with max. 10 channels (SNCS directly registered at STC).
- 5 additional communication channels.
- Automatic callback calls from the reached nurse/caregiver to the calling patient.
- Number of simultaneous callbacks limited by the number of SNCS voice channels, the number of voice channels to the PBX and the total number of communication channels in the server (note: a callback requires two communication channels).
- A maximum of 1 licence can be used.

790M160S — SWA for extension license for SIP Callback (10 channels)



Systevo Tel Connect Software Assurance for product 790M160.
Minor and major software upgrades.
Yearly renewal required.

790M161 — Extension license for for messaging package (50 devices)



Extension licence for Mobile Messaging with the following additional functions and features.
Intelligent text messaging per 50 devices and per interface or device type:
- Systevo-Mobile-Client (= SMC) interface incl. ateway module (Attention: Does not include SMC control licenses.)
- ASCOM OAP interface
- Mitel OM-AXI interface
- Spectralink DECT interface
- A maximum of 5 licences can be used.

Systevo Mobile

790M161S — SWA for extension license for for messaging package (50 devices)



Systevo Tel Connect Software Assurance for product 790M161.
Minor and major software upgrades.
Yearly renewal required.

790M162 — Extension license for Mobile client for Systevo Mobile smartphones (5 devices)



Extension licence for 5 Mobile Clients (Honeywell phones) with the following additional functions and features.
- SMC connection licenses for simultaneous connection to 5 SMCs (version 1.0) on Systeo-Mobile smartphones (with Android V8/V9 or iOS 13).
- 1x messaging package required per 50 SMCs.
- A maximum of 40 licenses can be used.

790M162S — SWA for extension license for Mobile client for Systevo Mobile smartphones (5 devices)



Systevo Tel Connect Software Assurance for product 790M162.
Minor and major software upgrades.
Yearly renewal required.

790M163 — Extension license for Mobile client for non-Honeywell smartphones (5 devices)



Extension licence for 5 Mobile Clients (Android/other phones) with the following additional functions and features.
- SMC connection licenses for simultaneous connection to 5 SMCs (version 1.0) on any smartphones (with Android V8/V9 or iOS 13).
- 1x messaging package required per 50 SMCs.
- A maximum of 40 licences can be used.

790M163S — SWA for extension license for Mobile client for non-Honeywell smartphones (5 devices)



Systevo Tel Connect Software Assurance for product 790M163.
Minor and major software upgrades.
Yearly renewal required.

790M164 — Extension license for Personal emergency call (5 devices)



Extension licence for Personal Emergency Call System with the following additional functions and features.
- Possibility to submit emergency calls (automatic and deliberate) per 5 Systevo-Mobile-Clients.
- A maximum of 20 licences can be used.

(note: 1x STC messaging package (per 50 SMCs) and 1x SMC control licenses (DE3L-Y5SMC or DE3L-Y5DMC) per 5 SMC required.)

790M164S — SWA for extension license for Personal emergency call (5 devices)



Systevo Tel Connect Software Assurance for product 790M164.
Minor and major software upgrades.
Yearly renewal required.

Systevo Mobile

790M170 — Extension license for Emergency telephony package



Extension licence for Emergency Telephony support with the following additional functions and features.

- Local emergency PBX functionality for 5 (additional) local SIP telephones (e.g. mobile DECT phones).
- Calls between each other, with SNCS and with subscribers in the telecommunications network.
- Backup in case of a breakdown of the facility's standard PBX (possibly Cloud-based).
- A maximum of 20 licences can be used.

790M170S — SWA for extension license for Emergency telephony package



Systevo Tel Connect Software Assurance for product 790M170.
Minor and major software upgrades.
Yearly renewal required.

790M171 — Extension license for Crisis communication feature (50 users)



Extension licence for CRISIS connunication support with the following additional functions and features.

- Broadcast groups with up to 50 subscribers configurable.
- Up to 20 (instead of usually 10) process resources for simultaneous active broadcasts or conferences.
- High priority processes configurable that cause low priority processes to terminate.
- Broadcasts with support for function groups and info calls.
- Broadcast calls with current announcement to record ad-hoc via telephone.
- Broadcasts with the option to enter the number of subscribers to be reached.
- Broadcasts with activation code and/or security codes.
- Sending of info and result e-mails.
- Support of time profiles incl. holiday table for digital inputs and notifications.
- Special conferences for emergency conferences in the context of the automation of the escape and rescue plan according to the workplace ordinance.
- A maximum of 1 licence can be used.

790M171S — SWA for extension license for Crisis communication feature (50 users)



Systevo Tel Connect Software Assurance for product 790M171.
Minor and major software upgrades.
Yearly renewal required.



Systevo Guard

System description	118
Central components	119
Transponder	120
Accessories	121

System description

Systevo Guard is a real-time localisation and positioning system for patients and residents requiring protection.
The system offers - unobtrusively and effectively - efficient assistance with looking after people in care facilities.
The benefit of the system lies in the creation of virtual protection areas, in which the person requiring protection, as well as care staff, visitors and other residents can move freely, without feeling restricted or locked in. This improves the quality of life of persons requiring protection and offers the utmost safety. This relief reduces the care effort for the care service and thereby has a positive effect on the entire working atmosphere.
It is essentially comprised of three components: the positioning hardware (reception and transmission units), the software and the RFID transponders.
The communication between the transponders and the receiving units is bidirectional and enables real-time localisation. The transmission units transmit position information to the transponders. Together with their own, unique code,the transponders send this information to the receiving unit. Escalation routines are stored in the Systevo Guard software, which allow various alarm scenarios.
Precisely defined protection areas
The transmission units gener4ate a spherical detection field within buildings of approx. 5 m in radius. To cover larger areas of up to 375 m2, a master transmission unit is simply replaced by several slave units. The reception units record the data from transponders within a radius of 25 m, in outdoor areas, up to 250 m. This way, all areas can be precisely secured.

Application:
In the simplest case, a transmission/reception unit is installed in a door area, which produces a spherical recording field with a maximum radius of 6 m. If necessary, additional antennas are used, which enable optimum adaptation to the structural conditions. The reception/transmission unit has the transponders of the patients and care staff allocated to it.
If one of the transponders enters the recording field, it transmits its code. The sent code is evaluated by the unit: If it is a patient transponder, a reaction occurs, e.g. a call is activated in the switched-on call system, logged, if desired, and signalised to the relevant area according to the stored allocation. Forwarding of the message as text message, voicemail and similar is also possible.
The call is omitted if a care transponder is identified, individually or in combination with a patient transponder. However, other activities can also be allocated, if necessary: For example, door closers or lift control units can be connected. In addition to personal safety, the system can naturally also be used for device safeguarding and device logistics. Due to the modular system approach, flexible solutions are possible with centralised technology for networking transmission/reception units. The configuration and allocation of device settings then takes place conveniently using a graphic user interface. Therefore, various implementation options are available. These range from the identification of a walking direction right up to the implementation of specific monitoring, identification and signalling applications.
The components listed in the catalogue are only a selection of frequently used articles. For specific, particularly networked systems, numerous additional components are available, with which even complex security solutions can be realised. Detailed information about this is available upon request.

790P100 Transceiver unit "Universal V"



Active transponder system with an adjustable range of up to 6 m of radius, safe three-dimensional detection of patient transponders and nursing transponders. Consisting of an antenna unit (868 MHz Operating frequency, 125 kHz quiescent frequency), of an evaluation unit with relay contacts (changer), built-in signal transmitter and 230 V AC- power pack (installed). With automatic field regulation (to the extent possible) if interference is detected in the detection range. Expandable with relay card for group identification and an external additional antenna. Signaling of an alarm via the integrated relay contact e.g. for forwarding to the call system. Alarm suppression in case of active confirmation through a nursing transponder (beyond the active detection range, radius dependent on characteristics of the building: at most approx. 30 m), besides, if the nursing transponder is detected within the detection range of the transceiver unit. Battery monitoring of the transponders with fault alarm if the battery capacity of 40% is fallen short of. Possibility for the connection of an external Additional antenna e.g. LF-length range (item 790P031) in order to adapt the detection range.

Technical Data

Frequency	868 MHz
Type of protection	IP 42
Color	white
Weight	approx. 550 g
Dimensions	W: 230 mm H: 145 mm D: 35 mm

1x Antenna Unit (868 MHz operation frequency, 125 kHz stand-by frequency)
1x Relay contacts control unit (investors)
1x Built-in signal transmitter
1x 230V power supply (built-in)

790P103 Transceiver unit "Universal V IP64"



Like item 790P100, however, in the outer housing with moisture protection IP64 / environmental protection class III.

790P120 Patient transponder "pendant" V2



Patient transponder with three-dimensional effect antenna and battery monitoring.

Version 1 available until 30.06.2020.
Version 2 available from 01.07.2021.

790P122 Patient transponder " watch "



Patient transponder with three-dimensional effect antenna and battery monitoring. The bracelet can only be opened with a magnetic key.

790P213 Dementia transponder with strap



Dementia transponder with three-dimensional effect antenna and battery monitoring. The bracelet can only be opened with a magnetic key.

Technical Data

Operating voltage	3 V DC
Ambient temperature	5 °C ... 55 °C
Air humidity	< 20-90 %
Protection class	IP67
Material	PC-ABS Leather with buckle
Color	black (housing)
Weight	approx. 26 g
Dimensions	W: 50 mm H: 47 mm D: 17 mm

Available from 01.03.2020
Replacement for 790P124

790P121 Patient transponder "watch dummy" V2



Patient transponder with three-dimensional effect antenna and battery monitoring. The bracelet can only be opened with a magnetic key.

Version 1 available until 30.06.2020.
Version 2 available from 01.07.2021.

790P212 Care giver transponder with button and clip



Care transponder with one-dimensional-looking antenna and battery monitoring, with integrated button for call suppression and call cancellation. This transponder is not suitable as patient transponder.

Technical Data

Operating voltage	3 V DC
Ambient temperature	5 °C ... 55 °C
Air humidity	< 20-90 %
Protection class	IP67
Material	PC-ABS
Color	grey
Weight	approx. 26 g
Dimensions	W: 50 mm H: 47 mm D: 17 mm

Available from 01.03.2020
Replacement for 790P121

790P053 **Magnetic key**



Magnetic key integrated in a bag to open the magnetic fasteners (white button and bracelet). For nursing personnel only.

790P123 **Spare bracelet for transponder 790P121 (V2) and 790P213**

Spare strap for transponder in strap case (Product no. 790P121 (V2) and Product no. 790P213).



790P051 **Spare fastener**

Complete additional magnetic fastener (white button)

5 pcs

790P052 **Spare bracelet for transponder 790P122**

Spare strap for transponder in watch case (Product no. 790P122).

790P054 **Spare bracelet for transponder 790P121 (V1)**



Spare strap for transponder in strap case (Product no. 790P121 (V1)).

Notes



Systevo DECT

System description	124
Central components	125-128
Mobile units	129-130

System description

With Systevo DECT, a wireless communication solution is available, which has been significantly expanded with respect to its upgrading options with respect to the functionalities. The system can be optimally adapted to existing telecom systems via analogue extension connections or via VoIP/ SIP interface and supplements these with the mobile alarm functionality and the wireless DECT telephony. The existing call system is connected to the communication system via a standardised interface: Calls are displayed directly in the displays of the mobile devices. Through the allocation of various priorities and ring tones, the care staff can immediately identify the importance of an incoming call message, without needing to pick up the mobile end device.
With the system, additional communication systems are unnecessary, as the care staff can use the advantages of mobile voice communication and the text message services through a single end device. Alternative end devices may also be use for office applications. **Centre for up to 255 base stations**
The heart of the system is the modular central unit. It regulates the communication between the mobile devices registered in the system and the connected telecom system and also receives the messages from the call system. Furthermore, it controls the voice and data signals between the base stations in the entire transmission/reception network. The flexible system structure allows step-by-step system upgrading to up to 255 base stations and around 1,000 mobile devices. Repeaters, with which the transmission ranges of the base stations can be enlarged significantly, ensure additional scope. Due to this upgrade, Systevo Call Ackermann is also appropriate for use in medium-sized to large care facilities.**Suitability for day-to-day use and highest security**
The transmission of the data in this system takes place in tapping-protected mode. In addition to the fulfilment of the highest security standards, the system offers the highest voice quality. A maximum security standard also formed the basis for the conception of the mobile devices. In addition to the appealing design, they also distinguish themselves with their particularly robust structure: The rubberised surface softens jolts upon impact and the IP64 moisture protection prevents the penetration of moisture in rough day-to-day care, as well as during cleaning.
An additional safety aspect is for the protection of care staff, for example, in case of attacks by awkward residents. The system has the option for deliberate or non-deliberate alarm activation. A deliberate alarm is activated by the person who has had an accident pressing an alarm button on the end device. Via a localisation function, the position of the person can be determined and the accident sites can be displayed on a layout map. A non-deliberate alarm is activated automatically with a tear-off contact or a position sensor in the end device after a defined period of time, for example, if the person suffering the accident is unconscious or cannot respond for other reasons.
Long-term investment security
Due to its integration capability and the modular system structure, Systevo Call Ackermann offers the highest investment security. The system is independent from the telecom system and can also continue being used when the same is replaced, regardless of the new technology is an analogue or VoIP system. To upgrade existing Systevo Call Ackermann systems, it is possible to replace the previous centre, so that the customer is always up-to-date with an upgrade. Base station, mobile devices and repeaters may continue to be used and can be upgraded, if necessary.

790D150

Systevo DECT central unit



Central unit as basic housing for the telecommunication system according to the DECT/GAP standard for upgrading a telephone system with analogue extension participants and/or VoIP participants. The modular system upgrade of the central unit in accordance with the customer requirements with a CPU card and various plug-in cards for the administration of the DECT base stations and extension users (a/b and VoIP/SIP). In a Systevo DECT system, up to 250 base stations and 500 DECT telephones can be used. The assembly takes place in a 19" installation cabinet or alternatively in connection with the optional wall bracket.

Technical Data

Frequency range	1880 MHz ... 1900 MHz
Ambient temperature	0 °C ... 40 °C
Air humidity	< 20 %
Mounting	for installation in rack housing
Weight	approx. 5,34 kg without power supply (max. 12 kg with power supply units)
Dimensions	W: 422 mm H: 177 mm D: 330 mm

Systevo DECT central unit

Features

- 1 central casing with Backplane
- 1 Power supply unit for the supply of the plug-in cards
- Max. installation of 1 CPU-card and 8 further plug-in cards
- For more than 4 "Base station control units", a separate power pack is necessary
- Redundancy operation possible with the 2nd power pack

Accessories

790D001 Connection cable 5 m PC
790D155 Alternatively 790D156 CPU card for central unit 19"
790D160 Control unit base station (8)
790D170 Alternatively 790D175 PABX interface card (8 a/b or 16 a/b)
790D177 PABX interface card VoIP/SIP
790D180 Power supply unit for central unit 19"
790D185 Wall bracket for central unit 19"

790D160

Base station interface card (8)



Plug-in card for the central unit and for controlling up to 8 wired base stations. The control unit is integrated into the Systevo DECT central unit and processes the communication and control of the voice and data signals between the connected base stations and the wireless DECT telephones according to the DECT/GAP standard.

Technical Data

Frequency range	1880 MHz ... 1900 MHz
Ambient temperature	0 °C ... 40 °C
Dimensions	W: 45 mm H: 140 mm D: 200 mm

With more than 4 control units for base stations, another mains appliance is necessary for the central processing unit.

Features

Inputs / outputs:

- Interface for 8 base stations
- Connections: RJ45
- Integrated power supply for base stations
- status LEDs

Accessories

583486 Patch Cable, 1 m

790D175

PABX Interface card for 8 a/b extension subscribers



Similar to item790D170, but for maximum 8 DECT terminal devices.

Technical Data

Power supply	via central control unit
Ambient temperature	0 °C ... 40 °C
Dimensions	W: 45 mm H: 140 mm D: 200 mm

Features

Inputs/outputs:

-
- Interface for 8 base stations
- Connection technology: RJ45
- integrated power supply of the base station
- Status LEDs

Accessories

583486 Patch Cable, 1 m

790D156

CPU card for Systevo DECT central unit, without link option



CPU card for installation in the central unit. With a processor unit, serial interface and ETH connection, in order to network several central units. The CPU card is integrated into the Systevo DECT central unit and processes the communication between the DECT end devices registered in the system and the connected telecom system via analogue extension users or the VoIP/SIP interface. This unit also takes on the control of the voice and data signals between the individual base stations and repeaters in the entire transmission/reception network. The central unit is connected to a workstation via the serial interface (RS232). Use of the serial interface for the configuration of the overall Systevo DECT system and for transmission of ASCII text messages (SMS paging) of a Systevo Call Ackermann connected to the workstation. Option for remote diagnosis for the system analysis and services via remote access.

Features

Inputs/outputs:

- Serial interface RS232
- ETH-LAN interface
- status LEDs

Technical Data

Frequency range	1900 MHz ... 1880 MHz
Ambient temperature	0 °C ... 40 °C
Dimensions	W: 45 mm H: 140 mm D: 200 mm

Accessories

583486 Patch Cable, 1 m

790D177

PABX-interface card VoIP/SIP



Plug-in card for the central unit for administering up to 32 simultaneous voice channels for DECT end devices via VoIP/SIP interface of the telecom system. The connection of the PABX-interface card VoIP/SIP and the CPU card of the central unit with the telecom system takes place via each of one ETH-LAN interface. The plug-in card card is integrated into the Systevo DECT central unit and processes the communication and control of the voice and data signals between the connected telecom system and the wireless DECT telephones. Different performance features, such as “query” or “CLIP” take place via the basic scope of function defined in the SIP protocol. Compatibility with telecom systems upon request.

Features

Inputs / outputs and features:

- VoIP/SIP interfaces for 32 voice communication channels
- Audio codec support (SIP)
- G.711 A-law /µ-law
- G.726 (32kbps - 4 bit ADPCM)
- ETH-LAN interface
- status LEDs

Technical Data

Power supply	via central control unit
Ambient temperature	0 °C ... 40 °C
Dimensions	W: 45 mm H: 140 mm D: 200 mm

Accessories

583486 Patch Cable, 1 m

790D030 DECT base stations



For voice and data signal transfer (up to 4 parallel voice channels) between a base station and the mobile devices.
Data transfer and power supply of the base station are carried out using a two-wire connection (twisted pair cable) from the control card for the base stations (max. distance of 1000 m).
Maximum transmission range: up to 50m indoors (based on the composition, structure and materials used) and up to 300 m outdoors. Base station is wired using the provided junction box.

Technical Data

Operating voltage	48 V DC
Power consumption	1.5 W 1.5 W
Frequency range	1880 MHz ... 1900 MHz
Ambient temperature	0 °C ... 40 °C
Mounting	wall mounting (inside)
Weight	approx. 200 g
Dimensions	W: 150 mm H: 160 mm D: 36 mm (including antenna)

DECT-Base Station

Features

- 1 base station for up to 4 concurrent speech channels

790D180 Power supply unit for Systevo DECT central unit



The mains appliance serves for the power supply of the central processing unit as well as the integrated plug-in unit cards and the connected base stations. A second mains appliance will be needed if more than 4 control unit base stations per central processing unit are being used. In redundancy mode, up to 4 mains appliances are being used.

Features

- Required for redundancy
- Required for use of more than 4 control units

790D001 Connection cable - serial (spare part)



Optional unit for alternative wall mounting of central control unit.

790D159 Patch panel 12 x CAT5 on LSA-plus



Compact RJ 45 Patchpanel with 12 x CAT5 jacks and LSA plus terminals. Use to the wiring of the plug-in cards of the central processing unit (e.g. when wall mounting) in order to connect the base stations and the participants of the PABX (a/b or VoIP) with the central processing unit. Suitable for wall mounting.

Technical Data

Ambient temperature	0 °C ... 40 °C
Color	light gray, similar to RAL 7035

Features

Inputs / outputs:

- 12 x RJ45-Jacks, shielded
- 12 x LSA-plus ports
- Cat 6 / Class E according to ISO/IEC11801 (9/2002) and EN50173

Accessories

583486 Patch Cable, 1 m

790D500

DECT-Telephone Series D5 Basic



Robust DECT end device, which is optimized for use in care facilities. The shock-protected housing with a rubber gasket surround is equipped with an antimicrobial surface and is resistant to disinfectants. Dust-proof and splash-proof (protection type IP65), the device is prepared for tough day-to-day use and is available to the user with high call times and standby times, even during long shifts. As a mobile device in accordance with the DECT/GAP standard, it can be used for cordless telephone calls and for transmitting data signals of system messages in conjunction with the call system (calls, alarms, technical messages, faults). Incoming messages are shown on the high-quality color display and notified acoustically according to the pre-defined priority. Also designed with a vibration alarm, in order to signal messages in every situation. Message memory for up to 10 messages, which can be repeatedly queried and deleted. Fitted with a 7-row illuminated color display, number and function keys and a high-quality lithium-ion rechargeable battery. Simple menu guidance with intuitive operation in 13 different national languages using the function keys. A comprehensive address book is available, with up to 200 entries (1000 telephone numbers). Cordless telephony via an optional headphone (with microphone) or also in hands-free mode via the integrated loudspeaker.

Technical Data

Frequency range	1880 MHz ... 1900 MHz
Screen diagonal	4,5 cm
Weight	approx. 0,14 kg (incl.battery)
Dimensions	W: 53 mm H: 152 mm D: 27 mm

The service life of a battery depends on how often the battery is charged (max. approx. 500 charge cycles). At 2 charges per day, this means approx. 12 months. To maximize the battery life, the battery must always be fully charged. Do not start charging until the battery display is nearly empty
(approx. 20 %). If the standby time becomes too short, the battery should be replaced.

The DECT terminal device cannot be operated on a "Clino Call DECT central unit" (installations before 2012). Contact our sales representative to work out a suitable solution for you.

Features

- DECT telephone incl. battery
- Impact-resistant housing
- Headphone port
- Auxiliary loudspeaker
- 7-line color display
- Keypad and control keys
- Memory for 10 text messages (32 characters each)
- Address book (200 entries with 1000 numbers)
- Call list
- 13 menu languages
- Vibration device
- Different call signals
- Certifications: TBR6(DECT RF), TBR22(GAP), EMC ETS300329, CE

Accessories

790D501 Battery for DECT telephone series D5
790D503 Leather case for DECT telephone series D5
790D510 Charging cradle for DECT telephone series D5

790D520

DECT-Telephone Series D5, Alarm



Like item 790D500, however, in addition, with an alarm button and extended memory for up to 20 text messages (> 150 characters). Automatic selection when pressing the alarm button of a preprogrammed phone number. Prepared for the display of messages in different colors as well as with special symbols (planning in future firmware of the central processing unit, functional support of the call system necessary).

Technical Data

Frequency range	1880 MHz ... 1900 MHz
Screen diagonal	4,5 cm
Weight	approx. 0,14 kg (incl.battery)
Dimensions	W: 53 mm H: 152 mm D: 27 mm

The service life of a rechargeable battery depends on how often the battery has been charged (max. approx. 500 charging cycles). With 2 charges per day, this corresponds to approx. 12 months. In order to enable the maximum service life of the rechargeable battery, the charging process must always be fully completed. The charging process should only be started if the battery display is nearly empty
(approx. 20 %). If the standby time becomes too short, the rechargeable battery should be replaced.

The DECT terminal device cannot be operated on a "Clino Call DECT central unit" (installations before 2012). Contact our sales representative to work out a suitable solution for you.


Features

- DECT telephone incl. battery
- Impact-resistant housing
- Headphone port
- Auxiliary loudspeaker
- 7-line color display
- Keypad and control keys
- Memory for 10 text messages (32 characters each)
- Address book (200 entries with 1000 numbers)
- Call list
- 13 menu languages
- Vibration device
- Different call signals
- Alarm button
- Certifications: TBR6(DECT RF), TBR22(GAP), EMC ETS300329, CE

Accessories

790D501 Battery for DECT telephone series D5
790D503 Leather case for DECT telephone series D5
790D510 Charging cradle for DECT telephone series D5

790D510 Charging cradle for DECT telephone series D5



For charging the DECT phone series D5, equipped with high quality charging contacts and, hence, suitable for long-term use. The charging electronics is adapted especially for the batteries of this terminal device series: the continuous temperature monitor of the battery during the charging process allows an optimal battery life. Display of the charging process in the display of the DECT phone.

Single charging tray, mains plug

790D501 Rechargeable battery for DECT-telephone series D5



Battery as a replacement for the original battery of the DECT telephone series D5.

The service life of a rechargeable battery depends on how often the battery has been charged (max. approx. 500 charging cycles). With 2 charges per day, this corresponds to approx. 12 months. In order to enable the maximum service life of the rechargeable battery, the charging process must always be fully completed. The charging process should only be started if the battery display is nearly empty (e.g. 20 %). If the standby time becomes too short, the rechargeable battery should be replaced.


790D503 Leather case for DECT-telephone Series D5



Leather bag with viewing window to protect against damage and soiling of the DECT- phone series D5. For charging the DECT- phone series D5, the device must be taken out of the leather bag.





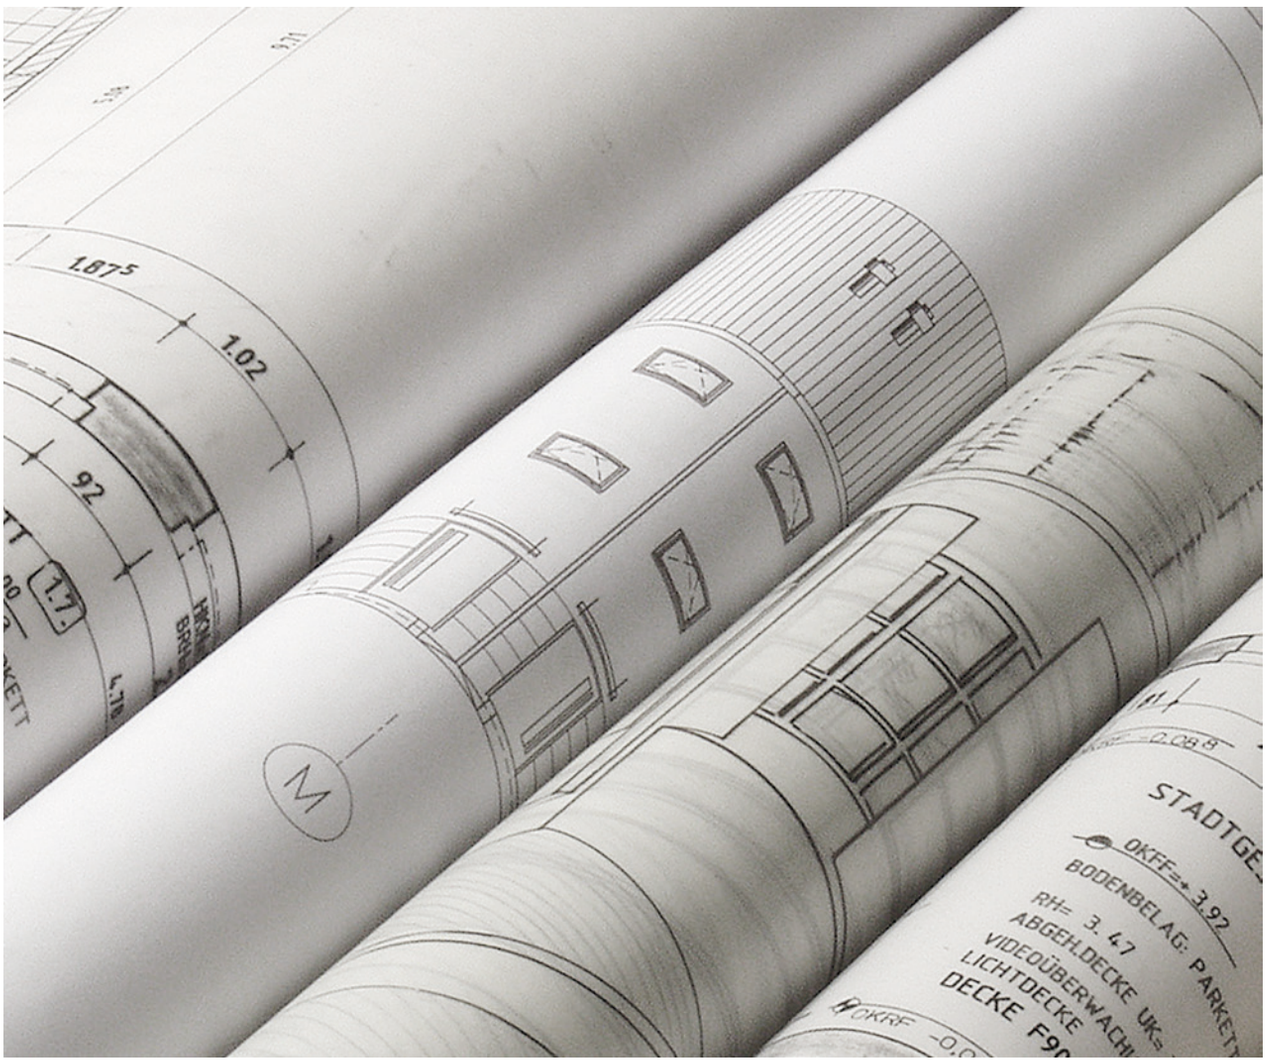

Appendix

	Part No. Index	133
	Keyword Index	134-136

Appendix

Part No. Index

Part No.	Page
70005BZ	102
70006D	70
70007A	102
70007B	102
70047A	70
72515Z1	105
72515Z2	105
72590D	54
72590L0	40/56
72590L1	40/55
72590L2	40/56
72590T1	57
72590T2	57
72591D	39/53
72592D	55
72641A2	30
72641Z1	30
72642D	29
72800A	28
72800Z1	29
72800Z2	29
73090A	67
73090B	71
73090C	72
73090D	68
73091A	61
73091B	62
73091C	40/63
73091E	64
73091F	65
73091G	38
73091H	66
73091I	67
73091Z1	108
73310F2	101
73310G2	102
73310J2	102
73312C1	101
73312C2	101
73312C3	101
74160B1	81
74160C1	83
74160Z1	99
74160Z3	99
74161B1	87
74161B3	88
74161B4	89
74161B9	76
74162B1	84
74162C1	86
74163B1	90
74163B3	92
74163B4	94
74163B7	96
74163B9	77
74163C1	91
74163C3	93
74163C4	95
74163C7	97
74163C9	78
74164B1	82
74165B3	98
74165B9	79
74165C9	80
74166B1	85
74170A9	60
74170Z1	61
74189A	69
74199A	70
74659B1	104
74659Z4	104
74659Z5	105
74659Z6	105
74910D1	59
74913EJ	103
74913EJ1	103
74913FJ	103
74913FJ1	103
74920A1	48
74920CJ	51
74920Z1	49
74920Z2	50
74920Z3	50
74920ZJ	51
765M430	12
765M440	11
765M450	13
76919JP	51
790D001	127
790D030	127
790D150	125
790D156	126
790D159	127
790D160	125
790D175	125
790D177	126
790D180	127
790D500	129
790D501	130
790D503	130
790D510	130
790D520	129
790M150	113
790M150S	113
790M151	113
790M151S	113
790M152	114
790M152S	114
790M153	114
790M153S	114
790M160	114
790M160S	114
790M161	114
790M161S	115
790M162	115
790M162S	115
790M163	115
790M163S	115
790M164	115
790M164S	115
790M170	116
790M170S	116
790M171	116
790M171S	116
790P051	121
790P052	121
790P053	121
790P054	121
790P100	119
790P103	119
790P120	120
790P121	120
790P122	120
790P123	121
790P212	120
790P213	120
79823B1	26
79823C2	26
79823C3	26
79823D1	27
79823F1	27
79CM307	43
79CM307Z1	44
79CM307Z2	45
79CM307Z3	46
79CM307Z4	47
79CM407	37
79SW400	15
79SW401	15
79SW402	16
79SW403	16
79SW410	16
79SW411	17
79SW412	17
79SW413	17
79SW414	17
79SW415	17
79SW450	18
79SW451	18
79SW452	19
79SW453	19
79SW454	20
79SW455	20
79SW456	21
79SW457	21
79SW458	21
79SW459	21
79SW460	22
79SW461	22
79SW470	22
79SW471	22
83WE130	24
83WE140	23
83WE145	23
83WE150	25
83WE160	25
83WE170	25
83WE200	24
88160B	74
88880A3N	69
88880C3N	71
88880C5	69
88880D3	70
88881D3N	68
88881G3N	68
88881H3N	71
88881M3N	72
88882A3N	72
88882B3N	73
88885A3	62
88885AC	63
88885B3	63
88885C3	40/64
88885F3	65
88885G3	38
88885H3	29
88885I3	67
88894AL1	110
88894BL1	110
88894CL1	110
88894DL1	110
88910N3N	69
88914A3	107
88914A5	73
88914B5	73
88914C5	74
88915A5	108
88915B5	108
88915C5	109
89371C	74
89371D	30
89734AH1	106
89734AJ1	106
89734AK1	106
89954C10	14
89954C6	33
89954C6E	34
89954C7	33
89954C7E	35
89954C8	34
89954C8E	35
89954C9	35
89954CA	34
89954CB	32
89954R4	31
89954R5	31
89954R6	32

Keyword Index

Keyword	Page
A	
Adapter with pull cord and knob	69
Adaptor for BM99-connection board for bed head unit	108
Auto-release plug system	70
Auto-release plug system - A-coded	69
B	
Base station interface card (8)	125
Blind cover plate for Systevo units	29
Browser license for STIP/SCVIP (10 dev.)	22
Browser license for STIP/SCVIP (25 dev.)	22
C	
Call / cancel push-button	72
Call button for pneumatic actuation	70
Call Button grey/red icon 25pcs	63
Call unit for pull cord adaptor	68
Call unit with Call button	67
Cancel push-button - PR 1 -	71
Care giver transponder with button and clip	120
Ceiling mount. Systevo info-disp.	105
Charging cradle for DECT telephone series D5	130
Connection board for contact interface	30
Connection cable - serial (spare part)	127
Connection Unit for Systevo Care View IP	38
Contact interface	30
Contact step mat wired	101
Contact step mat with integrated radio transmitter	101
Corridor databus splitter / repeater / terminator -active-	29
Cover plate for auto release plug	69
Cover plate for auto-release plug system (74199A)	70
Cover plate for call unit / pull function	69
Cover plate for pneumatic call unit	71
Cover plate for Systevo Connection Unit for SCVIP	38
Cover plate Systevo Audio Interface	67
Cover plate Systevo bed unit w/ mag socket and DIN7, button red/cancel button grey	62
Cover plate Systevo bed unit with magnetic plug system	65
Cover plate Systevo bed unit, DIN7 Call button red/cancel button grey	63
Cover plate Systevo call/cancel unit Call button red/cancel button green	40/64
Cover plate with button - blue -	68
Cover plate with button - red -	68
Cover plate with button - yellow -	72
Cover plate with button (green)	71
Cover plate with buttons - red-, - green -	72
Cover plate with keys -yellow-, -green-	73
CPU card for Systevo DECT central unit, without link option	126
Cradle for Systevo Call Smart	61
D	
DECT base stations	127
DECT-Telephone Series D5 Basic	129
DECT-Telephone Series D5, Alarm	129
Dementia transponder with strap	120
Duty room functions license for STIP (1 dev.)	20
Duty room functions license for STIP (10 dev.)	20
E	
Earth fault detector DIN VDE 0834-1: 2016-06	32
Electronic impulse switch 1 closer	74
Electronic relay 1 changeover contact	30
Extension license for 10 rooms	113
Extension License for 16 callback channels	17
Extension License for 2 callback channels	17
Extension License for 4 callback channels	17
Extension License for 50 additional rooms	16
Extension License for 8 callback channels	17
Extension license for Advanced Call Forwarding process for 100 rooms	114
Extension license for Crisis communication feature (50 users)	116
Extension license for Emergency telephony package	116
Extension license for ESPA 4.4.4./ESPA-X	114
Extension license for for messaging package (50 devices)	114
Extension license for Mobile client for non-Honeywell smart-phones (5 devices)	115
Extension license for Mobile client for Systevo Mobile smart-phones (5 devices)	115
Extension license for Personal emergency call (5 devices)	115
Extension license for SIP Callback (10 channels)	114
Extension License to support enhanced CP95 migration functionality	17
F	
Fixing-Clip, Systevo Call Easy	99
Frame for 1 cover plate (single)	73
Frame for cover plate (double)	73
Frame for cover plate (triple)	74
Frontcover for SEM/SCL (silver)	40/55
Frontcover for SEM/SCL (white)	40/56
G	
GBIC (GigaBit Interface Converter) module, type multimode	26
H	
Halogen-free system cable, 100 m bundle	106
Halogen-free system cable, 300 m cable drum	106
Halogen-free system cable, 500 m cable drum	106
Hand-held transmitter IP68, 868 MHz	102
Housing sm for power supply / UPS 5 A-10 A	34
I	
Insert for front cover for SEM (white) (5pcs)	40/56
L	
Labeling set for zone indicator lamp, 35 mm (accessories)	105
Labelling set for zone indicator lamp, 50 mm (accessories)	105
Leather case for DECT-telephone Series D5	130
LED lamp, clear	110
LED lamp, green	110
LED lamp, red	110
LED lamp, yellow	110
Licence for 1 Systevo room terminal for enabling the extended duty room functions	22
Licence for 10 Systevo room terminals for enabling the extended duty room functions	22
License to access Care Plan for Systevo Touch IP (10 dev.)	18
License to access Care Plan for Systevo Touch IP (25 dev.)	19
M	
Magnetic key	121
Mounting frame for cover plate (single)	107
Mounting, Systevo Call Easy	99
Multimode Fiber SC-LC Sx	27
N	
Network isolator EN 60601-1	27
P	
PABX Interface card for 8 a/b extension subscribers	125
PABX-interface card VoIP/SIP	126
Patch panel 12 x CAT5 on LSA-plus	127

Keyword Index

Keyword	Page
Patient transponder " watch "	120
Patient transponder "pendant" V2	120
Patient transponder "watch dummy" V2	120
Plastering Cover for Flash-mounting box	51
Pneumatic breath call unit (NCC) DIN-plug	102
Pneumatic pear push-button (NCC) DIN plug, 1.9 m	102
Power Supply /UPS 230 V AC-24 V DC 0.8 A	35
Power supply unit for Systevo DECT central unit	127
Pullcord with cancel function	70
R	
Radio receiver set 868 MHz	101
Radio receiver set with contact step mat	101
Rechargeable battery for DECT-telephone series D5	130
Replacement rechargeable battery for DC-UPS 20 A / 24 Ah	35
Replacement rechargeable battery for DC-UPS 5 A / 7 Ah	34
Replacement rechargeable battery for DC-USPS10 A / 15 Ah	35
Room Terminal Connection board for SRT	49
Room Unit Connection board for SRT	50
S	
Sealing kit for standard installations	74
Separate radio receiver, 868MHz	102
Single-phase power supply 24 V DC (20 A)	32
Single-phase power supply unit 24 V DC (10 A)	31
Single-phase power supply unit 24 V DC (5 A)	31
Single-phase UPS Module 230 VAC 19" installation (2 HE) / desktop unit	14
SIP telephony license for STIP/SCVIP (10 dev.)	21
Sm-Adaptor for flush mounting ZT99/95	50
Software FTC module for ESSER	25
Software FTC module for FAT of other brands	25
Software FTC module for NOTIFIER	25
Software module for communication system connection via ESPA-X	23
Software module for DECT/Paging system connection via ESPA 4.4.4.	23
Software module for VITAL function monitoring	24
Spare bracelet for transponder 790P121 (V1)	121
Spare bracelet for transponder 790P121 (V2) and 790P213	121
Spare bracelet for transponder 790P122	121
Spare fastener	121
Spare parts set for 74659B1	105
Spare set for Systevo Control IP+	29
Spare tubes for pneumatic call unit	102
Surface mount base (double)	108
Surface mount base (single)	108
Surface mount base (triple)	109
SWA for extension license for 10 rooms	113
SWA for extension license for Advanced Call Forwarding process for 100 rooms	114
SWA for extension license for Crisis communication feature (50 users)	116
SWA for extension license for Emergency telephony package	116
SWA for extension license for ESPA 4.4.4./ESPA-X	114
SWA for extension license for for messaging package (50 devices)	115
SWA for extension license for Mobile client for non-Honeywell smartphones (5 devices)	115
SWA for extension license for Mobile client for Systevo Mobile smartphones (5 devices)	115
SWA for extension license for Personal emergency call (5 devices)	115
SWA for extension license for SIP Callback (10 channels)	114
SWA for Tel-Connect for 80 rooms	113
System License for more than 500 rooms	16
System License for up to 100 rooms	15
System License for up to 250 rooms	15
System License for up to 500 rooms	16
System switch GS724Tv4 Layer 2, 24-Port	26
System-Switch, 8-port, 24 V DC	26
Systevo Audio Interface (SPDIF)	67
Systevo Audio Switch	66
Systevo Bed Unit, DIN-7 call socket, call and cancel buttons	62
Systevo Bed Unit, with magnetic plug system, 2 control outputs	65
Systevo Bed Unit, with magnetic plug system, 5 control outputs	64
Systevo Bed Unit, with magnetic plug system, DIN-7 call socket, call and cancel buttons	61
Systevo Call Easy, 2 light buttons, auto-release plug -A-, 3m, IP67	94
Systevo Call Easy, 2 light buttons, auto-release plug -A-, 5m, IP67	95
Systevo Call Easy, 2 light buttons, auto-release plug -L-, 3m, IP67	96
Systevo Call Easy, 2 light buttons, auto-release plug -L-, 5m, IP67	97
Systevo Call Easy, 2 light buttons, auto-release plug, 3m, IP67	92
Systevo Call Easy, 2 light buttons, auto-release plug, 5m, IP67	93
Systevo Call Easy, 2 light buttons, DIN-plug, 3m, IP54	84
Systevo Call Easy, 2 light buttons, DIN-plug, 3m, IP54, NOC	85
Systevo Call Easy, 2 light buttons, DIN-plug, 3m, IP67	90
Systevo Call Easy, 2 light buttons, DIN-plug, 5m, IP54	86
Systevo Call Easy, 2 light buttons, DIN-plug, 5m, IP67	91
Systevo Call Easy, 2 light buttons, for magnetic system connector, 3m, IP67	77
Systevo Call Easy, 2 light buttons, for magnetic system connector, 5m, IP67	78
Systevo Call Easy, 5 control buttons, auto-release plug, 3m, IP67	98
Systevo Call Easy, 5 control buttons, for magnetic system connector, 3m, IP67	79
Systevo Call Easy, 5 control buttons, for magnetic system connector, 5m, IP67	80
Systevo Call Easy, auto-release plug -A-, 3m, IP67	89
Systevo Call Easy, auto-release plug, 3m, IP67	88
Systevo Call Easy, DIN-plug, 3m, IP54	81
Systevo Call Easy, DIN-plug, 3m, IP54, NOC	82
Systevo Call Easy, DIN-plug, 3m, IP67	87
Systevo Call Easy, DIN-plug, 5m, IP54	83
Systevo Call Easy, for magnetic system connector, 3m, IP67	76
Systevo Call Smart	60
Systevo Care Plan system interface License	18
Systevo Care Unit (Call/Cancel fct.) with call / presence buttons	40/63
Systevo Care View IP station with 7" Display	37
Systevo Connection Board for Systevo Touch IP terminal, Databus	44
Systevo Connection Board for Systevo Touch IP terminal, Databus / IP (ETH-LAN)	45
Systevo Connection Board for Systevo Touch IP terminal, IP (ETH/PoE)	46
Systevo Connection Board for Systevo Touch IP terminal, IP (ETH/PoE), Databus	47
Systevo Control IP+	28
Systevo Corridor Lamp (SCL)	55
Systevo Dashboard license (10 dev.)	21
Systevo DECT central unit	125
Systevo DECT coupling	24
Systevo Display Unit with Call- and Cancel buttons	59
Systevo Electronic Module (SEM)	54
Systevo Electronic Module plus (SEM+)	39/53
Systevo Information Display (SINF)	104

Keyword Index

Keyword	Page
Systevo Nameplate (silver)	57
Systevo Nameplate (white)	57
Systevo protect terminal	51
Systevo Room Terminal (SRT)	48
Systevo Server (230 VAC) System-Release V12 Standard	13
Systevo Staff account extension license (+50 usr.)	19
Systevo Touch IP, 7" Display	43
Systevo Workstation (230 VAC) System-Release V12 Standard	11
Systevo Workstation Mini System-Release V12 for max. 200 rooms	12
T	
Tel-Connect Gateway for 80 rooms	113
Transceiver unit "Universal V IP64"	119
Transceiver unit "Universal V"	119
U	
UP installation box for Systevo Protect Room Terminal	51
UPS module 24 V DC (10 A) for 10 A power supply unit	33
UPS module 24 V DC (20 A) for 20 A power supply unit	34
UPS module 24 V DC (5 A) for 5 A power supply unit	33
V	
Vandalism-protected CALL Unit V2A	103
Vandalism-protected CALL Unit V2B	103
Vandalism-protected cancel Unit V2A	103
Vandalism-protected cancel Unit V2B	103
W	
Wall mounting adapter for SINF	104
Wall mounting kit for central processing unit 19”	126
Wall mounting kit, Systevo Call Easy	100
Wireless Extension license for STIP/SCVIP (10 dev.)	21
Wireless Extension license for STIP/SCVIP (25 dev.)	21

Honeywell Safety and Productivity Solutions
Intelligent Life Care | Ackermann

Novar GmbH
Forumstrasse 30, 41468 Neuss, Germany
www.ackermann-clino.com/en
info@ackermann-clino.com

Terms and Conditions:
www.ackermann-clino.com/en/legal-notice/

Part No. 054601EN
Catalogue Systevo Call Ackermann I EN | 05/24
© 2024 Honeywell International Inc.

THE FUTURE IS WHAT WE MAKE IT

Honeywell