
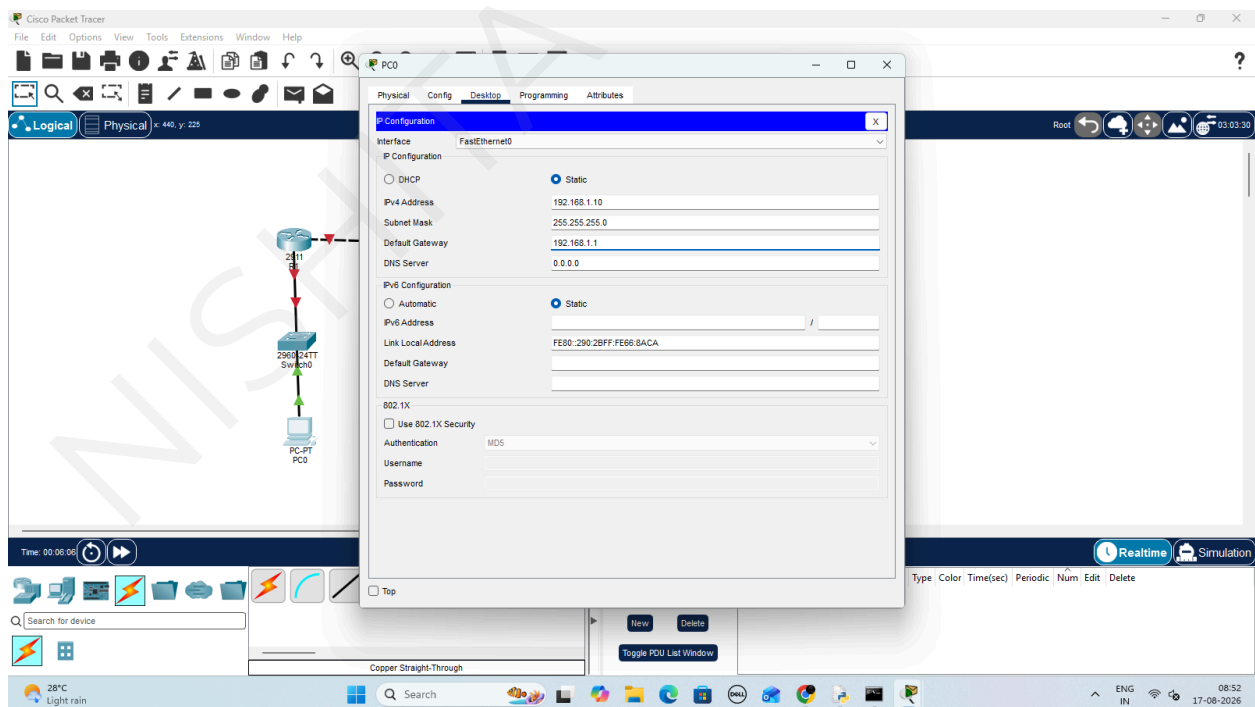




SHETH LUJ AND SIR MV COLLEGE

PRACTICAL NO 06



AIM : Configure IPsec on network devices to provide secure communication and protect against unauthorized access and attacks.

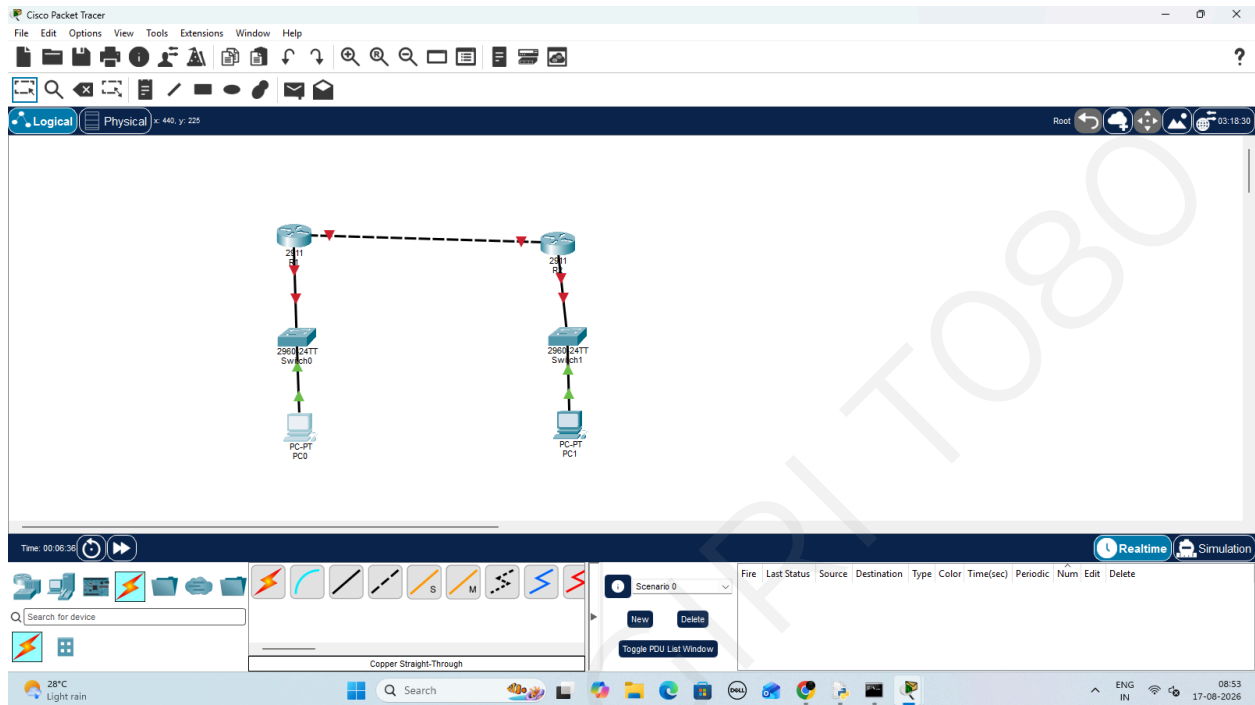

SHETH LUJ AND SIR MV COLLEGE

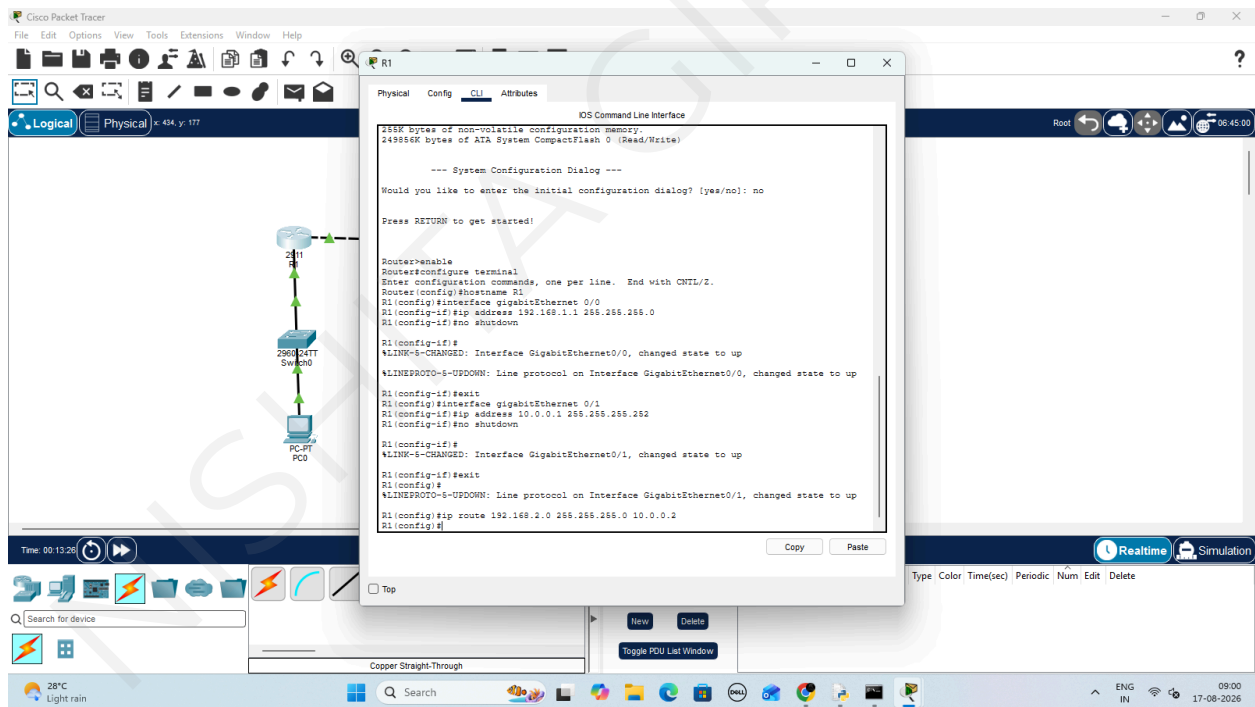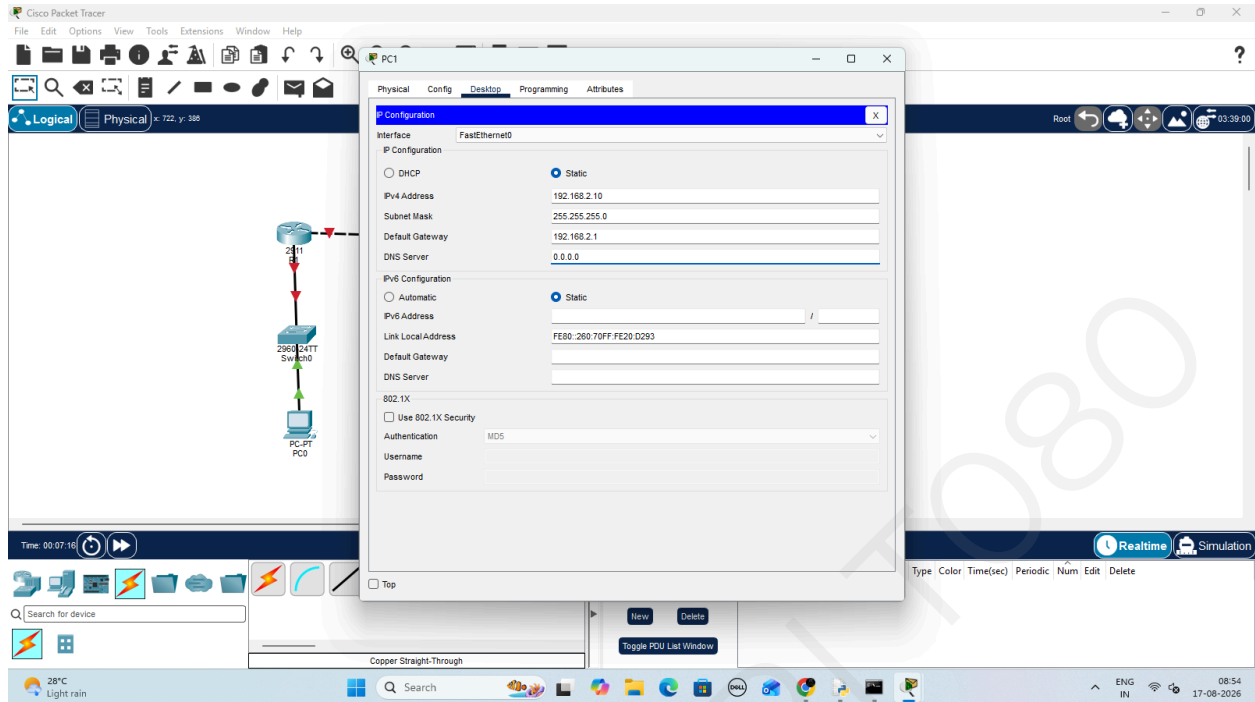

SHETH LUJ AND SIR MV COLLEGE

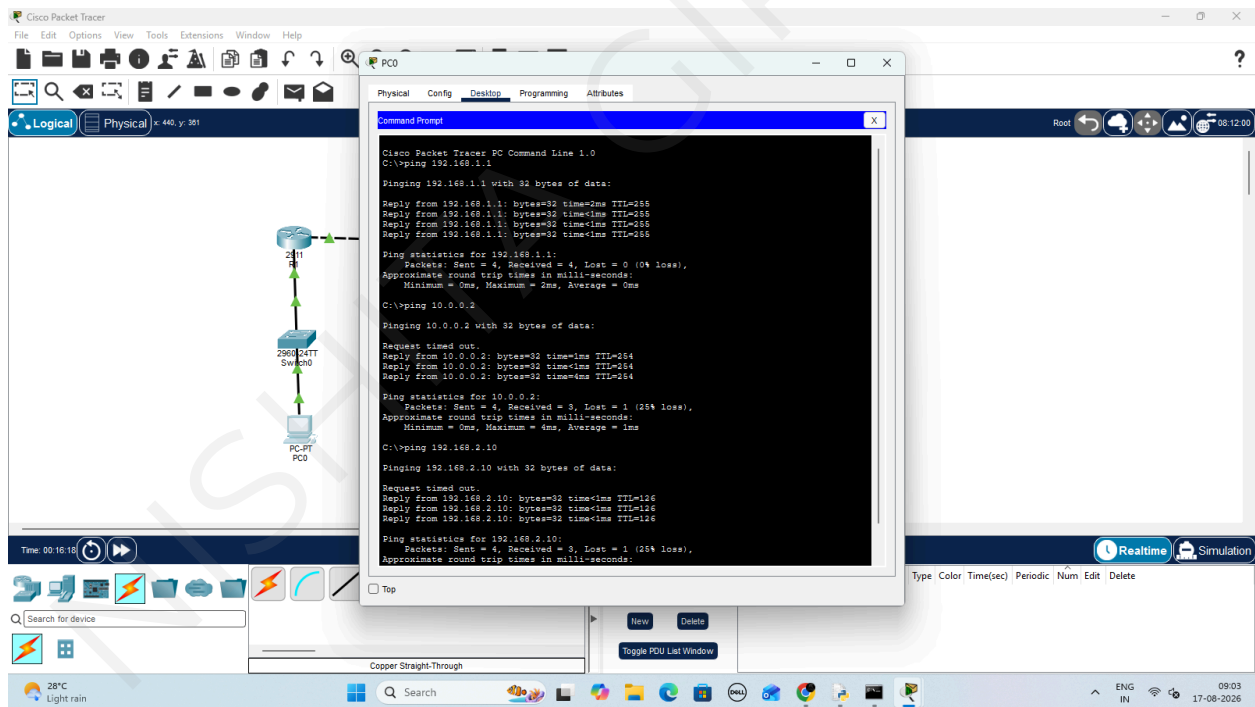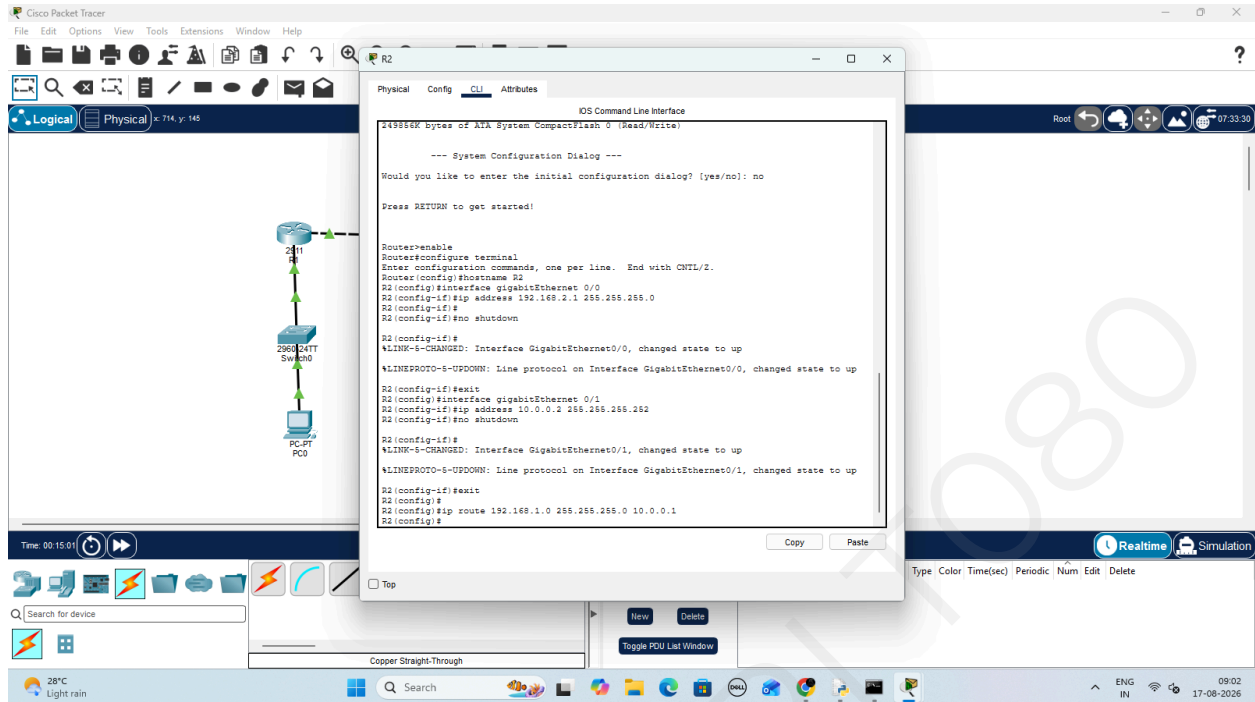

The screenshot displays the Cisco Packet Tracer interface. On the left, a network diagram shows a cloud connected to a 2960-KTT switch, which is connected to a PC-A. The top menu bar includes File, Edit, Options, View, Tools, Extensions, Window, and Help. The bottom status bar shows the time as 09:21 on 17-08-2020.

The main window is divided into two panes. The left pane shows the network diagram, and the right pane shows the terminal output for the PC-A. The terminal output is as follows:

```

Compiled Wed 18-Jul-07 04:14 by pt_team
Image text-base: 0x2100F910, data-base: 0x24729040

This product contains cryptographic features and is subject to United
States and local country laws governing import, export, transfer and
use. Delivery of Cisco cryptographic products does not imply
third-party authority to import, export, distribute or use encryption.
Importers, exporters, distributors and users are responsible for
compliance with U.S. and local country laws. By using this product you
agree to comply with applicable laws and regulations. If you are unable
to comply with U.S. and local laws, return this product immediately.


A summary of U.S. laws governing Cisco cryptographic products may be found at:
http://www.cisco.com/wll/export/crypto/tool/stqrg.html

If you require further assistance please contact us by sending email to
export@cisco.com.

Cisco C8502911/K9 (revision 1.0) with 491520K/32768K bytes of memory.
Processor board ID FTX15240082
3 Gigabit Ethernet interfaces
DRAM configuration is 64 bits wide with parity disabled.
512K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)

Press RETURN to get started!

R1>enable
R1#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#crypto isakmp policy 10
R1(config-isakmp)#encryption aes
R1(config-isakmp)#hash sha
R1(config-isakmp)#authentication pre-share
R1(config-isakmp)#group 2
R1(config-isakmp)#lifetime 86400
R1(config-isakmp)#exit
R1(config)#
  
```

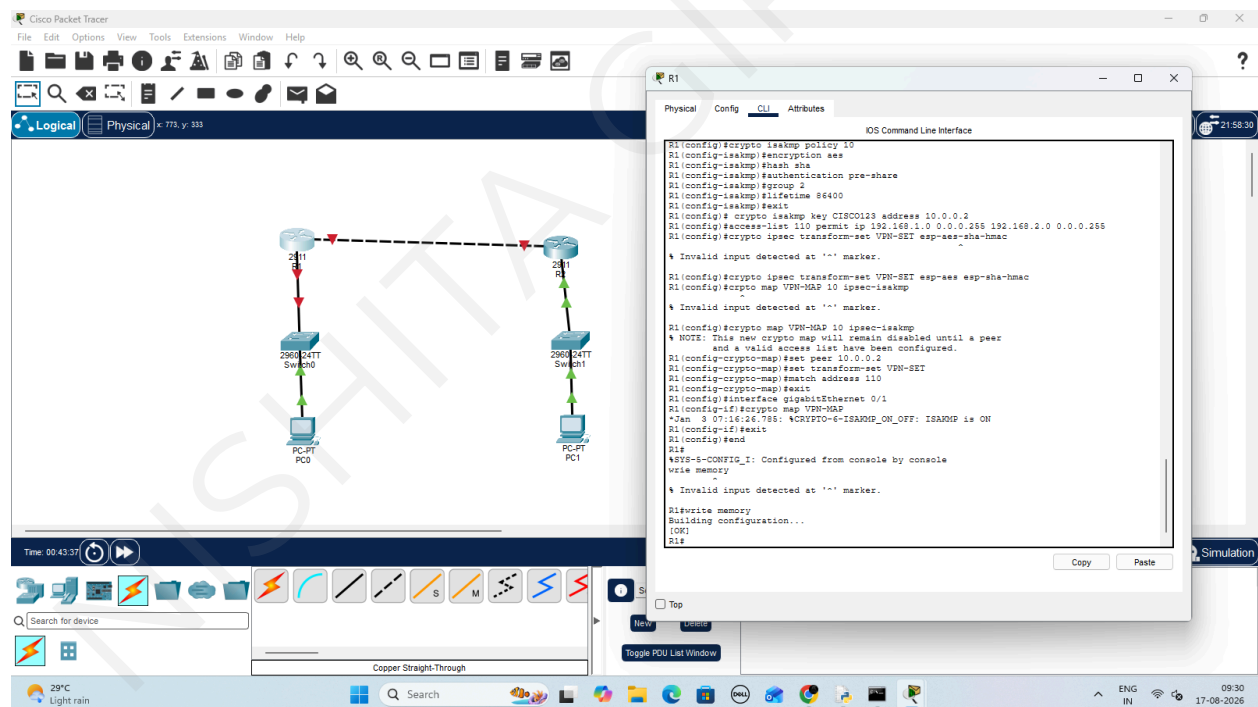

NISHITA GIRI T080
CYBER SECURITY PRACT 6

The screenshot displays the Cisco Packet Tracer interface. On the left, a network diagram shows a PC connected to a switch, which is connected to a router. The router is labeled '2000' and the switch is labeled '2000'. The PC is labeled 'PC-01'. The router's configuration is shown in the CLI window on the right.

The CLI window shows the following configuration:

```

Cisco IOS Command Line Interface

This product contains cryptographic features and is subject to United States and local country laws governing import, export, transfer and use. Delivery of Cisco cryptographic products does not imply third-party authority to import, export, distribute or use encryption. Importers, exporters, distributors and users are responsible for compliance with U.S. and local country laws. By using this product you agree to comply with applicable laws and regulations. If you are unable to comply with U.S. and local laws, return this product immediately.


A summary of U.S. laws governing Cisco cryptographic products may be found at:
http://www.cisco.com/wol/export/crypto/tool/stqrg.html

If you require further assistance please contact us by sending email to
export@cisco.com.

Cisco CISCO2811/K9 (revision 1.0) with 491520K/32768K bytes of memory.
Processor board ID FTK154002E
3 Gigabit Ethernet interfaces
DRAM configuration is 64 bits wide with parity disabled.
165K bytes of non-volatile configuration memory.
249956K bytes of ATA System CompactFlash 0 (Read/Write)

Press RETURN to get started!

R2#enable
R2#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
R2(config)#crypto isakmp policy 10
R2(config-isakmp)#encryption aes
R2(config-isakmp)#hash sha
R2(config-isakmp)#authentication pre-share
R2(config-isakmp)#group 2
R2(config-isakmp)#lifetime 86400
R2(config-isakmp)#exit
R2(config)#crypto isakmp key CISCO123 address 10.0.0.1
R2(config)#access-list 110 permit ip 192.168.2.0 0.0.0.255 192.168.1.0 0.0.0.255
R2(config)#crypto ipsec transform-set VPN-SET esp-aes esp-sha-hmac
R2(config)#
  
```

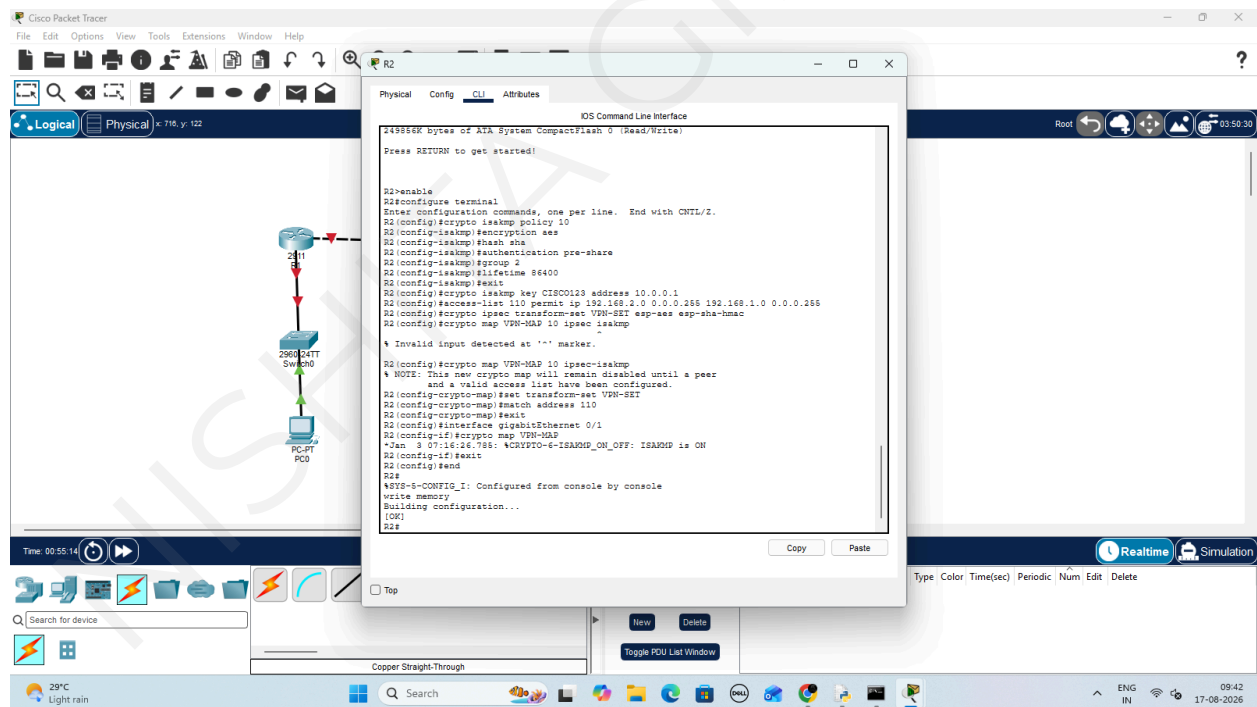

NISHITA GIRI T080
CYBER SECURITY PRACT 6

SHETH LUJ AND SIR MV COLLEGE

