
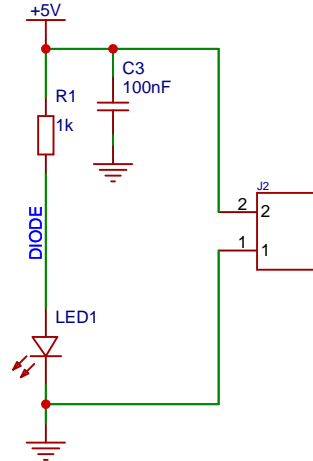


USB-C POWER SUPPLY


USB-C (INPUT)

+5V OUTPUT

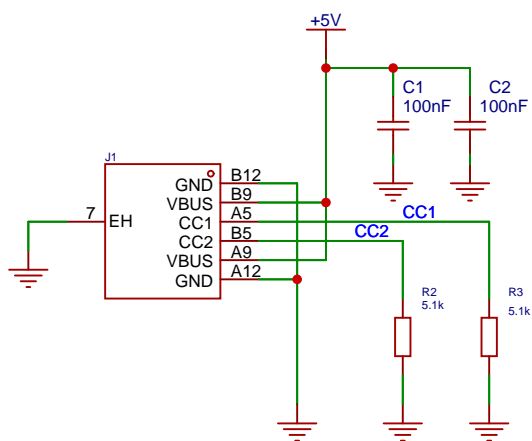

CC1 / CC2	USB Max Current
0-0.66V	0.5A
0.66-1.23V	1.5A
Above 1.23V	3A

MOUNTING HOLES

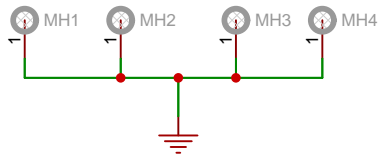

Schematic	USB C POWER SUPPLY		Update Date	2024-12-29
			Create Date	2024-06-23
Page	Schematic		Part Number	
Drawn	EasyEDA	USB_C_POWER_SUPPLY		
Reviewed	EasyEDA			
		VER	SIZE	PAGE 1 OF 1
EasyEDA		V0.1	A4	PITIGALA PKNW