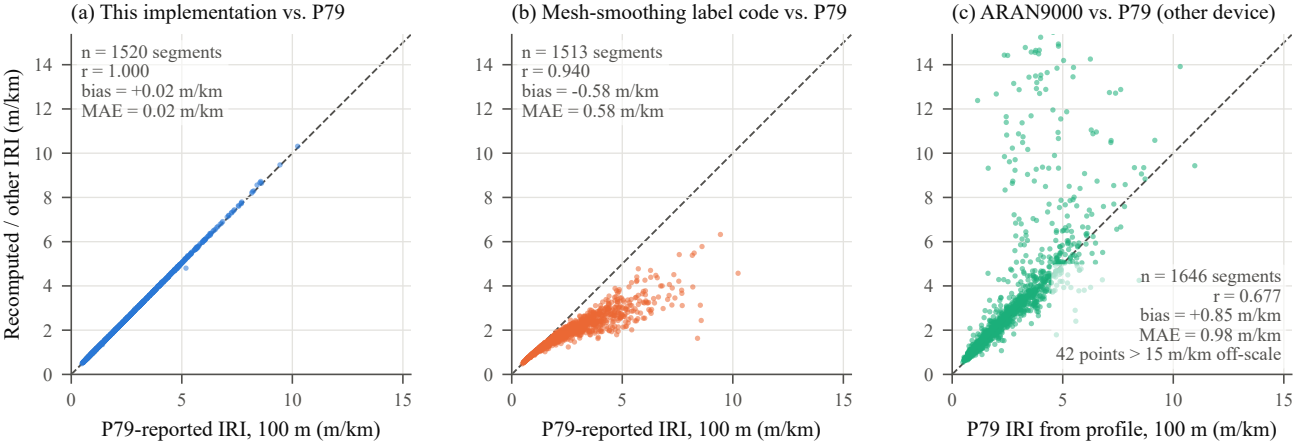

(a) This implementation vs. P79
n = 1520 segments
r = 1.000
bias = +0.02 m/km
MAE = 0.02 m/km
Recomputed / other IRI (m/km)
P79-reported IRI, 100 m (m/km)
(b) Mesh-smoothing label code vs. P79
n = 1513 segments
r = 0.940
bias = -0.58 m/km
MAE = 0.58 m/km
P79-reported IRI, 100 m (m/km)
(c) ARAN9000 vs. P79 (other device)
n = 1646 segments
r = 0.677
bias = +0.85 m/km
MAE = 0.98 m/km
42 points > 15 m/km off-scale
P79 IRI from profile, 100 m (m/km)