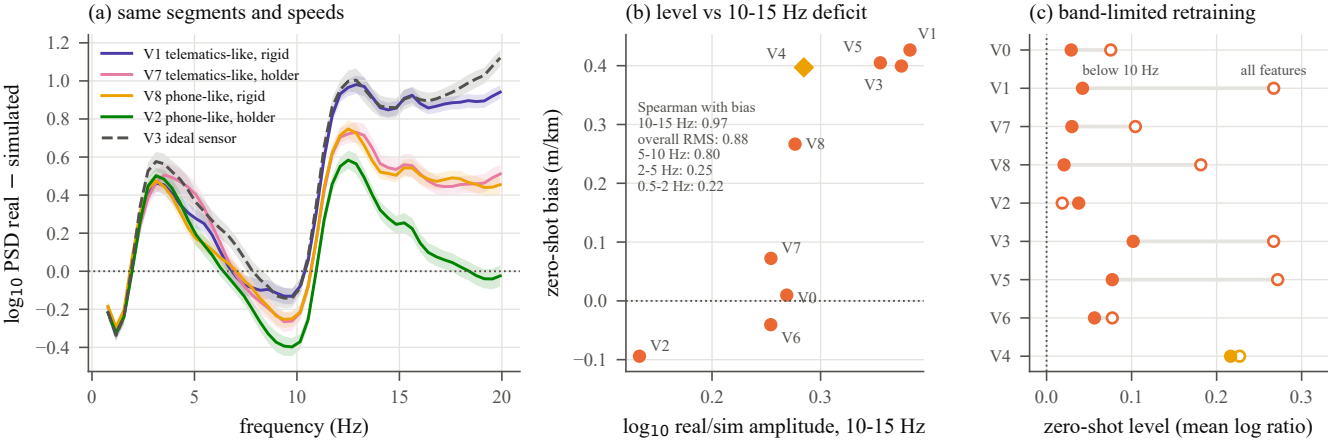
(a) same segments and speeds
V1 telematics-like, rigid
V7 telematics-like, holder
V8 phone-like, rigid
V2 phone-like, holder
V3 ideal sensor
log10 PSD real − simulated
frequency (Hz)
(b) level vs 10-15 Hz deficit
Spearman with bias
10-15 Hz: 0.97
overall RMS: 0.88
5-10 Hz: 0.80
2-5 Hz: 0.25
0.5-2 Hz: 0.22
zero-shot bias (m/km)
log10 real/sim amplitude, 10-15 Hz
(c) band-limited retraining
below 10 Hz
all features
zero-shot level (mean log ratio)