1) Create a topology and simulate sending a simple PDU from source to destination using hub and switch as connecting devices and demonstrates ping message.

Solution:

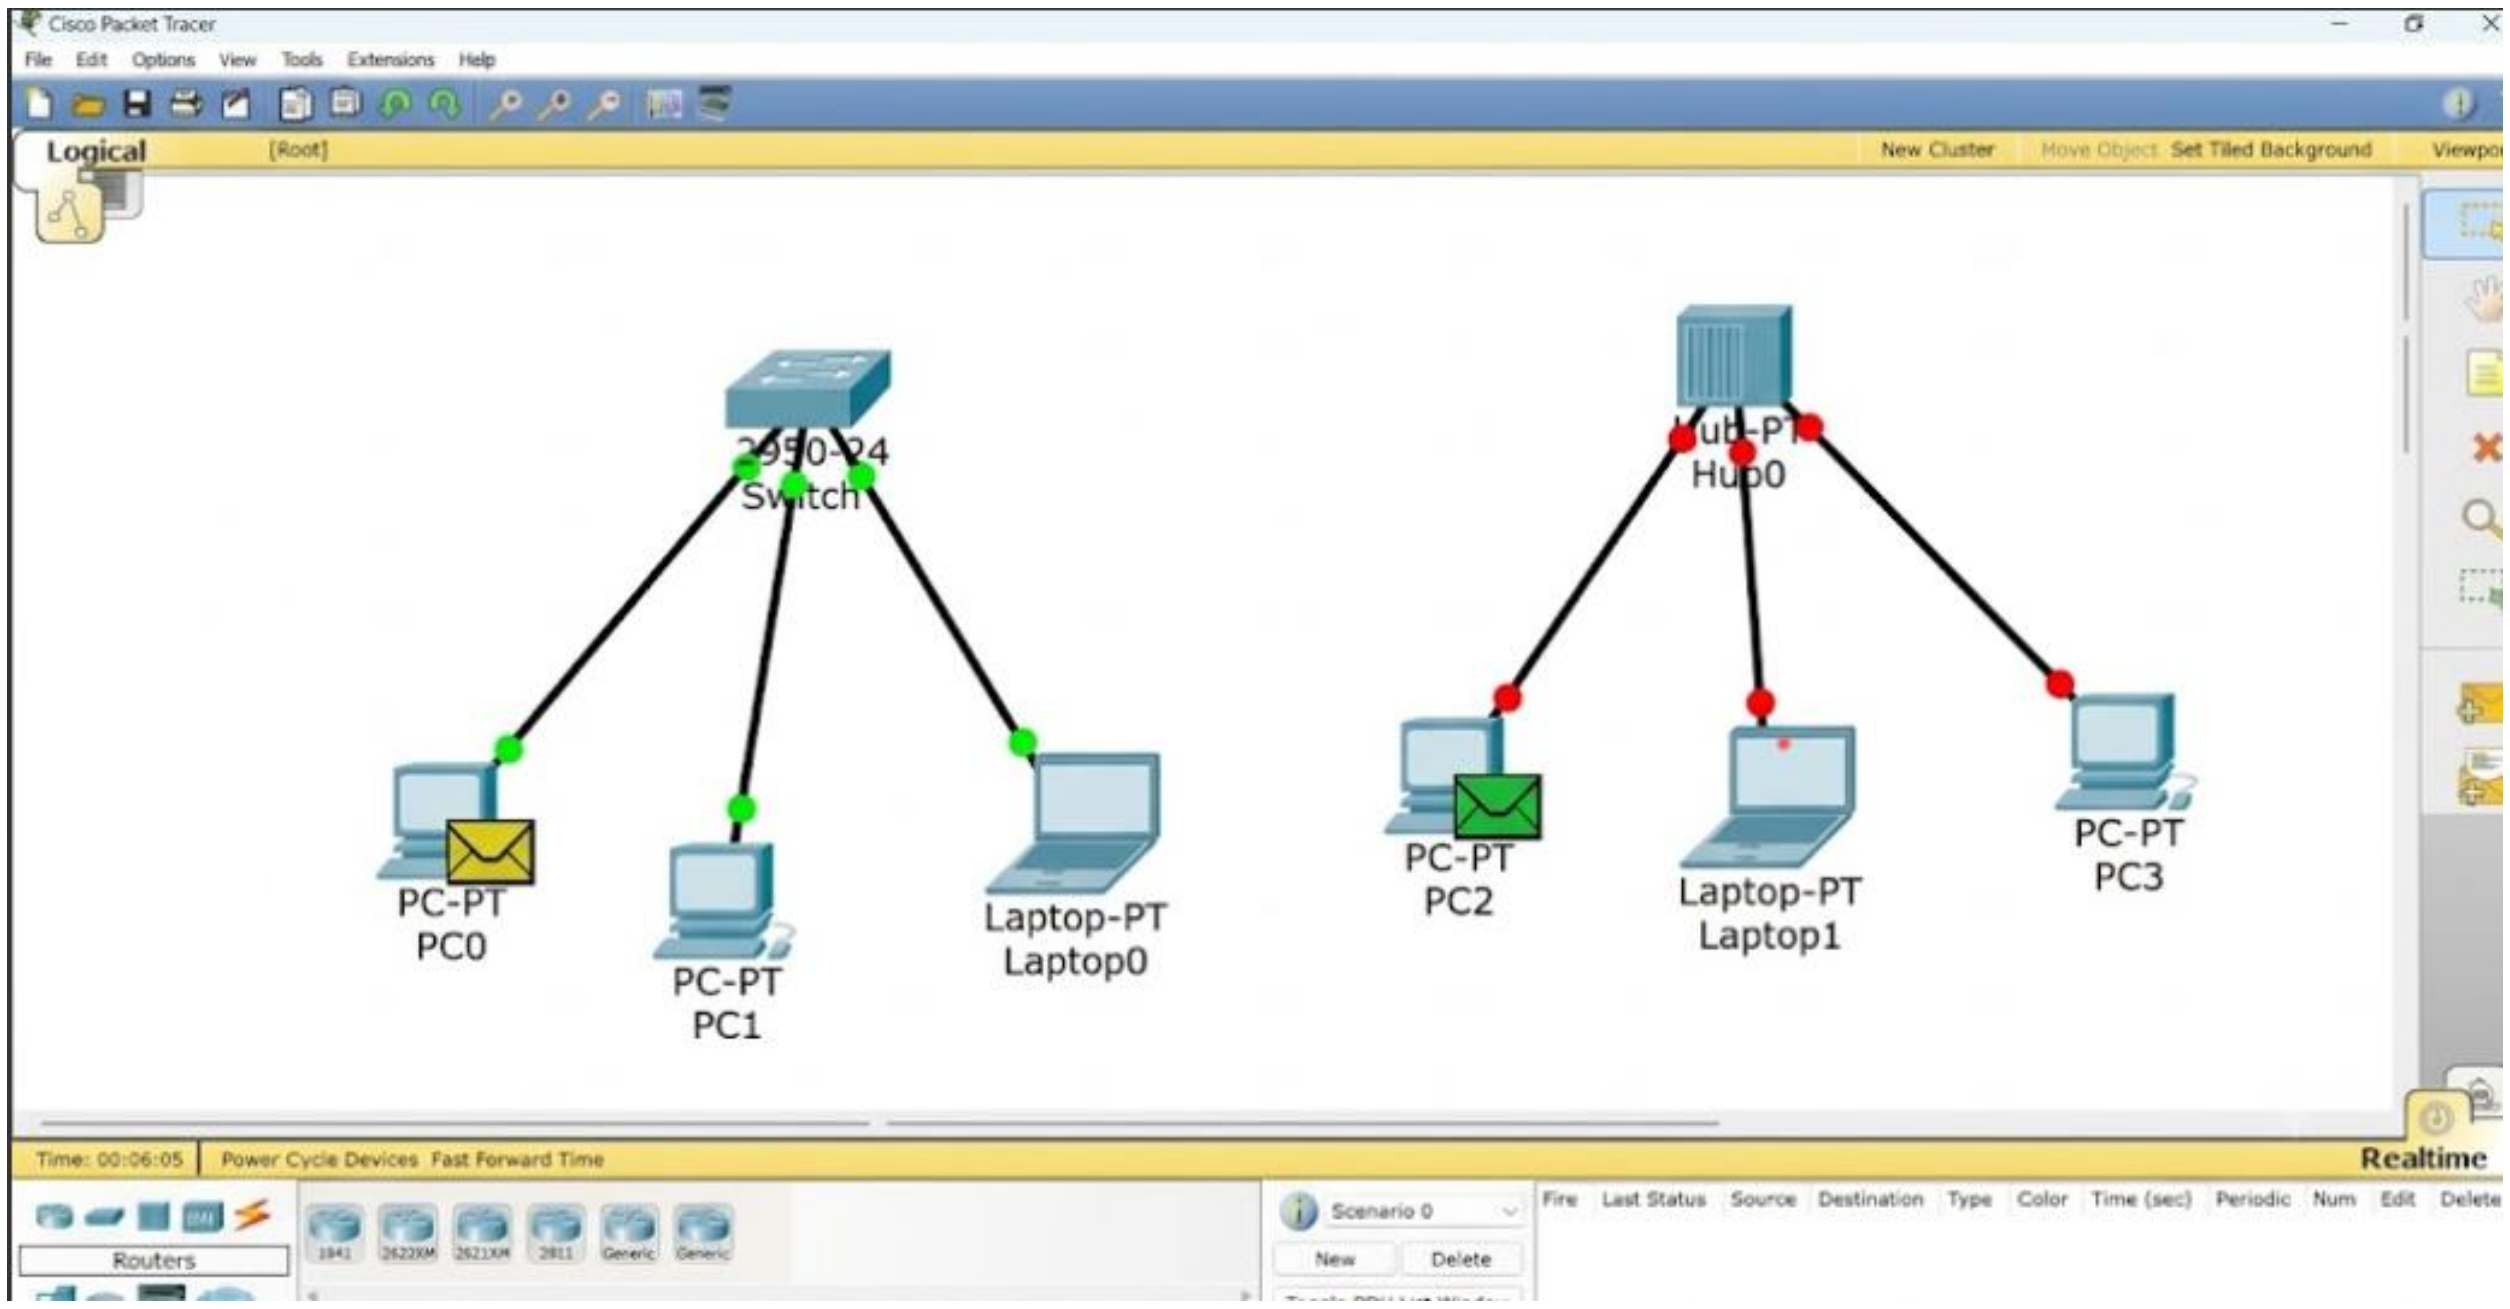
Cisco Packet Tracer
File Edit Options View Tools Extensions Help
Logical
[Root]
New Cluster
Move Object
Set Tiled Background
Viewport
2950-24
Switch
Hub-PT
Hub0
PC-PT
PC0
PC-PT
PC1
Laptop-PT
Laptop0
PC-PT
PC2
Laptop-PT
Laptop1
PC-PT
PC3
Time: 00:06:05
Power Cycle Devices
Fast Forward Time
Realtime
Routers
1841
2620XM
2621XM
2811
Generic
Generic
Scenario 0
New
Delete
Fire
Last Status
Source
Destination
Type
Color
Time (sec)
Periodic
Num
Edit
Delete

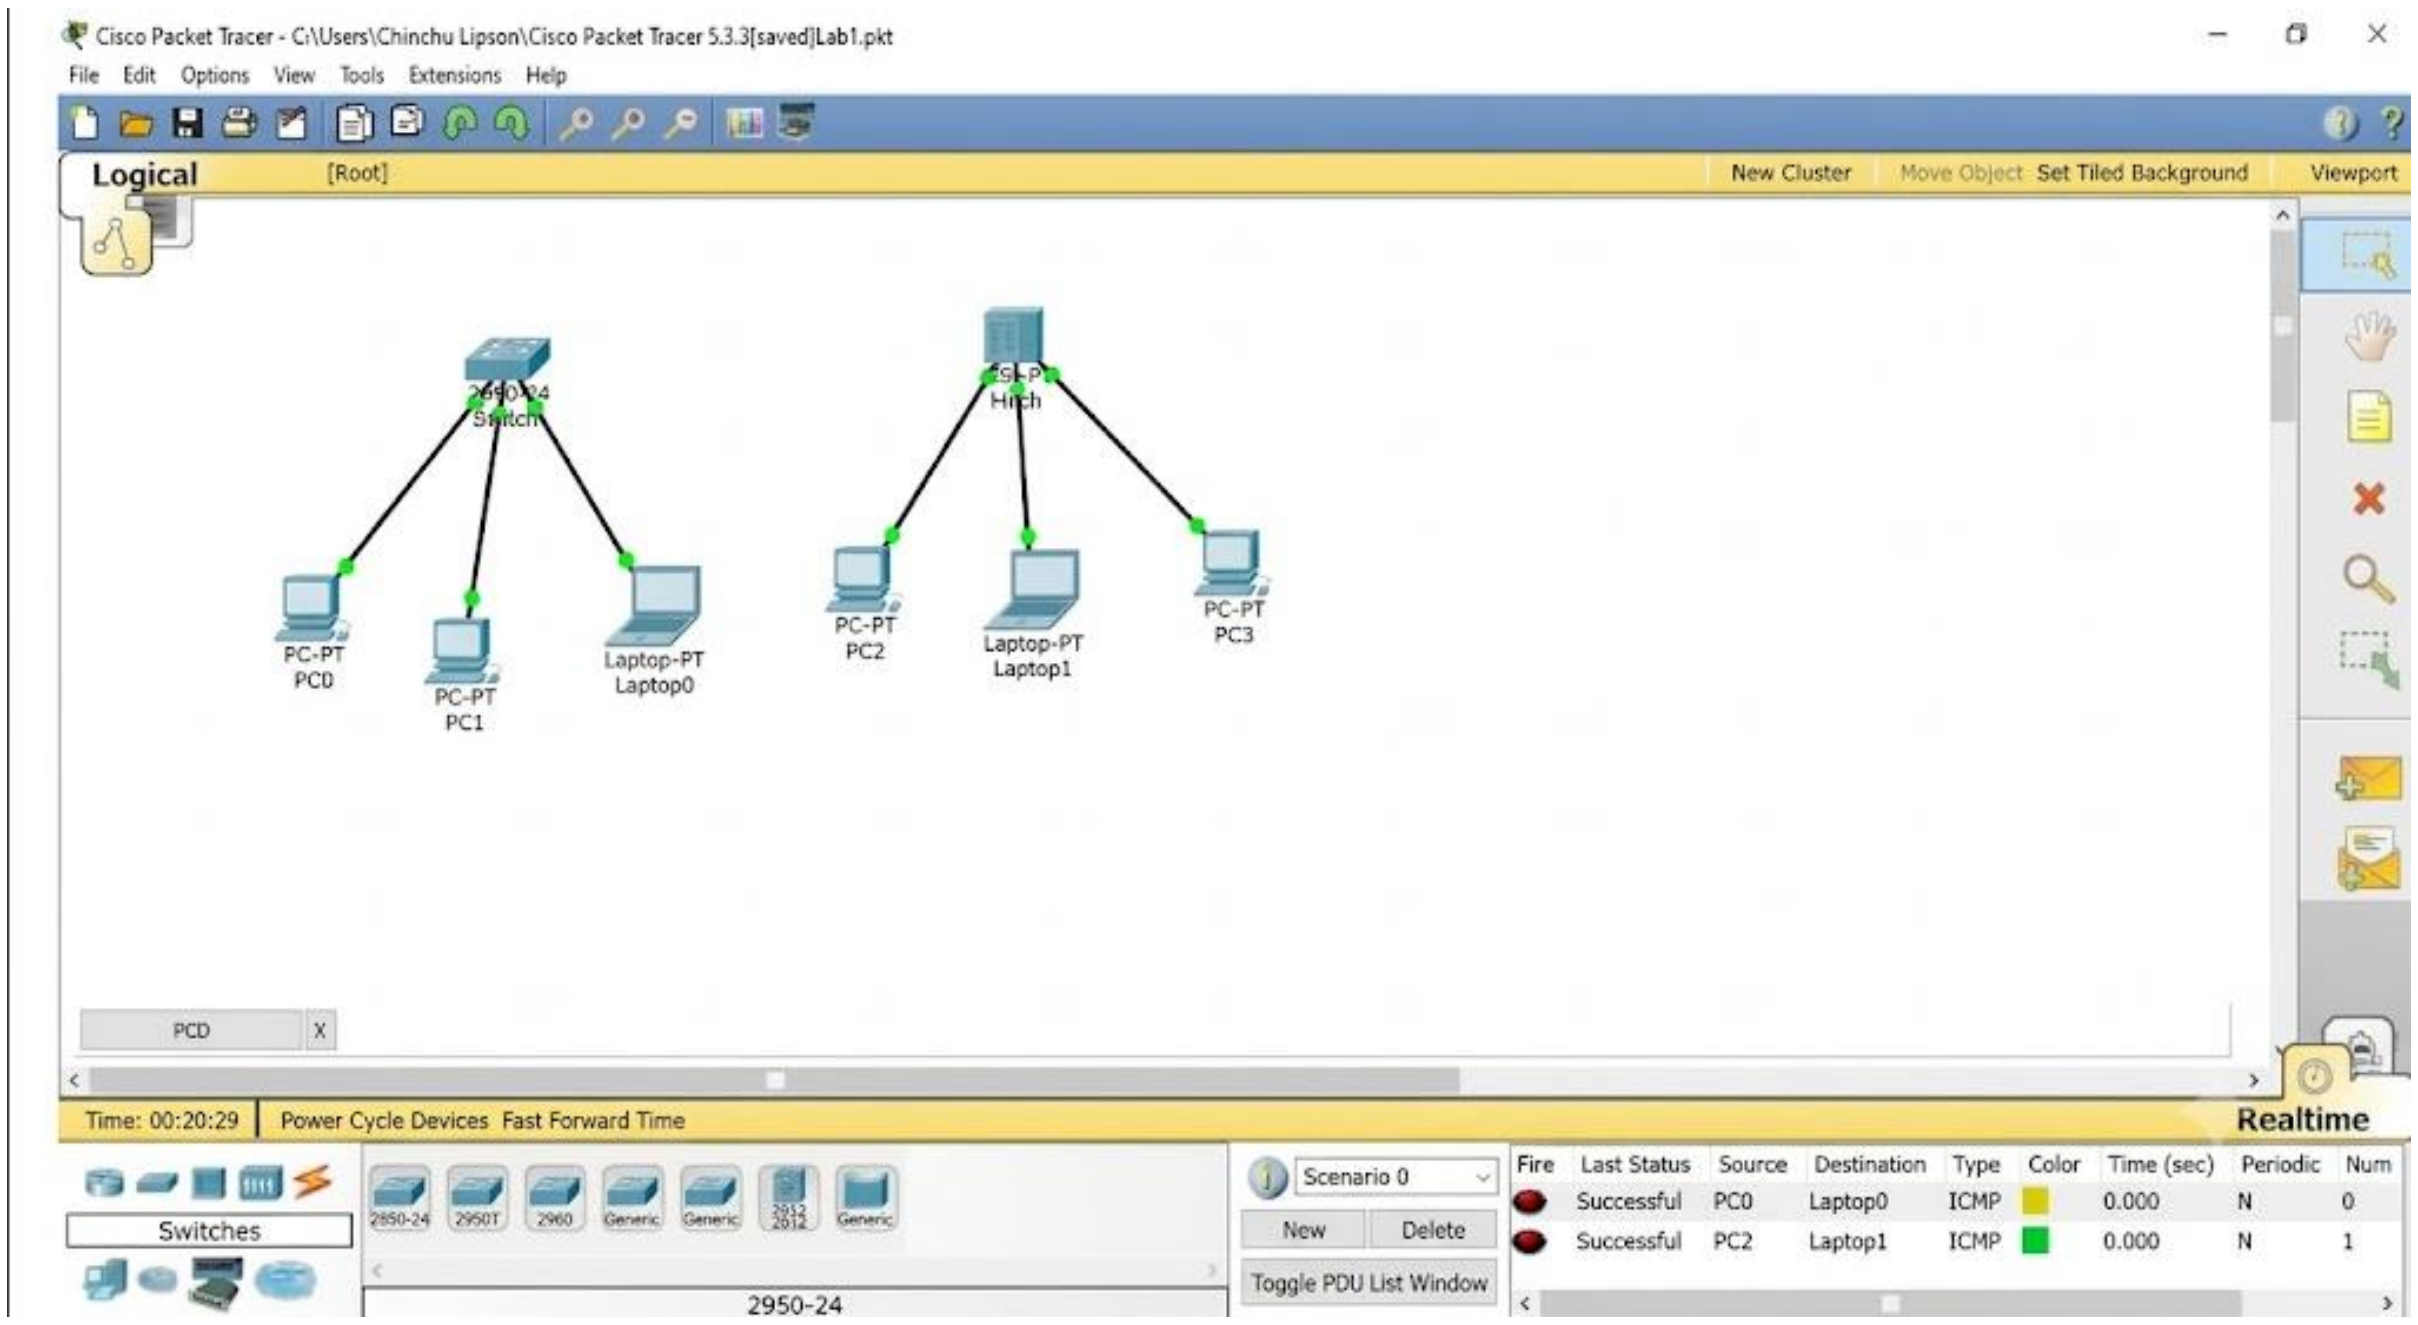
Cisco Packet Tracer - C:\Users\Chinchu Lipson\Cisco Packet Tracer 5.3.3[saved]Lab1.pkt
File Edit Options View Tools Extensions Help
Logical
[Root]
New Cluster
Move Object
Set Tiled Background
Viewport
2950-24
Switch
Hub-PT
Hub
PC-PT
PC0
PC-PT
PC1
Laptop-PT
Laptop0
PC-PT
PC2
Laptop-PT
Laptop1
PC-PT
PC3
PCD
X
Time: 00:20:29
Power Cycle Devices
Fast Forward Time
Realtime
Switches
2950-24
2950T
2960
Generic
Generic
2912
Generic
2950-24
Scenario 0
New
Delete
Toggle PDU List Window

Fire	Last Status	Source	Destination	Type	Color	Time (sec)	Periodic	Num
●	Successful	PC0	Laptop0	ICMP	🟨	0.000	N	0
●	Successful	PC2	Laptop1	ICMP	🟩	0.000	N	1

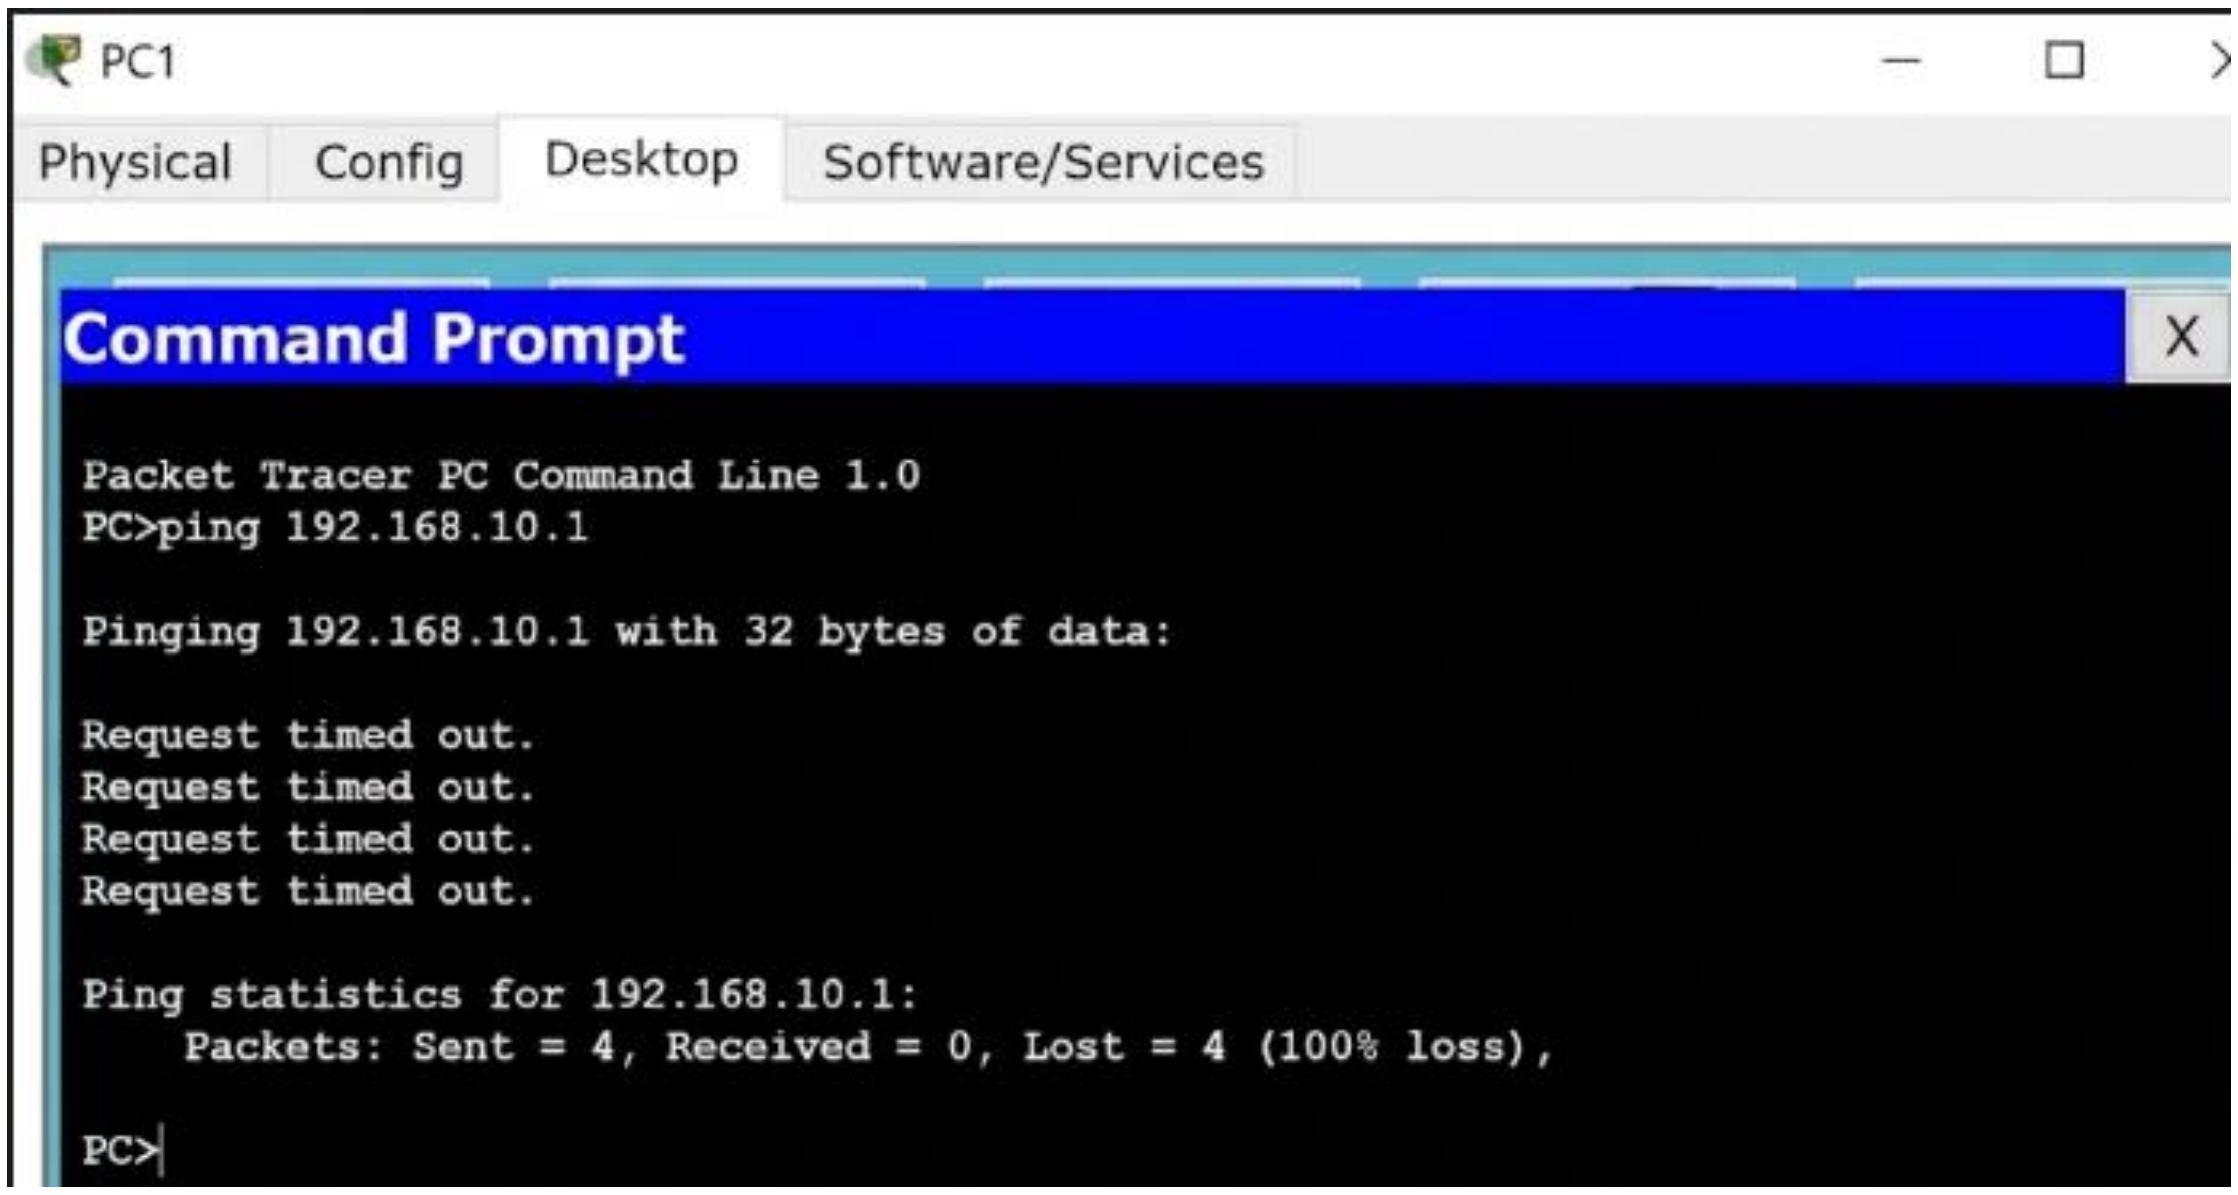
PC1
Physical
Config
Desktop
Software/Services
Command Prompt
X

```
Packet Tracer PC Command Line 1.0
PC>ping 192.168.10.1

Pinging 192.168.10.1 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.10.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

PC>
```

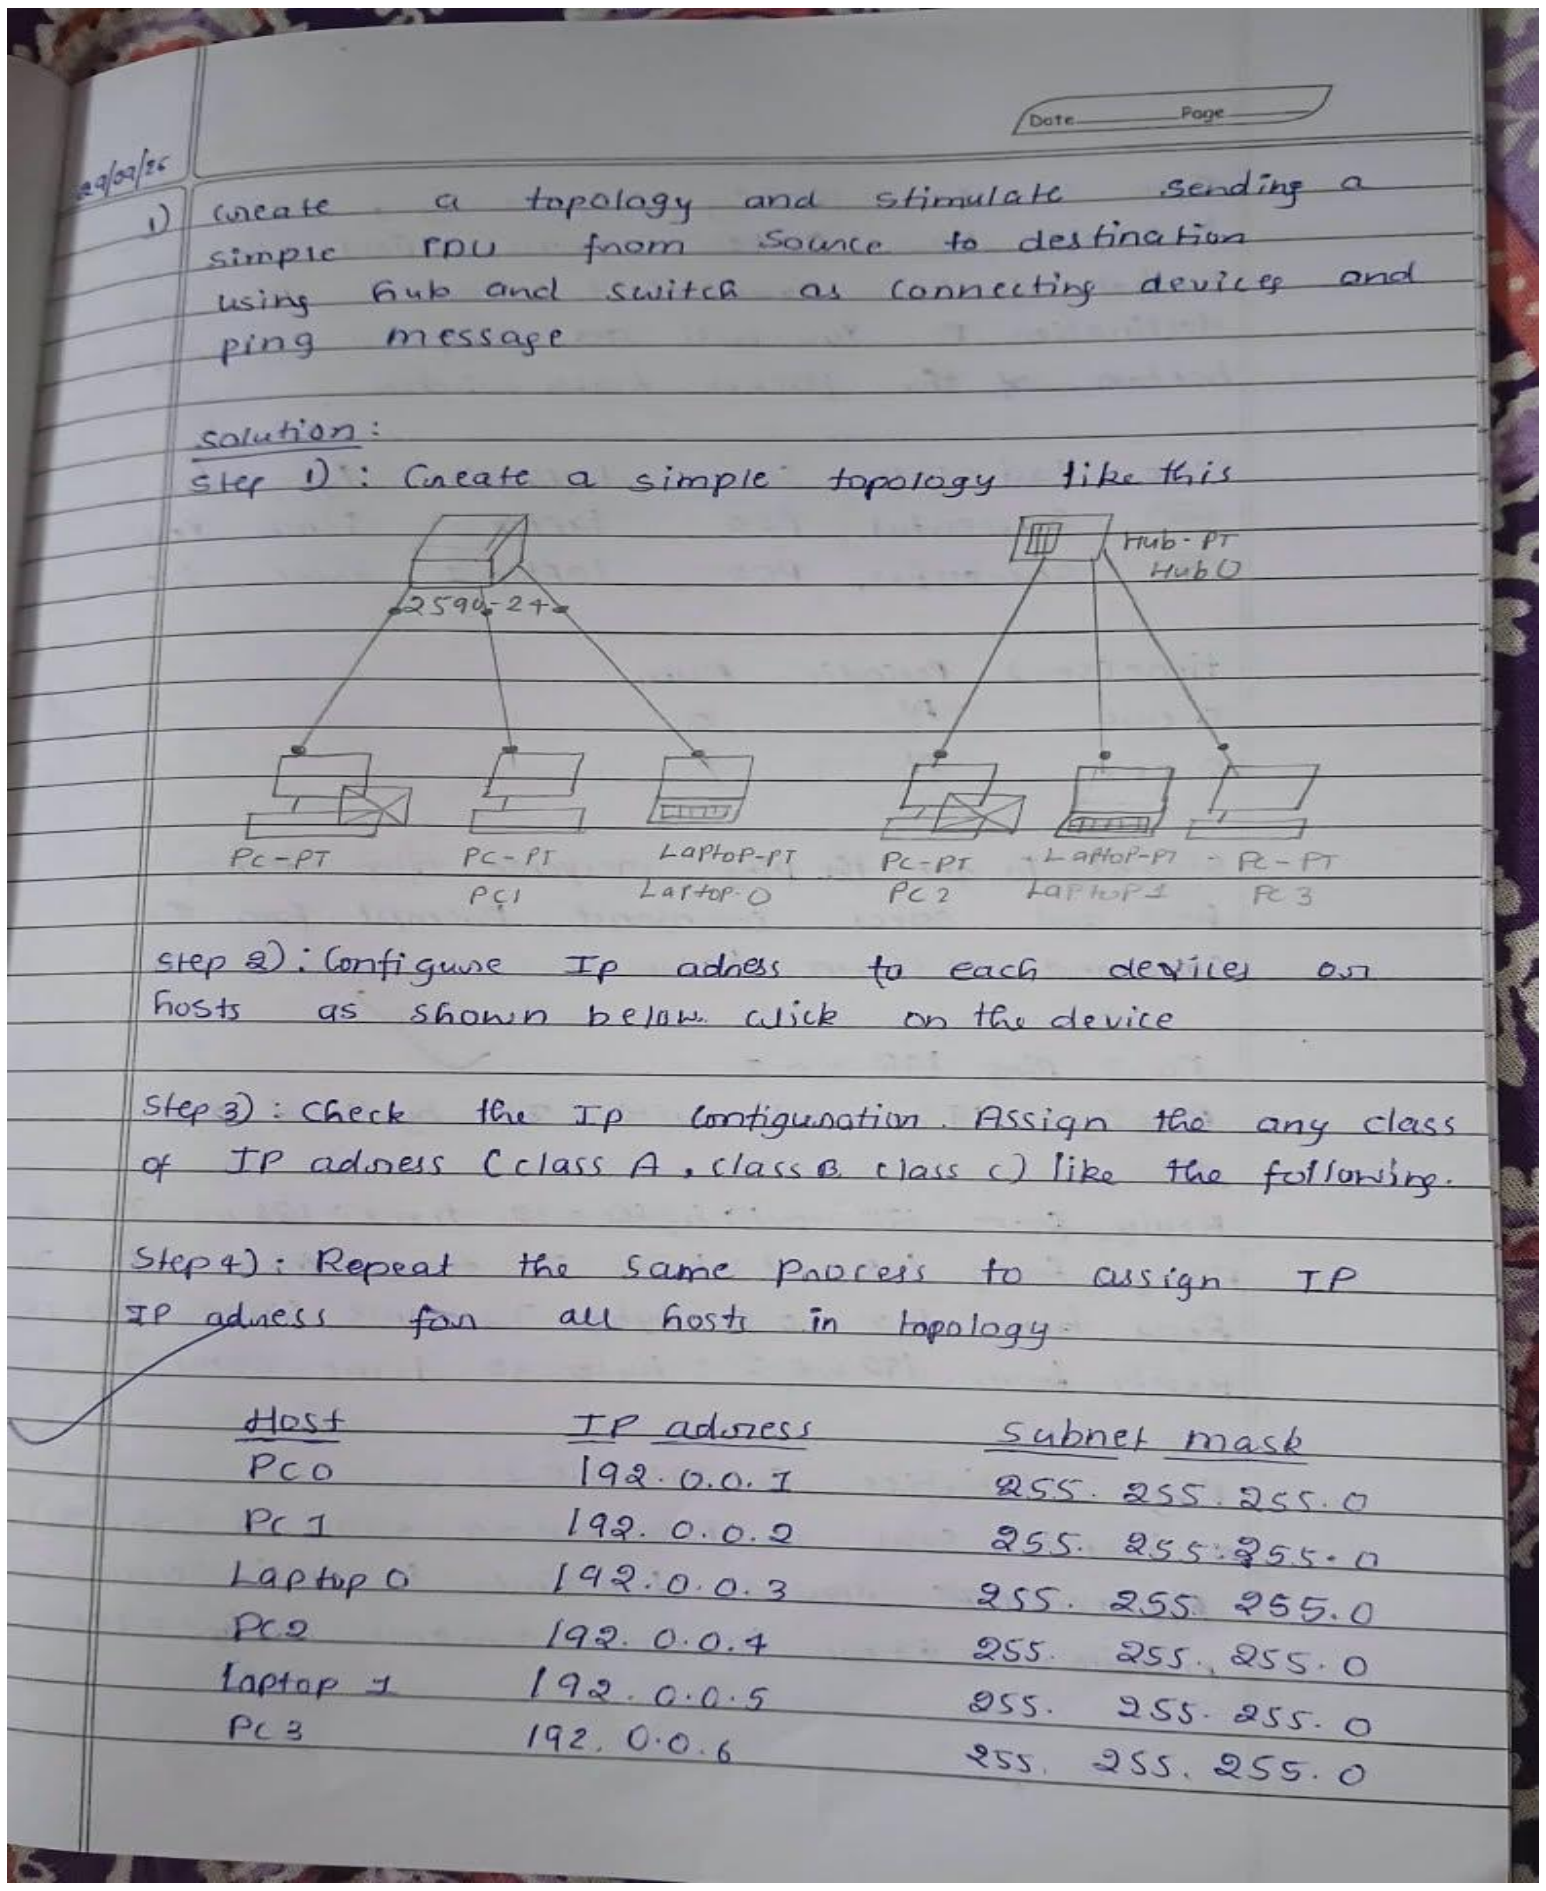
Date
Page
2590-24
Hub-PT
Hub0
PC-PT
PC-PT
PC1
Laptop-PT
Laptop 0
PC-PT
PC2
Laptop-PT
Laptop1
PC-PT
PC3

29/09/25

1) Create a topology and stimulate sending a simple PDU from Source to destination using Hub and switch as connecting devices and ping message

solution:

step 1): Create a simple topology like this

step 2): Configure Ip adress to each devices on hosts as shown below click on the device

Step 3): Check the Ip Configuration. Assign the any class of IP adress (class A, class B class c) like the following.

Step 4): Repeat the same process to assign IP IP adress for all hosts in topology.

Host	IP adress	Subnet mask
PC0	192.0.0.1	255.255.255.0
Pc 1	192.0.0.2	255.255.255.0
Laptop 0	192.0.0.3	255.255.255.0
Pc2	192.0.0.4	255.255.255.0
laptop 1	192.0.0.5	255.255.255.0
Pc 3	192.0.0.6	255.255.255.0

Step 5: For cacking connectivity, select "simple PDU Packet" from right side of packet tracer and select source PC and destination PC. You will get response at right bottom of the packet tracer window

Fire	last status	Source	destination	type	color
●	Successful	PC0	laptop 0	ICMP	Yellow
●	Successful	PC2	laptop 1	ICMP	Green

time(sec)	Periodic	Num
0.000	N	0
0.000	N	1

Step 6): To get the ping response open desktop of host and select command prompt. Run the command as shown below.

✓

```
PC > Ping 192.0.0.1
Pinging 192.0.0.1 with 32 bytes of data.

Reply from 192.0.0.1: bytes=32 time=126ms TTL=128
Reply from 192.0.01: bytes=32 time=64ms TTL=128
Reply from 192.0.0.1: bytes=32 time=63ms TTL=128
Reply from 192.0.0.1: bytes=32 time=63ms TTL=128

Ping statistics for 192.0.0.1:
  Packets: Sent=4, Recieved=4, Cost=0 (0% loss)
Approxiamate round trip times in mili-Seconds:
minimum=63ms, maximum=126ms, Average=79ms
```

24/09/25

2). Configu
Explor
unrea

Step 1:
addr

PC-

✓

step
on
like
give
mo
get
ter
mo

Ste
a
t
C
i