
USN:1WN24CS186

5)Configure Web server, DNS within a LAN.

Solution:



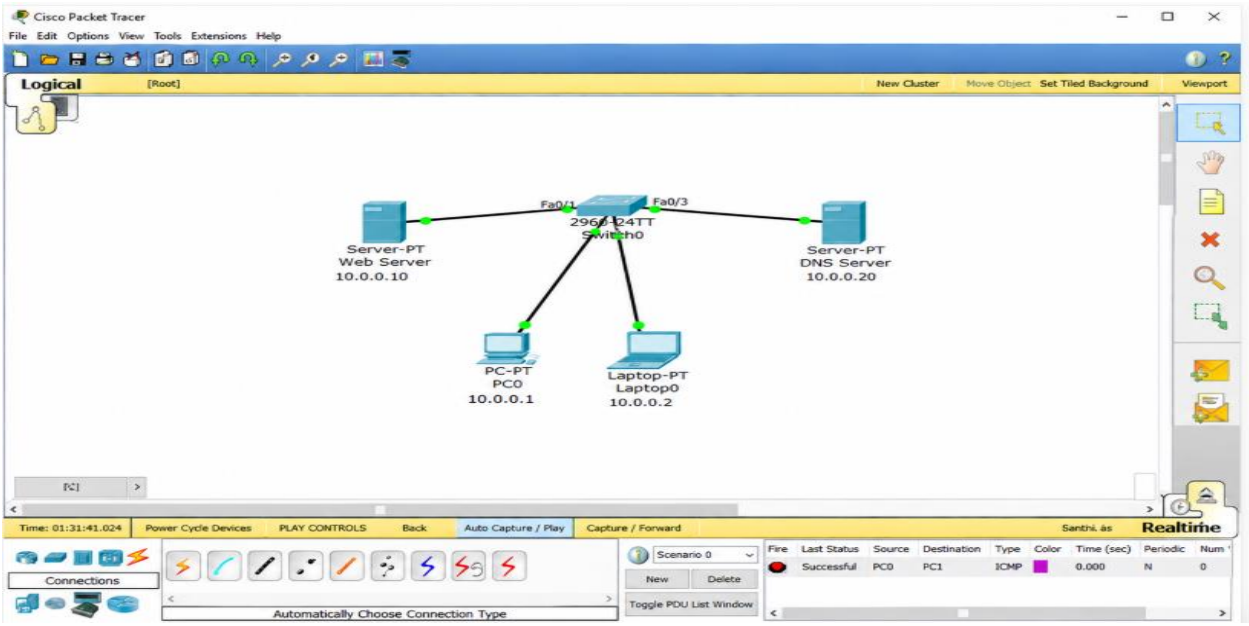

Laptop0

Physical | Config | Desktop | Software/Services

Command Prompt


```
Packet Tracer PC Command Line 1.0
PC>ping www.mysite.com

Pinging 10.0.0.20 with 32 bytes of data:

Reply from 10.0.0.20: bytes=32 time=62ms TTL=128
Reply from 10.0.0.20: bytes=32 time=62ms TTL=128
Reply from 10.0.0.20: bytes=32 time=62ms TTL=128
Reply from 10.0.0.20: bytes=32 time=62ms TTL=128

Ping statistics for 10.0.0.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 62ms, Maximum = 62ms, Average = 62ms

PC>
```

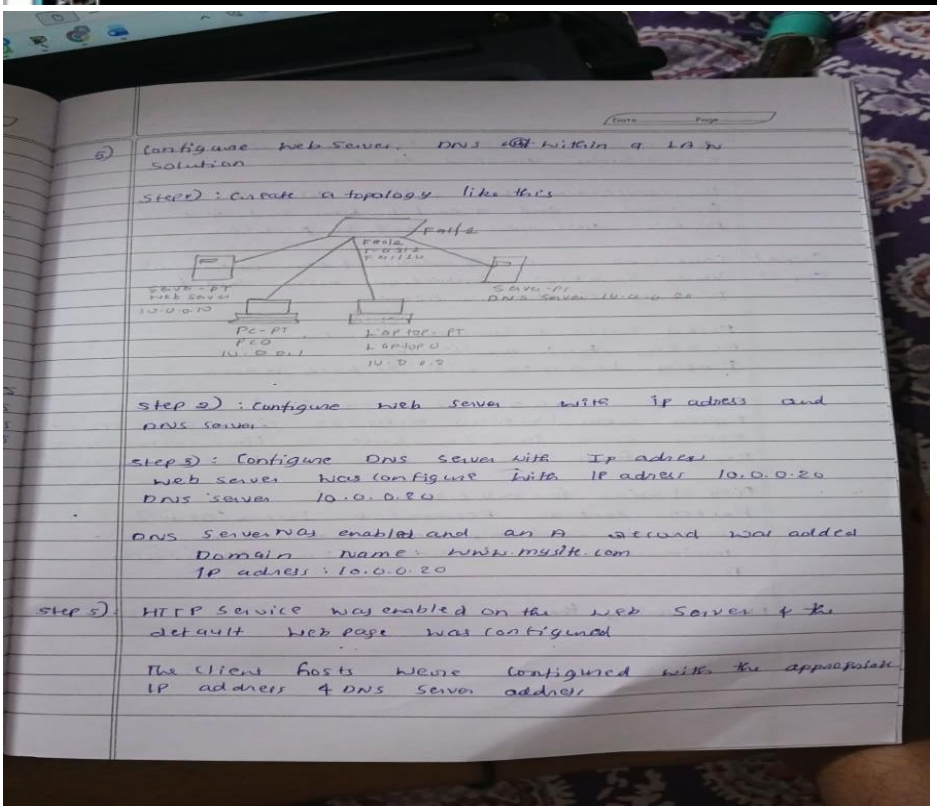

The domain name www.mysite.com was successfully resolved to 10.0.0.20

The connection was verified using the Ping command and 4 packets were sent & 4 packets were received with 0% packet loss


Step 6) Configure hosts IP address & DNS address also
Step 7) Verify the above connection using cmd by pinging the domain name

Packet Tracer PC command line 1.0
PC > Ping www.mysite.com
Pinging 10.0.0.20 with 32 bytes of data:

Reply from 10.0.0.20 bytes=32 time=62ms TTL=120
Reply from 10.0.0.20 bytes=32 time=62ms TTL
Reply from 10.0.0.20 bytes=32 time=62ms TTL
Reply from 10.0.0.20 bytes=32 time=62ms TTL

Ping statics for 10.0.0.20:
Packets: Sent=4, Recieved=4, Lost=0 (0% loss)
Approximate round trip times in milli-seconds:
Minimum=62ms, Maximum=62ms, Average=62ms
PC>

Now verify the web Browser.

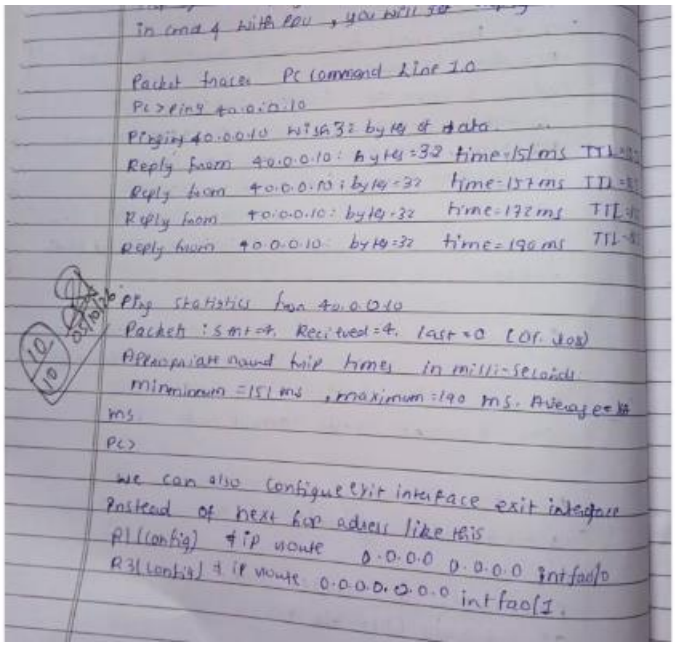

in cmd & with PDU, you will

Packet tracer PC command line 1.0
PC > ping 40.0.0.10
Pinging 40.0.0.10 with 32 bytes of data
Reply from 40.0.0.10: bytes=32 time=151ms TTL=
Reply from 40.0.0.10: bytes=32 time=157ms TTL=
Reply from 40.0.0.10: bytes=32 time=172ms TTL=
Reply from 40.0.0.10: bytes=32 time=190ms TTL=

Ping statistics for 40.0.0.10
Packets: Sent=4, Recieved=4, Lost=0 (0% loss)
Approximate round trip times in milli-seconds:
Minimum=151ms, Maximum=190ms, Average=
ms
PC>

we can also configure exit interface exit interface
Instead of next hop address like this
R1(config) # ip route 0.0.0.0 0.0.0.0 int fa0/0
R3(config) # ip route 0.0.0.0 0.0.0.0 int fa0/1.