
USN :1WN24CS186

2) Configure IP address to routers in packet tracer. Explore the following messages: ping responses, destination unreachable, request timed out, reply.

Solution:

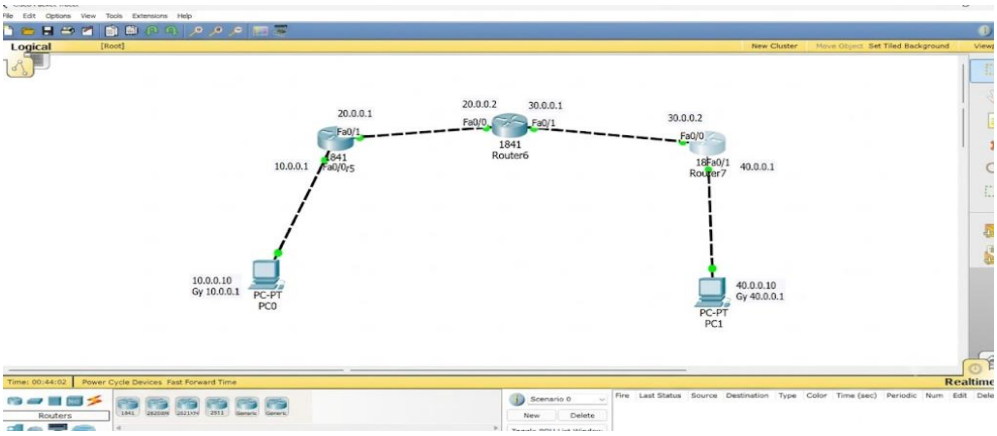

Physical Config CLI

IOS

```
Continue with configuration dialog? [yes/no]: n


Press RETURN to get started!



Router>enable
Router#config t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#int fa0/0
Router(config-if)#ip address 10.0.0.1 255.0.0.0
Router(config-if)#no shut

%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state t
o up

Router(config-if)#exit
Router(config)#int fa0/1
Router(config-if)#ip address 20.0.0.1 255.0.0.0
Router(config-if)#no shut

%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state t
o up

Router(config-if)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#write memory
Building configuration...
[OK]
Router#
```

```
Continue with configuration dialog? [yes/no]: n


Press RETURN to get started!

--- Router2 Configuration ---

Router>enable
Router#config t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#int fa0/0
Router(config-if)#ip address 10.0.0.1 255.0.0.0
Router(config-if)#no shut

%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigiBthernet0/0, changed state t
o up

Router(config-if)#exit
Router(config)#int gi0/1
Router(config-if)#ip address 20.0.1.1 255.0.0.0
Router(config-if)#no shut

%LINK-5-CHANGED: Interface GigiEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigiEthernet0/1, changed state t
o up
Router3(config)#int se0/0/0
Router3(config)#1 ip address 30.0.0.1 255.0.0.0
Router3(config))#clock rate 4not
Router3
%SYS-5-CONFIG_I: Configured from console by console

Router#write memory
Building configuration...
[OK]
Router3#
```

Physical Config CLI

--- Router3 Configuration --- IOS

```
Continue with configuration dialog? [yes/no]: n


Press RETURN to get started!

--- Router3 Configuration ---

Router3>enable
Router3#config t
Enter configuration commands, one per line.  End with CNTL/Z.
Router3(config)#int fa0/0
Router3(config-if)ip address 10.0.3.1 255.0.0.0
Router3(config-if)#no shut

%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigiBthernet0/0, changed state t
o up

Router3(config-if)#exit
Router3(config)#int gi0/1
Router3(config-if)ip address 20.0.3.1 255.0.0.0
Router3(config-if)#no shut

%LINK-5-CHANGED: Interface GigiEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigiEthernet0/1, changed state t
o up
Router3(config)#int se0/0/0
Router3(config)#1 ip address 30.0.0.1 255.0.0.0
Router3(config))#clock rate 4not
Router3
%SYS-5-CONFIG_I: Configured from console by console

Router3#write memory
Building configuration...
[OK]
Router3#
```

PC0

Physical | Config | Desktop | Software/Services

Command Prompt

```
PC>ping 10.0.0.6

Pinging 10.0.0.6 with 32 bytes of data:

Reply from 10.0.0.6: bytes=32 time=45ms TTL=64
Reply from 10.0.0.6: bytes=32 time=42ms TTL=64
Reply from 10.0.0.6: bytes=32 time=48ms TTL=64
Reply from 10.0.0.6: bytes=32 time=44ms TTL=64

Ping statistics for 10.0.0.6:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss)

PC>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.


Ping statistics for 40.0.0.10:
    Packets: Sent = 4, Received = 0, Lost = 0 (100% loss)

PC>ping 10.0.0.1

Pinging 10.0.0.1 with 32 bytes of data:

Reply from 10.0.0.1: bytes=32 time=24ms TTL=255
Reply from 10.0.0.1: bytes=32 time=31ms TTL=255
Reply from 10.0.0.1: bytes=32 time=48ms TTL=255
Reply from 10.0.0.1: bytes=32 time=44ms TTL=255

Ping statistics for 10.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 24ms, Maximum = 31ms, Average = 29ms
```

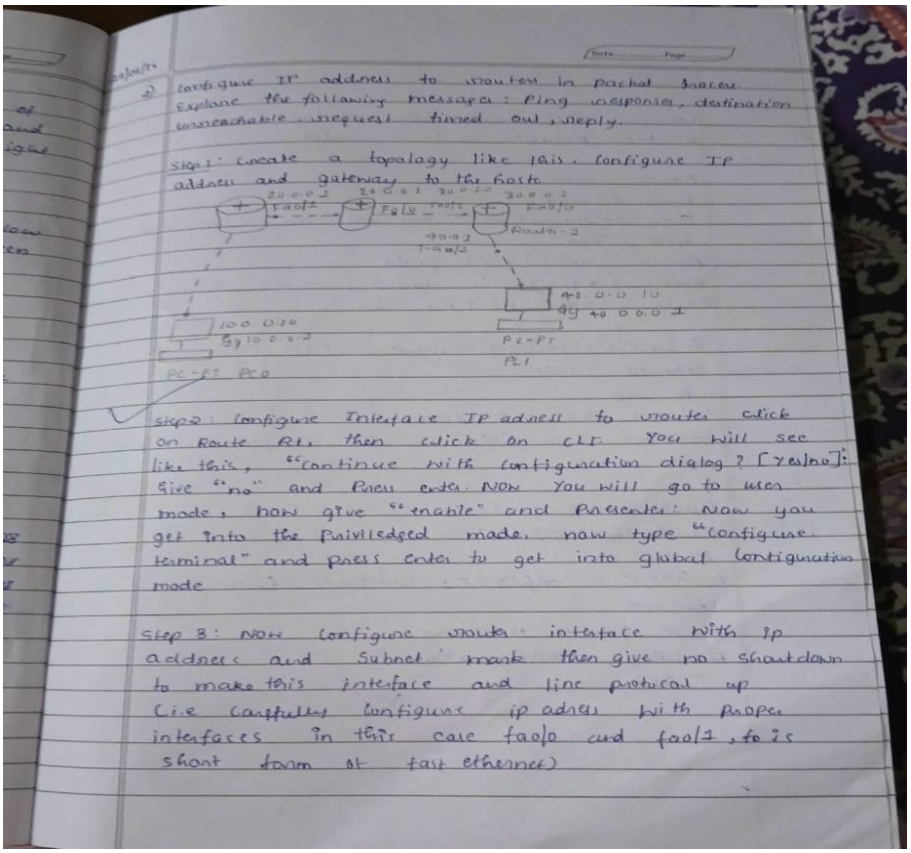


2) Configure IP address to routers in packet tracer. Explore the following messages: Ping responses, destination unreachable, request timed out, reply.

Step 1: Create a topology like this. Configure IP address and gateway to the hosts.

Step 2: Configure Interface IP address to routers click on Route R1, then click on CLI. You will see like this, "Continue with configuration dialog? [yes/no]:" give "no" and Press enter. Now you will go to user mode, now give "enable" and Press enter: Now you get into the Privileged mode. now type "configure terminal" and press enter to get into global configuration mode.

Step 3: Now configure router interface with ip address and Subnet mask then give no shutdown to make this interface and line protocol up (i.e carefully configure ip address with proper interfaces in this case fa0/0 and fa0/1, fa is short form of fast ethernet)

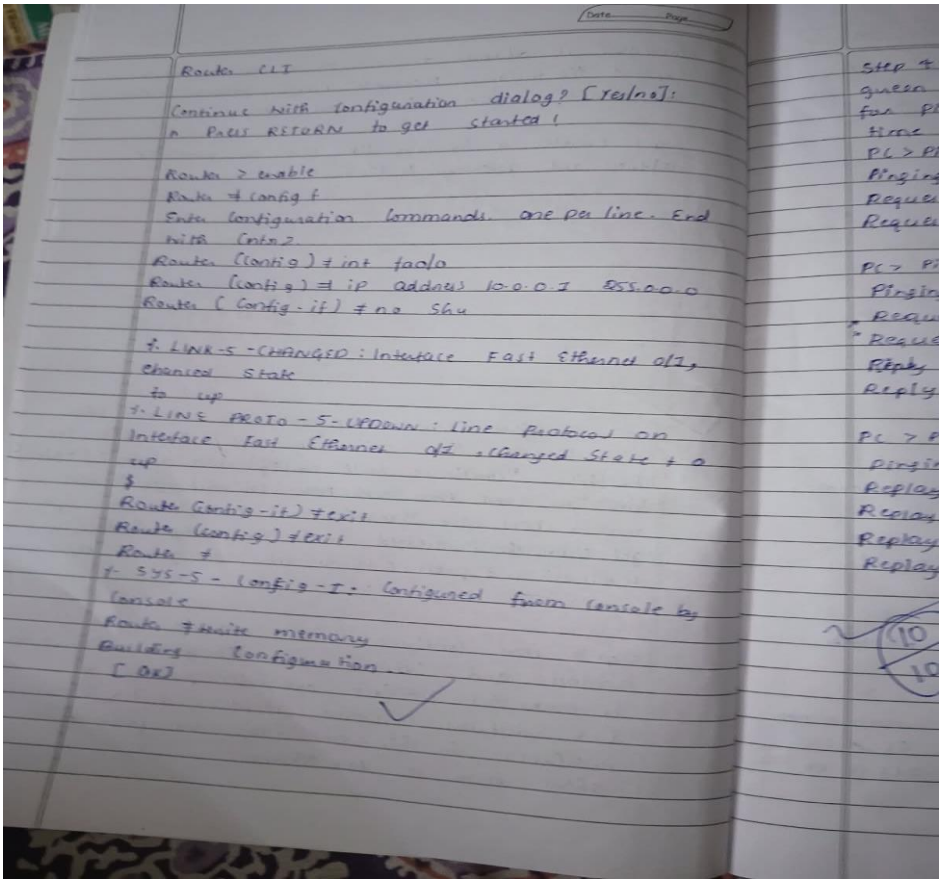


Router CLI

Continue with configuration dialog? [yes/no]:
n PRESS RETURN to get started!

Router > enable
Router # config t
Enter configuration commands. one per line. End with Cntrl z.
Router (config) # int fa0/0
Router (config-if) # ip address 10.0.0.1 255.0.0.0
Router (config-if) # no shu

%. LINK-5-CHANGED: Interface Fast Ethernet 0/0, changed state
to up
%. LINEPROTO-5-UPDOWN: Line protocol on Interface Fast Ethernet 0/0, changed state to up
$
Router (config-if) # exit
Router (config) # exit
Router #
%. SYS-5-CONFIG_I: Configured from console by console
Router # write memory
Building configuration...
[OK]

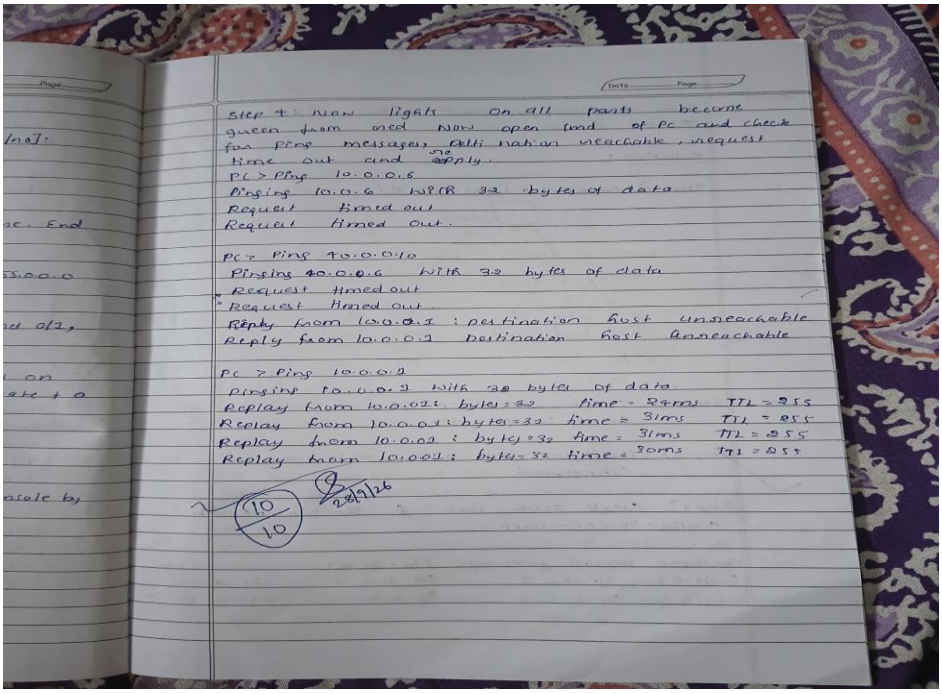

Step 1: Now lights on all ports become green from red. Now open cmd of PC and check for ping messages. Delhi nahi un reachable, request time out and apply.
PC > Ping 10.0.0.6
Pinging 10.0.0.6 with 32 bytes of data
Request timed out
Request timed out.

PC > Ping 40.0.0.10
Pinging 40.0.0.6 with 32 bytes of data
Request timed out
Request timed out.
Reply from 10.0.0.1: destination host unreachable
Reply from 10.0.0.1 destination host unreachable

PC > Ping 10.0.0.2
Pinging 10.0.0.2 with 32 bytes of data
Replay from 10.0.0.2: bytes=32 time=94ms TTL=255
Replay from 10.0.0.2: bytes=32 time=31ms TTL=255
Replay from 10.0.0.2: bytes=32 time=31ms TTL=255
Replay from 10.0.0.2: bytes=32 time=30ms TTL=255

10/10
28/9/26