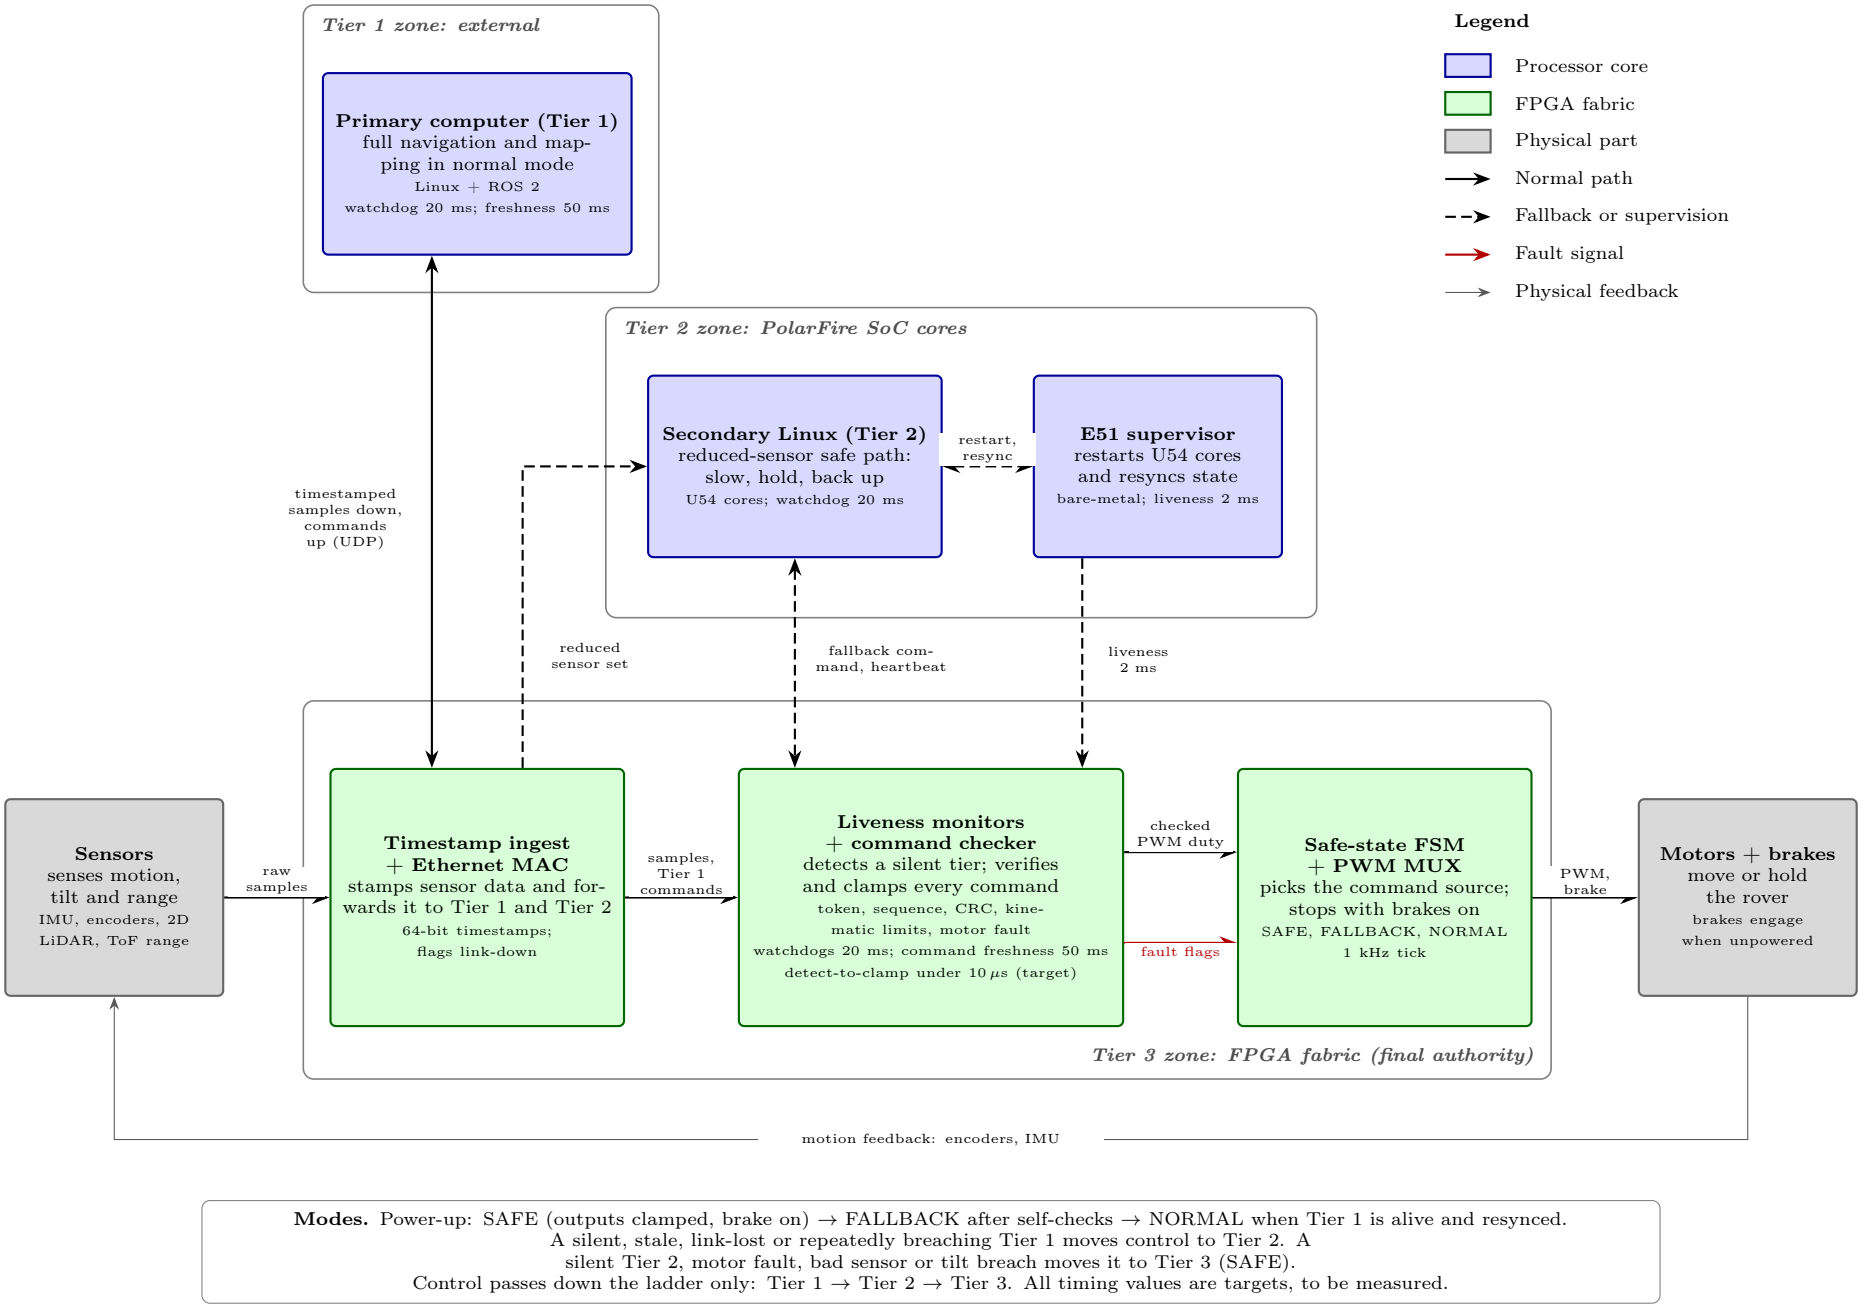


Modes. Power-up: SAFE (outputs clamped, brake on) → FALLBACK after self-checks → NORMAL when Tier 1 is alive and resynced. A silent, stale, link-lost or repeatedly breaching Tier 1 moves control to Tier 2. A silent Tier 2, motor fault, bad sensor or tilt breach moves it to Tier 3 (SAFE). Control passes down the ladder only: Tier 1 → Tier 2 → Tier 3. All timing values are targets, to be measured.