


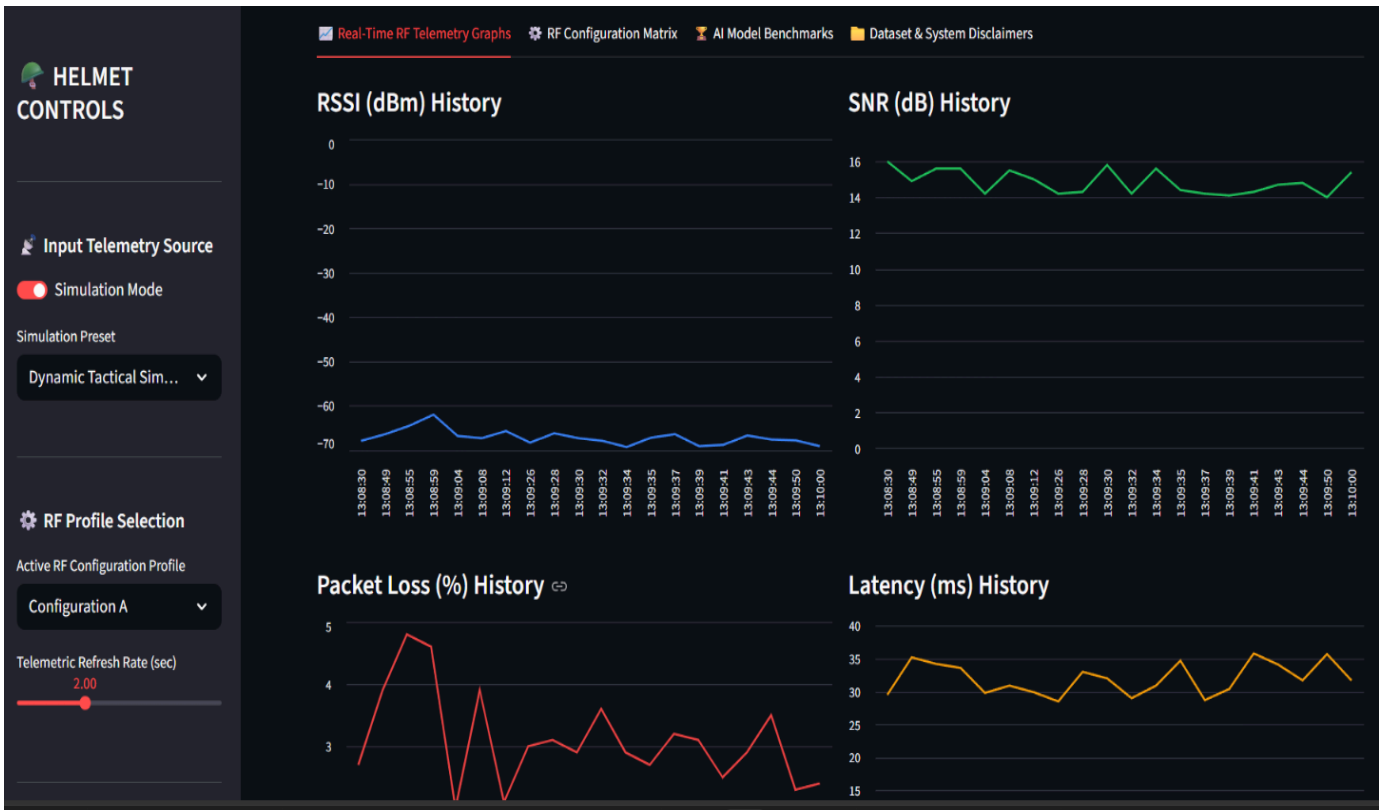

HELMET
CONTROLS

Input Telemetry Source

Simulation Mode

Simulation Preset

Dynamic Tactical Sim...

RF Profile Selection

Active RF Configuration Profile

Configuration C

Telemetric Refresh Rate (sec)

2.00

AI SIGNAL OPTIMIZATION MONITOR

Wireless Communication Telemetry

RSSI

SNR

Packet Loss

Latency

Throughput

-66.5 ...

14.1 dB

2.5 %

28.8 ms

7.07 ...

Current RF Configuration: Configuration C (Configuration C (Balanced Mesh / 5GHz Diversity))

AI Signal Diagnostics

AI SIGNAL STATUS:

AI CONFIDENCE:

MEDIUM

57.0 %

RECOMMENDED ACTION:

CONTINUE CURRENT CONFIGURATION

Reason: Signal is moderate, but current configuration remains the best available option.