



File Edit View Command Window

```
1 clc; clear; close all;
2 fs=1000; t=0:1/fs:1;
3 TBW=600; Users=3;
4 CBW=TBW/Users;
5 fc=[100 300 500];
6 m=sin(2*pi*10*t);
7 s1=m.*cos(2*pi*fc(1)*t);
8 s2=m.*cos(2*pi*fc(2)*t);
9 s3=m.*cos(2*pi*fc(3)*t);
10 subplot(2,1,1)
11 plot(t,s1,'r',t,s2,'g',t,s3,'b'),grid on
12 title('FDMA Channel Allocation'),xlabel('Time (s)'),ylabel('Amplitude')
13 subplot(2,1,2)
14 bar(1:Users,CBW*ones(1,Users)),grid on
15 xlabel('Users'),ylabel('Channel Bandwidth (kHz)'),title('Channel Bandwidth per User')
```

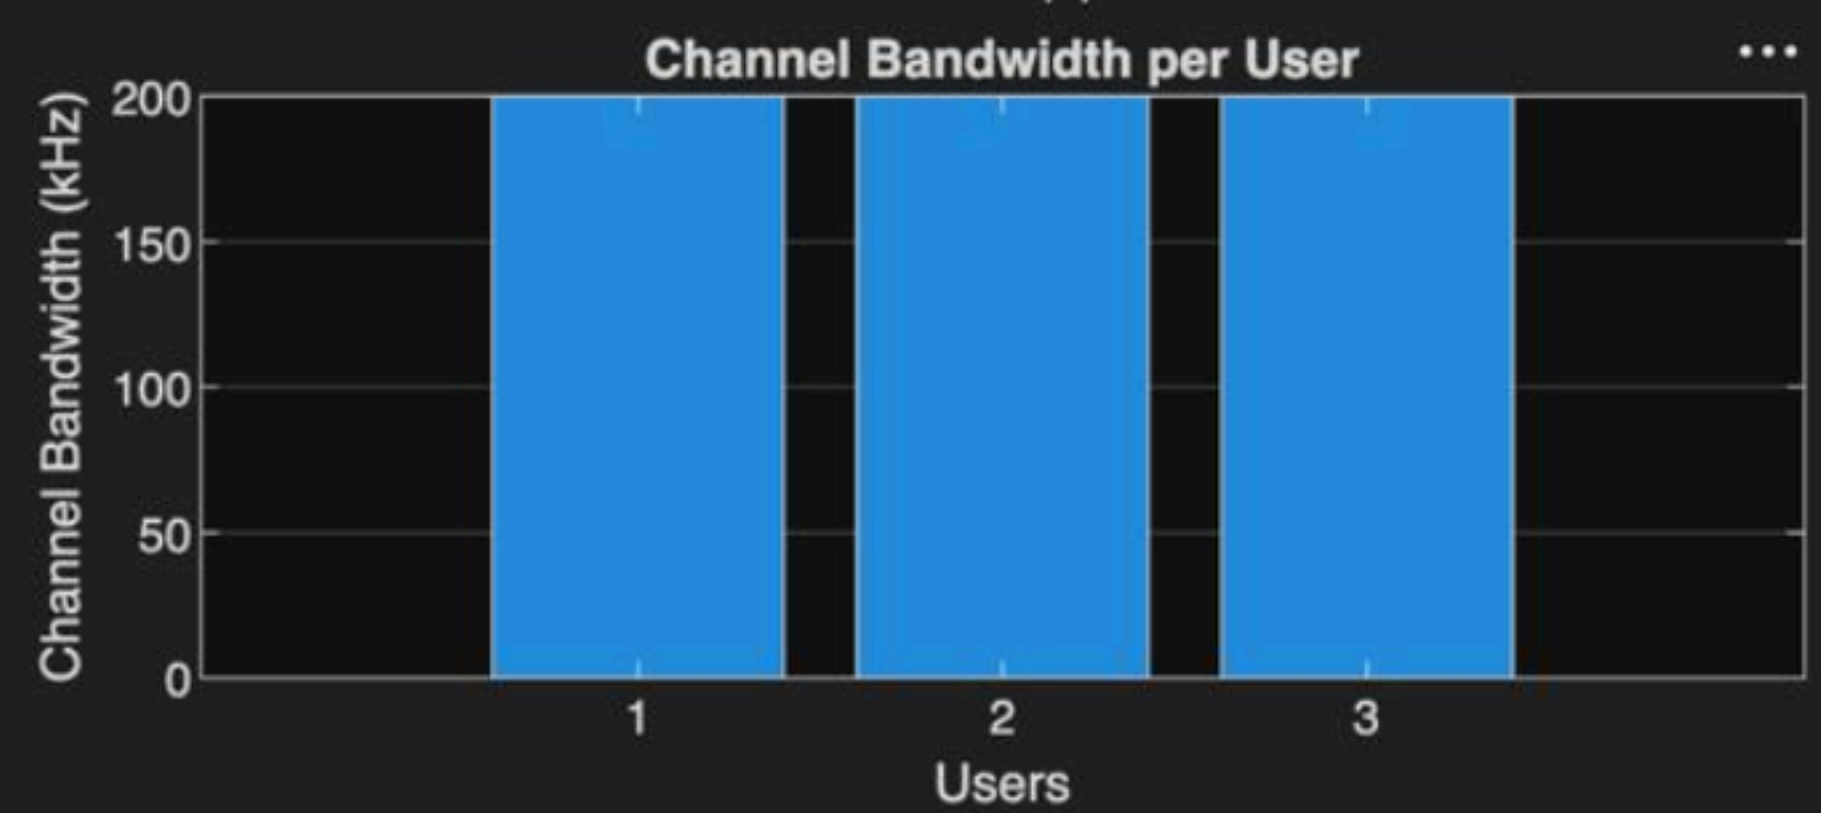

```
simulation tas.m × expimemt1.m × untitled6.m × +
/MATLAB Drive/untitled6.m
1  clc; clear; close all;
2  BW = 200; Users = 3;
3  M = 2; DataRate = BW*log2(M); Rate = DataRate*ones(1,Users);
4  % Channel Bandwidth (kHz)
5  % BPSK Modulation
6  % Data Rate (kbps)
7  disp(' User Data Rate (kbps)')
8  disp([(1:Users)' Rate'])
9  figure
10 bar(1:Users,Rate)
11 xlabel('Users')
12 ylabel('Data Rate (kbps)')
13 title('FDMA Data Rate for Each User')
14 grid on
```

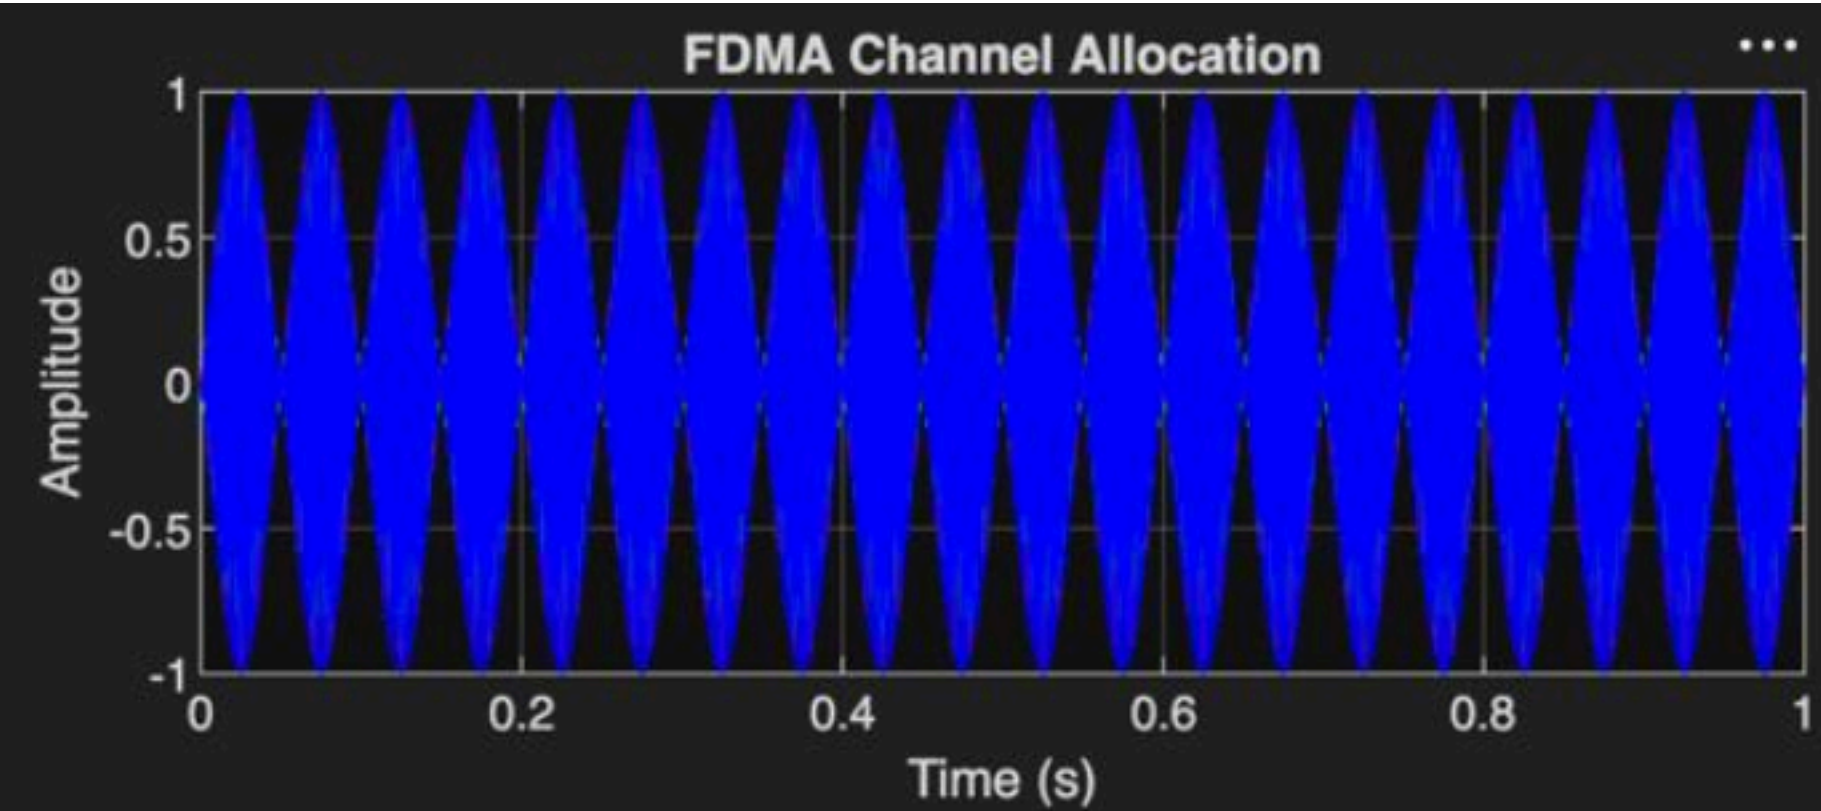