# NAAN MUDHALVAN – PROFESSIONAL READINESS FOR INNOVATION, EMPLOYMENT AND ENTERPRENEURSHIP

#### **ASSIGNMENT - 3**

STUDENT NAME	NITHISHNA S
STUDENT ROLL NO	814720104031

#### **QUESTION:**

Build wowki product, use ultrasonic sensor and detect the distance from the object. Whenever distance is less than 100cms upload the value to the ibm cloud.in recent deviceevents upload the data from wokwi.

- Example: distance is 20 cms. Upload the 20 value to theibm cloud in recent event in the ibm iot platform device
- Submit the Assignment in PDF format in the Git repo.
- PDF should have wokwi share link, connections image,
   code, IBM cloud recent events image(Screenshot)
- Everyone in the team should submit the assignment as it is an individual task.

### LINK:

https://wokwi.com/projects/364311694669799425

### Code:


```
#include <WiFi.h>//library for wifi #include
<PubSubClient.h>//library for MQtt
#define LED 5
#define LED2 4 #define LED3
2 int LDR = 32; intLDRReading
= 0;
                      int
threshold_val = 800;
int IEDBrightness = 0;int
flag=0;
 void callback(char* subscribetopic, byte* payload, unsigned intpayloadLength);
//----credentials of IBM Accounts----
#define ORG "stuloy"//IBM ORGANITION ID
#define DEVICE_TYPE "abcd"//Device type mentioned in ibm watson IOT Platform#define
DEVICE ID "1234" //Device ID mentioned in ibm watson IOT Platform #define TOKEN
"12345678"
                                   //Token
String data3; float h, t;
//---- Customise the above values ---- char server[] = ORG ".messaging.internetofthings.ibmcloud.
com";// Server Name char publishTopic[] ="iot-2/evt/Data/fmt/json";// topic name and type of event
perform and format inwhich data to be send char subscribetopic[] = "iot-2/cmd/test/fmt/String";//
cmd REPRESENT command type AND COMMAND IS TEST OF FORMAT STRING char authMethod[]
= "use-token-auth";// authentication method char token[] = TOKEN; char clientId[] = "d:" ORG ":"
DEVICE_TYPE ":" DEVICE_ID;//client id
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback, wifiClient); //calling the predefined client id by passing
parameter like server id, portand wificredential void setup()// configureing the ESP32
  Serial.begin(115200);
pinMode(LED,OUTPUT);
pinMode(LED2,OUTPUT);
pinMode(LED3,OUTPUT);
delay(10);
Serial.println();
wificonnect();
mqttconnect();
} void loop()// RecursiveFunction
```

```
//PublishData(t, h);
  //delay(1000);
  /* LDRReading = analogRead(LDR);Serial.
  print("LDR READING:");
  Serial.println(LDRReading);
   if (LDRReading >threshold_val){
IEDBrightness = map(LDRReading, 0, 1023, 0, 255);
  Serial.print("LED BRIGHTNESS:");
  Serial.println(IEDBrightness);
   analogWrite(LED, IEDBrightness);
analogWrite(LED2, IEDBrightness);
analogWrite(LED3, IEDBrightness);
       else{
analogWrite(LED, 0);
analogWrite(LED2, 0);
analogWrite(LED3, 0);
delay(300);*/
  if (!client.loop()) {
mqttconnect();
/*....retrieving to
Cloud. */
/*void PublishData(float temp, float humid) {
mqttconnect();//function call for connecting to ibm*/
            creating the String in in form JSon to update the data to ibmcloud
                                                                                  */
  /*String payload = "{\"temperature\":";payload +=
                       payload += ","
temp;
"\"humidity\":";
                       payload += humid; payload
+= "}";
  Serial.print("Sending payload: ");
  Serial.println(payload);
  if (client.publish(publishTopic, (char*) payload.c_str())) {
     Serial.println("Publish ok");// if it sucessfully upload data on the cloudthen it will print publish
ok in Serial monitor or else it will print publish failed
  } else {
    Serial.println("Publish failed");
```


```
*/ void mqttconnect()
              if (!client.connected())
     Serial.print("Reconnecting client to ");
Serial.println(server);
     while (!!!client.connect(clientId, authMethod, token)) {Serial.print(".");
                                 delay(500);
       initManagedDevice();
       Serial.println();
  }}
void wificonnect() //function defination for wificonnect
  Serial.println(); Serial.print("Connecting
  to ");
  WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the connection while
(WiFi.status() != WL_CONNECTED) {
                                                                                  delay(500);
     Serial.print(".");
  Serial.println(""); Serial.println("WiFi
  connected");Serial.println("IP address: ");
  Serial.println(WiFi.localIP());
} void initManagedDevice() {
  if (client.subscribe(subscribetopic)) {
Serial.println((subscribetopic));
     Serial.println("subscribe to cmd OK");
   } else {
     Serial.println("subscribe to cmd FAILED");
} void callback(char* subscribetopic, byte* payload, unsigned intpayloadLength)
  Serial.print("callback invoked for topic: ");
  Serial.println(subscribetopic);
     for (int i = 0; i < payloadLength; i++)</pre>
        //Serial.print((char)payload[i]);data3 +=
(char)payload[i];
  Serial.println("data: "+ data3);
if(data3=="lighton1")
Serial.println(data3); digitalWrite(LED,HIGH);
```

```
else
if(data3=="lightoff1")
Serial.println(data3);
digitalWrite(LED,LOW);
  else if(data3=="lighton2")
Serial.println(data3); digitalWrite(LED2,HIGH);
                                         else
if(data3=="lightoff2")
Serial.println(data3); digitalWrite(LED2,LOW);
        else
if(data3=="lighton3")
Serial.println(data3);
digitalWrite(LED3,HIGH);
         else
if(data3=="lightoff3")
Serial.println(data3); digitalWrite(LED3,LOW);
data3="";
```

## **CIRCUIT DIAGRAM:**

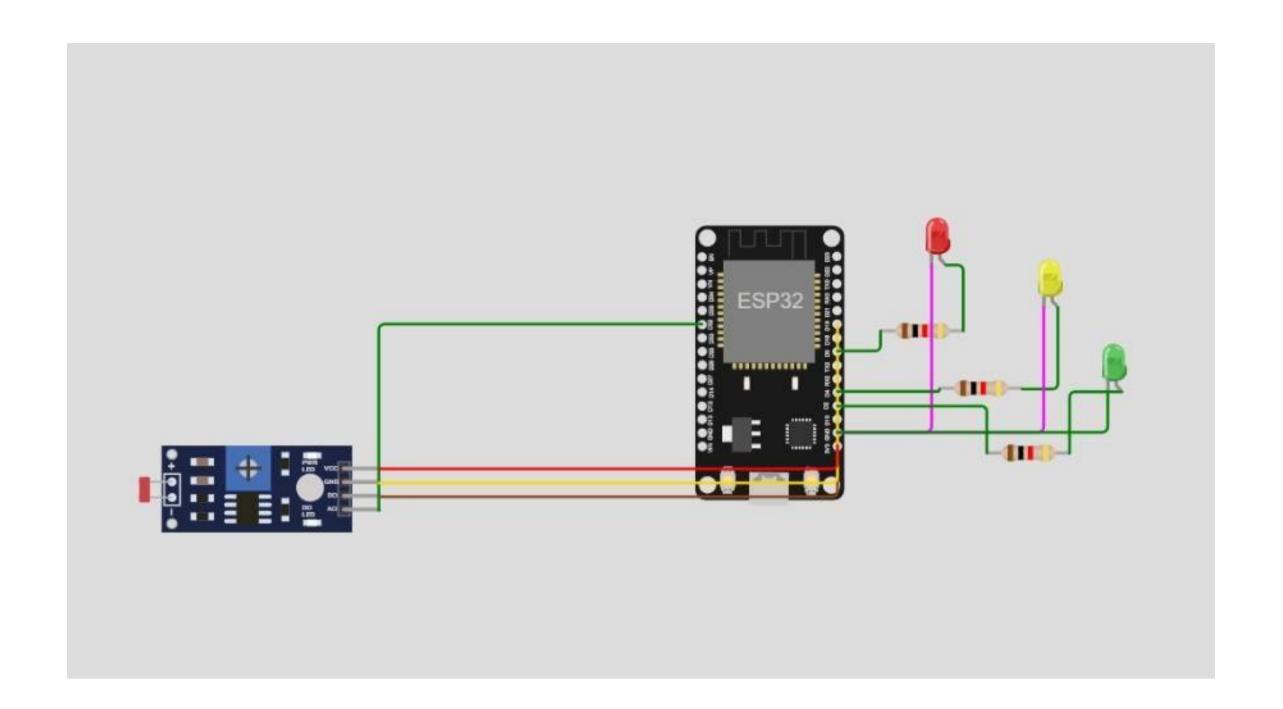

## **IBM CLOUD RECENT EVENT IMAGE:**

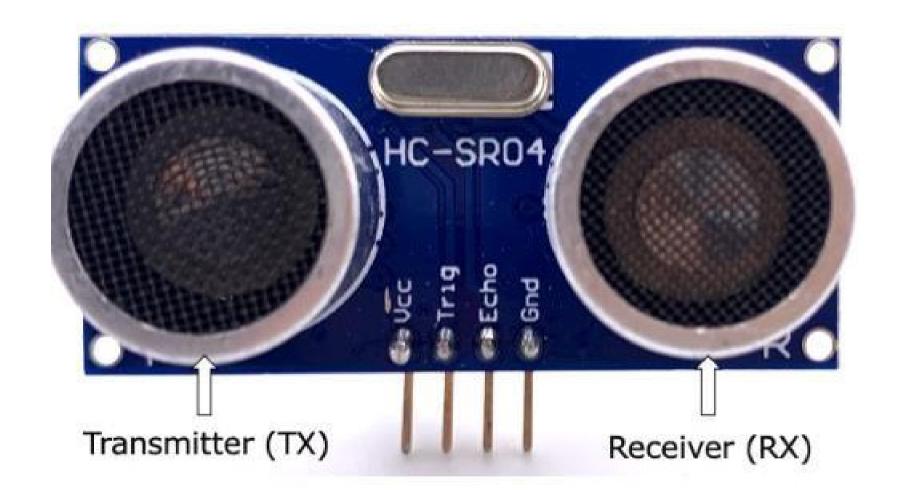

••