

SCRUBBER WASTE WATER TREATMENT



LIQUINEX

WWW.LIQUINEX.COM




LIQUINEX SFG SYSTEM

OUR TECHNOLOGY

Liquinex's water treatment system for scrubber waste water is designed to efficiently purify waste water produced by wet scrubber systems at any gas exhaust including power plants, factories, or marine vessels. The system will separate solid particles from water with a 95-98% efficiency. The resulting water is fit to be discharged or fed into RO system for reuse.

RESULTS

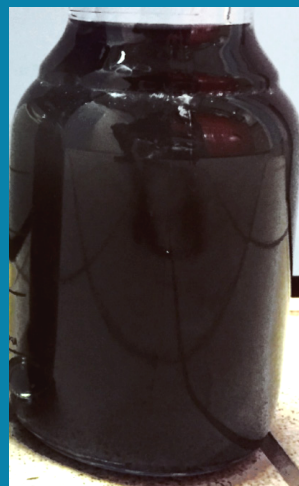

Flue gas condensate



cleaned condensate

LIQUINEX SFG is an elegant solution to the scrubber waste water treatment. The system is built on an auto nano filtration-regeneration process that perpetually regenerates the nano filters without losing performance. It does not rely on polymer filters which must be often replaced to maintain performance level. Our unique nano filters are ultra hydrophilic which allows water to pass through easily and strain out contaminants while using minimal energy.

Liquinex SFG processes scrubber wastewater into discharge friendly water and sludge containing flue gas contaminants which can be dewatered and easily disposed.

Integrated smart self-regulating system on-board ensures sustained performance of the unit without frequent manual supervision and intervention.

Custom capacity and engineered solutions are also available



WATER SAVING

Use 95-98% less water by recovering and recycling reusable water



HI PERFORMANCE

Meet the strictest regulatory discharge limit standards



COST SAVING

Reduce operating cost without using disposable filters and by using less water and less energy



GREEN SOLUTION

Environmentally friendly solution; minimise environmental pollution



EASY HANDLING

Dewatered sludge can be easily disposed off through normal waste disposal


CUSTOM CAPACITY AND CONFIGURATIONS

The Liquinex scrubber waste water system can be manufactured for any size requirement starting from 1 m³/hour to any feed flow, and different configurations depending on specific applications.




The system can be configured to be automatic or semi automatic minimizing human intervention during operation. Additional options include remote monitoring and control system. Our engineers will assess your plant specifications in order to recommend the appropriate capacity and configuration.

PROCESS FOR DISCHARGE

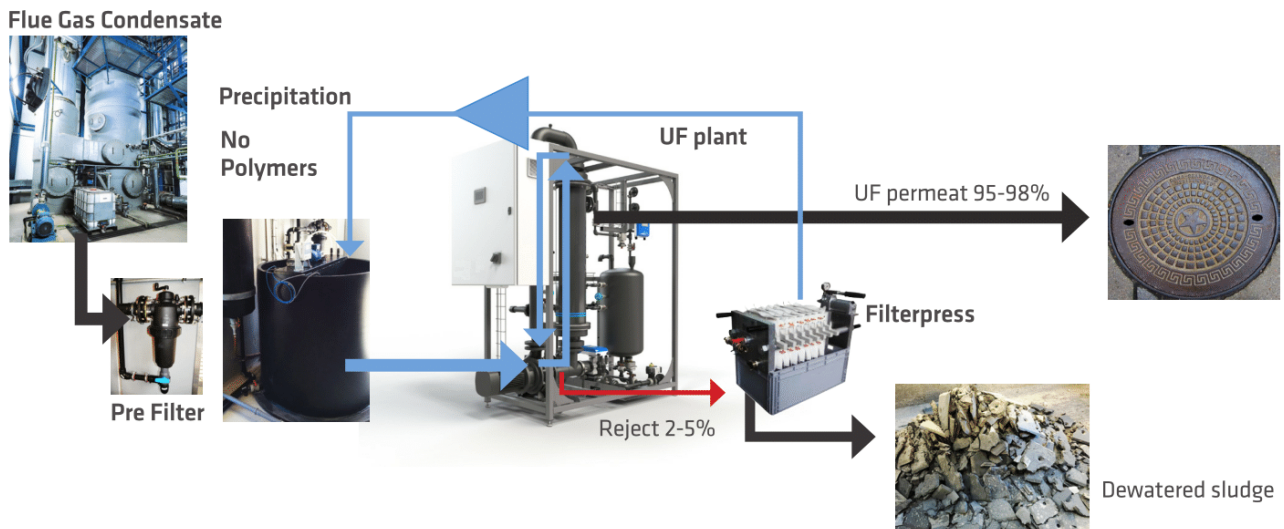

PROCESS FOR REUSE

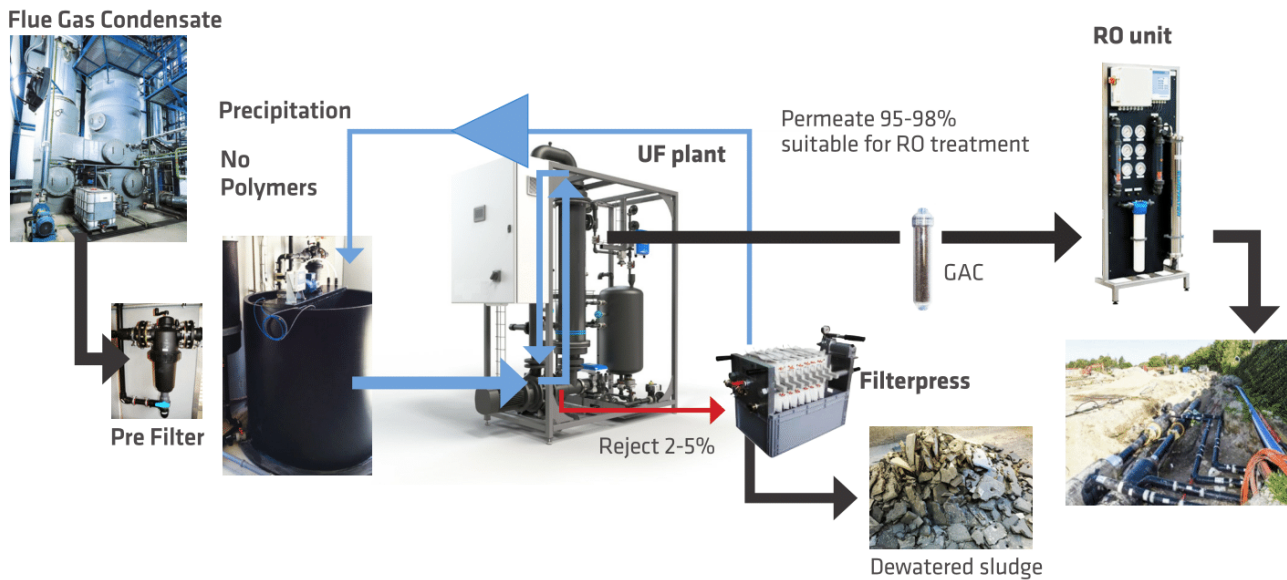

The background of the slide features a low-angle, upward-looking photograph of a modern building's facade. The architecture is characterized by sharp, angular concrete structures and a series of horizontal lines. The image is overlaid with a semi-transparent blue geometric pattern consisting of large, overlapping triangles and polygons. The overall color palette is dominated by various shades of blue and grey.

LIQUINEX GROUP PTE LTD

1 Coleman Street #10-06
The Adelphi
Singapore 179803

lqxgroup@liquinex.com

+65 9741 6479 / +65 9354 0060