





Industrial & Marine Series W C S



Rear View




Front View

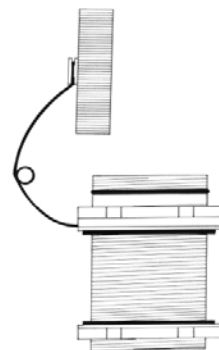

Side View



Top View
Example: HD 15 Monitor



Back Side (Cable Outlet)
Example: HD 15 pos. for Monitor


... with our new water-resistant (IP 68) receptacle system, you can now access devices that previously needed to be sheltered in outside and exposed environments. Our system was designed as a universal, robust, yet compact and low-profile solution to protect many different types of device applications, ranging from standard interconnects, hazard switches, ignition switches, and many other device types requiring protection. Initially developed for the marine industry, the robust and full metal body design is well suited for harsh environment applications often found in industrial and military sectors.

.... for more custom configurations, please contact us !



Industrial & Marine Series W C S


The Details

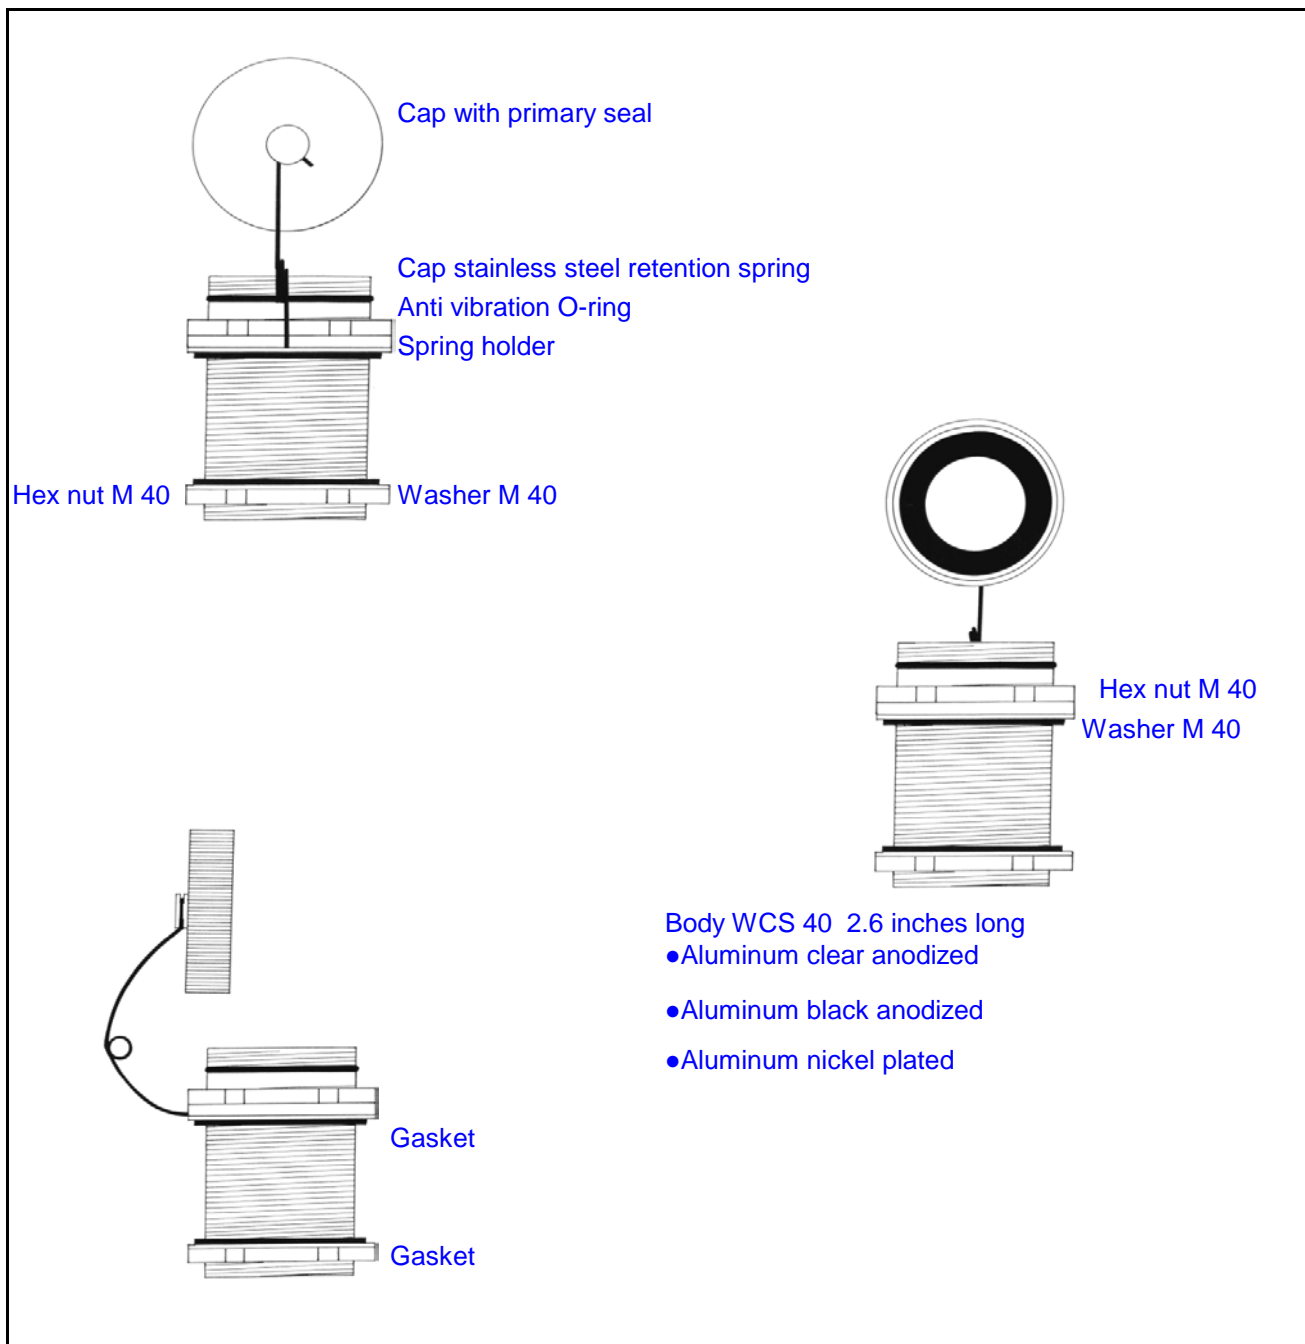



Industrial & Marine Series W C S

The Measurements

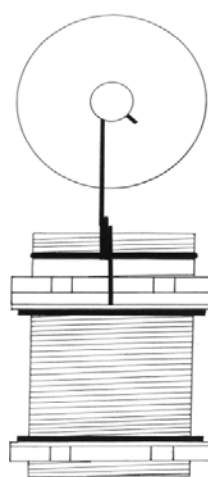


Cap diameter
44 mm (1.73 inches)


12 mm (0.47 inches)



flats 46 mm (wrench)
O.D. 50 mm (1.97 in.)

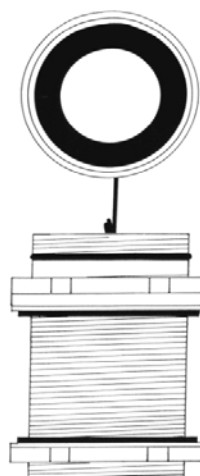

Panel cut diameter 40.5 mm (1.6 inches / 1-5/8)

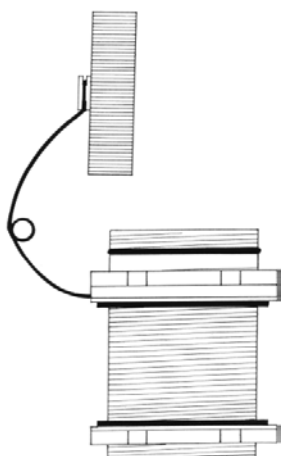

adjustable wall-thickness
1 - 35 mm (0.04 up to 1.38 inches)
body 66 mm (2.6 inches) long



Industrial & Marine Series W C S

The most popular versions

Top View	Back Side	Description	Length	Part Number
		Battery connector with 2 leads 16 AWG red (+) black (-) include mating connector	6 feet	WN1-1BCAA0-006F
			10 feet	WN1-1BCAA0-010F
			15 feet	WN1-1BCAA0-015F
			25 feet	WN1-1BCAA0-025F
			50 feet	WN1-1BCAA0-050F
			100 feet	WN1-1BCAA0-100F
		RJ 45 shielded connector with female side potted and male connector at the open end. 8 pos. for Ethernet etc.. shielded cable CAT 5e	6 feet	WN1-145AA0-006F
			10 feet	WN1-145AA0-010F
			15 feet	WN1-145AA0-015F
			25 feet	WN1-145AA0-025F
			50 feet	WN1-145AA0-050F
			100 feet	WN1-145AA0-100F
		D-Sub Connector DB9 with female side potted and male connector at the open end. 9 position for various applications	6 feet	WN1-1DBAA0-006F
			10 feet	WN1-1DBAA0-010F
			15 feet	WN1-1DBAA0-015F
			25 feet	WN1-1DBAA0-025F
			50 feet	WN1-1DBAA0-050F
			100 feet	WN1-1DBAA0-100F
		High Density connector HD 15 with female side potted and male connector at the open end, 14 pos. wired, for IBM monitors and compatibles with ferrite core	6 feet	WN1-1MTAA0-006F
			10 feet	WN1-1MTAA0-010F
			15 feet	WN1-1MTAA0-015F
			25 feet	WN1-1MTAA0-025F
			50 feet	WN1-1MTAA0-050F
			75 feet	WN1-1MTAA0-075F
		1 x USB2-A connector with 1 x MinDin6 connector, both female sides potted and male connectors at the open end, for various applications like printers, keyboard ...	6 feet	WN1-2ADAA0-006F
			10 feet	WN1-2ADAA0-010F
		2 x USB2-B connectors with female sides potted and male connectors at the open end, for various applications	6 feet	WN1-2BBAA0-006F
			10 feet	WN1-2BBAA0-010F



Industrial & Marine Series W C S

The most popular versions

Top View	Back Side	Description	Length	Part Number
		1 x USB2-B connector with 1 x MinDin6 connector, with female sides potted and male connectors at the open end, for various applications like printers, keyboard, mouse ...		
			6 feet	WN1-2BDAA0-006F
			10 feet	WN1-2BDAA0-010F
			15 feet	WN1-2BDAA0-015F
		2 x MinDin6 connectors with female sides potted and male connectors at the open end.	6 feet	WN1-2DDAA0-006F
			10 feet	WN1-2DDAA0-010F
			15 feet	WN1-2DDAA0-015F
			25 feet	WN1-2DDAA0-025F
			50 feet	WN1-2DDAA0-050F
		3 x USB2-A connectors with female sides potted and male connectors at the open end.		
			6 feet	WN1-3AAAA0-006F
			10 feet	WN1-3AAAA0-010F
		2 x USB2-A connectors and 1 x MinDin6 connector with female sides potted and male connectors at the open end.		
			6 feet	WN1-3ADAA0-006F
			10 feet	WN1-3ADAA0-010F
		2 x MinDin6 connectors and 1 x USB2-A connector with female sides potted and male connectors at the open end.		
			6 feet	WN1-3ADAA1-006F
			10 feet	WN1-3ADAA1-010F
		1 x MinDin6, 1 x USB2-A and 1 x USB2-B connector with female sides potted and male connectors at the open end.		
			6 feet	WN1-3BAAA0-006F
			10 feet	WN1-3BAAA0-010F



Industrial & Marine Series W C S

The most popular versions

Top View	Back Side	Description	Length	Part Number
		Power connector, 3 conductor, grounded, 13 Amps, 125 Volt, 16AWG, 1625 Watts, male side potted, female side at the open end.		
			10 feet	WN1-1PCMP0-010F
			25 feet	WN1-1PCMP0-025F
			50 feet	WN1-1PCMP0-050F
		Power connector, 3 conductor, grounded, 13 Amps, 125 Volt, 16AWG, 1625 Watts, male side potted, open end with single conductors.	10 feet	WN1-1PCMP1-010F
			25 feet	WN1-1PCMP1-025F
			50 feet	WN1-1PCMP1-050F
			100 feet	WN1-1PCMP1-100F
			150 feet	WN1-1PCMP1-150F
			200 feet	WN1-1PCMP1-200F
		Power connector, 3 conductor, grounded, 13 Amps, 125 Volt, 16AWG, 1625 Watts, female side potted, male side at the open end.		
			10 feet	WN1-1PCFP0-010F
			25 feet	WN1-1PCFP0-025F
			50 feet	WN1-1PCFP0-050F
		Power connector, 3 conductor, grounded, 13 Amps, 125 Volt, 16AWG, 1625 Watts, female side potted, open end with single conductors.	10 feet	WN1-1PCFP1-010F
			25 feet	WN1-1PCFP1-025F
			50 feet	WN1-1PCFP1-050F
			100 feet	WN1-1PCFP1-100F
			150 feet	WN1-1PCFP1-150F
			200 feet	WN1-1PCFP1-200F
		RG 58/U Antenna connector female side potted, male side at the open end.		
			6 feet	WN1-1RG580-006F
			10 feet	WN1-1RG580-010F
			25 feet	WN1-1RG580-025F
		1xRG 58/U Antenna connector and 1 x MiniDin6 connector with female sides potted and male sides at the open end.	50 feet	WN1-1RG580-050F
			6 feet	WN1-2RGMD6-006F
			10 feet	WN1-2RGMD6-010F
			25 feet	WN1-2RGMD6-025F
			50 feet	WN1-2RGMD6-050F



Industrial & Marine Series W C S

The most popular versions

Top View	Back Side	Description	Length	Part Number
		1xRG58/U Antenna connector and 1 x USB2-A connector with female sides potted and male connectors at the open end.		
			6 feet	WN1-2RGUA1-006F
			10 feet	WN1-2RGUA1-010F
		1xRG58/U Antenna connector and 2 x USB2-A connectors with female sides potted and male connectors at the open end.		
			6 feet	WN1-3RG2UA-006F
			10 feet	WN1-3RG2UA-010F
		1xRG58/U Antenna connector and 2 x MiniDin6 connectors with female sided potted and male connectors at the open end.		
			6 feet	WN1-3RG2MD-006F
			10 feet	WN1-3RG2MD-010F
			25 feet	WN1-3RG2MD-025F
		1xRG58/U Antenna connector and 1 x USB2-B connector with female sides potted and male connectors at the open end.		
			6 feet	WN1-2RGUB0-006F
			10 feet	WN1-2RGUB0-010F
		1 x High Density connector HD 15 and 2 x USB2-A connectors with female sides potted and male connectors at the open end.		
			6 feet	WN1-3MT2UA-006F
			10 feet	WN1-3MT2UA-010F
		1 x D-Sub connector DB 09 and 2 x USB2-A connectors with female sides potted and male connectors at the open end.		
			6 feet	WN1-3DB2UA-006F
			10 feet	WN1-3DB2UA-010F



Industrial & Marine Series W C S

The most popular versions

Top View	Back Side	Description	Length	Part Number
		2 x USB2-A connectors and 1 x MinDin6 connector with female sides potted and male connectors at the open end.		
			6 feet	WN1-3BAAA1-006F
			10 feet	WN1-3BAAA1-010F
		2 x MinDin6 connectors and 1 x USB2-B connector with female sides potted and male connectors at the open end.		
			6 feet	WN1-3BDAA1-006F
			10 feet	WN1-3BDAA1-010F
		3 x MinDin6 connectors with female sides potted and male connectors at the open end.	6 feet	WN1-3DDAA0-006F
			10 feet	WN1-3DDAA0-010F
			15 feet	WN1-3DDAA0-015F
			25 feet	WN1-3DDAA0-025F
			50 feet	WN1-3DDAA0-050F
		4 x MinDin6 connectors with female sides potted and male connectors at the open end.	6 feet	WN1-4DDAA0-006F
			10 feet	WN1-4DDAA0-010F
			15 feet	WN1-4DDAA0-015F
			25 feet	WN1-4DDAA0-025F
			50 feet	WN1-4DDAA0-050F



rde Connectors & Cables, Inc.
 5277 N.W. 108th Avenue
 Sunrise, FL 33351
 Phone: 954-746-6400
 Phone: 1-800-511-7184
 Fax: 954-746-4700
<http://www.rde-usa.com>