




3V3 regulator




Oscillator

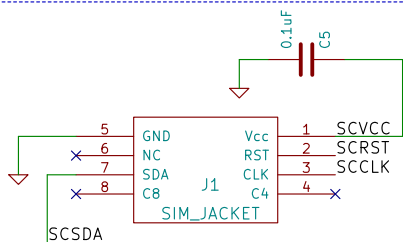


Smartcard socket

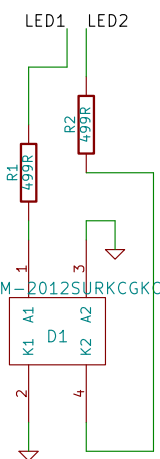


LEDs




Debug header



Programming header




MCU decoupling

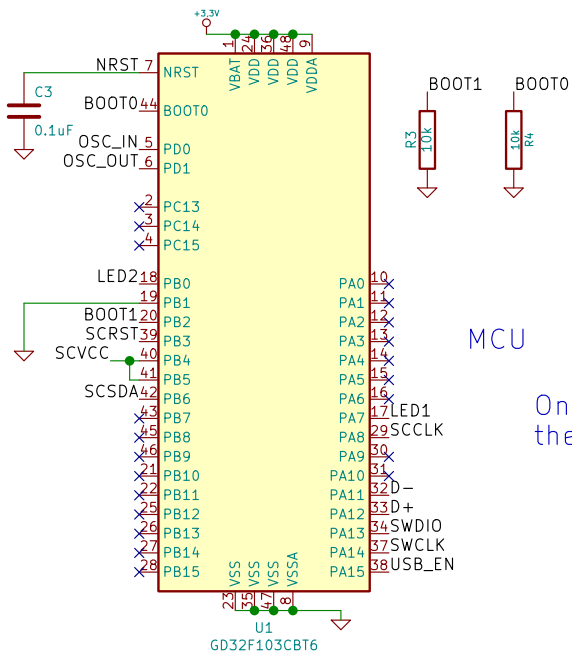

MCU

On the r5 variant shown here (with GD32 instead of STM32) the PB1 pin is connected to GND for variant identification.

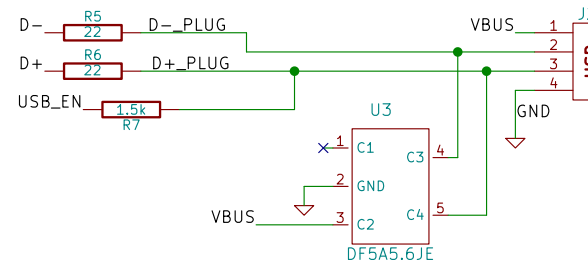

USB interface



Fiducials



Power flags

Nitrokey

Sheet: /
File: cryptostick.sch

Title: Pro Hardware

Size: A4 Date: 2018-03-31
KiCad E.D.A. kicad 5.1.12-84ad8e8a8692ubuntu21.04.1

Rev: 2
Id: 1/1