

POLYAMIDE CONDUIT GLANDS (PG THREAD)



TECHNICAL DETAILS

Material : POLYAMIDE PA6 V2

Connection Thread : PG (DIN 40430)

Color : Grey, Black

Temperature range : -30°C + 80°C

POLYAMIDE CONDUIT GLANDS

PROPERTIES


UV Resistance (Black)

Easy to assemble

Halogen Free

Apply with either PA or PP Conduits

IP 67 / IP 64

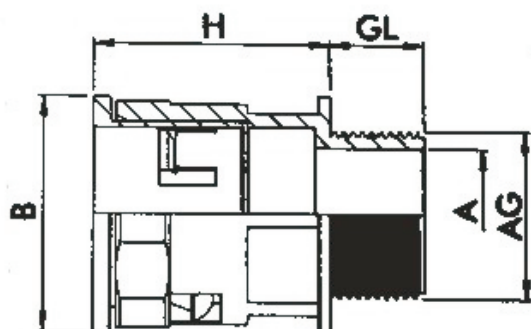

CAT NO.	AG MM.	SIZE	SPIRAL DIAMETER	H MM.	GL MM.	A MM.	B MM.	MM.	STAND. PKT
TG 7	PG 7	PG 7 / AD10	6.5 x 10	26	11	6.9	18.7	15	100
TG 9	PG 9	PG 9 / AD 13	10 x 13	26	11	10.3	21.7	18	100
TG 11	PG 11	PG 11 / AD 15.8	12 x 15.8	26.5	11	13.3	26	20	100
TG 13.5	PG 13.5	PG 13.5 / AD 18.4	14.2 x 18.4	31	11	15.3	28	23	100
TG 16	PG 16	PG 16 / AD 21.2	16.5 x 21.2	33	13	16.6	32	27	100
TG 21	PG 21	PG 21 / AD 28.4	23 x 28.4	39	16	22.3	39.5	34	50
TG 29	PG 29	PG 29 / AD 34.5	29 x 34.5	43	16	31.7	46.5	40	50
TG 36	PG 36	PG 36 / AD 42.5	36 x 42.5	45.5	16	40.5	55.5	50	20
TG 49	PG 49	PG 49 / AD 54.5	48 x 54.5	47.5	16	51.7	67.5	62	20



tecocind@gmail.com



www.tecox.in