


Date: 23-Aug-22 Time: 08:45:09

CMC DE Pass/Fail Tolerance: 1.00

I:c Ratio: (2.00 1.00)

Measured by:

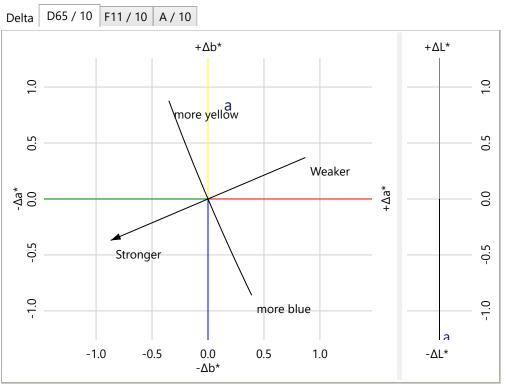

Single/All

CMC Plot

Zoom Out

Zoom In

Print Form

Batch Name	III/Obs DL*	<u>Da*</u>	<u>Db*</u>	DL*/ISL	DC*/cSC	DH*/SH	CMC DE	<u>M.I.</u>	<u>P/F</u>	Color	Comments
MTR17080 PR2223/68673 1- 3047363/VIII/22	D65 10 Deg -1.19	0.17	0.88	-0.50	-0.30	-0.60	0.83		Warn too dark	too dull	too yellow
MTR17080 PR2223/68673 1- 3047363/VIII/22	F11 10 Deg -0.82	-1.05	1.38	-0.35	0.16	-1.39	1.45	1.36	Warn too dark	too bright	too yellow
MTR17080 PR2223/68673 1- 3047363/VIII/22	A 10 Deg -1.09	-0.29	1 17	-0 47	-0.20	-0.86	1.00	0.55	Pass too dark	too dull	too vellow