

Standard Name10 of 88

095A Black CONST FW14

Visual Hue Request:

New StdRetrieve StdStore StdList Std

Instrument Setup:%R LAV SCI UV Cal

Date: 26-Jun-21Time: 19:15:25

Batch Name47 of 50

ADIN212611-017185-L 3-3 3041909/VI/21

New BatRetrieve BatStore BatList Bat


Instrument Setup: %R LAV SCI UV Cal

Date: 17-Jul-21Time: 13:37:32

Batch Name

70008305 ADIN212611-017185-L 3-3 3041909/VI/21

70008305 ADIN212611-017185-L 3-3 3041909/VI/21

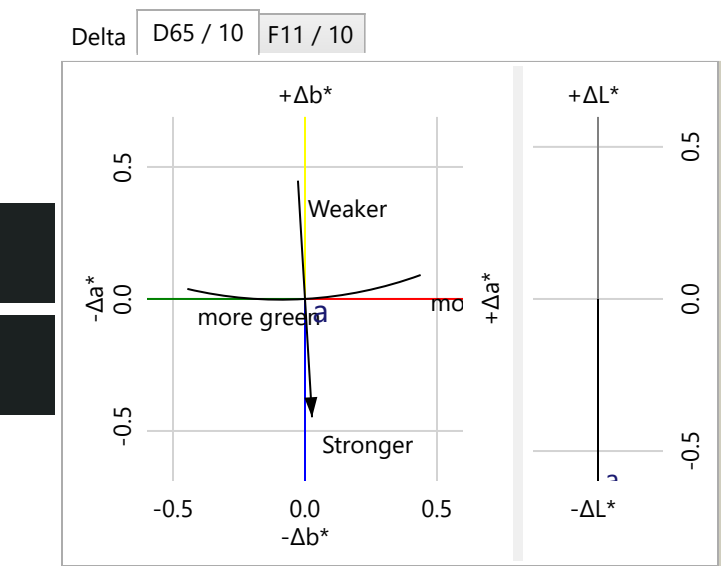

Single/AllZoom InZoom OutCMC PlotPrint Form

DataColor TOOLS 2.8.1S/N NO. 8823242

Standard %R

400-450nm 3.17 2.83 2.63 2.50 2.42 2.40

460-510nm 2.36 2.35 2.33 2.32 2.32 2.30

520-570nm 2.29 2.27 2.28 2.25 2.20 2.15

580-630nm 2.12 2.11 2.11 2.10 2.11 2.13

640-690nm 2.20 2.32 2.57 3.06 4.30 5.96

700nm 9.57

CMC DE Pass/Fail Tolerance: 0.80

I:c Ratio: (2.00 1.00)

III/Obs	DL*	Da*	Db*	DL*/ISL	DC*/cSC	DH*/SH	CMC DE	M.I.	P/F	Color	Comments	
D65 10 Deg	-0.57	0.06	-0.02	-0.54	0.03	0.07	0.55		Pass	too dark	too bright	too red
F11 10 Deg	-0.77	-0.39	-0.41	-0.74	0.70	-0.28	1.05	0.65	Fail	too dark	too bright	too green