

Standard Name 270 of 270

21C 1048 CRD

Visual Hue Request:

New Std	Retrieve Std	Store Std	List Std	Update Std
---------	--------------	-----------	----------	------------

Instrument Setup: %R LAV SCI UV Cal

Date: 13-Dec-21 Time: 10:51:43

Batch Name 1 of 3

↑ 3157 5329257 1-1 3060300/X/22 PERSIAN RED ↓

New Bat	Retrieve Bat	Store Bat	List Bat	Update Bat
---------	--------------	-----------	----------	------------

Instrument Setup: %R LAV SCI UV Cal

Date: 14-Nov-22 Time: 16:43:53


CMC DE Pass/Fail Tolerance: 1.00

I:c Ratio: (2.00 1.00)

Measured by: ▼

DataColor TOOLS 2.8.1

S/N NO. 8823242

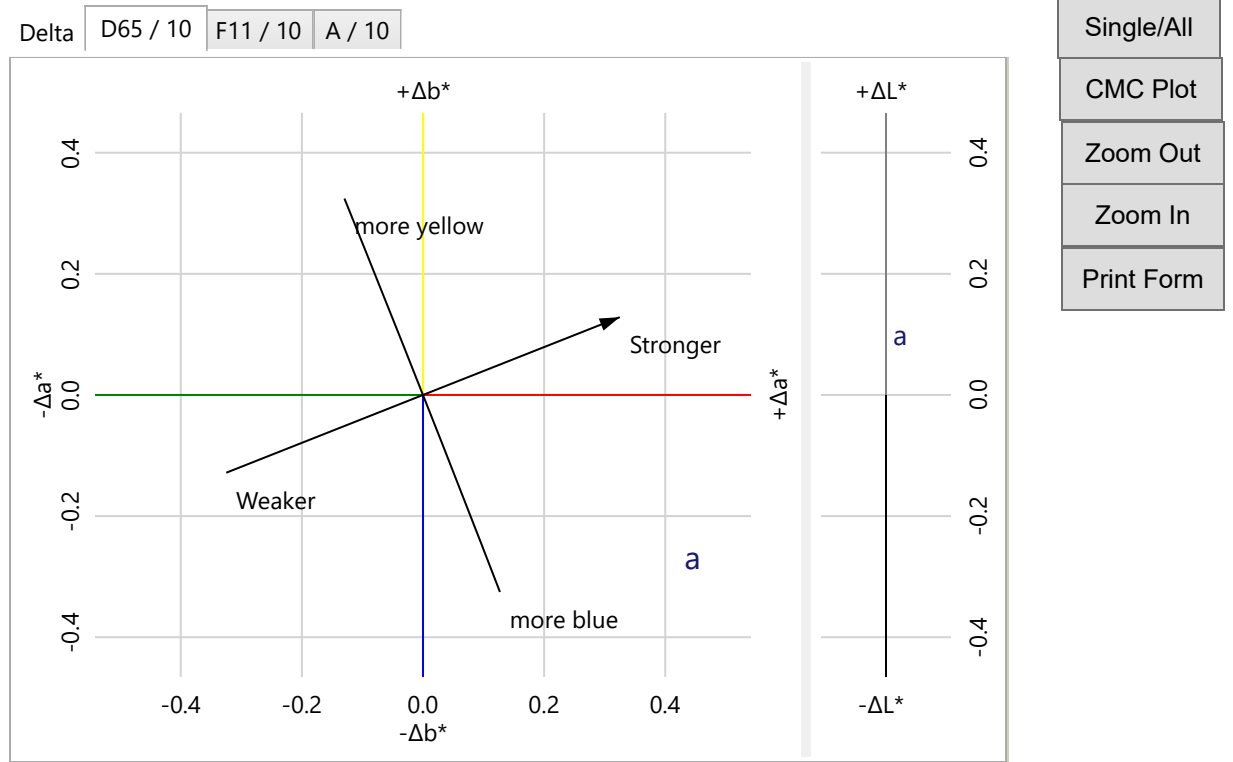

<u>Batch Name</u>	<u>III/Obs</u>	<u>DL*</u>	<u>Da*</u>	<u>Db*</u>	<u>DL*/ISL</u>	<u>DC*/cSC</u>	<u>DH*/SH</u>	<u>CMC DE</u>	<u>M.I.</u>	<u>P/F</u>	<u>Color</u>	<u>Comments</u>	
F3T18157 5329257 1-1 3060300/X/22 PERSIAN RED	D65 10 Deg	0.10	0.44	-0.26	0.06	0.13	-0.29	0.32		Pass	too light	too bright	too blue
F3T18157 5329257 1-1 3060300/X/22 PERSIAN RED	F11 10 Deg	0.07	0.20	-0.38	0.04	-0.00	-0.33	0.33	0.29	Pass	too light	too dull	too blue
F3T18157 5329257 1-1 3060300/X/22 PERSIAN RED	A 10 Deg	0.16	0.57	-0.11	0.08	0.17	-0.30	0.36	0.16	Pass	too light	too bright	too blue