


Instrument Setup: %R LAV SCI UV Cal
Date: 01-Feb-23 Time: 15:58:05

CMC DE Pass/Fail Tolerance: 1.00

I:c Ratio: (2.00 1.00)

Measured by:

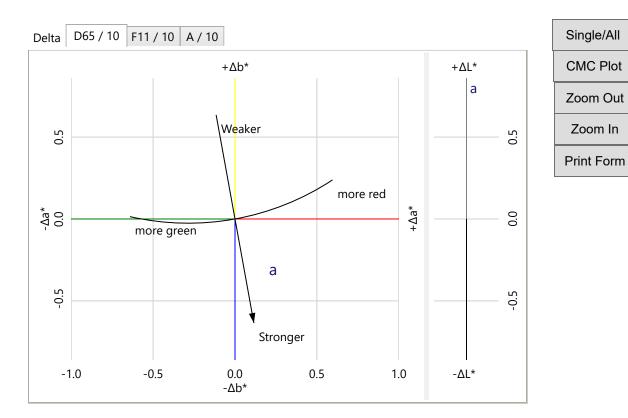

Batch Name	III/Obs	DL*	<u>Da*</u>	Db*	DL*/ISL	DC*/cSC	DH*/SH	CMC DE	<u>M.I.</u>	<u>P/F</u>	Color	<u>Comments</u>
SPQ19053 5329885 1-1 3060225/X/22 GRAPHITE GREY	D65 10 Deg	0.82	0.23	-0.29	0.59	0.45	0.22	0.77		Warn too light	too bright	too red
SPQ19053 5329885 1-1 3060225/X/22 GRAPHITE GREY	F11 10 Deg	0.77	0.30	-0.42	0.55	0.46	0.51	0.88	0.16	Warn too light	too bright	too red
SPQ19053 5329885 1-1 3060225/X/22 GRAPHITE GREY	A 10 Deg	0.83	0.26	-0.27	0.59	0.49	0.03	0.77	0.02	Warn too light	too bright	too red