


Instrument Setup: %R LAV SCI UV Cal Date: 19-Aug-23 Time: 09:49:08

CMC DE Pass/Fail Tolerance: 1.00

I:c Ratio: ( 2.00 1.00)

Measured by:

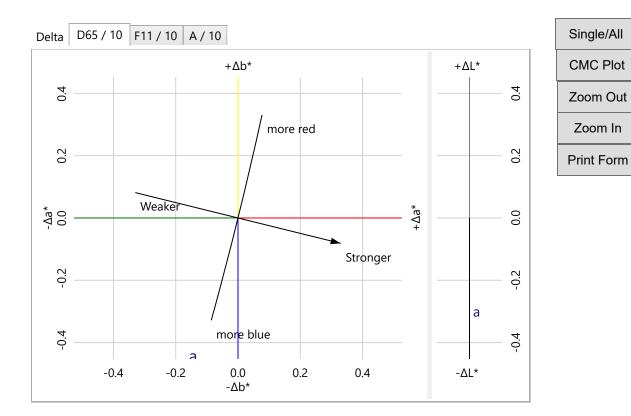

Batch Name	III/Obs	DL*	<u>Da*</u>	<u>Db*</u>	DL*/ISL	DC*/cSC	DH*/SH	CMC DE	<u>M.I.</u>	P/F	Color Co	omments
SJS7091 24U190 84745 EXP2300641 CYBER VIOLET SJS7091 24U190 84745 EXP2300641 CYBER VIOLET SJS7091 24U190 84745 EXP2300641 CYBER VIOLET	D65 10 Deg F11 10 Deg A 10 Deg		-0.14 -0.10 -0.40		-0.14 -0.15 -0.16	-0.02 0.02 -0.28	-0.46 -0.55 -0.54	0.48 0.57 0.63	0.11 0.26	Pass too dark Pass too dark Pass too dark	too bright	too blue too blue too blue