

CHAPTER

4

ENERGY ANALYSIS OF CLOSED SYSTEMS

OBJECTIVES

The objectives of Chapter 4 are to:

- Examine the moving boundary work or $P dV$ work commonly encountered in reciprocating devices such as automotive engines and compressors.
- Identify the first law of thermodynamics as simply a statement of the conservation of energy principle for closed (fixed-mass) systems.
- Develop the general energy balance applied to closed systems.
- Define the specific heat at constant volume and the specific heat at constant pressure.
- Relate the specific heats to the calculation of the changes in internal energy and enthalpy of ideal gases.
- Describe incompressible substances and determine the changes in their internal energy and enthalpy.
- Solve energy balance problems for closed (fixed-mass) systems that involve heat and work interactions for general pure substances, ideal gases, and incompressible substances.

In Chap. 2, we considered various forms of energy and energy transfer, and we developed a general relation for the conservation of energy principle or energy balance. Then in Chap. 3, we learned how to determine the thermodynamics properties of substances. In this chapter, we apply the energy balance relation to systems that do not involve any mass flow across their boundaries—that is, closed systems.

We start this chapter with a discussion of the *moving boundary work* or $P dV$ work commonly encountered in reciprocating devices such as automotive engines and compressors. We continue by applying the *general energy balance* relation, which is simply expressed as $E_{in} - E_{out} = \Delta E_{system}$, to systems that involve pure substance. Then we define *specific heats*, obtain relations for the internal energy and enthalpy of *ideal gases* in terms of specific heats and temperature changes, and perform energy balances on various systems that involve ideal gases. We repeat this for systems that involve solids and liquids, which are approximated as *incompressible substances*.

4-1 ■ MOVING BOUNDARY WORK

One form of mechanical work often encountered in practice is associated with the expansion or compression of a gas in a piston–cylinder device. During this process, part of the boundary (the inner face of the piston) moves back and forth. Therefore, the expansion and compression work is often called **moving boundary work**, or simply **boundary work** (Fig. 4–1). Some call it the $P dV$ work for reasons explained later. Moving boundary work is the primary form of work involved in *automobile engines*. During their expansion, the combustion gases force the piston to move, which in turn forces the crankshaft to rotate.

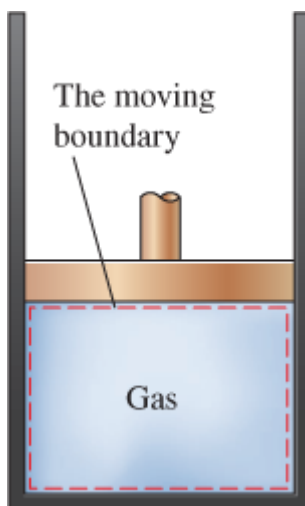


FIGURE 4-1

The work associated with a moving boundary is called *boundary work*.

The moving boundary work associated with real engines or compressors cannot be determined exactly from a thermodynamic analysis alone because the piston usually moves at very high speeds, making it difficult for the gas inside to maintain equilibrium. Then the states through which the system passes during the process cannot be specified, and no process path can be drawn. Work, being a path function, cannot be determined analytically without a knowledge of the path. Therefore, the boundary work in real engines or compressors is determined by direct measurements.

In this section, we analyze the moving boundary work for a *quasi-equilibrium process*, a process during which the system remains nearly in equilibrium at all times. A quasi-equilibrium process, also called a *quasi-static process*, is closely approximated by real engines, especially when the piston moves at low velocities. Under identical conditions, the work output of the engines is found to be a maximum, and the work input to the compressors to be a minimum, when quasi-equilibrium processes are used in place of nonquasi-equilibrium processes. In the following example, the work associated with a moving boundary is evaluated for a quasi-equilibrium process.

Consider the gas enclosed in the piston–cylinder device shown in Fig. 4–2. The initial pressure of the gas is P , the total volume is V , and the cross-sectional area of the piston is A . If the piston is allowed to move a distance ds in a quasi-equilibrium manner, the differential work done during this process is

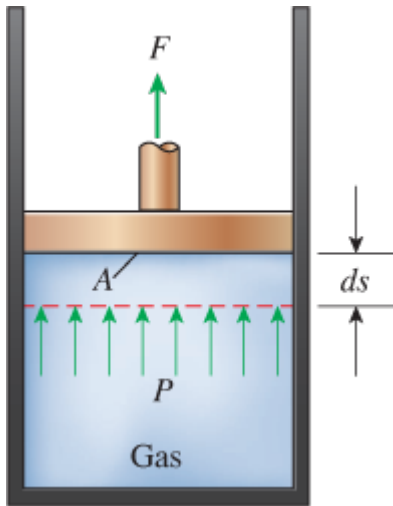


FIGURE 4–2

A gas does a differential amount of work δW_b as it forces the piston to move by a differential amount ds .

$$(4-1)$$

That is, the boundary work in the differential form is equal to the product of the absolute pressure P and the differential change in the volume dV of the system. This expression also explains why the moving boundary work is sometimes called the $P dV$ work.

Note in Eq. 4–1 that P is the absolute pressure, which is always positive. However, the volume change dV is positive during an expansion process (volume increasing) and negative during a compression process (volume decreasing). Thus, the boundary work is positive during an expansion process and negative during a compression process. Therefore, Eq. 4–1 can be viewed as an expression for boundary work output, $W_{b,\text{out}}$. A negative result indicates boundary work input (compression).

The total boundary work done during the entire process as the piston moves is obtained by adding all the differential works from the initial state to the final state:

$$(4-2)$$

This integral can be evaluated only if we know the functional relationship between P and V during the process. That is, $P = f(V)$ should be available. Note that $P = f(V)$ is simply the equation of the process path on a P - V diagram.

The quasi-equilibrium expansion process described is shown on a P - V diagram in Fig. 4–3. On this diagram, the differential area dA is equal to $P dV$, which is the differential work. The total area A under the process curve 1–2 is obtained by adding these differential areas:

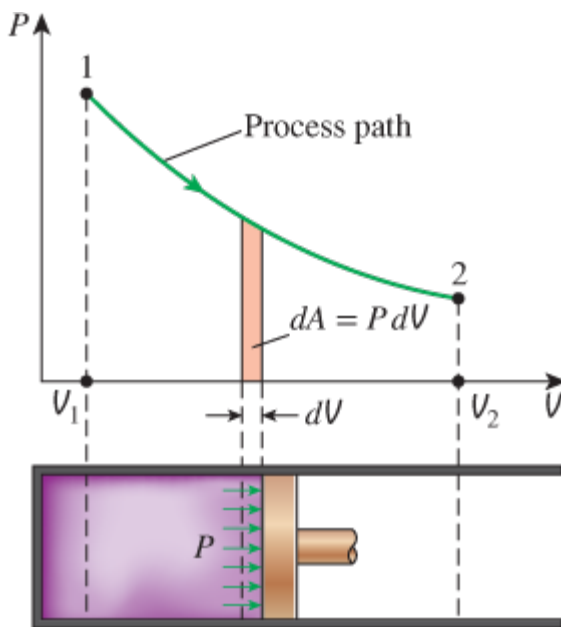


FIGURE 4-3

The area under the process curve on a P - V diagram represents the boundary work.

$$(4-3)$$

A comparison of this equation with Eq. 4-2 reveals that *the area under the process curve on a P - V diagram is equal, in magnitude, to the work done during a quasi-equilibrium expansion or compression process of a closed system.* (On the P - V diagram, it represents the boundary work done per unit mass.)

A gas can follow several different paths as it expands from state 1 to state 2. In general, each path will have a different area underneath it, and since this area represents the magnitude of the work, the work done will be different for each process (Fig. 4-4). This is expected, since work is a path function (i. e., it depends on the path followed as well as the end states). If work were not a path function, no cyclic devices (car engines, power plants) could operate as work-producing devices. The work produced by these devices during one part of the cycle would have to be consumed during another part, and there would be no net work output. The cycle shown in Fig. 4-5 produces a net work output because the work done by the system during the expansion process (area under path A) is greater than the work done on the system during the compression part of the cycle (area under path B), and the difference between these two is the net work done during the cycle (the colored area).

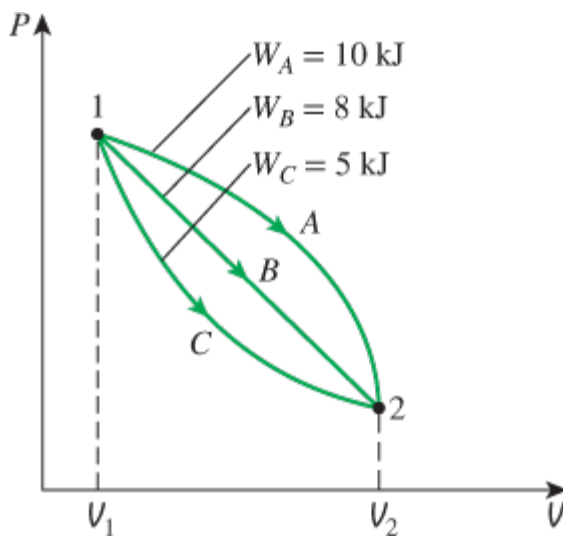


FIGURE 4-4

The boundary work done during a process depends on the path followed as well as the end states.

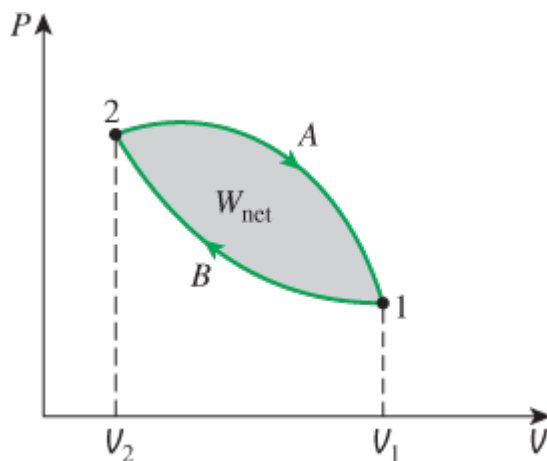


FIGURE 4-5

The net work done during a cycle is the difference between the work done by the system and the work done on the system.

If the relationship between P and V during an expansion or a compression process is given in terms of experimental data instead of in a functional form, obviously we cannot perform the integration analytically. We can, however, plot the P - V diagram of the process using these data points and calculate the area underneath graphically to determine the work done.

Strictly speaking, the pressure P in Eq. 4-2 is the pressure at the inner surface of the piston. It becomes equal to the pressure of the gas in the cylinder only if the process is quasi-equilibrium and thus the entire gas in the cylinder is at the same pressure at any given time. Equation 4-2 can also be used for nonquasi-equilibrium processes provided that the pressure *at the inner face of the piston* is used for P . (Besides, we cannot speak of the pressure of a *system* during a nonquasi-equilibrium process since properties are defined for equilibrium states only.) Therefore, we can generalize the boundary work relation by expressing it as

$$(4-4)$$

where P_i is the pressure at the inner face of the piston.

Note that work is a mechanism for energy interaction between a system and its surroundings, and W_b represents the amount of energy transferred from the system during an expansion process (or to the system during a compression process). Therefore, it has to appear somewhere else, and we must be able to account for it since energy is conserved. In a car engine, for example, the boundary work done by the expanding hot gases is used to overcome friction between the piston and the cylinder, to push atmospheric air out of the way, and to rotate the crankshaft. Therefore,

(4-5)

Of course the work used to overcome friction appears as frictional heat and the energy transmitted through the crankshaft is transmitted to other components (such as the wheels) to perform certain functions. But note that the energy transferred by the system as work must equal the energy received by the crankshaft, the atmosphere, and the energy used to overcome friction. The use of the boundary work relation is not limited to the quasi-equilibrium processes of gases only. It can also be used for solids and liquids.

EXAMPLE 4-1 Boundary Work for a Constant-Volume Process

A rigid tank contains air at 500 kPa and 150°C. As a result of heat transfer to the surroundings, the temperature and pressure inside the tank drop to 65°C and 400 kPa, respectively. Determine the boundary work done during this process.

SOLUTION Air in a rigid tank is cooled, and both the pressure and temperature drop. The boundary work done is to be determined.

Analysis A sketch of the system and the P - V diagram of the process are shown in Fig. 4-6. The boundary work can be determined from Eq. 4-2 to be

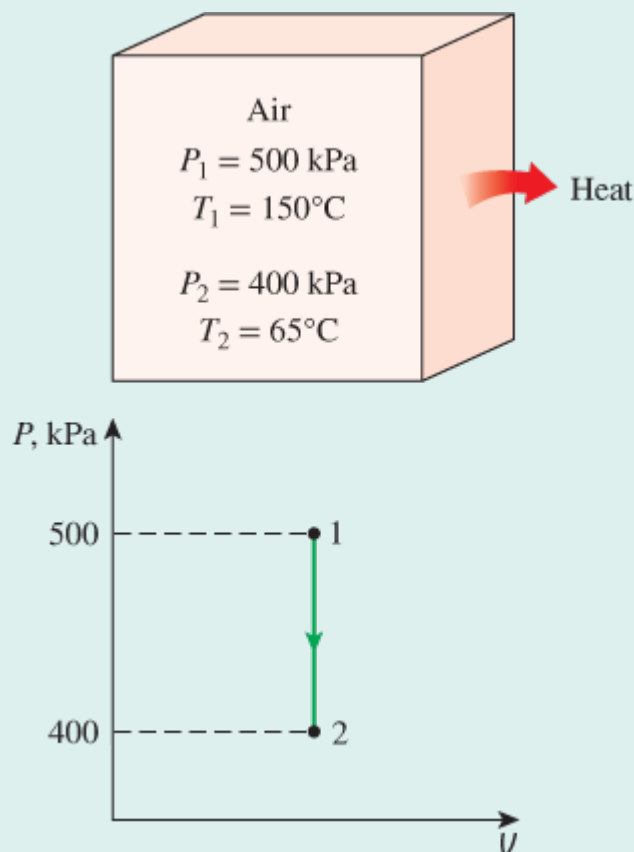


FIGURE 4-6

Schematic and P - V diagram for Example 4-1.

$$W_b = \int_1^2 P dV = 0$$

Discussion This is expected since a rigid tank has a constant volume and $dV = 0$ in this equation. Therefore, there is no boundary work done during this process. That is, the boundary work done during a constant-volume process is always zero. This is also evident from the P - V diagram of the process (the area under the process curve is zero).

EXAMPLE 4-2 Boundary Work for a Constant-Pressure Process

A frictionless piston–cylinder device contains 10 lbm of steam at 60 psia and 320°F. Heat is now transferred to the steam until the temperature reaches 400°F. If the piston is not attached to a shaft and its mass is constant, determine the work done by the steam during this process.

SOLUTION Steam in a piston–cylinder device is heated and the temperature rises at constant pressure. The boundary work done is to be determined.

Assumptions The expansion process is quasi-equilibrium.

Analysis A sketch of the system and the P - V diagram of the process are shown in Fig. 4-7. Even though it is not explicitly stated, the pressure of the steam within the cylinder remains constant during this process since both the atmospheric pressure and the weight of the piston remain constant. Therefore, this is a constant-pressure process, and, from Eq. 4-2

page 165

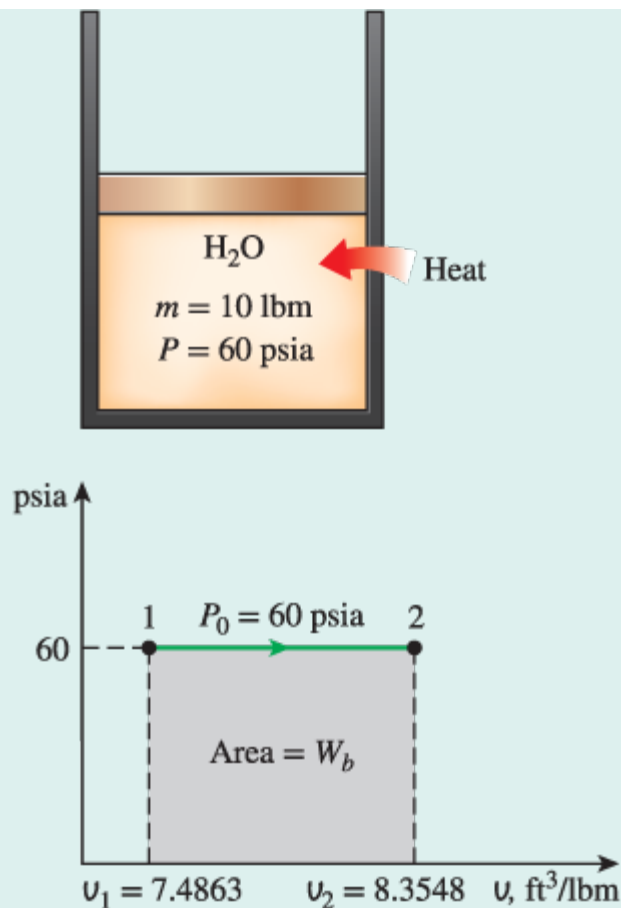


FIGURE 4-7

Schematic and P - v diagram for Example 4-2.

(4-6)

or

$$W_b = mP_0(v_2 - v_1)$$

since $V = m\bar{v}$. From the superheated vapor table (Table A-6E), the specific volumes are determined to be $\bar{v}_1 = 7.4863 \text{ ft}^3/\text{lbm}$ at state 1 (60 psia, 320°F) and $\bar{v}_2 = 8.3548 \text{ ft}^3/\text{lbm}$ at state 2 (60 psia, 400°F). Substituting these values yields

$$\begin{aligned} W_b &= (10 \text{ lbm})(60 \text{ psia})[(8.3548 - 7.4863) \text{ ft}^3/\text{lbm}] \left(\frac{1 \text{ Btu}}{5.404 \text{ psia} \cdot \text{ft}^3} \right) \\ &= \mathbf{96.4 \text{ Btu}} \end{aligned}$$

Discussion The positive sign indicates that the work is done by the system. That is, the steam used 96.4 Btu of its energy to do this work. The magnitude of this work could also be determined by calculating the area under the process curve on the P - v diagram, which is simply $P_0 \Delta \bar{v}$ for this case.

EXAMPLE 4-3 Isothermal Compression of an Ideal Gas

A piston–cylinder device initially contains 0.4 m^3 of air at 100 kPa and 80°C . The air is now compressed to 0.1 m^3 in such a way that the temperature inside the cylinder remains constant. Determine the work done during this process.

SOLUTION Air in a piston–cylinder device is compressed isothermally. The boundary work done is to be determined.

Assumptions 1 The compression process is quasi-equilibrium. 2 At specified conditions, air can be considered to be an ideal gas since it is at a high temperature and low pressure relative to its critical-point values.

Analysis A sketch of the system and the P - V diagram of the process are shown in Fig. 4-8. For an ideal gas at constant temperature T_0 ,

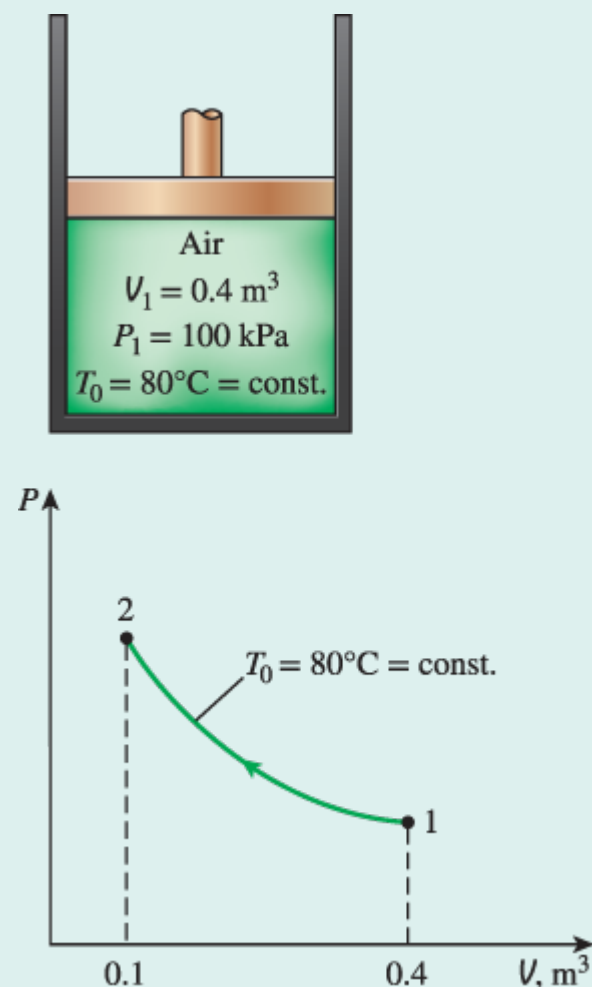


FIGURE 4-8

Schematic and P - V diagram for Example 4-3.

$$PV = mRT_0 = C \quad \text{or} \quad P = \frac{C}{V}$$

where C is a constant. Substituting this into Eq. 4-2, we have

$$W_b = \int_1^2 P \, dV = \int_1^2 \frac{C}{V} dV = C \int_1^2 \frac{dV}{V} = C \ln \frac{V_2}{V_1} = P_1 V_1 \ln \frac{V_2}{V_1} \quad (4-7)$$

In Eq. 4-7, $P_1 V_1$ can be replaced by $P_2 V_2$ or mRT_0 . Also, V_2/V_1 can be replaced by P_1/P_2 for this case since $P_1 V_1 = P_2 V_2$.



Substituting the numerical values into Eq. 4-7 yields

$$\begin{aligned} W_b &= (100 \text{ kPa})(0.4 \text{ m}^3) \left(\ln \frac{0.1}{0.4} \right) \left(\frac{1 \text{ kJ}}{1 \text{ kPa} \cdot \text{m}^3} \right) \\ &= -55.5 \text{ kJ} \end{aligned}$$

Discussion The negative sign indicates that this work is done on the system (a work input), which is always the case for compression processes.

Polytropic Process

During actual expansion and compression processes of gases, pressure and volume are often related by $PV^n = C$, where n and C are constants. A process of this kind is called a **polytropic process** (Fig. 4-9). Next we develop a general expression for the work done during a polytropic process. The pressure for a polytropic process can be expressed as

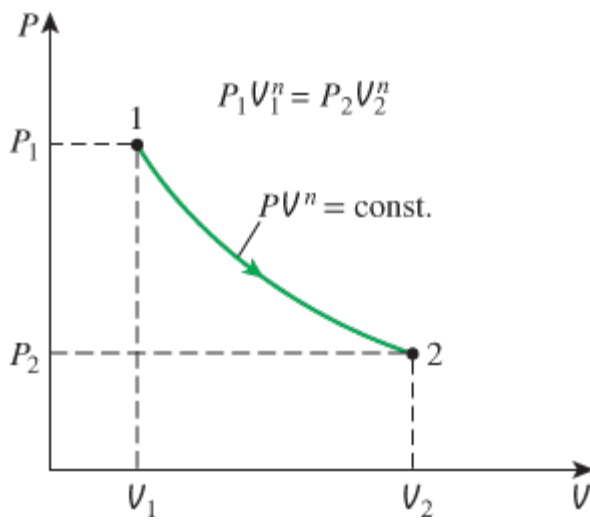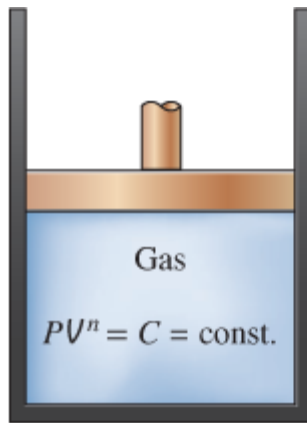**FIGURE 4-9**

Schematic and P - V diagram for a polytropic process.

(4-8)

Substituting this relation into Eq. 4-2, we obtain

(4-9)

since $C = P_1 V_1^n = P_2 V_2^n$. For an ideal gas ($PV = mRT$), this equation can also be written as

(4-10)

For the special case of $n = 1$ the boundary work becomes

$$W_b = \int_1^2 P dV = \int_1^2 C V^{-1} dV = PV \ln \left(\frac{V_2}{V_1} \right)$$

For an ideal gas this result is equivalent to the isothermal process discussed in the previous example.

EXAMPLE 4–4 Expansion of a Gas Against a Spring

A piston–cylinder device contains 0.05 m^3 of a gas initially at 200 kPa . At this state, a linear spring that has a spring constant of 150 kN/m is touching the piston but exerting no force on it. Now heat is transferred to the gas, causing the piston to rise and to compress the spring until the volume inside the cylinder doubles. If the cross-sectional area of the piston is 0.25 m^2 , determine (a) the final pressure inside the cylinder, (b) the total work done by the gas, and (c) the fraction of this work done against the spring to compress it.

SOLUTION A gas in a piston–cylinder device equipped with a linear spring expands as a result of heating. The final gas pressure, the total work done, and the fraction of the work done to compress the spring are to be determined.

Assumptions 1 The expansion process is quasi-equilibrium. 2 The spring is linear in the range of interest.

Analysis A sketch of the system and the P - V diagram of the process are shown in Fig. 4–10.

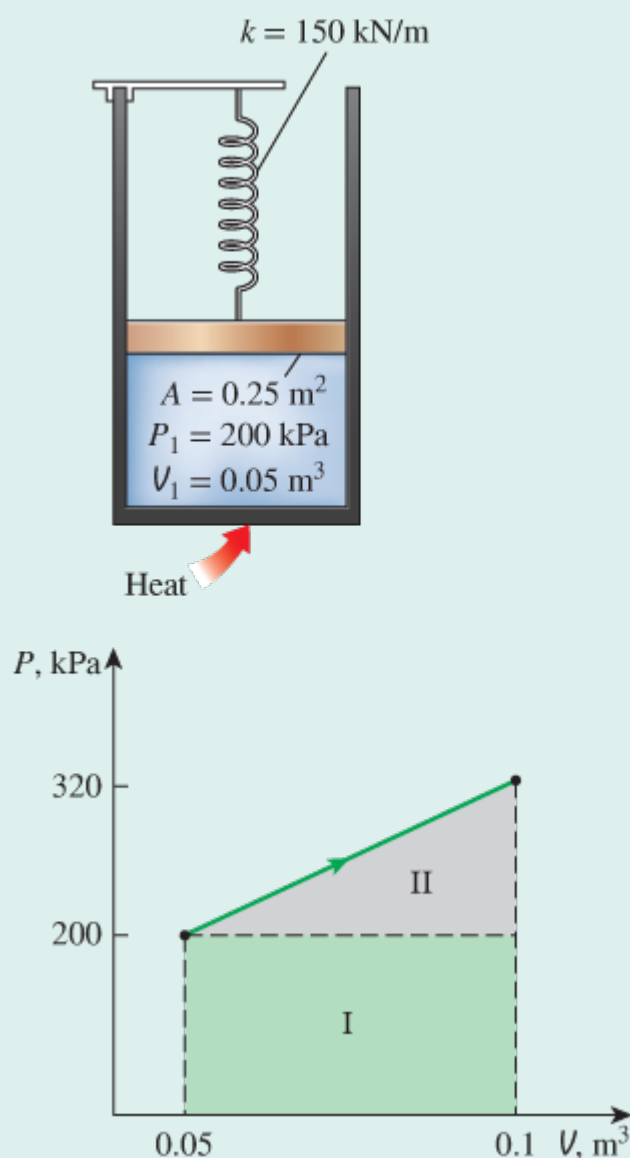


FIGURE 4–10

Schematic and P - V diagram for Example 4–4.

(a) The enclosed volume at the final state is

$$V_2 = 2V_1 = (2)(0.05 \text{ m}^3) = 0.1 \text{ m}^3$$

Then the displacement of the piston (and of the spring) becomes

$$x = \frac{\Delta V}{A} = \frac{(0.1 - 0.05) \text{ m}^3}{0.25 \text{ m}^2} = 0.2 \text{ m}$$

The force applied by the linear spring at the final state is

page 167

$$F = kx = (150 \text{ kN/m})(0.2 \text{ m}) = 30 \text{ kN}$$

The additional pressure applied by the spring on the gas at this state is

$$P = \frac{F}{A} = \frac{30 \text{ kN}}{0.25 \text{ m}^2} = 120 \text{ kPa}$$

Without the spring, the pressure of the gas would remain constant at 200 kPa while the piston is rising. But under the effect of the spring, the pressure rises linearly from 200 kPa to

$$200 + 120 = \mathbf{320 \text{ kPa}}$$

at the final state.

(b) An easy way of finding the work done is to plot the process on a P - V diagram and find the area under the process curve. From Fig. 4–10 the area under the process curve (a trapezoid) is determined to be

$$W = \text{area} = \frac{(200 + 320) \text{ kPa}}{2} [(0.1 - 0.05) \text{ m}^3] \left(\frac{1 \text{ kJ}}{1 \text{ kPa} \cdot \text{m}^3} \right) = \mathbf{13 \text{ kJ}}$$

Note that the work is done by the system.

(c) The work represented by the rectangular area (region I) is done against the piston and the atmosphere, and the work represented by the triangular area (region II) is done against the spring. Thus,

$$W_{\text{spring}} = \frac{1}{2} [(320 - 200) \text{ kPa}] (0.05 \text{ m}^3) \left(\frac{1 \text{ kJ}}{1 \text{ kPa} \cdot \text{m}^3} \right) = \mathbf{3 \text{ kJ}}$$

Discussion This result could also be obtained from

$$W_{\text{spring}} = \frac{1}{2} k(x_2^2 - x_1^2) = \frac{1}{2} (150 \text{ kN/m}) [(0.2 \text{ m})^2 - 0^2] \left(\frac{1 \text{ kJ}}{1 \text{ kN} \cdot \text{m}} \right) = 3 \text{ kJ}$$

4-2 ■ ENERGY BALANCE FOR CLOSED SYSTEMS

Energy balance for any system undergoing any kind of process was expressed as (see Chap. 2)

(4-11)

or, in the **rate form**, as

(4-12)

For constant rates, the total quantities during a time interval Δt are related to the quantities per unit time as

(4-13)

The energy balance can be expressed on a **per unit mass** basis as

 page 168

(4-14)

which is obtained by dividing all the quantities in Eq. 4-11 by the mass m of the system. Energy balance can also be expressed in the differential form as

(4-15)

For a closed system undergoing a **cycle**, the initial and final states are identical, and thus $\Delta E_{\text{system}} = E_2 - E_1 = 0$. Then, the energy balance for a cycle simplifies to $E_{\text{in}} - E_{\text{out}} = 0$ or $E_{\text{in}} = E_{\text{out}}$. Noting that a closed system does not involve any mass flow across its boundaries, the energy balance for a cycle can be expressed in terms of heat and work interactions as

(4-16)

That is, the net work output during a cycle is equal to net heat input (Fig. 4-11).

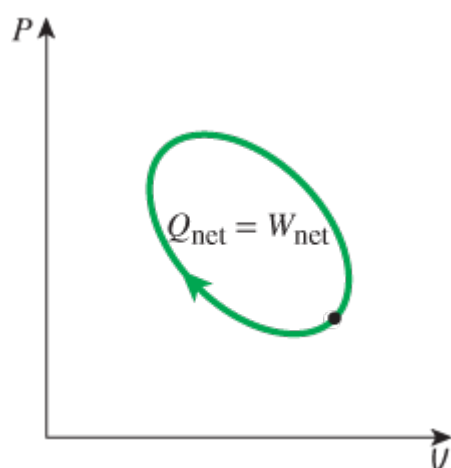


FIGURE 4-11

For a cycle $\Delta E = 0$, thus $Q = W$.

The energy balance (or the first-law) relations already given are intuitive in nature and are easy to use when the magnitudes and directions of heat and work transfers are known. However, when performing a general analytical study or solving a problem that involves an unknown heat or work interaction, we need to assume a direction for the heat or work interactions. In such cases, it is

common practice to use the classical thermodynamics sign convention and to assume heat to be transferred *into the system* (heat input) in the amount of Q and work to be done *by the system* (work output) in the amount of W , and then to solve the problem. The energy balance relation in that case for a closed system becomes

$$(4-17)$$

where $Q = Q_{\text{net,in}} = Q_{\text{in}} \# Q_{\text{out}}$ is the *net heat input* and $W = W_{\text{net,out}} = W_{\text{out}} \# W_{\text{in}}$ is the *net work output*.

Obtaining a negative quantity for Q or W simply means that the assumed direction for that quantity is wrong and should be reversed. Various forms of this “traditional” first-law relation for closed systems are given in Fig. 4-12.

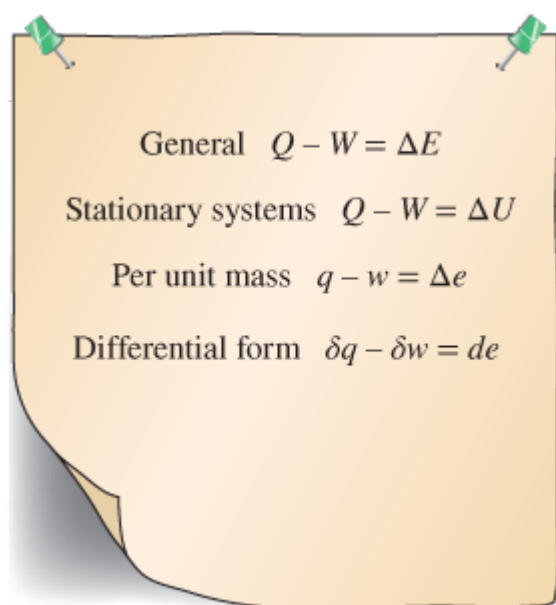


FIGURE 4-12

Various forms of the first-law relation for closed systems.

The first law cannot be proven mathematically, but no process in nature is known to have violated the first law, and this should be taken as sufficient proof. Note that if it were possible to prove the first law on the basis of other physical principles, the first law then would be a consequence of those principles instead of being a fundamental physical law itself.

As energy quantities, heat and work are not that different, and you probably wonder why we keep distinguishing them. After all, the change in the energy content of a system is equal to the amount of energy that crosses the system boundaries, and it makes no difference whether the energy crosses the boundary as heat or work. It seems as if the first-law relations would be much simpler if we had just one quantity that we could call *energy interaction* to represent both heat and work. Well, from the first-law point of view, heat and work are not different at all. From the second-law point of view, however, heat and work are very different, as is discussed in later chapters.


EXAMPLE 4-5 Electric Heating of a Gas at Constant Pressure

A piston–cylinder device contains 25 g of saturated water vapor that is maintained at a constant pressure of 300 kPa. A resistance heater within the cylinder is turned on and passes a current of 0.2 A for 5 min from a 120-V source. At the same time, a heat loss of 3.7 kJ occurs. (a) Show that for a closed system the boundary work W_b and the change in internal energy $\#U$ in the first-law relation can be combined into one term, $\#H$, for a constant-pressure process. (b) Determine the final temperature of the steam.

SOLUTION Saturated water vapor in a piston–cylinder device expands at constant pressure as a result of heating. It is to be shown that $\#U + W_b = \#H$, and the final temperature is to be determined.

Assumptions 1 The cylinder is stationary and thus the kinetic and potential energy changes are zero, $\#KE = \#PE = 0$. Therefore, $\#E = \#U$, and internal energy is the only form of energy of the system that may change during this process. 2 Electrical wires constitute a very small part of the system, and thus the energy change of the wires can be neglected.

Analysis We take the contents of the cylinder, including the resistance wires, as the *system* (Fig. 4–13). This is a *closed system* since no mass crosses the system boundary during the process. We observe that a piston–cylinder device typically involves a moving boundary and thus boundary work W_b . The pressure remains constant during the process and thus $P_2 = P_1$. Also, heat is lost from the system and electrical work W_e is done on the system.

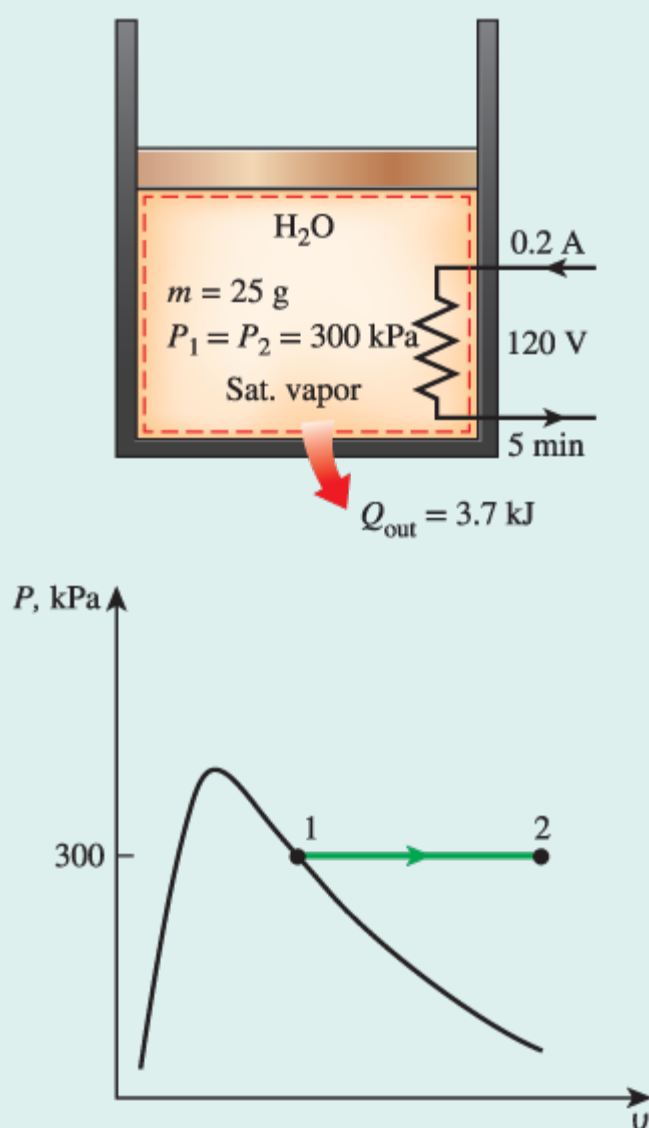**FIGURE 4-13**

Schematic and P - v diagram for Example 4-5.

(a) This part of the solution involves a general analysis for a closed system undergoing a quasi-equilibrium constant-pressure process, and thus we consider a general closed system. We take the direction of heat transfer Q to be to the system and the work W to be done by the system. We also express the work as the sum of boundary and other forms of work (such as electrical and shaft). Then, the energy balance can be expressed as

$$\underbrace{E_{\text{in}} - E_{\text{out}}}_{\substack{\text{Net energy transfer} \\ \text{by heat, work, and mass}}} = \underbrace{\Delta E_{\text{system}}}_{\substack{\text{Change in internal, kinetic,} \\ \text{potential, etc., energies}}}$$

$$Q - W = \Delta U + \Delta \overset{0}{KE} + \Delta \overset{0}{PE}$$

$$Q - W_{\text{other}} - W_b = U_2 - U_1$$

For a constant-pressure process, the boundary work is given as $W_b = P_0(V_2 - V_1)$. Substituting this into the preceding relation gives

$$Q - W_{\text{other}} - P_0(V_2 - V_1) = U_2 - U_1$$

However,

$$P_0 = P_2 = P_1 \rightarrow Q - W_{\text{other}} = (U_2 + P_2 V_2) - (U_1 + P_1 V_1)$$

Also $H = U + P V$, and thus

(4–18)

which is the desired relation (Fig. 4–14). This equation is very convenient to use in the analysis of closed systems undergoing a **constant-pressure quasi-equilibrium process** since the boundary work is automatically taken care of by the enthalpy terms, and one no longer needs to determine it separately.

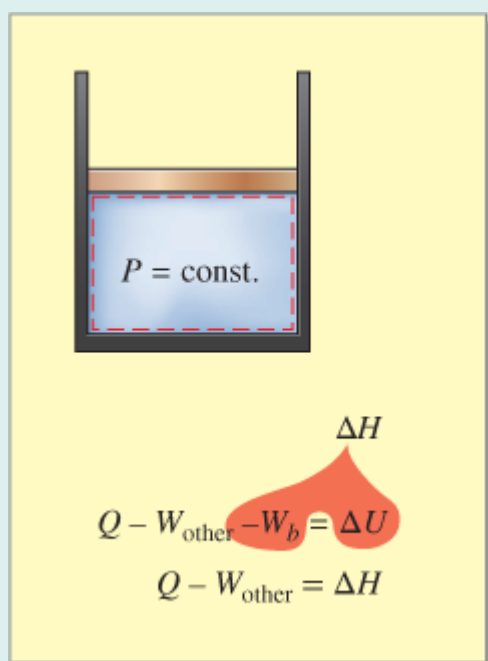


FIGURE 4–14

For a closed system undergoing a quasi-equilibrium, $P = \text{constant}$ process, $\#U + W_b = \#H$. Note that this relation is NOT valid for closed systems processes during which pressure DOES NOT remain constant.

(b) The only other form of work in this case is the electrical work, which can be determined from

$$W_e = VI\Delta t = (120 \text{ V})(0.2 \text{ A})(300 \text{ s}) \left(\frac{1 \text{ kJ/s}}{1000 \text{ VA}} \right) = 7.2 \text{ kJ}$$

(Table A–
5)

The enthalpy at the final state can be determined directly from Eq. 4–18 by expressing heat transfer from the system and work done on the system as negative quantities (since their directions are opposite to the assumed directions). Alternately, we can use the general energy balance relation with the simplification that the boundary work is considered automatically by replacing $\#U$ with $\#H$ for a constant-pressure expansion or compression process:

$$\begin{aligned}
 \underbrace{E_{\text{in}} - E_{\text{out}}}_{\substack{\text{Net energy transfer} \\ \text{by heat, work, and mass}}} &= \underbrace{\Delta E_{\text{system}}}_{\substack{\text{Change in internal, kinetic,} \\ \text{potential, etc., energies}}} \\
 W_{e,\text{in}} - Q_{\text{out}} - W_b &= \Delta U \\
 W_{e,\text{in}} - Q_{\text{out}} &= \Delta H = m(h_2 - h_1) \quad (\text{since } P = \text{constant}) \\
 7.2 \text{ kJ} - 3.7 \text{ kJ} &= (0.025 \text{ kg})(h_2 - 2724.9) \text{ kJ/kg} \\
 h_2 &= 2864.9 \text{ kJ/kg}
 \end{aligned}$$

Now the final state is completely specified since we know both the pressure and the enthalpy. The temperature at this state is

(Table A–6)

Therefore, the steam will be at 200°C at the end of this process.

Discussion Strictly speaking, the potential energy change of the steam is not zero for this process since the center of gravity of the steam rose somewhat. Assuming an elevation change of 1 m (which is rather unlikely), the change in the potential energy of the steam would be 0.0002 kJ, which is very small compared to the other terms in the first-law relation. Therefore, in problems of this kind, the potential energy term is always neglected.

EXAMPLE 4–6 Unrestrained Expansion of Water

A rigid tank is divided into two equal parts by a partition. Initially, one side of the tank contains 5 kg of water at 200 kPa and 25°C, and the other side is evacuated. The partition is then removed, and the water expands into the entire tank. The water is allowed to exchange heat with its surroundings until the temperature in the tank returns to the initial value of 25°C. Determine (a) the volume of the tank, (b) the final pressure, and (c) the heat transfer for this process.

SOLUTION One-half of a rigid tank is filled with liquid water while the other side is evacuated. The partition between the two parts is removed, and water is allowed to expand and fill the entire tank while the temperature is maintained constant. The volume of the tank, the final pressure, and the heat transfer are to be determined.

Assumptions 1 The system is stationary and thus the kinetic and potential energy changes are zero, $\#KE = \#PE = 0$ and $\#E = \#U$. 2 The direction of heat transfer is to the system (heat gain, Q_{in}). A negative result for Q_{in} indicates the assumed direction is wrong and thus it is a heat loss. 3 The volume of the rigid tank is constant, and thus there is no energy transfer as boundary work. 4 There is no electrical, shaft, or any other kind of work involved.

Analysis We take the contents of the tank, including the evacuated space, as the *system* (Fig. 4–15). This is a *closed system* since no mass crosses the system boundary during the process. We observe that the water fills the entire tank when the partition is removed (possibly as a liquid–vapor mixture).

page 171

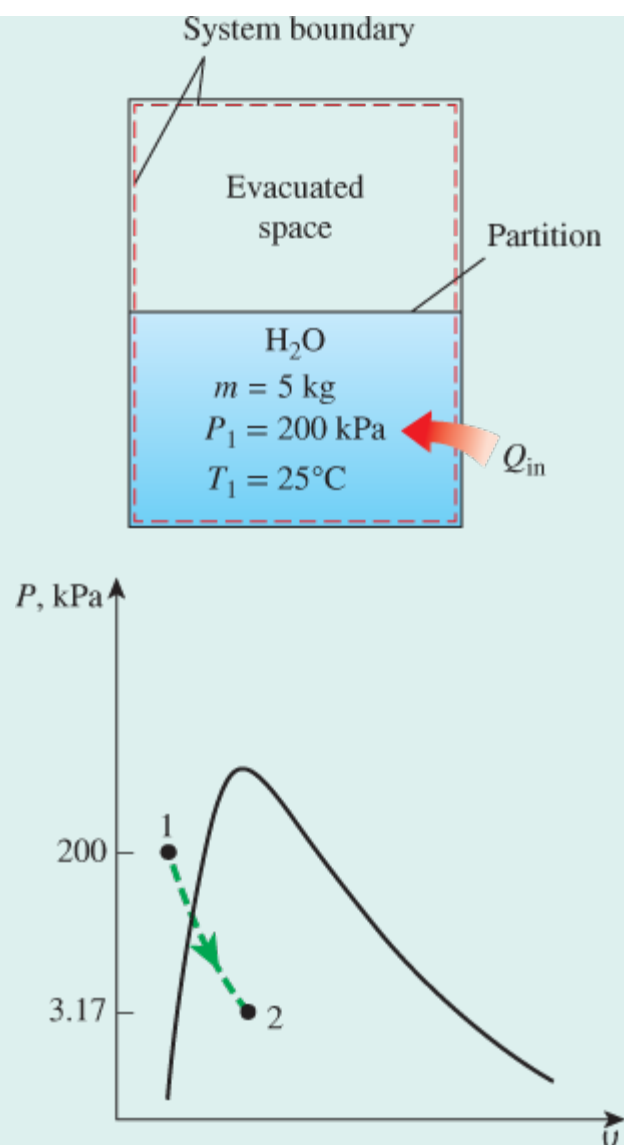


FIGURE 4-15

Schematic and P - v diagram for Example 4-6.

(a) Initially the water in the tank exists as a compressed liquid since its pressure (200 kPa) is greater than the saturation pressure at 25°C (3.1698 kPa). Approximating the compressed liquid as a saturated liquid at the given temperature, we find

(Table A-4)

Then the initial volume of the water is

$$V_1 = m v_1 = (5 \text{ kg})(0.001 \text{ m}^3/\text{kg}) = 0.005 \text{ m}^3$$

The total volume of the tank is twice this amount:

$$V_{\text{tank}} = (2)(0.005 \text{ m}^3) = \mathbf{0.01 \text{ m}^3}$$

(b) At the final state, the specific volume of the water is

$$v_2 = \frac{V_2}{m} = \frac{0.01 \text{ m}^3}{5 \text{ kg}} = 0.002 \text{ m}^3/\text{kg}$$

which is twice the initial value of the specific volume. This result is expected since the volume doubles while the amount of mass remains constant.

(Table A–
4)

Since $v_f < v_2 < v_g$, the water is a saturated liquid–vapor mixture at the final state, and thus the pressure is the saturation pressure at 25°C:

(Table A–
4)

(c) Under stated assumptions and observations, the energy balance on the system can be expressed as

$$\underbrace{E_{\text{in}} - E_{\text{out}}}_{\substack{\text{Net energy transfer} \\ \text{by heat, work, and mass}}} = \underbrace{\Delta E_{\text{system}}}_{\substack{\text{Change in internal, kinetic,} \\ \text{potential, etc., energies}}}$$

$$Q_{\text{in}} = \Delta U = m(u_2 - u_1)$$

Notice that even though the water is expanding during this process, the system chosen involves fixed boundaries only (the dashed lines), and therefore the moving boundary work is zero (Fig. 4–16). Then $W = 0$ since the system does not involve any other forms of work. (Can you reach the same conclusion by choosing the water as our system?) Initially,

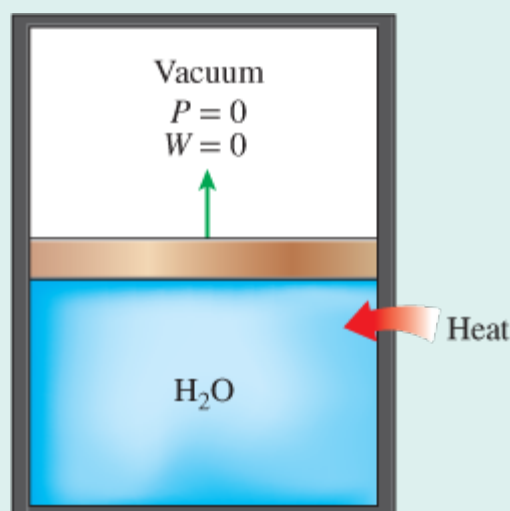


FIGURE 4–16

Expansion against a vacuum involves no work and thus no energy transfer.

$$u_1 \cong u_f @ 25^\circ\text{C} = 104.83 \text{ kJ/kg}$$

The quality at the final state is determined from the specific volume information:

page 172

$$x_2 = \frac{u_2 - u_f}{u_{fg}} = \frac{0.002 - 0.001}{43.34 - 0.001} = 2.3 \times 10^{-5}$$

Then

$$\begin{aligned} u_2 &= u_f + x_2 u_{fg} \\ &= 104.83 \text{ kJ/kg} + (2.3 \times 10^{-5})(2304.3 \text{ kJ/kg}) \\ &= 104.88 \text{ kJ/kg} \end{aligned}$$

Substituting yields

$$Q_{\text{in}} = (5 \text{ kg})[(104.88 - 104.83) \text{ kJ/kg}] = \mathbf{0.25 \text{ kJ}}$$

Discussion The positive sign indicates that the assumed direction is correct, and heat is transferred to the water.

4-3 ■ SPECIFIC HEATS

We know from experience that it takes different amounts of energy to raise the temperature of identical masses of different substances by one degree. For example, we need about 4.5 kJ of energy to raise the temperature of 1 kg of iron from 20 to 30°C, whereas it takes about nine times this much energy (41.8 kJ to be exact) to raise the temperature of 1 kg of liquid water by the same amount (Fig. 4-17).

Therefore, it is useful to have a property that will enable us to compare the energy storage capabilities of various substances. This property is the specific heat.

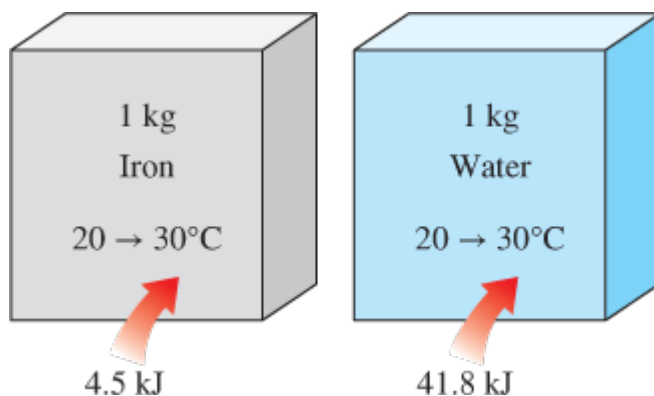
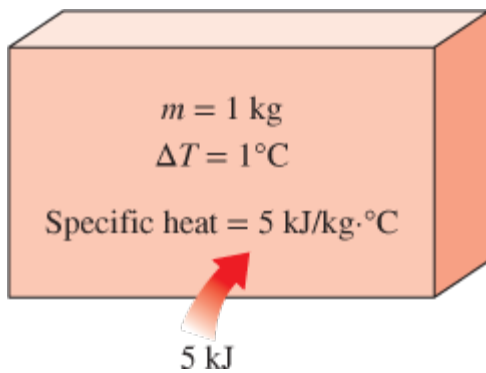


FIGURE 4-17


It takes different amounts of energy to raise the temperature of different substances by the same amount.

The **specific heat** is defined as *the energy required to raise the temperature of a unit mass of a substance by one degree* (Fig. 4-18). In general, this energy depends on how the process is executed. In thermodynamics, we are interested in two kinds of specific heats: **specific heat at constant volume** c_v and **specific heat at constant pressure** c_p .

**FIGURE 4–18**

Specific heat is the energy required to raise the temperature of a unit mass of a substance by one degree in a specified way.

Physically, the specific heat at constant volume c_v can be viewed as *the energy required to raise the temperature of the unit mass of a substance by one degree as the volume is maintained constant*. The energy required to do the same as the pressure is maintained constant is the specific heat at constant pressure c_p . This is illustrated in Fig. 4–19. The specific heat at constant pressure c_p is always greater than c_v because at constant pressure the system is allowed to expand, and the energy for this expansion work must also be supplied to the system.

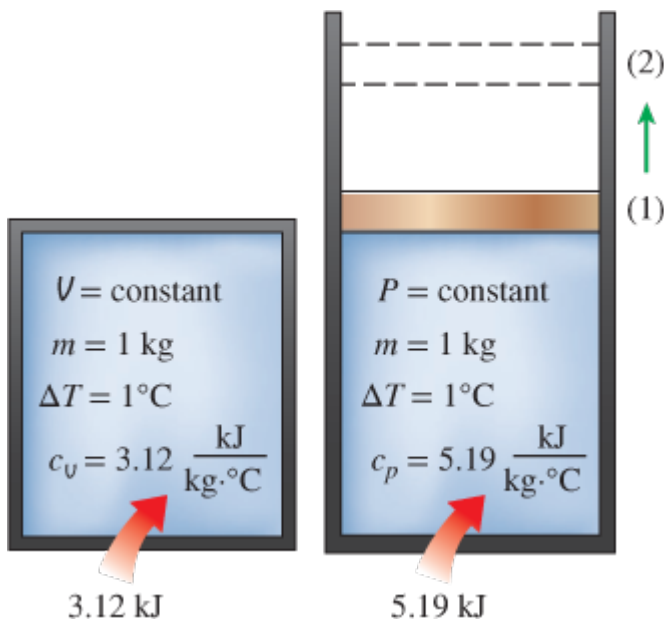**FIGURE 4–19**

Constant-volume and constant-pressure specific heats c_v and c_p (values given are for helium gas).

Now we try to express the specific heats in terms of other thermodynamic properties. First, consider a fixed mass in a stationary closed system undergoing a constant-volume process (and thus no expansion or compression work is involved). The conservation of energy principle $e_{in} - e_{out} = \#e_{system}$ for this process can be expressed in the differential form as

$$\delta e_{in} - \delta e_{out} = du$$

The left-hand side of this equation represents the net amount of energy transferred to the system. From the definition of c_v , this energy must be equal to $c_v dT$, where dT is the differential change in temperature. Thus,

$$c_v dT = du \quad \text{at constant volume}$$

or

$$(4-19)$$

Similarly, an expression for the specific heat at constant pressure c_p can be obtained by considering a constant-pressure expansion or compression process. It yields

$$(4-20)$$

Equations 4-19 and 4-20 are the defining equations for c_v and c_p , and their interpretation is given in Fig. 4-20.

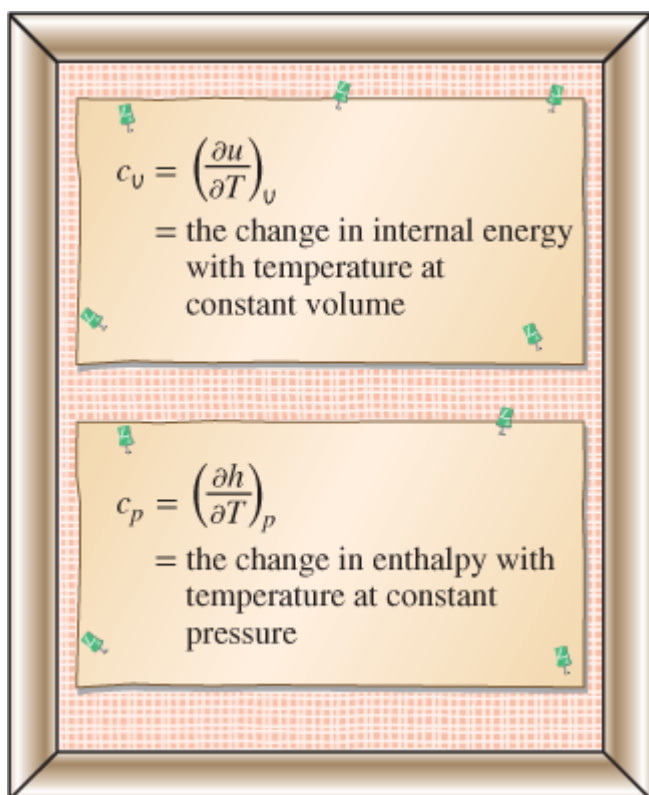
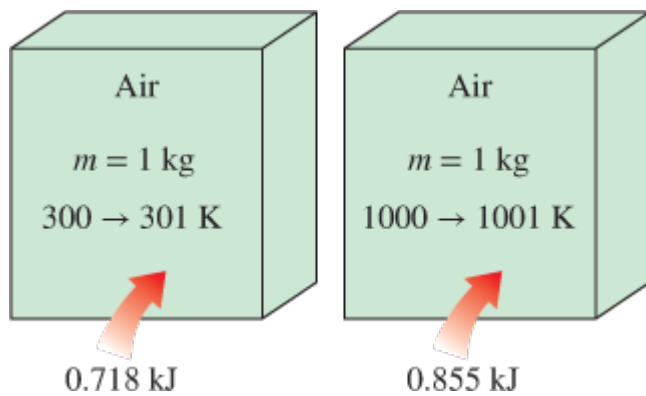


FIGURE 4-20

Formal definitions of c_v and c_p .

Note that c_v and c_p are expressed in terms of other properties; thus, they must be properties themselves. Like any other property, the specific heats of a substance depend on the state that, in general, is specified by two independent, intensive properties. That is, the energy required to raise the temperature of a substance by one degree is different at different temperatures and pressures (Fig. 4-21). But this difference is usually not very large.

**FIGURE 4-21**

The specific heat of a substance changes with temperature.

A few observations can be made from Eqs. 4-19 and 4-20. First, these equations are *property relations* and as such *are independent of the type of processes*. They are valid for *any* substance undergoing *any* process. The only relevance c_v has to a constant-volume process is that c_v happens to be the energy transferred to a system during a constant-volume process per unit mass, per unit degree rise in temperature. This is how the values of c_v are determined. This is also how the name *specific heat at constant volume* originated. Likewise, the energy transferred to a system per unit mass per unit temperature rise during a constant-pressure process happens to be equal to c_p . This is how the values of c_p can be determined, and it also explains the origin of the name *specific heat at constant pressure*.

Another observation that can be made from Eqs. 4-19 and 4-20 is that c_v is related to the changes in *internal energy* and c_p to the changes in *enthalpy*. In fact, it would be more proper to define c_v as *the change in the internal energy of a substance per unit change in temperature at constant volume*. Likewise, c_p can be defined as *the change in the enthalpy of a substance per unit change in temperature at constant pressure*. In other words, c_v is a measure of the variation of internal energy of a substance with temperature, and c_p is a measure of the variation of enthalpy of a substance with temperature.

Both the internal energy and enthalpy of a substance can be changed by the transfer of *energy* in any form, with heat being only one of them. Therefore, the term *specific energy* is probably more appropriate than the term *specific heat*, which implies that energy is transferred (and stored) in the form of heat.

A common unit for specific heats is kJ/kg·°C or kJ/kg·K. Notice that these two units are *identical* since $\#T(^{\circ}\text{C}) = \#T(\text{K})$, and a 1°C change in temperature is equivalent to a change of 1 K. The specific heats are sometimes given on a *molar basis*. They are then denoted by $\bar{c}_v$ and $\bar{c}_p$ and have the unit kJ/kmol·°C or kJ/kmol·K.

page 174

4-4 ■ INTERNAL ENERGY, ENTHALPY, AND SPECIFIC HEATS OF IDEAL GASES

We defined an ideal gas as a gas whose temperature, pressure, and specific volume are related by

$$Pv = RT$$

It has been demonstrated mathematically (Chap. 12) and experimentally (Joule, 1843) that for an ideal gas the internal energy is a function of the temperature only. That is,

$$(4-21)$$

In his classical experiment, Joule submerged two tanks connected with a pipe and a valve in a water bath, as shown in Fig. 4–22. Initially, one tank contained air at a high pressure and the other tank was evacuated. When thermal equilibrium was attained, he opened the valve to let air pass from one tank to the other until the pressures equalized. Joule observed no change in the temperature of the water bath and assumed that no heat was transferred to or from the air. Since there was also no work done, he concluded that the internal energy of the air did not change even though the volume and the pressure changed. Therefore, he reasoned, the internal energy is a function of temperature only and not a function of pressure or specific volume. (Joule later showed that for gases that deviate significantly from ideal-gas behavior, the internal energy is not a function of temperature alone.)

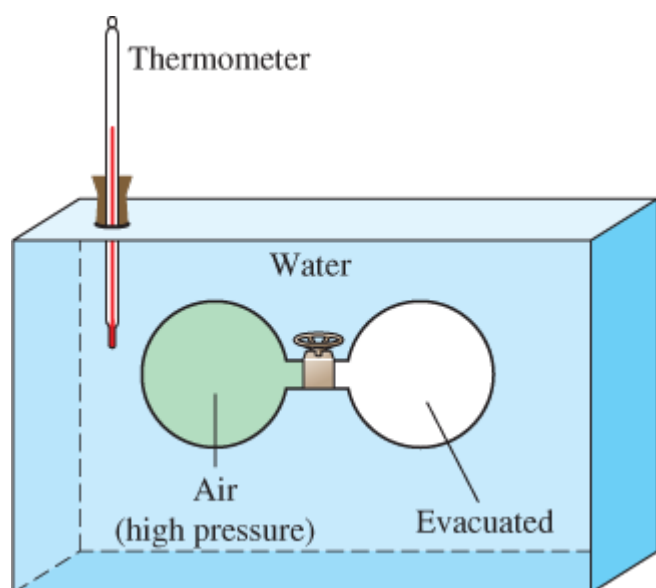


FIGURE 4–22

Schematic of the experimental apparatus used by Joule.

Using the definition of enthalpy and the equation of state of an ideal gas, we have

$$\left. \begin{array}{l} h = u + Pv \\ Pv = RT \end{array} \right\} h = u + RT$$

Since R is constant and $u = u(T)$, it follows that the enthalpy of an ideal gas is also a function of temperature only:

$$(4-22)$$

Since u and h depend only on temperature for an ideal gas, the specific heats c_v and c_p also depend, at most, on temperature only. Therefore, at a given temperature, u , h , c_v , and c_p of an ideal gas have fixed values regardless of the specific volume or pressure (Fig. 4–23). Thus, for ideal gases, the partial

derivatives in Eqs. 4–19 and 4–20 can be replaced by ordinary derivatives. Then, the differential changes in the internal energy and enthalpy of an ideal gas can be expressed as

$$\begin{aligned}u &= u(T) \\h &= h(T) \\c_v &= c_v(T) \\c_p &= c_p(T)\end{aligned}$$

FIGURE 4–23

For ideal gases, u , h , c_v , and c_p vary with temperature only.

(4–23)

and

(4–24)

The change in internal energy or enthalpy for an ideal gas during a process from state 1 to state 2 is determined by integrating these equations:


(4–25)

and

(4–26)

To carry out these integrations, we need to have relations for c_v and c_p as functions of temperature.

At low pressures, all real gases approach ideal-gas behavior, and therefore their specific heats depend on temperature only. The specific heats of real gases at low pressures are called *ideal-gas specific heats*, or *zero-pressure specific heats*, and they are often denoted c_{p0} and c_{v0} . Accurate analytical expressions for ideal-gas specific heats, based on direct measurements or calculations from statistical behavior of molecules, are available and are given as third-degree polynomials in the appendix (Table A–2c) for several gases. A plot of $\bar{c}_{p0}(T)$ data for some common gases is given in Fig. 4–24.

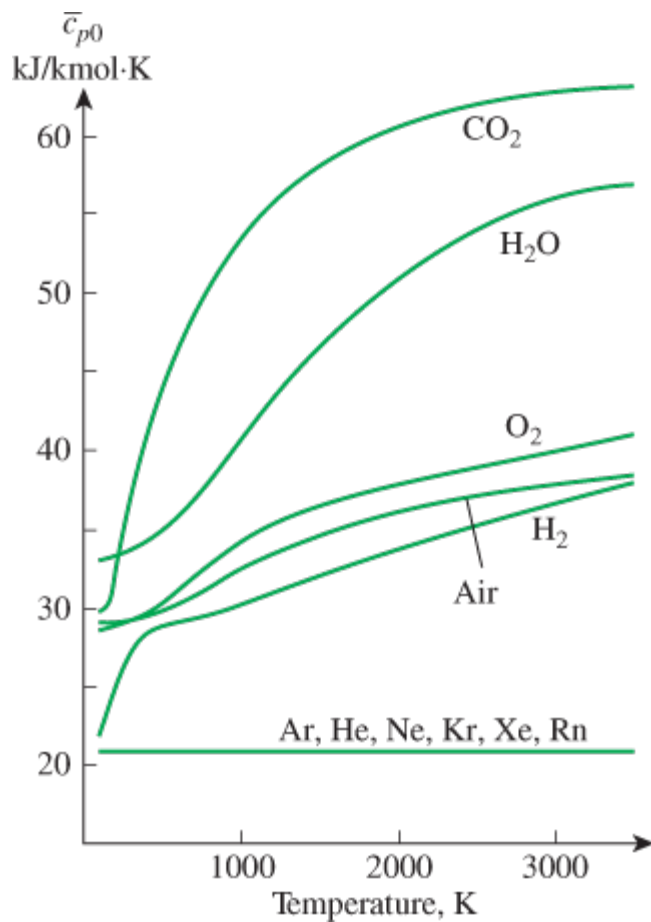**FIGURE 4–24**

Ideal-gas constant-pressure specific heats for some gases (see Table A–2c for c_p equations).

The use of ideal-gas specific heat data is limited to low pressures, but these data can also be used at moderately high pressures with reasonable accuracy as long as the gas does not deviate from ideal-gas behavior significantly.

The integrations in Eqs. 4–25 and 4–26 are straightforward but rather time-consuming and thus impractical. To avoid these laborious calculations, u and h data for a number of gases have been tabulated over small temperature intervals. These tables are obtained by choosing an arbitrary reference point and performing the integrations in Eqs. 4–25 and 4–26 by treating state 1 as the reference state. In the ideal-gas tables given in the appendix, zero kelvin is chosen as the reference state, and both the enthalpy and the internal energy are assigned zero values at that state (Fig. 4–25). The choice of the reference state has no effect on $\#u$ or $\#h$ calculations. The u and h data are given in kJ/kg for air (Table A–17) and usually in kJ/kmol for other gases. The unit kJ/kmol is very convenient in the thermodynamic analysis of chemical reactions.

Air		
T, K	$u, \text{kJ/kg}$	$h, \text{kJ/kg}$
0	0	0
.	.	.
.	.	.
300	214.07	300.19
310	221.25	310.24
.	.	.
.	.	.

FIGURE 4–25

In the preparation of ideal-gas tables, 0 K is chosen as the reference temperature.

Some observations can be made from Fig. 4–24. First, the specific heats of gases with complex molecules (molecules with two or more atoms) are higher and increase with temperature. Also, the variation of specific heats with temperature is smooth and may be approximated as linear over small temperature intervals (a few hundred degrees or less). Therefore, the specific heat functions in Eqs. 4–25 and 4–26 can be replaced by the constant average specific heat values. Then, the integrations in these equations can be performed, yielding

$$(4-27)$$

and

$$(4-28)$$

The specific heat values for some common gases are listed as a function of temperature in Table A–2b. The average specific heats $c_{p,\text{avg}}$ and $c_{v,\text{avg}}$ are evaluated from this table at the average page 176 temperature $(T_1 + T_2)/2$, as shown in Fig. 4–26. If the final temperature T_2 is not known, the specific heats may be evaluated at T_1 or at the anticipated average temperature. Then T_2 can be determined by using these specific heat values. The value of T_2 can be refined, if necessary, by evaluating the specific heats at the new average temperature.

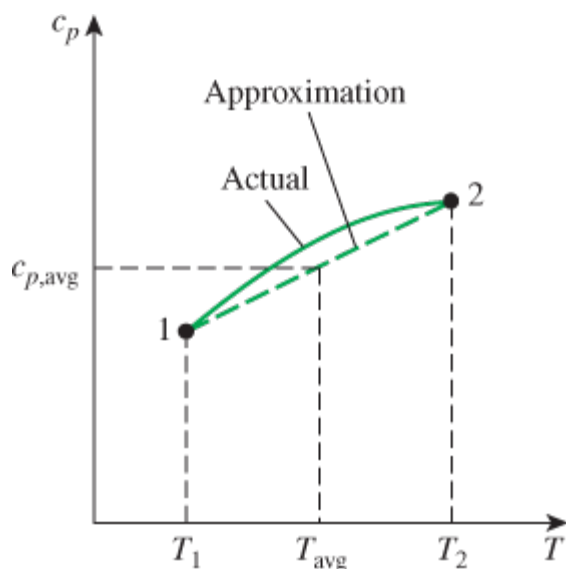


FIGURE 4–26

For small temperature intervals, the specific heats may be assumed to vary linearly with temperature.

Another way of determining the average specific heats is to evaluate them at T_1 and T_2 and then take their average. Usually both methods give reasonably good results, and one is not necessarily better than the other.

Another observation that can be made from Fig. 4–24 is that the ideal-gas specific heats of *monatomic gases* such as argon, neon, and helium remain constant over the entire temperature range. Thus, $\#u$ and $\#h$ of monatomic gases can easily be evaluated from Eqs. 4–27 and 4–28.

Note that the $\#u$ and $\#h$ relations given previously are not restricted to any kind of process. They are valid for all processes. The presence of the constant-volume specific heat c_v in an equation should not lead one to believe that this equation is valid for a constant-volume process only. On the contrary, the relation $\#u = c_{v,avg} \#T$ is valid for *any* ideal gas undergoing *any* process (Fig. 4–27). A similar argument can be given for c_p and $\#h$.

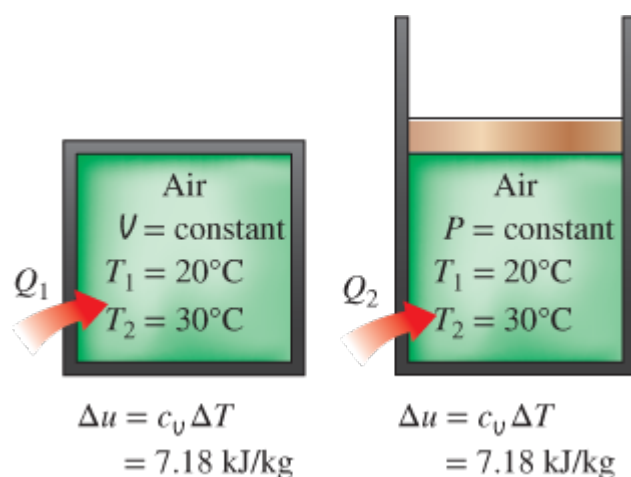


FIGURE 4–27

The relation $\#u = c_v \#T$ is valid for *any* kind of process, constant-volume or not.

To summarize, there are three ways to determine the internal energy and enthalpy changes of ideal gases (Fig. 4–28):

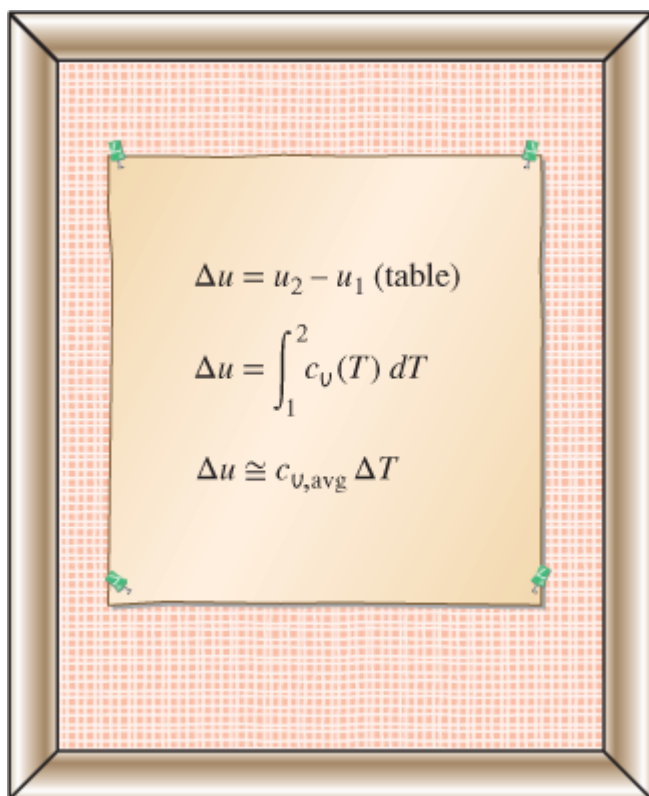


FIGURE 4–28

Three ways of calculating Δu .

1. By using the tabulated u and h data. This is the easiest and most accurate way when tables are readily available.
2. By using the c_v or c_p relations as a function of temperature and performing the integrations. This is very inconvenient for hand calculations but quite desirable for computerized calculations. The results obtained are very accurate.
3. By using average specific heats. This is very simple and certainly very convenient when property tables are not available. The results obtained are reasonably accurate if the temperature interval is not very large.

Specific Heat Relations of Ideal Gases

A special relationship between c_p and c_v for ideal gases can be obtained by differentiating the relation $h = u + RT$, which yields

$$dh = du + R dT$$

Replacing dh with $c_p dT$ and du with $c_v dT$ and dividing the resulting expression by dT , we obtain

$$(4-29)$$

This is an important relationship for ideal gases since it enables us to determine c_v from a knowledge of c_p and the gas constant R .

When the specific heats are given on a molar basis, R in Eq. 4–29 should be replaced by the universal gas constant R_u (Fig. 4–29).

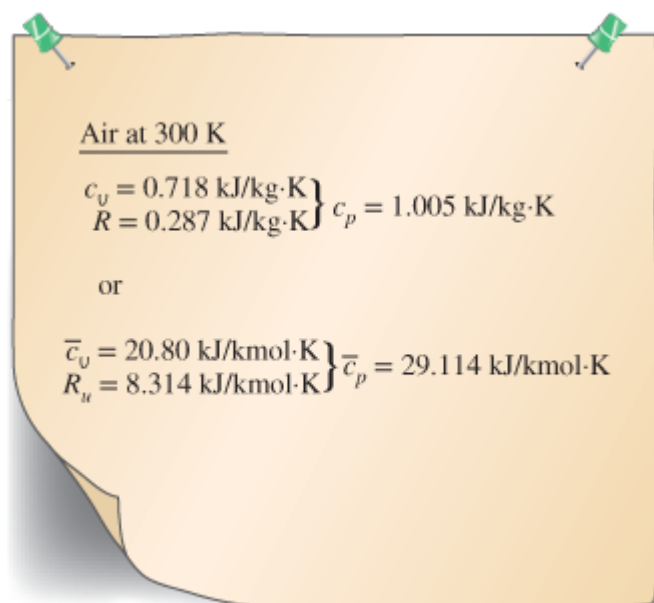


FIGURE 4–29

The c_p of an ideal gas can be determined from a knowledge of c_v and R .

(4–30)

At this point, we introduce another ideal-gas property called the **specific heat ratio** k , defined as

page 177

(4–31)

The specific ratio also varies with temperature, but this variation is very mild. For monatomic gases, its value is essentially constant at 1.667. Many diatomic gases, including air, have a specific heat ratio of about 1.4 at room temperature.

EXAMPLE 4–7 Evaluation of the Δu of an Ideal Gas

Air at 300 K and 200 kPa is heated at constant pressure to 600 K. Determine the change in internal energy of air per unit mass, using (a) data from the air table (Table A–17), (b) the functional form of the specific heat (Table A–2c), and (c) the average specific heat value (Table A–2b).

SOLUTION The internal energy change of air is to be determined in three different ways.

Assumptions At specified conditions, air can be considered to be an ideal gas since it is at a high temperature and low pressure relative to its critical-point values.

Analysis The internal energy change Δu of ideal gases depends on the initial and final temperatures only, and not on the type of process. Thus, the following solution is valid for any kind of process.

(a) One way of determining the change in internal energy of air is to read the u values at T_1 and T_2 from Table A-17 and take the difference:

$$u_1 = u_{@ 300 \text{ K}} = 214.07 \text{ kJ/kg}$$

$$u_2 = u_{@ 600 \text{ K}} = 434.78 \text{ kJ/kg}$$

Thus,

$$\Delta u = u_2 - u_1 = (434.78 - 214.07) \text{ kJ/kg} = \mathbf{220.71 \text{ kJ/kg}}$$

(b) The $\bar{c}_p(T)$ of air is given in Table A-2c in the form of a third-degree polynomial expressed as

$$\bar{c}_p(T) = a + bT + cT^2 + dT^3$$

where $a = 28.11$, $b = 0.1967 \times 10^{-2}$, $c = 0.4802 \times 10^{-5}$, and $d = -1.966 \times 10^{-9}$. From Eq. 4-30,

$$\bar{c}_v(T) = \bar{c}_p - R_u = (a - R_u) + bT + cT^2 + dT^3$$

From Eq. 4-25,

$$\Delta \bar{u} = \int_1^2 \bar{c}_v(T) dT = \int_{T_1}^{T_2} [(a - R_u) + bT + cT^2 + dT^3] dT$$

Performing the integration and substituting the values, we obtain

$$\Delta \bar{u} = 6447 \text{ kJ/kmol}$$

The change in the internal energy on a unit-mass basis is determined by dividing this value by the molar mass of air (Table A-1):

page 178

$$\Delta u = \frac{\Delta \bar{u}}{M} = \frac{6447 \text{ kJ/kmol}}{28.97 \text{ kg/kmol}} = \mathbf{222.5 \text{ kJ/kg}}$$

which differs from the tabulated value by 0.8 percent.

(c) The average value of the constant-volume specific heat $c_{v,\text{avg}}$ is determined from Table A-2b at the average temperature of $(T_1 + T_2)/2 = 450 \text{ K}$ to be

$$c_{v,\text{avg}} = c_{v@ 450 \text{ K}} = 0.733 \text{ kJ/kg}\cdot\text{K}$$

Thus,

$$\begin{aligned} \Delta u &= c_{v,\text{avg}}(T_2 - T_1) = (0.733 \text{ kJ/kg}\cdot\text{K})(600 - 300) \text{ K} \\ &= \mathbf{220 \text{ kJ/kg}} \end{aligned}$$

Discussion This answer differs from the tabulated value (220.71 kJ/kg) by only 0.4 percent. This close agreement is not surprising since the assumption that c_v varies linearly with temperature is a reasonable one at temperature intervals of only a few hundred degrees. If we had used the c_v value at $T_1 = 300$ K instead of at T_{avg} , the result would be 215.4 kJ/kg, which is in error by about 2 percent. Errors of this magnitude are acceptable for most engineering purposes.


EXAMPLE 4–8 Heating of a Gas in a Tank by Stirring

An insulated rigid tank initially contains 1.5 lbm of helium at 80°F and 50 psia. A paddle wheel with a power rating of 0.02 hp is operated within the tank for 30 min. Determine (a) the final temperature and (b) the final pressure of the helium gas.

SOLUTION Helium gas in an insulated rigid tank is stirred by a paddle wheel. The final temperature and pressure of helium are to be determined.

Assumptions 1 Helium is an ideal gas since it is at a very high temperature relative to its critical-point value of 451°F. 2 Constant specific heats can be used for helium. 3 The system is stationary and thus the kinetic and potential energy changes are zero, $\Delta KE = \Delta PE = 0$ and $\Delta E = \Delta U$. 4 The volume of the tank is constant, and thus there is no boundary work. 5 The system is adiabatic and thus there is no heat transfer.

Analysis We take the contents of the tank as the *system* (Fig. 4–30). This is a *closed system* since no mass crosses the system boundary during the process. We observe that there is shaft work done on the system.

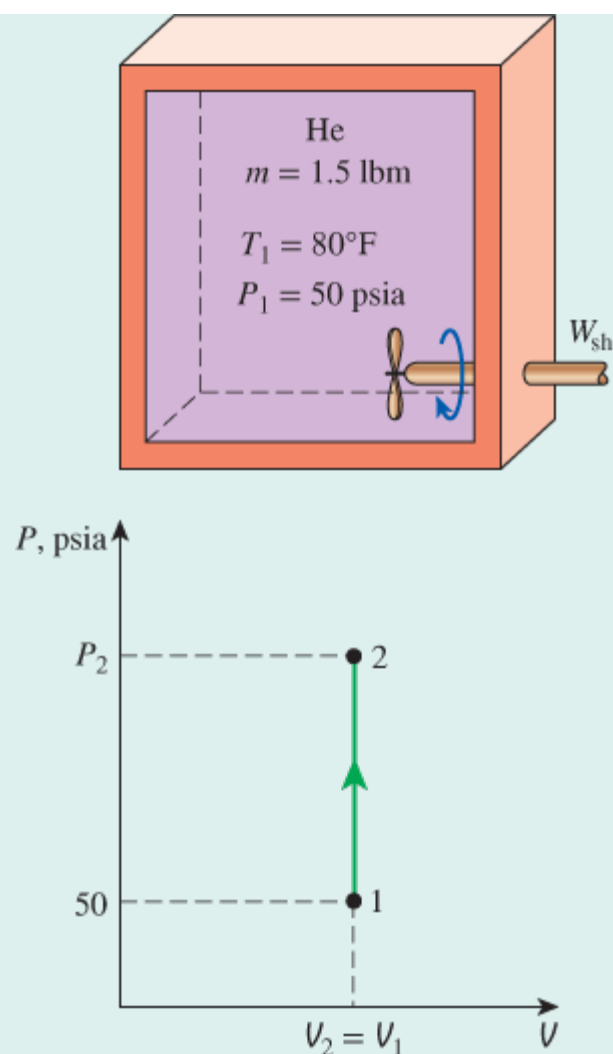**FIGURE 4-30**

Schematic and P - V diagram for Example 4-8.

(a) The amount of paddle-wheel work done on the system is

$$W_{\text{sh}} = \dot{W}_{\text{sh}} \Delta t = (0.02 \text{ hp})(0.5 \text{ h}) \left(\frac{2545 \text{ Btu/h}}{1 \text{ hp}} \right) = 25.45 \text{ Btu}$$

Under the stated assumptions and observations, the energy balance on the system can be expressed as

$$\underbrace{E_{\text{in}} - E_{\text{out}}}_{\substack{\text{Net energy transfer} \\ \text{by heat, work, and mass}}} = \underbrace{\Delta E_{\text{system}}}_{\substack{\text{Change in internal, kinetic,} \\ \text{potential, etc., energies}}}$$

$$W_{\text{sh, in}} = \Delta U = m(u_2 - u_1) = mc_{v, \text{avg}}(T_2 - T_1)$$

As we pointed out earlier, the ideal-gas specific heats of monatomic gases (helium being one of them) are constant. The c_v value of helium is determined from Table A-2Ea to be $c_v =$ page 179
 0.753 Btu/lbm·°F. Substituting this and other known quantities into the preceding equation, we obtain

$$25.45 \text{ Btu} = (1.5 \text{ lbm})(0.753 \text{ Btu/lbm} \cdot ^\circ\text{F})(T_2 - 80)^\circ\text{F}$$

$$T_2 = \mathbf{102.5^\circ\text{F}}$$

(b) The final pressure is determined from the ideal-gas relation

$$\frac{P_1 V_1}{T_1} = \frac{P_2 V_2}{T_2}$$

where V_1 and V_2 are identical and cancel out. Then the final pressure becomes

$$\frac{50 \text{ psia}}{(80 + 460) \text{ R}} = \frac{P_2}{(102.5 + 460) \text{ R}}$$

$$P_2 = 52.1 \text{ psia}$$

Discussion Note that the pressure in the ideal-gas relation is always the absolute pressure.


EXAMPLE 4–9 Heating of a Gas by a Resistance Heater

A piston–cylinder device initially contains 0.5 m^3 of nitrogen gas at 400 kPa and 27°C . An electric heater within the device is turned on and is allowed to pass a current of 2 A for 5 min from a 120-V source. Nitrogen expands at constant pressure, and a heat loss of 2800 J occurs during the process. Determine the final temperature of nitrogen.

SOLUTION Nitrogen gas in a piston–cylinder device is heated by an electric resistance heater. Nitrogen expands at constant pressure while some heat is lost. The final temperature of nitrogen is to be determined.

Assumptions 1 Nitrogen is an ideal gas since it is at a high temperature and low pressure relative to its critical-point values of -147°C and 3.39 MPa . 2 The system is stationary, and thus the kinetic and potential energy changes are zero, $\#KE = \#PE = 0$ and $\#E = \#U$. 3 The pressure remains constant during the process and thus $P_2 = P_1$. 4 Nitrogen has constant specific heats at room temperature.

Analysis We take the contents of the cylinder as the *system* (Fig. 4–31). This is a *closed system* since no mass crosses the system boundary during the process. We observe that a piston–cylinder device typically involves a moving boundary and thus boundary work, W_b . Also, heat is lost from the system and electrical work W_e is done on the system.

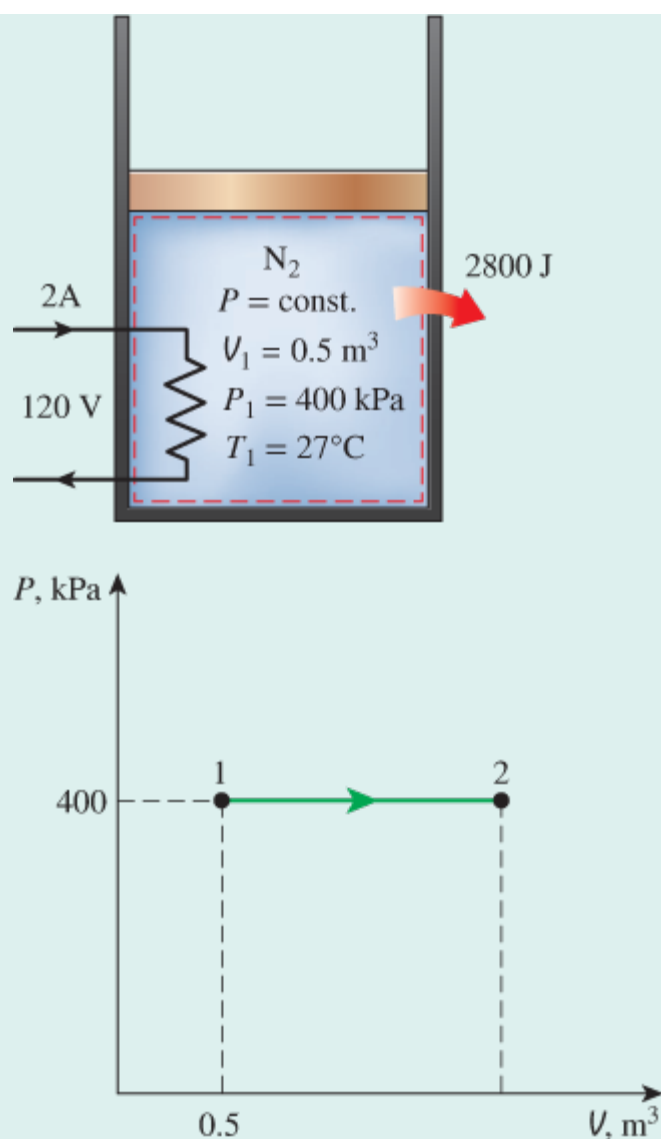**FIGURE 4-31**

Schematic and P - V diagram for Example 4-9.

First, let us determine the electrical work done on the nitrogen:

$$W_e = \mathbf{VI} \Delta t = (120 \text{ V})(2 \text{ A})(5 \times 60 \text{ s}) \left(\frac{1 \text{ kJ/s}}{1000 \text{ VA}} \right) = 72 \text{ kJ}$$

The mass of nitrogen is determined from the ideal-gas relation:

$$m = \frac{P_1 V_1}{R T_1} = \frac{(400 \text{ kPa})(0.5 \text{ m}^3)}{(0.297 \text{ kPa} \cdot \text{m}^3/\text{kg} \cdot \text{K})(300 \text{ K})} = 2.245 \text{ kg}$$

Under the stated assumptions and observations, the energy balance on the system can be expressed as

page 180

$$\begin{array}{ccc}
 \underbrace{E_{\text{in}} - E_{\text{out}}}_{\substack{\text{Net energy transfer} \\ \text{by heat, work, and mass}}} & = & \underbrace{\Delta E_{\text{system}}}_{\substack{\text{Change in internal, kinetic,} \\ \text{potential, etc., energies}}} \\
 W_{e,\text{in}} - Q_{\text{out}} - W_{b,\text{out}} & = & \Delta U \\
 W_{e,\text{in}} - Q_{\text{out}} & = & \Delta H = m(h_2 - h_1) = mc_p(T_2 - T_1)
 \end{array}$$


since $\#U + W_b = \#H$ for a closed system undergoing a quasi-equilibrium expansion or compression process at constant pressure. From Table A-2a, $c_p = 1.039 \text{ kJ/kg}\cdot\text{K}$ for nitrogen at room temperature. The only unknown quantity in the previous equation is T_2 , and it is found to be

$$\begin{array}{l}
 72 \text{ kJ} - 2.8 \text{ kJ} = (2.245 \text{ kg})(1.039 \text{ kJ/kg}\cdot\text{K})(T_2 - 27)^\circ\text{C} \\
 T_2 = \mathbf{56.7^\circ\text{C}}
 \end{array}$$

Discussion Note that we could also solve this problem by determining the boundary work and the internal energy change rather than the enthalpy change.

EXAMPLE 4-10 Heating of a Gas at Constant Pressure

A piston–cylinder device initially contains air at 150 kPa and 27°C. At this state, the piston is resting on a pair of stops, as shown in Fig. 4-32, and the enclosed volume is 400 L. The mass of the piston is such that a 350-kPa pressure is required to move it. The air is now heated until its volume has doubled. Determine (a) the final temperature, (b) the work done by the air, and (c) the total heat transferred to the air.

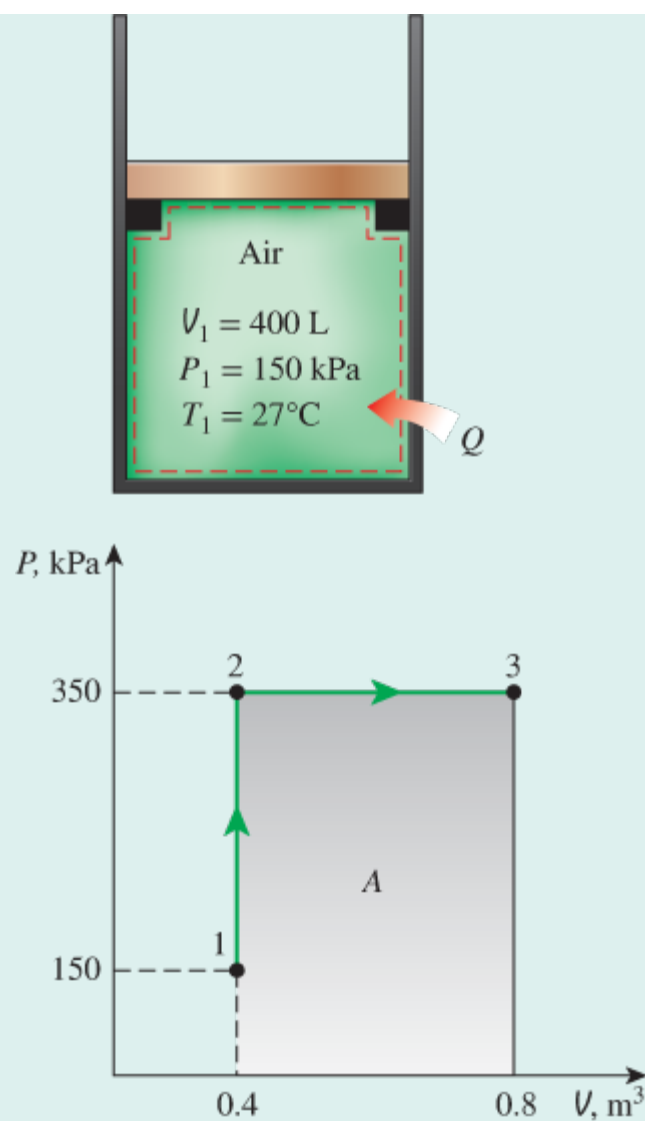**FIGURE 4-32**

Schematic and P - V diagram for Example 4-10.

SOLUTION Air in a piston–cylinder device with a set of stops is heated until its volume is doubled. The final temperature, work done, and the total heat transfer are to be determined.

Assumptions 1 Air is an ideal gas since it is at a high temperature and low pressure relative to its critical-point values. 2 The system is stationary and thus the kinetic and potential energy changes are zero, $\#KE = \#PE = 0$ and $\#E = \#U$. 3 The volume remains constant until the piston starts moving, and the pressure remains constant afterwards. 4 There are no electrical, shaft, or other forms of work involved.

Analysis We take the contents of the cylinder as the *system* (Fig. 4-32). This is a *closed system* since no mass crosses the system boundary during the process. We observe that a piston–cylinder device typically involves a moving boundary and thus boundary work, W_b . Also, the boundary work is done by the system, and heat is transferred to the system.

(a) The final temperature can be determined easily by using the ideal-gas relation between states 1 and 3 in the following form:

$$\frac{P_1 V_1}{T_1} = \frac{P_3 V_3}{T_3} \longrightarrow \frac{(150 \text{ kPa})(V_1)}{300 \text{ K}} = \frac{(350 \text{ kPa})(2V_1)}{T_3}$$

$$T_3 = \mathbf{1400 \text{ K}}$$

(b) The work done could be determined by integration, but for this case it is much easier to find it from the area under the process curve on a P - V diagram, shown in Fig. 4–32:

$$A = (V_2 - V_1)P_2 = (0.4 \text{ m}^3)(350 \text{ kPa}) = 140 \text{ m}^3 \cdot \text{kPa}$$

Therefore,

page 181

$$W_{13} = \mathbf{140 \text{ kJ}}$$

The work is done by the system (to raise the piston and to push the atmospheric air out of the way), and thus it is work output.

(c) Under the stated assumptions and observations, the energy balance on the system between the initial and final states (process 1–3) can be expressed as

$$\underbrace{E_{\text{in}} - E_{\text{out}}}_{\substack{\text{Net energy transfer} \\ \text{by heat, work, and mass}}} = \underbrace{\Delta E_{\text{system}}}_{\substack{\text{Change in internal, kinetic,} \\ \text{potential, etc., energies}}}$$

$$Q_{\text{in}} - W_{b,\text{out}} = \Delta U = m(u_3 - u_1)$$

The mass of the system can be determined from the ideal-gas relation:

$$m = \frac{P_1 V_1}{RT_1} = \frac{(150 \text{ kPa})(0.4 \text{ m}^3)}{(0.287 \text{ kPa} \cdot \text{m}^3/\text{kg} \cdot \text{K})(300 \text{ K})} = 0.697 \text{ kg}$$

The internal energies are determined from the air table (Table A–17) to be

$$u_1 = u_{@ 300 \text{ K}} = 214.07 \text{ kJ/kg}$$

$$u_3 = u_{@ 1400 \text{ K}} = 1113.52 \text{ kJ/kg}$$

Thus,

$$Q_{\text{in}} - 140 \text{ kJ} = (0.697 \text{ kg})[(1113.52 - 214.07) \text{ kJ/kg}]$$

$$Q_{\text{in}} = \mathbf{767 \text{ kJ}}$$

Discussion The positive sign verifies that heat is transferred to the system.

4–5 ■ INTERNAL ENERGY, ENTHALPY, AND SPECIFIC HEATS OF SOLIDS AND LIQUIDS

A substance whose specific volume (or density) is constant is called an **incompressible substance**. The specific volumes of solids and liquids essentially remain constant during a process (Fig. 4–33). Therefore, liquids and solids can be approximated as incompressible substances without sacrificing

much in accuracy. The constant-volume assumption should be taken to imply that the energy associated with the volume change is negligible compared with other forms of energy. Otherwise, this assumption would be ridiculous for studying the thermal stresses in solids (caused by volume change with temperature) or analyzing liquid-in-glass thermometers.

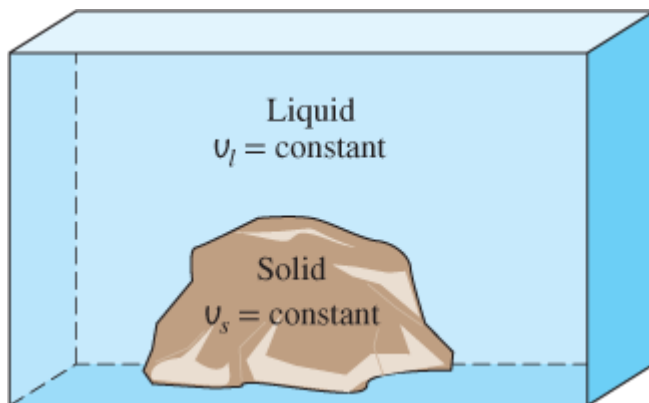


FIGURE 4–33

The specific volumes of incompressible substances remain constant during a process.

It can be mathematically shown (see Chap. 12) that the constant-volume and constant-pressure specific heats are identical for incompressible substances (Fig. 4–34). Therefore, for solids and liquids, the subscripts on c_p and c_v can be dropped, and both specific heats can be represented by a single symbol c . That is,

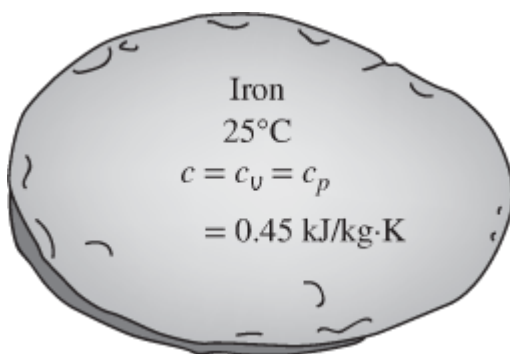


FIGURE 4–34

The c_v and c_p values of incompressible substances are identical and are denoted by c .

(4–32)

This result could also be deduced from the physical definitions of constant-volume and constant-pressure specific heats. Specific heat values for several common liquids and solids are given in Table A–3.

page 182

Internal Energy Changes

Like those of ideal gases, the specific heats of incompressible substances depend on temperature only. Thus, the partial differentials in the defining equation of c_v can be replaced by ordinary differentials, which yield

(4-33)

The change in internal energy between states 1 and 2 is then obtained by integration:

(4-34)

The variation of specific heat c with temperature should be known before this integration can be carried out. For small temperature intervals, a c value at the average temperature can be used and treated as a constant, yielding

(4-35)

Enthalpy Changes

Using the definition of enthalpy $h = u + Pv$ and noting that $v = \text{constant}$, the differential form of the enthalpy change of incompressible substances can be determined by differentiation to be

(4-36)

Integrating,

(4-37)

For *solids*, the term $v \Delta P$ is insignificant, and thus $\Delta h \approx \Delta u \approx c_{\text{avg}} \Delta T$. For *liquids*, two special cases are commonly encountered:

1. *Constant-pressure processes*, as in heaters ($\Delta P = 0$): $\Delta h = \Delta u \approx c_{\text{avg}} \Delta T$
2. *Constant-temperature processes*, as in pumps ($\Delta T = 0$): $\Delta h = v \Delta P$

For a process between states 1 and 2, the last relation can be expressed as $h_2 - h_1 = v(P_2 - P_1)$. By taking state 2 to be the compressed liquid state at a given T and P and state 1 to be the saturated liquid state at the same temperature, the enthalpy of the compressed liquid can be expressed as

(4-38)

as discussed in Chap. 3. This is an improvement over the assumption that the enthalpy of the compressed liquid could be taken as h_f at the given temperature (that is, $h_{@P,T} \approx h_{f@T}$). However, the contribution of the last term is often very small and is neglected. (Note that at high temperatures and pressures, Eq. 4-38 may overcorrect the enthalpy and result in a larger error than the approximation $h \approx h_{f@T}$.)

EXAMPLE 4-11 Enthalpy of Compressed Liquid

Determine the enthalpy of liquid water at 100°C and 15 MPa (a) by using compressed liquid tables, (b) by approximating it as a saturated liquid, and (c) by using the correction given by Eq. 4–38.

SOLUTION The enthalpy of liquid water is to be determined exactly and approximately.

Analysis At 100°C, the saturation pressure of water is 101.42 kPa, and since $P > P_{\text{sat}}$, the water exists as a compressed liquid at the specified state.

(a) From compressed liquid tables, we read

(Table A–7)

This is the exact value.

(b) Approximating the compressed liquid as a saturated liquid at 100°C, as is commonly done, we obtain

$$h \cong h_{f@100^\circ\text{C}} = 419.17 \text{ kJ/kg}$$

This value is in error by about 2.6 percent.

(c) From Eq. 4–38,

$$\begin{aligned} h_{@P,T} &\cong h_{f@T} + v_{f@T}(P - P_{\text{sat}@T}) \\ &= (419.17 \text{ kJ/kg}) + (0.001 \text{ m}^3/\text{kg})[(15,000 - 101.42) \text{ kPa}]\left(\frac{1 \text{ kJ}}{1 \text{ kPa}\cdot\text{m}^3}\right) \\ &= 434.07 \text{ kJ/kg} \end{aligned}$$

Discussion Note that the correction term reduced the error from 2.6 to about 1 percent in this case. However, this improvement in accuracy is often not worth the extra effort involved.

EXAMPLE 4–12 Cooling of an Iron Block by Water


A 50-kg iron block at 80°C is dropped into an insulated tank that contains 0.5 m³ of liquid water at 25°C. Determine the temperature when thermal equilibrium is reached.

SOLUTION An iron block is dropped into water in an insulated tank. The final temperature when thermal equilibrium is reached is to be determined.

Assumptions 1 Both water and the iron block are incompressible substances. 2 Constant specific heats at room temperature can be used for water and the iron. 3 The system is stationary, and thus the kinetic and potential energy changes are zero, $\#KE = \#PE = 0$ and $\#E = \#U$. 4 There are no electrical, shaft, or other forms of work involved. 5 The system is well insulated and thus there is no heat transfer.

Analysis We take the entire contents of the tank as the *system* (Fig. 4–35). This is a *closed system* since no mass crosses the system boundary during the process. We observe that the volume of a rigid tank is constant, and thus there is no boundary work. The energy balance on the system can be expressed as

page 184

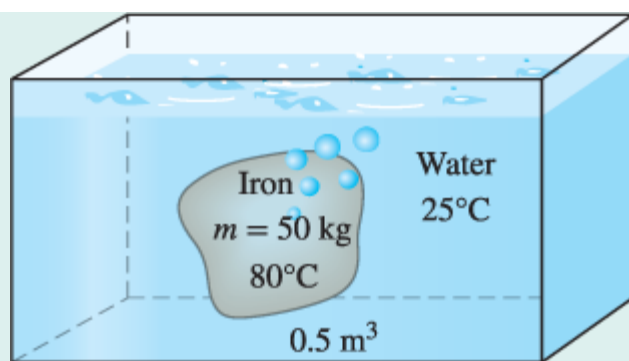**FIGURE 4-35**

Schematic for Example 4–12.

$$\underbrace{E_{\text{in}} - E_{\text{out}}}_{\substack{\text{Net energy transfer} \\ \text{by heat, work, and mass}}} = \underbrace{\Delta E_{\text{system}}}_{\substack{\text{Change in internal, kinetic,} \\ \text{potential, etc., energies}}}$$

$$0 = \Delta U$$

The total internal energy U is an extensive property, and therefore it can be expressed as the sum of the internal energies of the parts of the system. Then the total internal energy change of the system becomes

$$\Delta U_{\text{sys}} = \Delta U_{\text{iron}} + \Delta U_{\text{water}} = 0$$

$$[mc(T_2 - T_1)]_{\text{iron}} + [mc(T_2 - T_1)]_{\text{water}} = 0$$

The specific volume of liquid water at or about room temperature can be taken to be $0.001 \text{ m}^3/\text{kg}$. Then the mass of the water is

$$m_{\text{water}} = \frac{V}{v} = \frac{0.5 \text{ m}^3}{0.001 \text{ m}^3/\text{kg}} = 500 \text{ kg}$$

The specific heats of iron and liquid water are determined from Table A–3 to be $c_{\text{iron}} = 0.45 \text{ kJ/kg}\cdot^\circ\text{C}$ and $c_{\text{water}} = 4.18 \text{ kJ/kg}\cdot^\circ\text{C}$. Substituting these values into the energy equation, we obtain

$$(50 \text{ kg})(0.45 \text{ kJ/kg}\cdot^\circ\text{C})(T_2 - 80^\circ\text{C}) + (500 \text{ kg})(4.18 \text{ kJ/kg}\cdot^\circ\text{C})(T_2 - 25^\circ\text{C}) = 0$$

$$T_2 = \mathbf{25.6^\circ\text{C}}$$

Therefore, when thermal equilibrium is established, both the water and iron will be at 25.6°C .

Discussion The small rise in water temperature is due to its large mass and large specific heat.

EXAMPLE 4-13 Cooling of Carbon Steel Balls in Air

Carbon steel balls ($\rho = 7833 \text{ kg/m}^3$ and $c_p = 0.465 \text{ kJ/kg}\cdot^\circ\text{C}$) 8 mm in diameter are annealed by heating them first to 900°C in a furnace, and then allowing them to cool slowly to 100°C in ambient air at 35°C ,

as shown in Fig. 4-36. If 2500 balls are to be annealed per hour, determine the total rate of heat transfer from the balls to the ambient air.

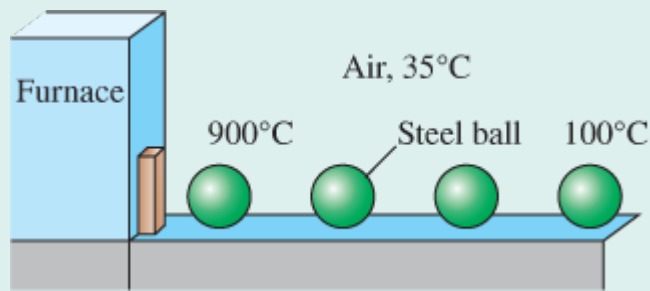


FIGURE 4-36

Schematic for Example 4-13.

SOLUTION Carbon steel balls are to be annealed at a rate of 2500/h by heating them first and then allowing them to cool slowly in ambient air at a specified rate. The total rate of heat transfer from the balls to the ambient air is to be determined.

Assumptions 1 The thermal properties of the balls are constant. 2 There are no changes in kinetic and potential energies. 3 The balls are at a uniform temperature at the end of the process.

Properties The density and specific heat of the balls are given to be $\rho = 7833 \text{ kg/m}^3$ and $c_p = 0.465 \text{ kJ/kg} \cdot ^\circ\text{C}$.

Analysis We take a single ball as the system. The energy balance for this closed system can be expressed as

$$\underbrace{E_{\text{in}} - E_{\text{out}}}_{\text{Net energy transfer by heat, work, and mass}} = \underbrace{\Delta E_{\text{system}}}_{\text{Change in internal, kinetic, potential, etc., energies}}$$

$$-Q_{\text{out}} = \Delta U_{\text{ball}} = m(u_2 - u_1)$$

$$Q_{\text{out}} = mc(T_1 - T_2)$$

The amount of heat transfer from a single ball is

$$m = \rho V = \rho \frac{\pi D^3}{6} = (7833 \text{ kg/m}^3) \frac{\pi (0.008 \text{ m})^3}{6} = 0.00210 \text{ kg}$$

$$Q_{\text{out}} = mc(T_1 - T_2) = (0.00210 \text{ kg})(0.465 \text{ kJ/kg} \cdot ^\circ\text{C})(900 - 100)^\circ\text{C} = 0.781 \text{ kJ (per ball)}$$

Then the total rate of heat transfer from the balls to the ambient air becomes

$$\dot{Q}_{\text{out}} = \dot{n}_{\text{ball}} Q_{\text{out}} = (2500 \text{ ball/h})(0.781 \text{ kJ/ball}) = 1953 \text{ kJ/h} = \mathbf{542 \text{ W}}$$

Discussion For solids and liquids, constant-pressure and constant-volume specific heats are identical and can be represented by a single symbol c . However, it is customary to use the symbol c_p for the specific heat of incompressible substances.

TOPIC OF SPECIAL INTEREST* Thermodynamic Aspects of Biological Systems

An important and exciting application area of thermodynamics is biological systems, which are the sites of rather complex and intriguing energy transfer and transformation processes. Biological systems are not in thermodynamic equilibrium, and thus they are not easy to analyze. Despite their complexity, biological systems are primarily made up of four simple elements: hydrogen, oxygen, carbon, and nitrogen. In the human body, hydrogen accounts for 63 percent, oxygen 25.5 percent, carbon 9.5 percent, and nitrogen 1.4 percent of all the atoms. The remaining 0.6 percent of the atoms comes from 20 other elements essential for life. By mass, about 72 percent of the human body is water.


The building blocks of living organisms are *cells*, which resemble miniature factories performing functions that are vital for the survival of organisms. A biological system can be as simple as a single cell. The human body contains about 100 trillion cells with an average diameter of 0.01 mm. The membrane of the cell is a semipermeable wall that allows some substances to pass through it while excluding others.

In a typical cell, thousands of chemical reactions occur every second, during which some molecules are broken down and energy is released and some new molecules are formed. This high level of chemical activity in the cells, which maintains the human body at a temperature of 37° C while performing the necessary bodily tasks, is called **metabolism**. In simple terms, metabolism refers to the burning of foods such as carbohydrates, fat, and protein. The rate of metabolism in the resting state is called the *basal metabolic rate*, which is the rate of metabolism required to keep a body performing the necessary functions (such as breathing and blood circulation) at zero external activity level. The metabolic rate can also be interpreted as the energy consumption rate for a body. For an average male (30 years old, 70 kg, 1.8-m² body surface area), the basal metabolic rate is 84 W. That is, the body dissipates energy to the environment at a rate of 84 W, which means that the body is converting the chemical energy of food (or of body fat if the person has not eaten) into thermal energy at a rate of 84 W (Fig. 4–37). The metabolic rate increases with the level of activity, and it may exceed 10 times the basal metabolic rate when a body is doing strenuous exercise. That is, two people doing heavy exercising in a room may be supplying more energy to the room than a 1-kW electrical resistance heater (Fig. 4–38). The fraction of sensible heat varies from about 40 percent in the case of heavy work to about 70 percent in the case of light work. The rest of the energy is rejected from the body by perspiration in the form of latent heat.

 page 186

**FIGURE 4–37**

An average person dissipates energy to the surroundings at a rate of 84 W when resting.

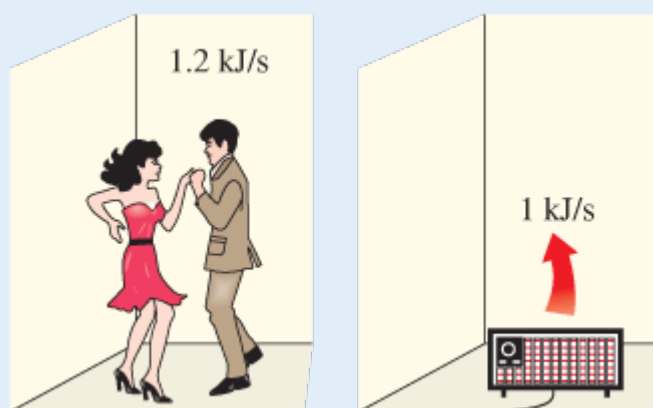**FIGURE 4–38**

Two fast-dancing people supply more energy to a room than a 1-kW electric resistance heater.

The basal metabolic rate varies with sex, body size, general health conditions, and so forth, and decreases considerably with age. This is one of the reasons people tend to put on weight in their late twenties and thirties even though they do not increase their food intake. The brain and the liver are the major sites of metabolic activity. These two organs are responsible for almost 50 percent of the basal metabolic rate of an adult human body, although they constitute only about 4 percent of the body mass. In small children, it is remarkable that about half of the basal metabolic activity occurs in the brain alone.

The biological reactions in cells occur essentially at constant temperature, pressure, and volume. The temperature of the cell tends to rise when some chemical energy is converted to heat, but this energy is quickly transferred to the circulatory system, which transports it to outer parts of the body and eventually to the environment through the skin.

The muscle cells function very much like an engine, converting the chemical energy into mechanical energy (work) with a conversion efficiency of close to 20 percent. When the body does no net work on the environment (such as moving some furniture upstairs), the entire work is also converted to heat. In that case, the entire chemical energy in the food released during metabolism in the body is eventually transferred to the environment. A TV set that consumes electricity at a rate of 300 W must reject heat to its environment at a rate of 300 W in steady operation regardless of what goes on in the set. That is, turning on a 300-W TV set or three 100-W lightbulbs will produce the same heating effect in a room as a 300-W resistance heater (Fig. 4–39). This is a consequence of the conservation of energy principle, which requires that the energy input into a system must equal the energy output when the total energy content of a system remains constant during a process.

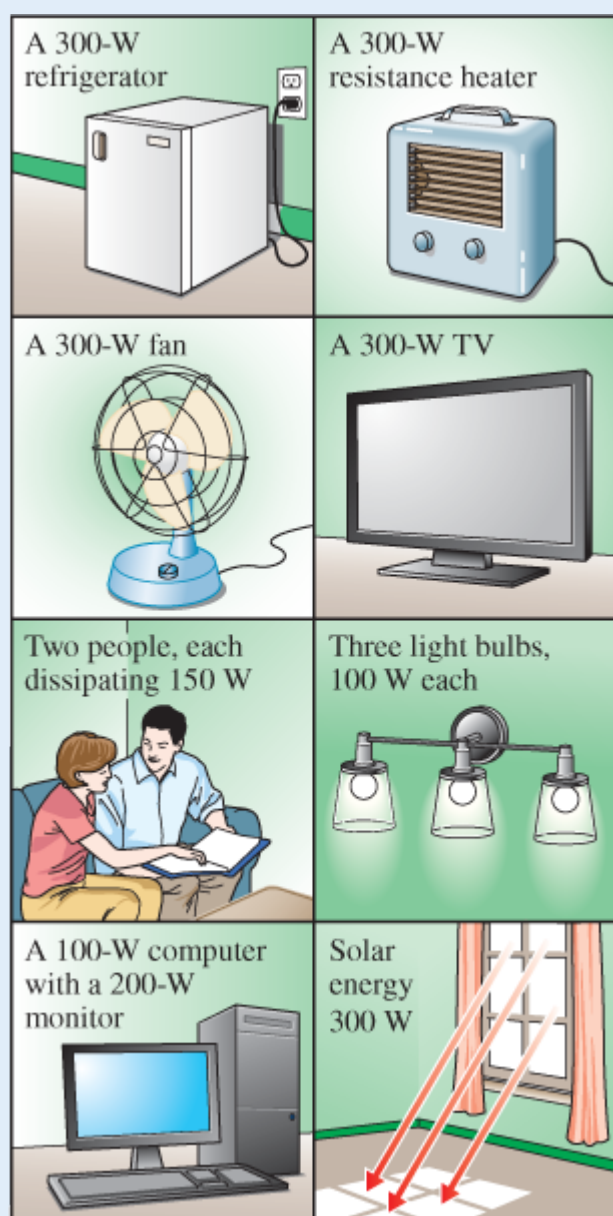


FIGURE 4–39

Some arrangements that supply a room with the same amount of energy as a 300-W electric resistance heater.

Food and Exercise

The energy requirements of a body are met by the food we eat. The nutrients in the food are considered in three major groups: carbohydrates, proteins, and fats. *Carbohydrates* are characterized by having hydrogen and oxygen atoms in a 2:1 ratio in their molecules. The molecules of carbohydrates range from very simple (as in plain sugar) to very complex or large (as in starch). Bread and plain sugar are the major sources of carbohydrates. *Proteins* page 187 are very large molecules that contain carbon, hydrogen, oxygen, and nitrogen, and they are essential for the building and repairing of the body tissues. Proteins are made up of smaller building blocks called *amino acids*. Complete proteins such as meat, milk, and eggs have all the amino acids needed to build body tissues. Plant source proteins such as those in fruits, vegetables, and grains lack one or more amino acids and are called incomplete proteins. *Fats* are relatively small molecules that consist of carbon, hydrogen, and oxygen. Vegetable oils and animal fats are major sources of fats. Most foods we eat contain all three nutrition groups at varying amounts. The typical average American diet consists of 45 percent carbohydrate, 40 percent fat, and 15 percent protein, although it is recommended that in a healthy diet less than 30 percent of the calories should come from fat.

The energy content of a given food is determined by burning a small sample of the food in a device called a *bomb calorimeter*, which is basically a well-insulated rigid tank (Fig. 4–40). The tank contains a small combustion chamber surrounded by water. The food is ignited and burned in the combustion chamber in the presence of excess oxygen, and the energy released is transferred to the surrounding water. The energy content of the food is calculated on the basis of the conservation of energy principle by measuring the temperature rise of the water. The carbon in the food is converted into CO_2 and hydrogen into H_2O as the food burns. The same chemical reactions occur in the body, and thus the same amount of energy is released.

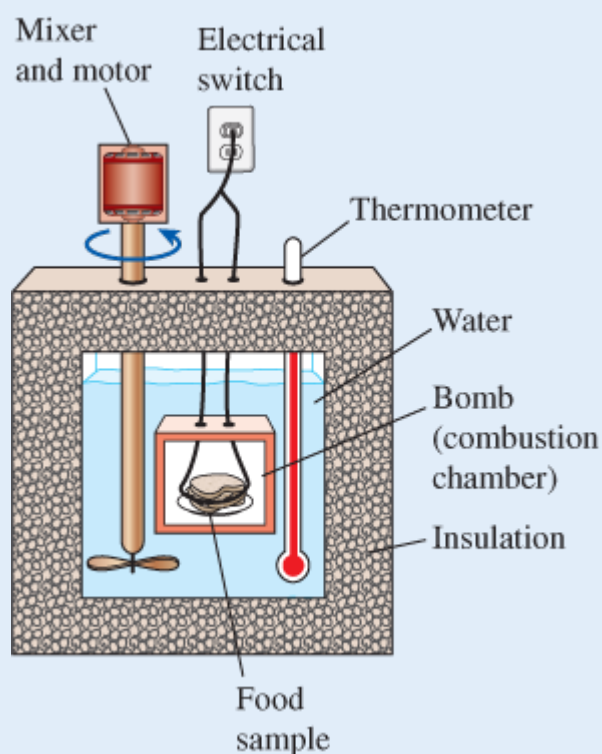


FIGURE 4–40

Schematic of a bomb calorimeter used to determine the energy content of food samples.

Using dry (free of water) samples, the average energy contents of the three basic food groups are determined by bomb calorimeter measurements to be 18.0 MJ/kg for carbohydrates, 22.2 MJ

/kg for proteins, and 39.8 MJ/kg for fats. These food groups are not entirely metabolized in the human body, however. The fraction of metabolizable energy contents are 95.5 percent for carbohydrates, 77.5 percent for proteins, and 97.7 percent for fats. That is, the fats we eat are almost entirely metabolized in the body, but close to one-quarter of the protein we eat is discarded from the body unburned. This corresponds to 4.1 Calories/g for proteins and carbohydrates and 9.3 Calories/g for fats (Fig. 4–41) commonly seen in nutrition books and on food labels. The energy contents of the foods we normally eat are much lower than the preceding values because of the large water content (water adds bulk to the food, but it cannot be metabolized or burned, and thus it has no energy value). Most vegetables, fruits, and meats, for example, are mostly water. The average metabolizable energy contents of the three basic food groups are 4.2 MJ/kg for carbohydrates, 8.4 MJ/kg for proteins, and 33.1 MJ/kg for fats. Note that 1 kg of natural fat contains almost 8 times the metabolizable energy of 1 kg of natural carbohydrates. Thus, a person who fills his stomach with fatty foods is consuming much more energy than a person who fills his stomach with carbohydrates such as bread or rice.



3 cookies (32 g)

Fat: (8 g)(9.3 Cal/g) = 74.4 Cal

Protein: (2 g)(4.1 Cal/g) = 8.2 Cal

Carbohydrates: (21 g)(4.1 Cal/g) = 86.1 Cal

Other: (1 g)(0 Cal/g) = 0

TOTAL (for 32 g): 169 Cal

FIGURE 4–41

Evaluating the calorie content of one serving of chocolate chip cookies (values are for Chips Ahoy cookies made by Nabisco).

©Comstock/Getty Images RF

The metabolizable energy content of foods is usually expressed by nutritionists in terms of the capitalized *Calories*. One Calorie is equivalent to one *kilocalorie* (1000 calories), which is equivalent to 4.1868 kJ. That is,

$$1 \text{ Cal (Calorie)} = 1000 \text{ calories} = 1 \text{ kcal (kilocalorie)} = 4.1868 \text{ kJ}$$

The calorie notation often causes confusion since it is not always followed in the tables or articles on nutrition. When the topic is food or fitness, a calorie normally means a kilocalorie whether it is capitalized or not.

The **daily calorie needs** of people vary greatly with age, gender, the state of health, the activity level, the body weight, and the composition of the body as well as other factors. A small person needs fewer calories than a larger person of the same sex and age. An average man needs about 2400 to 2700 Calories a day. The daily need of an average woman varies from 1800 to 2200 Calories. The daily calorie needs are about 1600 for sedentary women and some older adults; 2000 for sedentary men and most older adults; 2200 for most children, teenage girls, and active women; 2800 for teenage boys, active men, and some very active women; and above 3000 for very active men. The *average* value of calorie intake is usually taken to be 2000 Calories per day. The daily calorie needs of a person can be determined by multiplying the body weight in pounds (which is 2.205 times the body weight in kg) by 11 for a sedentary person, 13 for a moderately active person, 15 for a moderate exerciser or physical laborer, and 18 for an extremely active exerciser or physical laborer. The extra calories a body consumes are usually stored as fat, which serves as a spare energy supply for use when the energy intake of the body is less than the needed amount.

Like other natural fat, 1 kg of human body fat contains about 33.1 MJ of metabolizable energy. Therefore, a starving person (zero energy intake) who uses up 2200 Calories (9211 kJ) a day can meet his daily energy intake requirements by burning only $9211/33,100 = 0.28$ kg of body fat. So it is no surprise that people are known to survive over 100 days without eating. (They still need to drink water, however, to replenish the water lost through the lungs and the skin to avoid the dehydration that may occur in just a few days.) Although the desire to get rid of the excess fat in a thin world may be overwhelming at times, starvation diets are not recommended because the body soon starts to consume its own muscle tissue in addition to fat. A healthy diet should involve regular exercise while allowing for a reasonable calorie intake.

The average metabolizable energy contents of various foods and the energy consumption during various activities are given in Tables 4–1 and 4–2. Considering that no two hamburgers are alike, and that no two people walk exactly the same way, there is some uncertainty in these values, as you would expect. Therefore, you may encounter somewhat different values in other books or magazines for the same items.

TABLE 4–1

Approximate metabolizable energy content of some common foods (1 Calorie = 4.1868 kJ = 3.968 Btu)

Food	Calories
Apple (one, medium)	70
Baked potato (plain)	250
Baked potato with cheese	550
Bread (white, one slice)	70
Butter (one teaspoon)	35
Cheeseburger	325
Chocolate candy bar (20 g)	105
Cola (200 ml)	87
Egg (one)	80
Fish sandwich	450
French fries (regular)	250
Hamburger	275
Hot dog	300
Ice cream (100 ml, 10% fat)	110
Lettuce salad with French dressing	150
Milk (skim, 200 ml)	76
Milk (whole, 200 ml)	136
Peach (one, medium)	65

Pie (one slice, 23 cm diameter)	300
Pizza (large, cheese, one slice)	350

The rates of energy consumption listed in Table 4–2 during some activities are for a page 189
68-kg adult. The energy consumed for smaller or larger adults can be determined using the proportionality of the metabolism rate and the body size. For example, the rate of energy consumption by a 68-kg bicyclist is listed in Table 4–2 to be 639 Calories/h. Then the rate of energy consumption by a 50-kg bicyclist is

$$(50 \text{ kg}) \frac{639 \text{ Cal/h}}{68 \text{ kg}} = 470 \text{ Cal/h}$$

TABLE 4–2

Approximate energy consumption of a 68-kg adult during some activities (1 Calorie = 4.1868 kJ = 3.968 Btu)

Activity	Calories/h
Basal metabolism	72
Basketball	550
Bicycling (21 km/h)	639
Cross-country skiing (13 km/h)	936
Driving a car	180
Eating	99
Fast dancing	600
Fast running (13 km/h)	936
Jogging (8 km/h)	540
Swimming (fast)	860
Swimming (slow)	288
Tennis (advanced)	480
Tennis (beginner)	288
Walking (7.2 km/h)	432
Watching TV	72

For a 100-kg person, it would be 940 Cal/h.

The thermodynamic analysis of the human body is rather complicated since it involves mass transfer (during breathing, perspiring, etc.) as well as energy transfer. Thus it should be treated as an open system. However, the energy transfer with mass is difficult to quantify. Therefore, the human body is often modeled as a closed system for simplicity by treating energy transported with mass as just energy transfer. For example, eating is modeled as the transfer of energy into the human body in the amount of the metabolizable energy content of the food.

Dieting

Most diets are based on *calorie counting*; that is, the conservation of energy principle: a person who consumes more calories than his or her body burns will gain weight whereas a person who consumes fewer calories than his or her body burns will lose weight. Yet, people who eat whatever they want whenever they want without gaining any weight are living proof that the calorie-counting technique alone does not work in dieting. Obviously there is more to dieting than keeping track of calories. It should be noted that the phrases *weight gain* and *weight loss* are

misnomers. The correct phrases should be *mass gain* and *mass loss*. A man who goes to space loses practically all of his weight but none of his mass. When the topic is food and fitness, *weight* is understood to mean *mass*, and weight is expressed in mass units.

Researchers on nutrition proposed several theories on dieting. One theory suggests that some people have very “food efficient” bodies. These people need fewer calories than other people do for the same activity, just like a fuel-efficient car needing less fuel for traveling a given distance. It is interesting that we want our cars to be fuel efficient but we do not want the same high efficiency for our bodies. One thing that frustrates the dieters is that the body interprets dieting as *starvation* and starts using the energy reserves of the body more stringently. Shifting from a normal 2000-Calorie daily diet to an 800-Calorie diet without exercise is observed to lower the basal metabolic rate by 10 to 20 percent. Although the metabolic rate returns to normal once the dieting stops, extended periods of low-calorie dieting without adequate exercise may result in the loss of considerable muscle tissue together with fat. With less muscle tissue to burn calories, the metabolic rate of the body declines and stays below normal even after a person starts eating normally. As a result, the person regains the weight he or she has lost in the form of fat, plus more. The basal metabolic rate remains about the same in people who exercise while dieting.

Regular moderate exercise is part of any healthy dieting program for good reason: It builds or preserves muscle tissue that burns calories much faster than the fat tissue does. It is interesting that aerobic exercise continues to burn calories for several hours after the workout, raising the overall metabolic rate considerably.

Another theory suggests that people with *too many fat cells* developed during childhood or adolescence are much more likely to gain weight. Some people believe that the fat content of our bodies is controlled by the setting of a “fat control” mechanism, much like the temperature of a house is controlled by the thermostat setting.

Some people put the blame for weight problems simply on the *genes*. Considering that 80 percent of the children of overweight parents are also overweight, heredity may indeed play an important role in the way a body stores fat. Researchers from the University of Washington and the Rockefeller University have identified a gene, called the RIIbeta, that seems to control the rate of metabolism. The body tries to keep the body fat content at a particular level, called the **set point**, that differs from person to person (Fig. 4–42). This is done by *speeding up* the metabolism and thus burning calories faster when a person tends to gain weight and by *slowing down* the metabolism and thus burning calories more slowly when a person tends to lose weight. Therefore, a person who just became slim burns fewer calories than does a person of the same size who has always been slim. Even exercise does not seem to change that. Then to keep the weight off, the newly slim person should consume no more calories than he or she can burn. Note that in people with high metabolic rates, the body dissipates the extra calories as body heat instead of storing them as fat, and thus there is no violation of the conservation of energy principle.

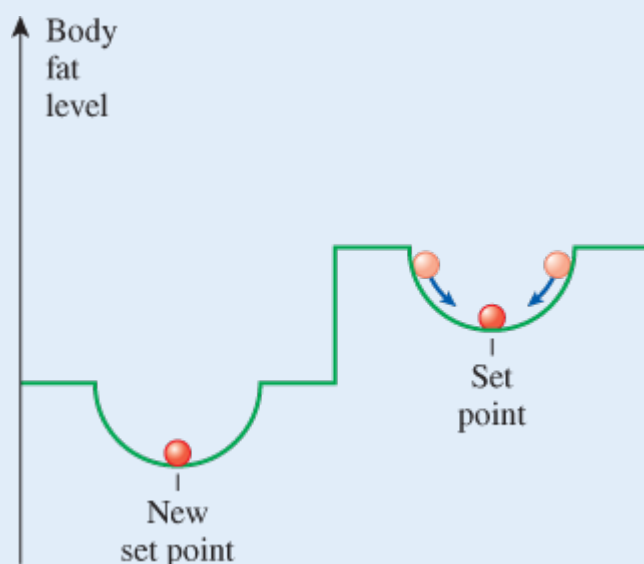


FIGURE 4–42

The body tends to keep the body fat level at a *set point* by speeding up metabolism when a person splurges and by slowing it down when the person starves.

In some people, a *genetic flaw* is believed to be responsible for the extremely low rates of metabolism. Several studies concluded that losing weight for such people is nearly impossible. That is, obesity is a biological phenomenon. However, even such people will not gain weight unless they eat more than their body can burn. They just must learn to be content with little food to remain slim, and forget about ever having a normal “eating” life. For most people, genetics determine the range of normal weights. A person may end up at the high or low end of that range, depending on eating and exercise habits. This also explains why some genetically identical twins are not so identical when it comes to body weight. *Hormone imbalance* is also believed to cause excessive weight gain or loss.

Based on his experience, the first author of this book has also developed a diet called the “*sensible diet*.” It consists of two simple rules: eat *whatever* you want *whenever* you want *as much* as you want provided that (1) you do not eat unless you are hungry and (2) you stop eating before you get stuffed. In other words, *listen to your body and don’t impose on it*. Don’t expect to see this unscientific diet advertised anywhere since there is nothing to be sold and thus no money to be made. Also, it is not as easy as it sounds since food is at the center stage of most leisure activities in social life, and eating and drinking have become synonymous with having a good time. However, it is comforting to know that the human body is quite forgiving of occasional impositions.

Being *overweight* is associated with a long list of health risks from high blood pressure to some forms of cancer, especially for people who have a weight-related medical condition such as diabetes, hypertension, and heart disease. Therefore, people often wonder if their weight is in the proper range. Well, the answer to this question is not written in stone, but if you cannot see your toes or you can pinch your love handles more than an inch, you don’t need an expert to tell you that you went over your range. On the other hand, some people who are obsessed with the weight issue try to lose more weight even though they are actually underweight. Therefore, it is useful to have a scientific criterion to determine physical fitness. The range of healthy weight for adults is usually expressed in terms of the **body mass index** (BMI), defined, in SI units, as

page 191

(4–39)

where W is the weight (actually, the mass) of the person in kg and H is the height in m. Therefore, a BMI of 25 is the upper limit for the healthy weight and a person with a BMI of 27 is 8 percent overweight. It can be shown that the formula is equivalent in English units to $BMI = 705 \, W/H^2$ where W is in pounds and H is in inches. The proper range of weight for adults of various heights is given in Table 4–3 in both SI and English units.

TABLE 4–3

The range of healthy weight for adults of various heights (Source: National Institute of Health)

English units		SI units	
Height in	Healthy weight, lbm*	Height, m	Healthy weight, kg*
58	91–119	1.45	40–53
60	97–127	1.50	43–56
62	103–136	1.55	46–60
64	111–146	1.60	49–64
66	118–156	1.65	52–68

68	125–165	1.70	55–72
70	133–175	1.75	58–77
72	140–185	1.80	62–81
74	148–195	1.85	65–86
76	156–205	1.90	69–90

*The upper and lower limits of healthy range correspond to body mass indexes of 25 and 19, respectively.

*This section can be skipped without a loss in continuity.

EXAMPLE 4-14 Burning Off Lunch Calories

A 90-kg man had two hamburgers, a regular serving of french fries, and a 200-ml Coke for lunch (Fig. 4-43). Determine how long it will take for him to burn the lunch calories off (a) by watching TV and (b) by fast swimming. What would your answers be for a 45-kg man?



FIGURE 4-43

A typical lunch discussed in Example 4-14.

©Copyright ©Food Collection RF

SOLUTION A man had lunch at a restaurant. The time it will take for him to burn the lunch calories by watching TV and by fast swimming are to be determined.

Assumptions The values in Tables 4-1 and 4-2 are applicable for food and exercise.

Analysis (a) We take the human body as our *system* and treat it as a *closed system* whose energy content remains unchanged during the process. Then the conservation of energy principle requires that the energy input into the body must be equal to the energy output. The net energy input in this case is the metabolizable energy content of the food eaten. It is determined from Table 4-1 to be

$$\begin{aligned}
 E_{\text{in}} &= 2 \times E_{\text{hamburger}} + E_{\text{fries}} + E_{\text{cola}} \\
 &= 2 \times 275 + 250 + 87 \\
 &= 887 \text{ Cal}
 \end{aligned}$$

The rate of energy output for a 68-kg man watching TV is given in Table 4–2 to be 72 Calories/h. For a 90-kg man it becomes

$$E_{\text{out}} = (90 \text{ kg}) \frac{72 \text{ Cal/h}}{68 \text{ kg}} = 95.3 \text{ Cal/h}$$

Therefore, it will take

page 192

$$\Delta t = \frac{887 \text{ Cal}}{95.3 \text{ Cal/h}} = \mathbf{9.3 \text{ h}}$$

to burn the lunch calories off by watching TV.

(b) It can be shown in a similar manner that it takes only **47 min** to burn the lunch calories off by fast swimming.

Discussion The 45-kg man is half as large as the 90-kg man. Therefore, expending the same amount of energy takes twice as long in each case: **18.6 h** by watching TV and **94 min** by fast swimming.

EXAMPLE 4–15 Losing Weight by Switching to Fat-Free Chips

The fake fat olestra passes through the body undigested, and thus adds zero calorie to the diet. Although foods cooked with olestra taste pretty good, they may cause abdominal discomfort, and the long-term effects are unknown. A 1-oz (28.3-g) serving of regular potato chips has 10 g of fat and 150 Calories, whereas 1 oz of the so-called fat-free chips fried in olestra has only 75 Calories. Consider a person who eats 1 oz of regular potato chips every day at lunch without gaining or losing any weight. Determine how much weight this person will lose in one year if he or she switches to fat-free chips (Fig. 4–44).



FIGURE 4-44

Schematic for Example 4-15.

SOLUTION A person switches from regular potato chips to fat-free ones. The weight the person loses in one year is to be determined.

Assumptions Exercising and other eating habits remain the same.

Analysis The person who switches to the fat-free chips consumes 75 fewer Calories a day. Then the annual reduction in calories consumed becomes

$$E_{\text{reduced}} = (75 \text{ Cal/day})(365 \text{ day/year}) = 27,375 \text{ Cal/year}$$

The metabolizable energy content of 1 kg of body fat is 33,100 kJ. Therefore, assuming the deficit in the calorie intake is made up by burning body fat, the person who switches to fat-free chips will lose

$$m_{\text{fat}} = \frac{E_{\text{reduced}}}{\text{Energy content of fat}} = \frac{27,375 \text{ Cal}}{33,100 \text{ kJ/kg}} \left(\frac{4.1868 \text{ kJ}}{1 \text{ Cal}} \right) = 3.46 \text{ kg}$$

(about 7.6 pounds) of body fat that year.

SUMMARY

Work is the energy transferred as a force acts on a system through a distance. The most common form of mechanical work is the *boundary work*, which is the work associated with the expansion and compression of substances. On a P - V diagram, the area under the process curve represents the boundary work for a quasi-equilibrium process. Various forms of boundary work are expressed as follows:

1. General $W_b = \int_1^2 P dV$

2. Isobaric process

page 193

$$W_b = P_0(V_2 - V_1) \quad (P_1 = P_2 = P_0 = \text{constant})$$

3. Polytropic process

$$W_b = \frac{P_2 V_2 - P_1 V_1}{1 - n} \quad (n \neq 1) \quad (PV^n = \text{constant})$$

4. Isothermal process of an ideal gas

$$\begin{aligned} W_b &= P_1 V_1 \ln \frac{V_2}{V_1} \\ &= mRT_0 \ln \frac{V_2}{V_1} \quad (PV = mRT_0 = \text{constant}) \end{aligned}$$

The first law of thermodynamics is essentially an expression of the conservation of energy principle, also called the energy balance. The general energy balance for *any system* undergoing *any process* can be expressed as

$$\underbrace{E_{\text{in}} - E_{\text{out}}}_{\substack{\text{Net energy transfer} \\ \text{by heat, work, and mass}}} = \underbrace{\Delta E_{\text{system}}}_{\substack{\text{Change in internal, kinetic,} \\ \text{potential, etc., energies}}}$$

It can also be expressed in the *rate form* as

$$\underbrace{\dot{E}_{\text{in}} - \dot{E}_{\text{out}}}_{\substack{\text{Rate of net energy transfer} \\ \text{by heat, work, and mass}}} = \underbrace{dE_{\text{system}}/dt}_{\substack{\text{Rate of change in internal,} \\ \text{kinetic, potential, etc., energies}}}$$

Taking heat transfer *to* the system and work done *by* the system to be positive quantities, the energy balance for a closed system can also be expressed as

$$Q - W = \Delta U + \Delta \text{KE} + \Delta \text{PE}$$

where

$$\begin{aligned} W &= W_{\text{other}} + W_b \\ \Delta U &= m(u_2 - u_1) \\ \Delta \text{KE} &= \frac{1}{2}m(V_2^2 - V_1^2) \\ \Delta \text{PE} &= mg(z_2 - z_1) \end{aligned}$$

For a *constant-pressure process*, $W_b + \Delta U = \Delta H$. Thus,

$$Q - W_{\text{other}} = \Delta H + \Delta \text{KE} + \Delta \text{PE}$$

Note that the relation above is limited to constant-pressure processes of closed systems and is NOT valid for processes during which pressure varies.

The amount of energy needed to raise the temperature of a unit mass of a substance by one degree is called the *specific heat at constant volume* c_v for a constant-volume process and the *specific heat at constant pressure* c_p for a constant-pressure process. They are defined as

$$c_v = \left(\frac{\partial u}{\partial T} \right)_v \quad \text{and} \quad c_p = \left(\frac{\partial h}{\partial T} \right)_p$$

For ideal gases u , h , c_v , and c_p are functions of temperature alone. The $\#u$ and $\#h$ of ideal gases are expressed as

$$\Delta u = u_2 - u_1 = \int_1^2 c_v(T) dT \cong c_{v,\text{avg}}(T_2 - T_1)$$

$$\Delta h = h_2 - h_1 = \int_1^2 c_p(T) dT \cong c_{p,\text{avg}}(T_2 - T_1)$$

For ideal gases, c_v and c_p are related by

$$c_p = c_v + R$$

where R is the gas constant. The *specific heat ratio* k is defined as

$$k = \frac{c_p}{c_v}$$

For *incompressible substances* (liquids and solids), both the constant-pressure and constant-volume specific heats are identical and denoted by c :

$$c_p = c_v = c$$

The $\#u$ and $\#h$ of incompressible substances are given by

$$\Delta u = \int_1^2 c(T) dT \cong c_{\text{avg}}(T_2 - T_1)$$

$$\Delta h = \Delta u + v \Delta P$$

REFERENCES AND SUGGESTED READINGS

1. ASHRAE *Handbook of Fundamentals*. SI version. Atlanta, GA: American Society of Heating, Refrigerating, and Air-Conditioning Engineers, Inc., 1993.
2. ASHRAE *Handbook of Refrigeration*. SI version. Atlanta, GA: American Society of Heating, Refrigerating, and Air-Conditioning Engineers, Inc., 1994.

PROBLEMS***Moving Boundary Work**


4-1C Is the boundary work associated with constant-volume systems always zero?

4-2C On a P - v diagram, what does the area under the process curve represent?

page 195

4-3C An ideal gas at a given state expands to a fixed final volume first at constant pressure and then at constant temperature. For which case is the work done greater?

4-4 Calculate the total work, in kJ, for process 1–3 shown in Fig. P4–4 when the system consists of 2 kg of nitrogen.

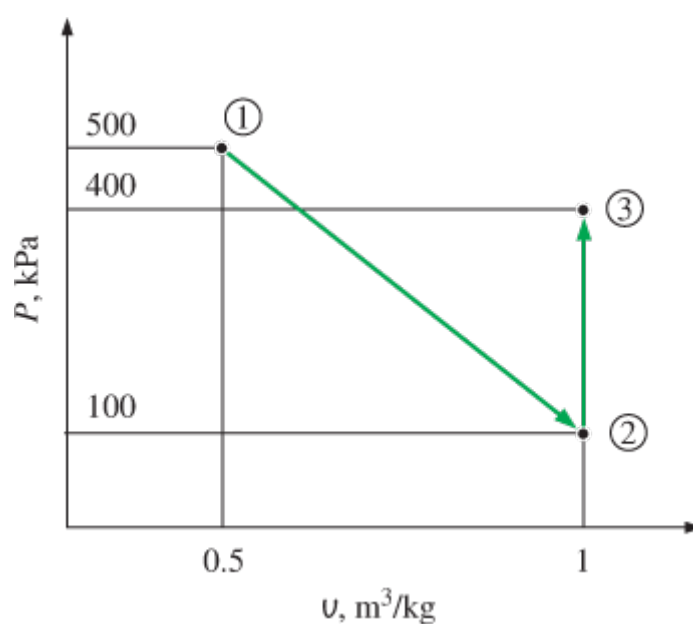**FIGURE P4-4**

4-5E Calculate the total work, in Btu, produced by the process of Fig. P4-5E.

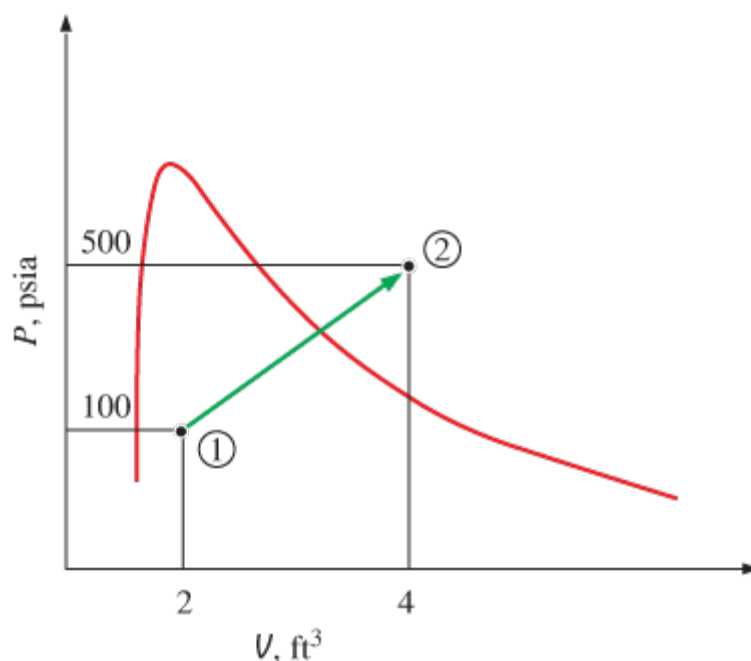


FIGURE P4-5E

4-6 Nitrogen at an initial state of 300 K, 150 kPa, and 0.2 m^3 is compressed slowly in an isothermal process to a final pressure of 800 kPa. Determine the work done during this process.

4-7 The volume of 1 kg of helium in a piston–cylinder device is initially 5 m^3 . Now helium is compressed to 2 m^3 while its pressure is maintained constant at 130 kPa. Determine the initial and final temperatures of helium as well as the work required to compress it, in kJ.

4-8 A piston–cylinder device with a set of stops initially contains 0.6 kg of steam at 1.0 MPa and 400°C . The location of the stops corresponds to 40 percent of the initial volume. Now the steam is cooled. Determine the compression work if the final state is (a) 1.0 MPa and 250°C and (b) 500 kPa. (c) Also determine the temperature at the final state in part b.

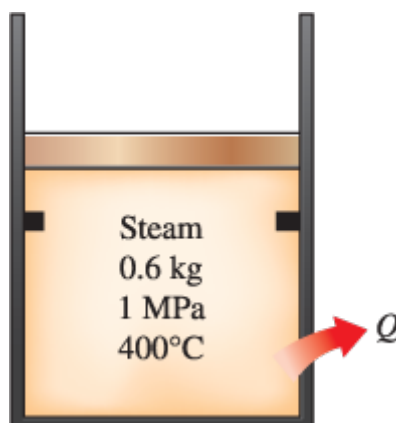


FIGURE P4-8

4-9 A mass of 5 kg of saturated water vapor at 150 kPa is heated at constant pressure until the temperature reaches 200°C . Calculate the work done by the steam during this process.

4–10E A frictionless piston–cylinder device contains 16 lbm of superheated water vapor at 40 psia and 600° F. Steam is now cooled at constant pressure until 70 percent of it, by mass, condenses. Determine the work done during this process.

4–11 1 m³ of saturated liquid water at 200°C is expanded isothermally in a closed system until its quality is 80 percent. Determine the total work produced by this expansion, in kJ.

4–12 Argon is compressed in a polytropic process with $n = 1.2$ from 120 kPa and 30°C to 1200 kPa in a piston–cylinder device. Determine the final temperature of the argon.

4–13 A gas is compressed from an initial volume of 0.42 m³ to a final volume of 0.12 m³. During the quasi-equilibrium process, the pressure changes with volume according to the relation $P = aV + b$, where $a = -1200$ kPa/m³ and $b = 600$ kPa. Calculate the work done during this process (a) by plotting the process on a P - V diagram and finding the area under the process curve and (b) by performing the necessary integrations.

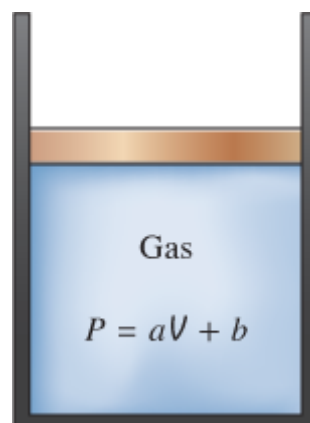


FIGURE P4–13

4–14 A mass of 1.5 kg of air at 120 kPa and 24°C is contained in a gas-tight, frictionless piston–cylinder device. The air is now compressed to a final pressure of 600 kPa. During the process, heat is transferred from the air such that the temperature inside the cylinder remains constant. Calculate the work input during this process. *Answer: 206 kJ*

4–15 During some actual expansion and compression processes in piston–cylinder devices, the gases have been observed to satisfy the relationship $PV^n = C$, where n and C are constants. Calculate the work done when a gas expands from 350 kPa and 0.03 m³ to a final volume of 0.2 m³ for the case of $n = 1.5$.

4–16  Reconsider Prob. 4–15. Using appropriate software, plot the process described in the problem on a P - V diagram, and investigate the effect of the polytropic exponent n on the boundary work. Let the polytropic exponent vary from 1.1 to 1.6. Plot the boundary work versus the polytropic exponent, and discuss the results.

4–17 A frictionless piston–cylinder device contains 5 kg of nitrogen at 100 kPa and 250 K. Nitrogen is now compressed slowly according to the relation $PV^{1.4} = \text{constant}$ until it reaches a final temperature of 450 K. Calculate the work input during this process. *Answer: 742 kJ*

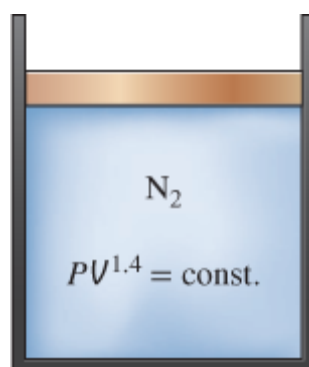


FIGURE P4-17

4-18E During an expansion process, the pressure of a gas changes from 15 to 100 psia according to the relation $P = aV + b$, where $a = 5 \text{ psia/ft}^3$ and b is a constant. If the initial volume of the gas is 7 ft^3 , calculate the work done during the process. *Answer: 181 Btu*

4-19 A piston–cylinder device initially contains 0.4 kg of nitrogen gas at 160 kPa and 140°C . The nitrogen is now expanded isothermally to a pressure of 100 kPa. Determine the boundary work done during this process. *Answer: 23.0 kJ*



FIGURE P4-19

4-20 A piston–cylinder device contains 0.15 kg of air initially at 2 MPa and 350°C . The air is first expanded isothermally to 500 kPa, then compressed polytropically with a polytropic exponent of 1.2 to the initial pressure, and finally compressed at the constant pressure to the initial state. Determine the boundary work for each process and the net work of the cycle.

4-21 Determine the boundary work done by a gas during an expansion process if the pressure and volume values at various states are measured to be 300 kPa, 1 L; 290 kPa, 1.1 L; 270 kPa, 1.2 L; 250 kPa, 1.4 L; 220 kPa, 1.7 L; and 200 kPa, 2 L.

4-22 1 kg of water that is initially at 90°C with a quality of 10 percent occupies a spring-loaded piston–cylinder device, such as that in Fig. P4-22. This device is now heated until the pressure rises to 800 kPa and the temperature is 250°C . Determine the total work produced during this process, in kJ. *Answer: 24.5 kJ*

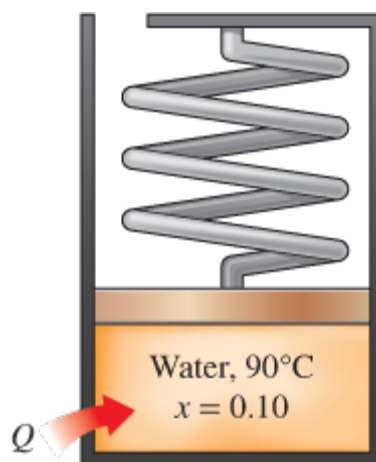


FIGURE P4-22

4-23 An ideal gas undergoes two processes in a piston–cylinder device as follows:

1–2 Polytropic compression from T_1 and P_1 with a polytropic exponent n and a compression ratio of $r =$

$$V_1/V_2.$$

2–3 Constant pressure expansion at $P_3 = P_2$ until $V_3 = V_1$.

(a)

Sketch the processes on a single P - V diagram.

(b)

Obtain an expression for the ratio of the compression-to-expansion work as a function of n and r .

(c)

Find the value of this ratio for values of $n = 1.4$ and $r = 6$.

 page 196

Answers: (b) $\frac{1}{n-1} \left(\frac{1-r^{1-n}}{r-1} \right)$ (c) 0.256

4-24 A piston–cylinder device contains 50 kg of water at 250 kPa and 25°C. The cross-sectional area of the piston is 0.1 m². Heat is now transferred to the water, causing part of it to evaporate and expand. When the volume reaches 0.2 m³, the piston reaches a linear spring whose spring constant is 100 kN/m. More heat is transferred to the water until the piston rises 20 cm more. Determine (a) the final pressure and temperature and (b) the work done during this process. Also, show the process on a P - V diagram. *Answers: (a) 450 kPa, 147.9°C, (b) 44.5 kJ*

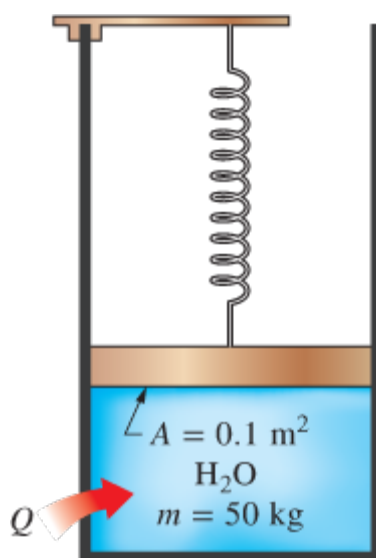


FIGURE P4-24

4–25  Reconsider Prob. 4–24. Using appropriate software, investigate the effect of the spring constant on the final pressure in the cylinder and the boundary work done. Let the spring constant vary from 50 kN/m to 500 kN/m. Plot the final pressure and the boundary work against the spring constant, and discuss the results.

4-26 Carbon dioxide contained in a piston–cylinder device is compressed from 0.3 to 0.1 m³. During the process, the pressure and volume are related by $P = aV^{-2}$, where $a = 8 \text{ kPa}\cdot\text{m}^6$. Calculate the work done on the carbon dioxide during this process. *Answer:* 53.3 kJ

Closed System Energy Analysis

4-27E A closed system like that shown in Fig. P4-27E is operated in an adiabatic manner. First, 15,000 lbf·ft of work are done by this system. Then, work is applied to the stirring device to raise the internal energy of the fluid by 10.28 Btu. Calculate the net increase in the internal energy of this system.




FIGURE P4-27E

4-28 A rigid container equipped with a stirring device contains 2.5 kg of motor oil. Determine the rate of specific energy increase when heat is transferred to the oil at a rate of 1 W, and 1.5 W of power is applied to the stirring device.

4-29 Complete each line of the following table on the basis of the conservation of energy principle for a closed system.

Q_{in}	W_{out}	E_1	E_2	m	$e_2 - e_1$
kJ	kJ	kJ	kJ	kg	kJ/kg
280	—	1020	860	3	—
#350	130	550	—	5	—
—	260	300	—	2	#150
300	—	750	500	1	—
—	#200	—	300	2	#100

FIGURE P4-29

4-30 A substance is contained in a well-insulated rigid container that is equipped with a stirring device, as shown in Fig. P4-30. Determine the change in the internal energy of this substance when 15 kJ of work is applied to the stirring device.

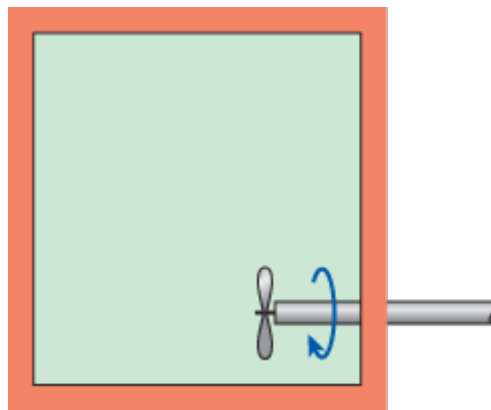


FIGURE P4-30

4-31 A 0.5-m³ rigid tank contains refrigerant-134a initially at 160 kPa and 40 percent quality. Heat is now transferred to the refrigerant until the pressure reaches 700 kPa. Determine (a) the mass of the refrigerant in the tank and (b) the amount of heat transferred. Also, show the process on a P - v diagram with respect to saturation lines.

4-32E A 20-ft³ rigid tank initially contains saturated refrigerant-134a vapor at 160 psia. As a result of heat transfer from the refrigerant, the pressure drops to 50 psia. Show the process on a P - v diagram with respect to saturation lines, and determine (a) the final temperature, (b) the amount of refrigerant that has condensed, and (c) the heat transfer.

4-33 A rigid 10-L vessel initially contains a mixture of liquid water and vapor at 100°C with 12.3 percent quality. The mixture is then heated until its temperature is 180°C. Calculate the heat transfer required for this process. *Answer: 92.5 kJ*

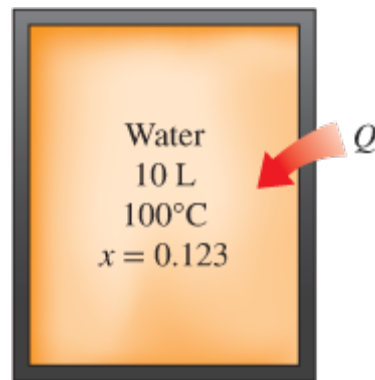


FIGURE P4-33

4-34E A rigid 1-ft³ vessel contains R-134a originally at -20°F and 27.7 percent quality. The refrigerant is then heated until its temperature is 100°F. Calculate the heat transfer required to do this. *Answer: 84.7 Btu*

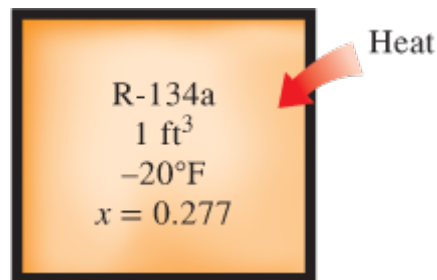


FIGURE P4-34E

4-35 A piston-cylinder device contains 5 kg of refrigerant-134a at 800 kPa and 70°C. The refrigerant is now cooled at constant pressure until it exists as a liquid at 15°C. Determine the amount of heat loss and show the process on a T - v diagram with respect to saturation lines. *Answer: 1173 kJ*

4-36E A piston-cylinder device contains 0.5 lbm of water initially at 120 psia and 2 ft³. Now 200 Btu of heat is transferred to the water while its pressure is held constant. Determine the final temperature of the water. Also, show the process on a T - v diagram with respect to saturation lines.

4-37 2 kg of saturated liquid water at 150°C is heated at constant pressure in a piston-cylinder device until it is saturated vapor. Determine the heat transfer required for this process.

4-38 An insulated piston-cylinder device contains 5 L of saturated liquid water at a constant pressure of 175 kPa. Water is stirred by a paddle wheel while a current of 8 A flows for 45 min through a resistor placed in the water. If one-half of the liquid is evaporated during this constant-pressure process and the paddle-wheel work amounts to 400 kJ, determine the voltage of the source. Also, show the process on a P - u diagram with respect to saturation lines. *Answer: 224 V*

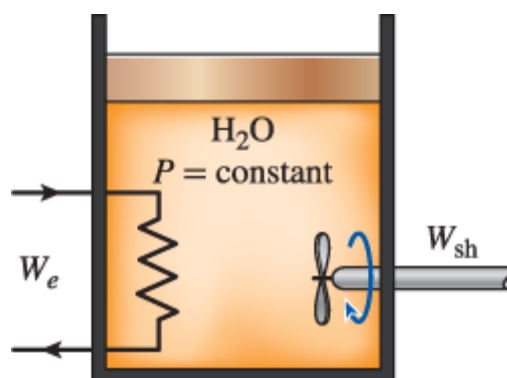


FIGURE P4–38

4–39 A 40-L electrical radiator containing heating oil is placed in a 50-m^3 room. Both the room and the oil in the radiator are initially at 10°C . The radiator with a rating of 2.4 kW is now turned on. At the same time, heat is lost from the room at an average rate of 0.35 kJ/s . After some time, the average temperature is measured to be 20°C for the air in the room, and 50°C for the oil in the radiator. Taking the density and the specific heat of the oil to be 950 kg/m^3 and $2.2\text{ kJ/kg}\cdot^\circ\text{C}$, respectively, determine how long the heater is kept on. Assume the room is well sealed so that there are no air leaks.

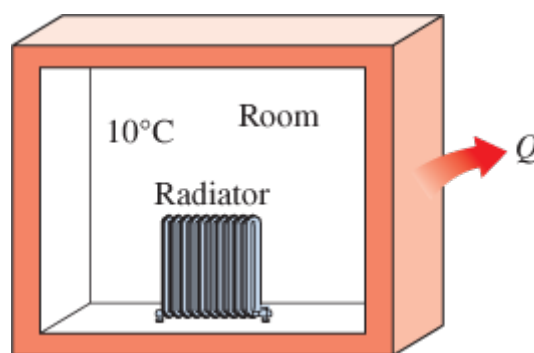


FIGURE P4–39

4–40 Steam at 75 kPa and 8 percent quality is contained in a spring-loaded piston–cylinder device, as shown in Fig. P4–40, with an initial volume of 2 m^3 . Steam is now heated until its volume is 5 m^3 and its pressure is 225 kPa . Determine the heat transferred to and the work produced by the steam during this process.

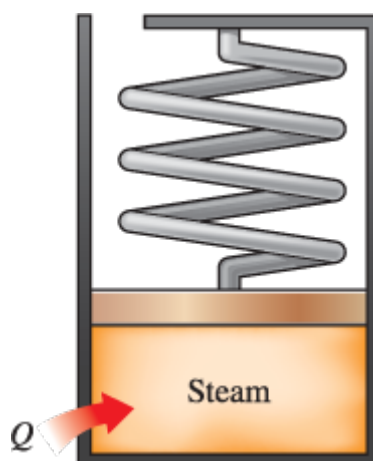


FIGURE P4-40

4-41 A piston–cylinder device initially contains 0.6 m^3 of saturated water vapor at 250 kPa. At this state, the piston is resting on a set of stops, and the mass of the piston is such that a pressure of 300 kPa is required to move it. Heat is now slowly transferred to the steam until the volume doubles. Show the process on a P - v diagram with respect to saturation lines and determine (a) the final temperature, (b) the work done during this process, and (c) the total heat transfer. *Answers: (a) 662°C, (b) 180 kJ, (c) 910 kJ*

4-42 An insulated tank is divided into two parts by a partition. One part of the tank contains 2.5 kg of compressed liquid water at 60°C and 600 kPa while the other part is evacuated. The partition is now removed, and the water expands to fill the entire tank. Determine the final temperature of the water and the volume of the tank for a final pressure of 10 kPa. page 198

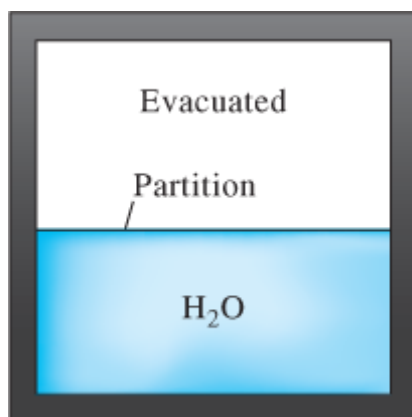


FIGURE P4-42

4-43  Reconsider Prob. 4-42. Using appropriate software, investigate the effect of the initial pressure of water on the final temperature in the tank. Let the initial pressure vary from 100 to 600 kPa. Plot the final temperature against the initial pressure, and discuss the results.

4-44 Two tanks (Tank A and Tank B) are separated by a partition. Initially Tank A contains 2 kg of steam at 1 MPa and 300°C while Tank B contains 3 kg of saturated liquid–vapor mixture at 150°C with a vapor mass fraction of 50 percent. The partition is now removed and the two sides are allowed to mix until mechanical and thermal equilibrium are established. If the pressure at the final state is 300 kPa, determine (a) the temperature and quality of the steam (if mixture) at the final state and (b) the amount of heat lost from the tanks.

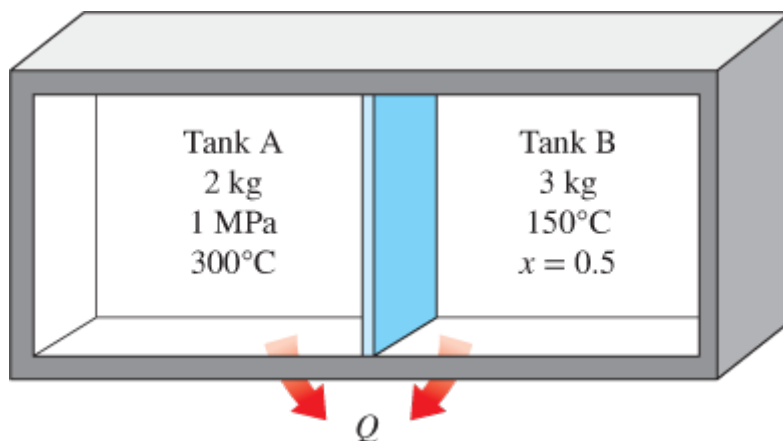


FIGURE P4-44

Specific Heats, $\#u$, and $\#h$ of Ideal Gases

4-45C Is the energy required to heat air from 295 to 305 K the same as the energy required to heat it from 345 to 355 K? Assume the pressure remains constant in both cases.

4-46C A fixed mass of an ideal gas is heated from 50 to 80°C at a constant pressure of (a) 1 atm and (b) 3 atm. For which case do you think the energy required will be greater? Why?

4-47C A fixed mass of an ideal gas is heated from 50 to 80°C at a constant volume of (a) 1 m³ and (b) 3 m³. For which case do you think the energy required will be greater? Why?

4-48C A fixed mass of an ideal gas is heated from 50 to 80°C (a) at constant volume and (b) at constant pressure. For which case do you think the energy required will be greater? Why?

4-49C Is the relation $\#u = mc_{v, \text{avg}} \#T$ restricted to constant-volume processes only, or can it be used for any kind of process of an ideal gas?

4-50C Is the relation $\#h = mc_{p, \text{avg}} \#T$ restricted to constant-pressure processes only, or can it be used for any kind of process of an ideal gas?

4-51E What is the change in the internal energy, in Btu/lbm, of air as its temperature changes from 100 to 200°F? Is there any difference if the temperature were to change from 0 to 100°F?

4-52 Neon is compressed from 100 kPa and 20°C to 500 kPa in an isothermal compressor. Determine the change in the specific volume and specific enthalpy of neon caused by this compression.

4-53 What is the change in the enthalpy, in kJ/kg, of oxygen as its temperature changes from 150 to 250°C? Is there any difference if the temperature change were from 0 to 100°C? Does the pressure at the beginning and end of this process have any effect on the enthalpy change?

4-54 A mass of 10 g of nitrogen is contained in the spring-loaded piston–cylinder device shown in Fig. P4-54. The spring constant is 1 kN/m, and the piston diameter is 10 cm. When the spring exerts no force against the piston, the nitrogen is at 120 kPa and 27°C. The device is now heated until its volume is 10 percent greater than the original volume. Determine the change in the specific internal energy and enthalpy of the nitrogen. *Answers: 46.8 kJ/kg, 65.5 kJ/kg*

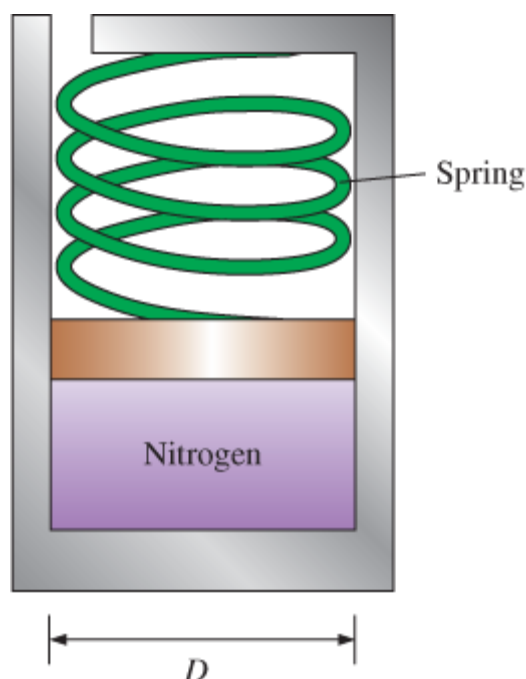


FIGURE P4-54

4-55 Determine the internal energy change $\#u$ of hydrogen, in kJ/kg, as it is heated from 200 to 800 K, using (a) the empirical specific heat equation as a function of temperature (Table A-2c), (b) the c_v value at the average temperature (Table A-2b), and (c) the c_v value at room temperature (Table A-2a)

4-56E Determine the enthalpy change $\#h$ of oxygen, in Btu/lbm, as it is heated from 800 to 1500 R, using (a) the empirical specific heat equation as a function of temperature (Table A-2Ec), (b) the c_p value at the average temperature (Table A-2Eb), and (c) the c_p value at room temperature (Table A-2Ea).

page 199

Answers: (a) 170 Btu/lbm, (b) 169 Btu/lbm, (c) 153 Btu/lbm

Closed-System Energy Analysis: Ideal Gases

4-57C Is it possible to compress an ideal gas isothermally in an adiabatic piston–cylinder device? Explain.

4-58 Nitrogen in a rigid vessel is cooled by rejecting 100 kJ/kg of heat. Determine the internal energy change of the nitrogen, in kJ/kg.

4-59E Nitrogen at 100 psia and 300°F in a rigid container is cooled until its pressure is 50 psia. Determine the work done and the heat transferred during this process, in Btu/lbm. *Answers: 0 Btu/lbm, 67.3 Btu/lbm*

4-60E A piston–cylinder device containing carbon-dioxide gas undergoes an isobaric process from 15 psia and 80°F to 200°F. Determine the work and the heat transfer associated with this process, in Btu/lbm. *Answers: 5.42 Btu/lbm, 24.4 Btu/lbm*

4-61 A 3-m³ rigid tank contains hydrogen at 250 kPa and 550 K. The gas is now cooled until its temperature drops to 350 K. Determine (a) the final pressure in the tank and (b) the amount of heat transfer.

4–62 1 kg of oxygen is heated from 20 to 120°C. Determine the amount of heat transfer required when this is done during a (a) constant-volume process and (b) isobaric process.

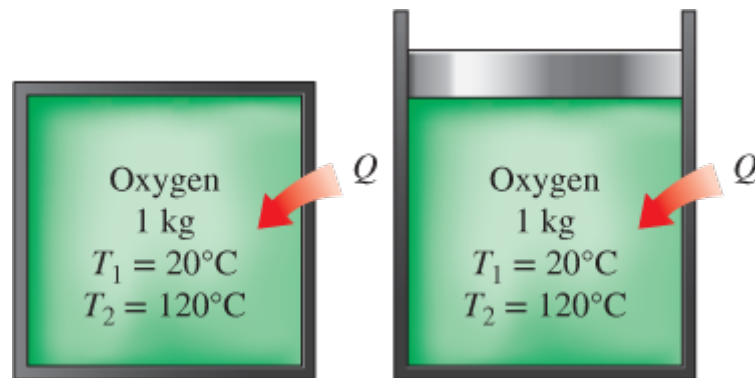


FIGURE P4–62

4–63E A 10-ft³ tank contains oxygen initially at 14.7 psia and 80°F. A paddle wheel within the tank is rotated until the pressure inside rises to 20 psia. During the process 20 Btu of heat is lost to the surroundings. Determine the paddle-wheel work done. Neglect the energy stored in the paddle wheel.

4–64 A 4-m × 5-m × 7-m room is heated by the radiator of a steam-heating system. The steam radiator transfers heat at a rate of 10,000 kJ/h, and a 100-W fan is used to distribute the warm air in the room. The rate of heat loss from the room is estimated to be about 5000 kJ/h. If the initial temperature of the room air is 10°C, determine how long it will take for the air temperature to rise to 20°C. Assume constant specific heats at room temperature.

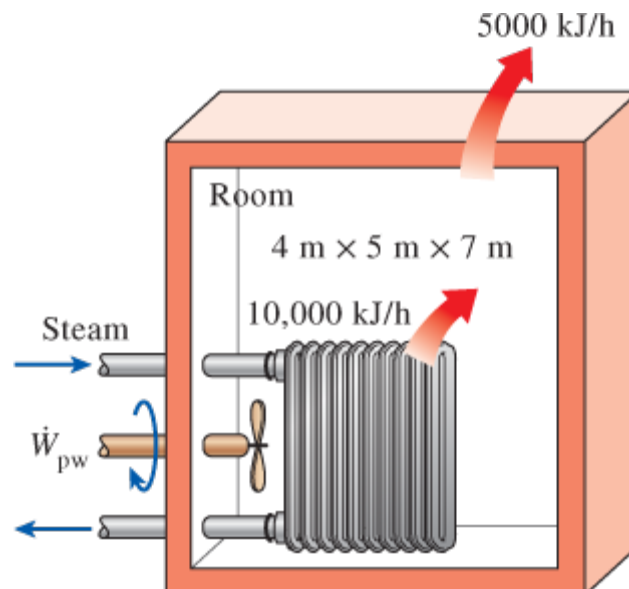


FIGURE P4–64

4–65 An insulated rigid tank is divided into two equal parts by a partition. Initially, one part contains 4 kg of an ideal gas at 800 kPa and 50°C, and the other part is evacuated. The partition is now removed, and the gas expands into the entire tank. Determine the final temperature and pressure in the tank.

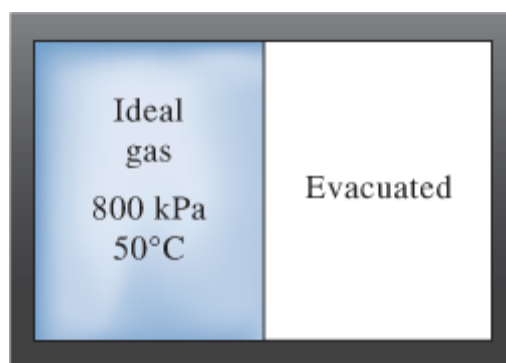


FIGURE P4-65

4-66 An ideal gas contained in a piston–cylinder device undergoes an isothermal compression process which begins with an initial pressure and volume of 100 kPa and 0.6 m^3 , respectively. During the process there is a heat transfer of 60 kJ from the ideal gas to the surroundings. Determine the volume and pressure at the end of the process. *Answers:* 0.221 m^3 , 272 kPa

4-67 A $4\text{-m} \times 5\text{-m} \times 6\text{-m}$ room is to be heated by a baseboard resistance heater. It is desired that the resistance heater be able to raise the air temperature in the room from 5 to 25°C within 17 min. Assuming no heat losses from the room and an atmospheric pressure of 100 kPa, determine the required power of the resistance heater. Assume constant specific heats at room temperature. *Answer:* 2.12 kW

4-68 An insulated piston–cylinder device initially contains 0.3 m^3 of carbon dioxide at 200 kPa and 27°C . An electric switch is turned on, and a 110-V source supplies current to a resistance heater inside the cylinder for a period of 10 min. The pressure is held constant during the process, while the volume is doubled. Determine the current that passes through the resistance heater.

4-69 Argon is compressed in a polytropic process with $n = 1.2$ from 120 kPa and 10°C to 800 kPa in a piston–cylinder device. Determine the work produced and heat transferred during this compression process, in kJ/kg.

page 200

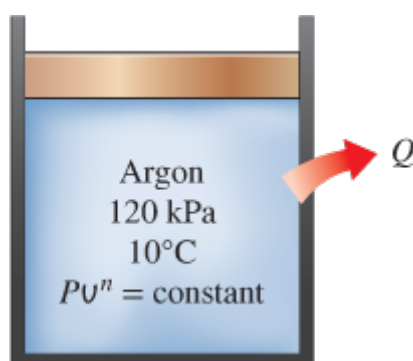


FIGURE P4-69

4-70 An insulated piston–cylinder device contains 100 L of air at 400 kPa and 25°C . A paddle wheel within the cylinder is rotated until 15 kJ of work is done on the air while the pressure is held constant. Determine the final temperature of the air. Neglect the energy stored in the paddle wheel.

4-71 Air is contained in a variable-load piston–cylinder device equipped with a paddle wheel. Initially, air is at 400 kPa and 17°C. The paddle wheel is now turned by an external electric motor until 75 kJ/kg of work has been transferred to air. During this process, heat is transferred to maintain a constant air temperature while allowing the gas volume to triple. Calculate the required amount of heat transfer, in kJ/kg. *Answer: 16.4 kJ/kg*

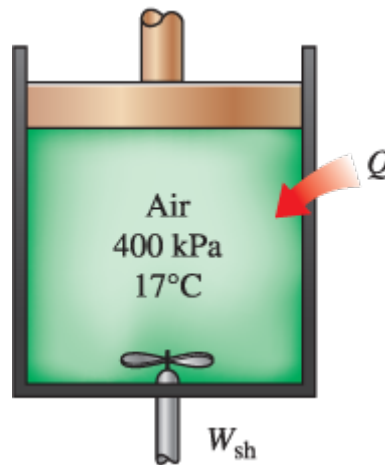


FIGURE P4-71

4-72 A mass of 15 kg of air in a piston–cylinder device is heated from 25 to 95°C by passing current through a resistance heater inside the cylinder. The pressure inside the cylinder is held constant at 300 kPa during the process, and a heat loss of 60 kJ occurs. Determine the electric energy supplied, in kWh. *Answer: 0.310 kWh*

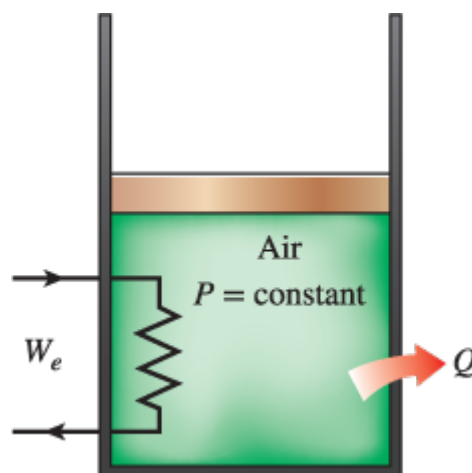


FIGURE P4-72

4-73E A 3-ft³ adiabatic rigid container is divided into two equal volumes by a thin membrane, as shown in Fig. P4-73E. Initially, one of these chambers is filled with air at 100 psia and 100°F while the other chamber is evacuated. Determine the internal energy change of the air when the membrane is ruptured. Also determine the final air pressure in the container.

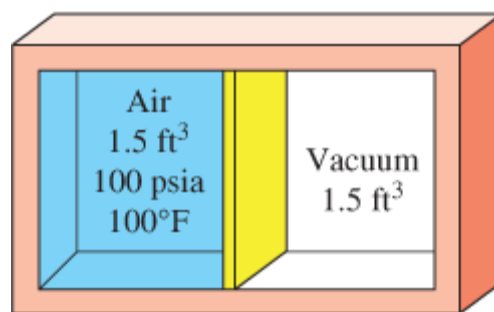


FIGURE P4-73E

4-74 A piston–cylinder device contains 2.2 kg of nitrogen initially at 100 kPa and 25°C. The nitrogen is now compressed slowly in a polytropic process during which $PV^{1.3} = \text{constant}$ until the volume is reduced by one-half. Determine the work done and the heat transfer for this process. page 201

4-75  Reconsider Prob. 4-74. Using appropriate software, plot the process described in the problem on a P - V diagram, and investigate the effect of the polytropic exponent n on the boundary work and heat transfer. Let the polytropic exponent vary from 1.0 to 1.4. Plot the boundary work and the heat transfer versus the polytropic exponent, and discuss the results.

4-76 A piston–cylinder device contains 4 kg of argon at 250 kPa and 35°C. During a quasi-equilibrium, isothermal expansion process, 15 kJ of boundary work is done by the system, and 3 kJ of paddle-wheel work is done on the system. Determine the heat transfer for this process.

4-77 A spring-loaded piston–cylinder device contains 5 kg of helium as the system, as shown in Fig. P4-77. This system is heated from 100 kPa and 20°C to 800 kPa and 160°C. Determine the heat transferred to and the work produced by this system.

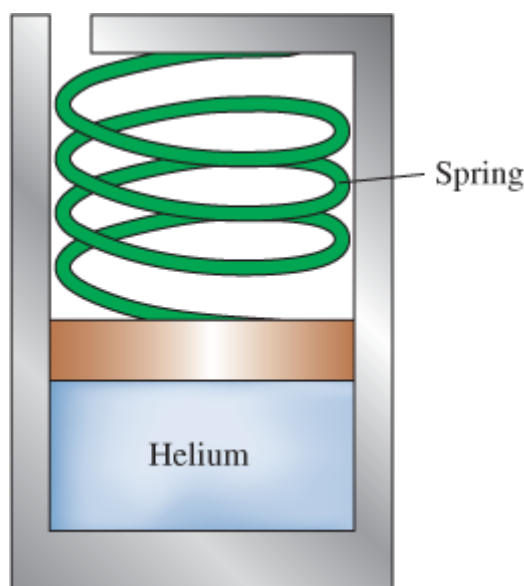


FIGURE P4-77

4-78 A piston–cylinder device whose piston is resting on top of a set of stops initially contains 0.5 kg of helium gas at 100 kPa and 25°C. The mass of the piston is such that 500 kPa of pressure is required to raise it. How much heat must be transferred to the helium before the piston starts rising? *Answer: 1857 kJ*

4-79 A piston–cylinder device, whose piston is resting on a set of stops, initially contains 3 kg of air at 200 kPa and 27°C. The mass of the piston is such that a pressure of 400 kPa is required to move it. Heat is now transferred to the air until its volume doubles. Determine the work done by the air and the total heat transferred to the air during this process. Also show the process on a P - V diagram. *Answers: 516 kJ, 2674 kJ*

Closed-System Energy Analysis: Solids and Liquids

4-80 A 1-kg block of iron is heated from 25 to 75°C. What is the change in the iron's total internal energy and enthalpy?

4-81E The state of liquid water is changed from 50 psia and 50°F to 2000 psia and 100°F. Determine the change in the internal energy and enthalpy of water on the basis of the (a) compressed liquid tables, (b) incompressible substance approximation and property tables, and (c) specific-heat model.

4-82E During a picnic on a hot summer day, all the cold drinks disappear quickly, and the only available drinks are those at the ambient temperature of 85°F. In an effort to cool a 12-fluid-oz drink in a can, a person grabs the can and starts shaking it in the iced water of the chest at 32°F. Using the properties of water for the drink, determine the mass of ice that will melt by the time the canned drink cools to 37°F.

4-83 An ordinary egg can be approximated as a 5.5-cm-diameter sphere. The egg is initially at a uniform temperature of 8°C and is dropped into boiling water at 97°C. Taking the properties of the egg to be $\rho = 1020 \text{ kg/m}^3$ and $c_p = 3.32 \text{ kJ/kg}\cdot^\circ\text{C}$, determine how much heat is transferred to the egg by the time the average temperature of the egg rises to 80°C.

4-84 Consider a 1000-W iron whose base plate is made of 0.5-cm-thick aluminum alloy 2024-T6 ($\rho = 2770 \text{ kg/m}^3$ and $c_p = 875 \text{ J/kg}\cdot^\circ\text{C}$). The base plate has a surface area of 0.03 m^2 . Initially, the iron is in thermal equilibrium with the ambient air at 22°C. Assuming 90 percent of the heat generated in the resistance wires is transferred to the plate, determine the minimum time needed for the plate temperature to reach 200°C.



FIGURE P4-84

4-85 Stainless steel ball bearings ($\rho = 8085 \text{ kg/m}^3$ and $c_p = 0.480 \text{ kJ/kg}\cdot^\circ\text{C}$) having a diameter of 1.2 cm are to be quenched in water at a rate of 800 per minute. The balls leave the oven at a uniform temperature of

900°C and are exposed to air at 25°C for a while before they are dropped into the water. If the temperature of the balls drops to 850°C prior to quenching, determine the rate of heat transfer from the balls to the air.

4–86E In a production facility, 1.6-in-thick 2-ft × 2-ft square brass plates ($\rho = 532.5 \text{ lbm/ft}^3$ and $c_p = 0.091 \text{ Btu/lbm} \cdot ^\circ\text{F}$) that are initially at a uniform temperature of 75°F are heated by passing them through an oven at 1500°F at a rate of 300 per minute. If the plates remain in the oven until their average temperature rises to 900°F, determine the rate of heat transfer to the plates in the furnace.

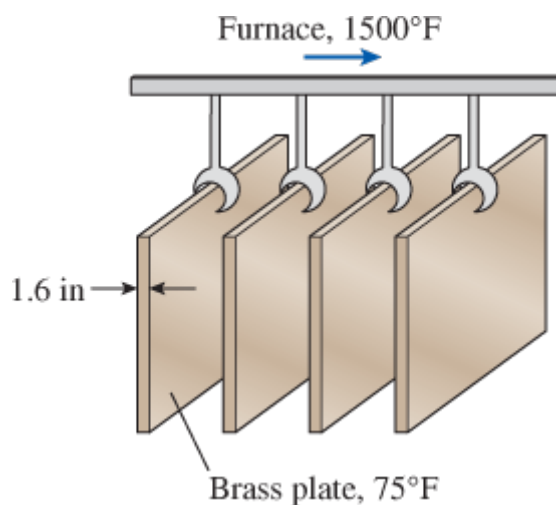


FIGURE P4–86E

4–87 Long cylindrical steel rods ($\rho = 7833 \text{ kg/m}^3$ and $c_p = 0.465 \text{ kJ/kg} \cdot ^\circ\text{C}$) of 8 cm diameter are heat-treated by drawing them at a velocity of 2 m/min through an oven maintained at 900°C. If the rods enter the oven at 30°C and leave at a mean temperature of 500°C, determine the rate of heat transfer to the rods in the oven.

4–88 An electronic device dissipating 25 W has a mass of 20 g and a specific heat of 850 J/kg·°C. The device is lightly used, and it is on for 5 min and then off for several hours, during which it cools to the ambient temperature of 25°C. Determine the highest possible temperature of the device at the end of the 5-min operating period. What would your answer be if the device were attached to a 0.5-kg aluminum heat sink? Assume the device and the heat sink to be nearly isothermal.

4–89  Reconsider Prob. 4–88. Using appropriate software, investigate the effect of the mass of the heat sink on the maximum device temperature. Let the mass of the heat sink vary from 0 to 1 kg. Plot the maximum temperature against the mass of the heat sink, and discuss the results.

4–90 If you ever slapped someone or got slapped yourself, you probably remember the burning sensation. Imagine you had the unfortunate occasion of being slapped by an angry person, which caused the temperature of the affected area of your face to rise by 2.4°C (ouch!). Assuming the slapping hand has a mass of 0.9 kg and about 0.150 kg of the tissue on the face and the hand is affected by the incident, estimate the velocity of the hand just before impact. Take the specific heat of the tissue to be 3.8 kJ/kg·K.

page 202

Special Topic: Biological Systems

4–91C For what is the energy released during metabolism in humans used?

4–92C Is the metabolizable energy content of a food the same as the energy released when it is burned in a bomb calorimeter? If not, how does it differ?

4–93C Is the number of prospective occupants an important consideration in the design of heating and cooling systems of classrooms? Explain.

4-94C What do you think of a diet program that allows for generous amounts of bread and rice provided that no butter or margarine is added?

4-95 Consider two identical rooms, one with a 2-kW electric resistance heater and the other with three couples fast dancing. In which room will the air temperature rise more quickly?

4-96 The average specific heat of the human body is $3.6 \text{ kJ/kg} \cdot ^\circ\text{C}$. If the body temperature of an 80-kg man rises from 37°C to 39°C during strenuous exercise, determine the increase in the thermal energy of the body as a result of this rise in body temperature.

4-97 Consider two identical 80-kg men who are eating identical meals and doing identical things except that one of them jogs for 30 min every day while the other watches TV. Determine the weight difference between the two in a month. *Answer: 1.04 kg*

4-98 A 68-kg woman is planning to bicycle for an hour. If she is to meet her entire energy needs while bicycling by eating 30-g chocolate candy bars, determine how many candy bars she needs to take with her.

4-99 A 90-kg man gives in to temptation and eats an entire 1-L box of ice cream. How long does this man need to jog to burn off the calories he consumed from the ice cream? *Answer: 1.54 h*

4-100 A 60-kg man used to have an apple every day after dinner without losing or gaining any weight. He now eats a 200-ml serving of ice cream instead of an apple and walks 20 min every day. On this new diet, how much weight will he lose or gain per month? *Answer: 0.087-kg gain*

4-101 Consider a man who has 20 kg of body fat when he goes on a hunger strike. Determine how long he can survive on his body fat alone.

4-102 Consider two identical 50-kg women, Candy and Wendy, who are doing identical things and eating identical food except that Candy eats her baked potato with four teaspoons of butter while Wendy eats hers plain every evening. Determine the difference in the weights of Candy and Wendy after one year. *Answer: 6.5 kg*

4-103E A 190-pound man and a 130-pound woman went to Burger King for lunch. The man had a BK Big Fish sandwich (720 Cal), medium french fries (400 Cal), and a large Coke (225 Cal). The woman had a basic hamburger (330 Cal), medium french fries (400 Cal), and a diet Coke (0 Cal). After lunch, they start shoveling snow and burn calories at a rate of 420 Cal/h for the woman and 610 Cal/h for the man. Determine how long each one of them needs to shovel snow to burn off the lunch calories.

4-104 Consider two friends who go to Burger King every day for lunch. One of them orders a Double Whopper sandwich, large fries, and a large Coke (total Calories = 1600) while the other orders a Whopper Junior, small fries, and a small Coke (total Calories = 800) every day. If these two friends are very much alike otherwise and they have the same metabolic rate, determine the weight difference between these two friends in a year.

4-105 A person eats a McDonald's Big Mac sandwich (530 Cal), a second person eats a Burger King Whopper sandwich (640 Cal), and a third person eats 50 olives with regular french fries (350 Cal) for lunch. Determine who consumes the most calories. An olive contains about 5 Calories.

4-106 A 5-oz serving of a Bloody Mary contains 14 g of alcohol and 5 g of carbohydrates, and thus 116 Calories. A 2.5-oz serving of a martini contains 22 g of alcohol and a negligible amount of carbohydrates, and thus 156 Calories. An average person burns 600 Calories per hour while exercising on a cross-country ski machine. Determine how long it will take to burn the calories from one serving of (a) a Bloody Mary and (b) a martini on this cross-country ski machine.

4-107E The range of healthy weight for adults is usually expressed in terms of the *body mass index* (BMI), defined, in SI units, as

$$\text{BMI} = \frac{W \text{ (kg)}}{H^2 \text{ (m}^2\text{)}}$$

where W is the weight (actually, the mass) of the person in kg and H is the height in m, and the range of healthy weight is $19 \leq \text{BMI} \leq 25$. Convert the previous formula to English units such that the weight is in pounds and the height in inches. Also, calculate your own BMI, and if it is not in the healthy range, determine how many pounds (or kg) you need to gain or lose to be fit.

4-108 The body mass index (BMI) of a 1.6-m-tall woman who normally has 3 large slices of cheese pizza and a 400-ml Coke for lunch is 30. She now decides to change her lunch to 2 slices of pizza and a 200-ml Coke. Assuming that the deficit in the calorie intake is made up by burning body fat, determine how long it will take for the BMI of this person to drop to 20. Use the data in the text for calories and take the metabolizable energy content of 1 kg of body fat to be 33,100 kJ. *Answer: 463 days*

Review Problems

4-109 Which of two gases—neon or air—requires less work when compressed in a closed page 203 system from P_1 to P_2 using a polytropic process with $n = 1.5$?

4-110 Which of two gases—neon or air—produces more work when expanded from P_1 to P_2 in a closed-system polytropic process with $n = 1.2$?

4-111 Consider a classroom that is losing heat to the outdoors at a rate of 12,000 kJ/h. If there are 40 students in class, each dissipating sensible heat at a rate of 84 W, determine if it is necessary to turn the heater in the classroom on to prevent the room temperature from dropping.

4-112 The temperature of air changes from 0 to 10°C while its velocity changes from zero to a final velocity, and its elevation changes from zero to a final elevation. At which values of final air velocity and final elevation will the internal, kinetic, and potential energy changes be equal? *Answers: 120 m/s, 732 m*

4-113 A rigid tank contains a gas mixture with a specific heat of $c_v = 0.748$ kJ/kg·K. The mixture is cooled from 200 kPa and 200°C until its pressure is 100 kPa. Determine the heat transfer during this process, in kJ/kg.

4-114 Consider a piston–cylinder device that contains 0.5 kg air. Now heat is transferred to the air at constant pressure and the air temperature increases by 5°C. Determine the expansion work done during this process.

4-115 A mass of 0.2 kg of saturated refrigerant-134a is contained in a piston–cylinder device at 200 kPa. Initially, 75 percent of the mass is in the liquid phase. Now heat is transferred to the refrigerant at constant pressure until the cylinder contains vapor only. Show the process on a P - v diagram with respect to saturation lines. Determine (a) the volume occupied by the refrigerant initially, (b) the work done, and (c) the total heat transfer.

4-116E Air in the amount of 2 lbm is contained in a well-insulated, rigid vessel equipped with a stirring paddle wheel. The initial state of this air is 30 psia and 60°F. How much work, in Btu, must be transferred to the air with the paddle wheel to raise the air pressure to 40 psia? Also, what is the final temperature of the air?

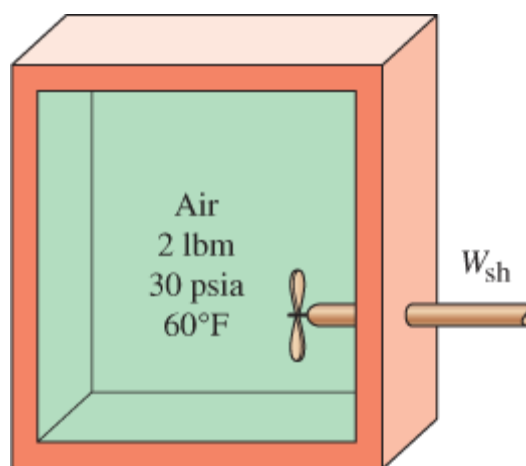


FIGURE P4-116E

4-117 Air is expanded in a polytropic process with $n = 1.2$ from 1 MPa and 400°C to 110 kPa in a piston–cylinder device. Determine the final temperature of the air.

4-118 Nitrogen at 100 kPa and 25°C in a rigid vessel is heated until its pressure is 300 kPa. Calculate the work done and the heat transferred during this process, in kJ/kg.

4-119 A well-insulated, rigid vessel contains 3 kg of saturated liquid water at 40°C. The vessel also contains an electrical resistor that draws 10 A when 50 V are applied. Determine the final temperature in the vessel after the resistor has been operating for 30 min.

4-120 A mass of 3 kg of saturated liquid–vapor mixture of water is contained in a piston–cylinder device at 160 kPa. Initially, 1 kg of the water is in the liquid phase and the rest is in the vapor phase. Heat is now transferred to the water, and the piston, which is resting on a set of stops, starts moving when the pressure inside reaches 500 kPa. Heat transfer continues until the total volume increases by 20 percent. Determine (a) the initial and final temperatures, (b) the mass of liquid water when the piston first starts moving, and (c) the work done during this process. Also, show the process on a P - v diagram.

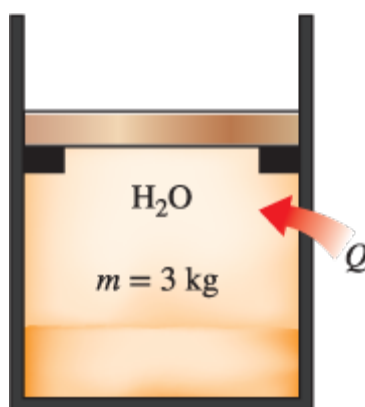


FIGURE P4-120

4-121 A mass of 12 kg of saturated refrigerant-134a vapor is contained in a piston–cylinder device at 240 kPa. Now 300 kJ of heat is transferred to the refrigerant at constant pressure while a 110-V source supplies current to a resistor within the cylinder for 6 min. Determine the current supplied if the final temperature is 70°C. Also, show the process on a T - v diagram with respect to the saturation lines. *Answer: 12.8 A*

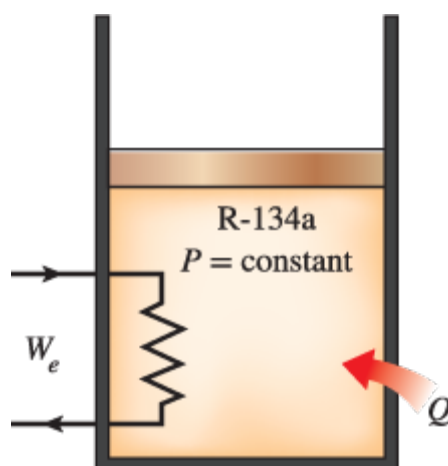


FIGURE P4-121

4-122 Saturated water vapor at 200°C is condensed to a saturated liquid at 50°C in a spring-loaded piston–cylinder device. Determine the heat transfer for this process in kJ/kg. page 204

4-123 A piston–cylinder device contains helium gas initially at 100 kPa, 10°C, and 0.2 m³. The helium is now compressed in a polytropic process ($PV^n = \text{constant}$) to 700 kPa and 290°C. Determine the heat loss or gain during this process. *Answer: 6.51 kJ loss*

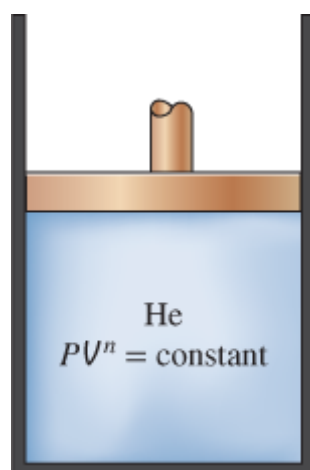


FIGURE P4-123

4-124 A frictionless piston–cylinder device initially contains air at 100 kPa and 0.15 m³. At this state, a linear spring ($F \propto x$) is touching the piston but exerts no force on it. The air is now heated to a final state of 0.45 m³ and 800 kPa. Determine (a) the total work done by the air and (b) the work done against the spring. Also, show the process on a P - V diagram. *Answers: (a) 135 kJ, (b) 105 kJ*

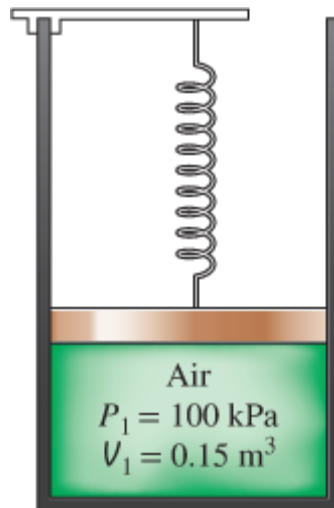


FIGURE P4-124

4-125 A frictionless piston–cylinder device and a rigid tank initially contain 12 kg of an ideal gas each at the same temperature, pressure, and volume. We wish to raise the temperatures of both systems by 15°C. Determine the amount of extra heat that must be supplied to the gas in the cylinder, which is maintained at constant pressure to achieve this result. Assume the molar mass of the gas is 25.

4-126 An insulated piston–cylinder device initially contains 0.01 m³ of saturated liquid–vapor mixture with a quality of 0.2 at 120°C. Now some ice at 0°C is added to the cylinder. If the cylinder contains saturated liquid at 120°C when thermal equilibrium is established, determine the amount of ice added. The melting temperature and the heat of fusion of ice at atmospheric pressure are 0°C and 333.7 kJ/kg, respectively.

4-127 A passive solar house that is losing heat to the outdoors at an average rate of 50,000 kJ/h is maintained at 22°C at all times during a winter night for 10 h. The house is to be heated by 50 glass containers each containing 20 L of water that is heated to 80°C during the day by absorbing solar energy. A thermostat-controlled 15-kW backup electric resistance heater turns on whenever necessary to keep the house at 22°C. (a) How long did the electric heating system run that night? (b) How long would the electric heater run that night if the house incorporated no solar heating? *Answers: (a) 4.77 h, (b) 9.26 h*

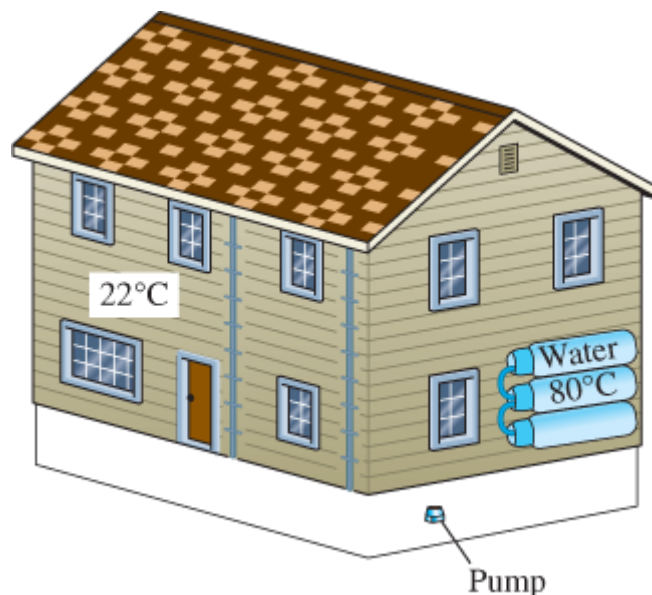


FIGURE P4-127

4–128 Water is boiled at sea level in a coffeemaker equipped with an immersion-type electric heating element. The coffeemaker contains 1 L of water when full. Once boiling starts, it is observed that half of the water in the coffeemaker evaporates in 13 min. Determine the power rating of the electric heating element immersed in water. Also, determine how long it will take for this heater to raise the temperature of 1 L of cold water from 18°C to the boiling temperature.

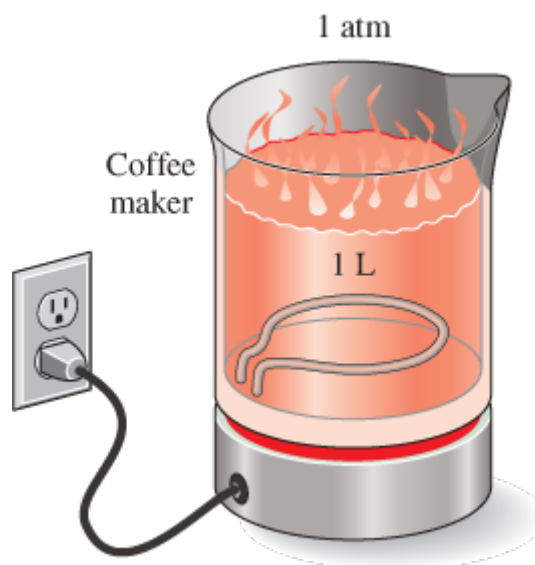


FIGURE P4–128

4–129 The energy content of a certain food is to be determined in a bomb calorimeter that contains 3 kg of water by burning a 2-g sample of it in the presence of 100 g of air in the reaction chamber. If the water temperature rises by 3.2°C when equilibrium is established, determine the energy content of the food, in kJ/kg, by neglecting the thermal energy stored in the reaction chamber and the energy supplied by the mixer. What is a rough estimate of the error involved in neglecting the thermal energy stored in the reaction chamber? *Answer: 20,060 kJ/kg*

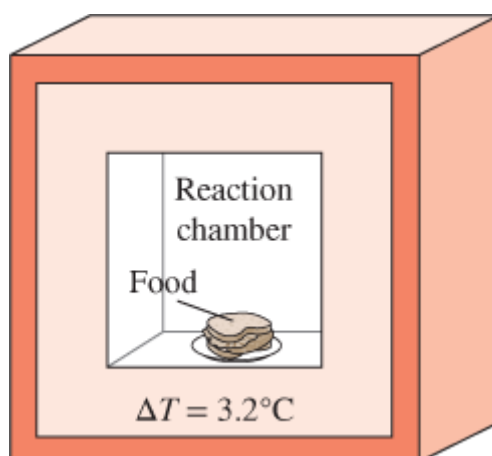


FIGURE P4–129

4–130 A 68-kg man whose average body temperature is 39°C drinks 1 L of cold water at 3°C in an effort to cool down. Taking the average specific heat of the human body to be 3.6 kJ/kg·°C, determine the drop in the average body temperature of this person under the influence of this cold water.

4–131 An insulated piston–cylinder device initially contains 1.8 kg of saturated liquid water at 120°C. Now an electric resistor placed in the cylinder is turned on for 10 min until the volume quadruples. Determine (a)

the volume of the cylinder, (b) the final temperature, and (c) the electrical power rating of the resistor. *Answers:*

(a) 0.00763 m^3 , (b) 120°C , (c) 0.0236 kW

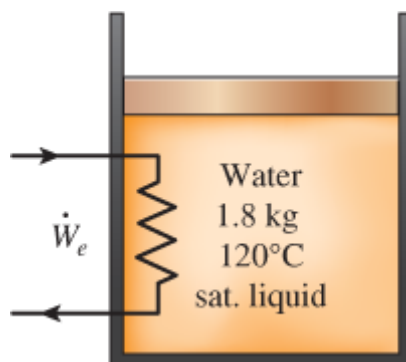


FIGURE P4-131

4-132 An insulated rigid tank initially contains 1.4 kg of saturated liquid water at 200°C and air. At this state, 25 percent of the volume is occupied by liquid water and the rest by air. Now an electric resistor placed in the tank is turned on, and the tank is observed to contain saturated water vapor after 20 min. Determine (a) the volume of the tank, (b) the final temperature, and (c) the electric power rating of the resistor. Neglect energy added to the air. *Answers:* (a) 0.00648 m^3 , (b) 371°C , (c) 1.58 kW

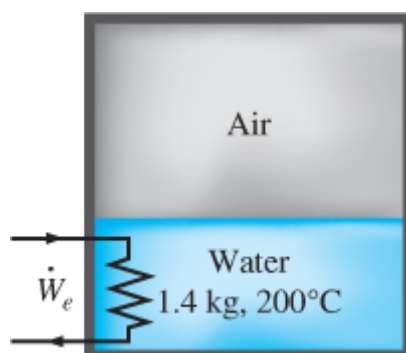


FIGURE P4-132

4-133 In order to cool 1 ton of water at 20°C in an insulated tank, a person pours 130 kg of ice at -5°C into the water. Determine the final equilibrium temperature in the tank. The melting temperature and the heat of fusion of ice at atmospheric pressure are 0°C and 333.7 kJ/kg , respectively. *Answer:* 8.2°C

4-134 A 0.3-L glass of water at 20°C is to be cooled with ice to 5°C . Determine how much ice needs to be added to the water, in grams, if the ice is at (a) 0°C and (b) -20°C . Also determine how much water would be needed if the cooling is to be done with cold water at 0°C . The melting temperature and the heat of fusion of ice at atmospheric pressure are 0°C and 333.7 kJ/kg , respectively, and the density of water is 1 kg/L .

4-135  Reconsider Prob. 4-134. Using appropriate software, investigate the effect of the initial temperature of the ice on the final mass required. Let the ice temperature vary from -26 to 0°C . Plot the mass of ice against the initial temperature of ice, and discuss the results.

4-136 A well-insulated $3\text{-m} \times 4\text{-m} \times 6\text{-m}$ room initially at 7°C is heated by the radiator of a steam heating system. The radiator has a volume of 15 L and is filled with superheated vapor at 200 kPa and 200°C . At this moment both the inlet and the exit valves to the radiator are closed. A 120-W fan is used to distribute the air in the room. The pressure of the steam is observed to drop to 100 kPa after 45 min as a result of heat

transfer to the room. Assuming constant specific heats for air at room temperature, determine the average temperature of air in 45 min. Assume the air pressure in the room remains constant at 100 kPa.

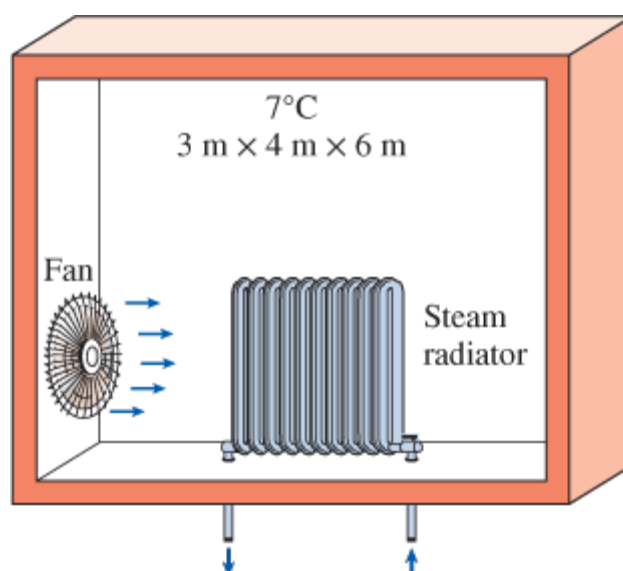


FIGURE P4-136

4-137 Two adiabatic chambers, 2 m³ each, are interconnected by a valve, as shown in Fig. P4-137, with one chamber containing oxygen at 1000 kPa and 127°C and the other chamber evacuated. The valve is now opened until the oxygen fills both chambers and both tanks have the same pressure. Determine the total internal energy change and the final pressure in the tanks.

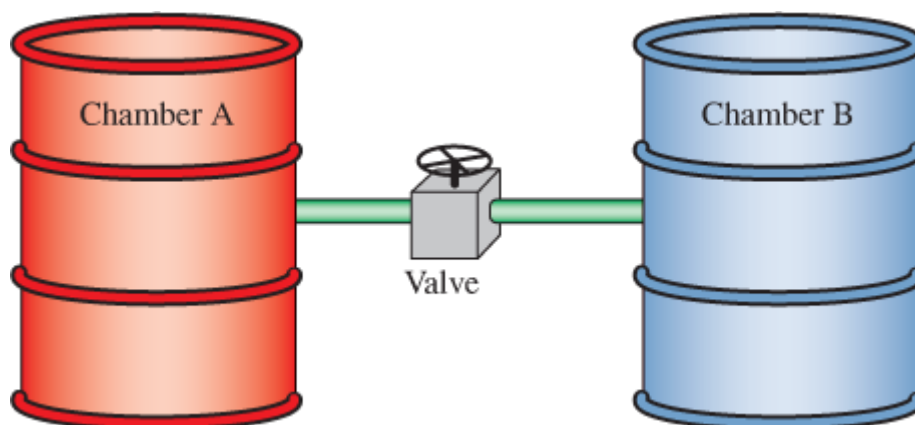


FIGURE P4-137

4-138 Two rigid tanks are connected by a valve. Tank A contains 0.2 m³ of water at 400 kPa and 80 percent quality. Tank B contains 0.5 m³ of water at 200 kPa and 250°C. The valve is now opened, and the two tanks eventually come to the same state. Determine the pressure and the amount of heat transfer when the system reaches thermal equilibrium with the surroundings at 25°C. *Answers: 3.17 kPa, 2170 kJ*

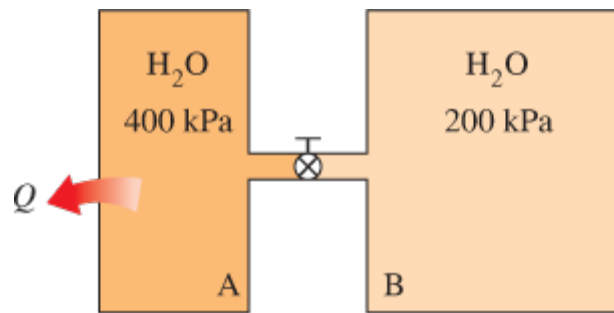


FIGURE P4-138

4-139  Reconsider Prob. 4-138. Using appropriate software, investigate the effect of the environment temperature on the final pressure and the heat transfer. Let the environment temperature vary from 0 to 50° C. Plot the final results against the environment temperature, and discuss the results.

4-140 A vertical 10-cm-diameter piston–cylinder device contains an ideal gas at the ambient conditions of 1 bar and 24°C. Initially, the inner face of the piston is 20 cm from the base of the cylinder. Now an external shaft connected to the piston exerts a force corresponding to a boundary work input of 0.1 kJ. The temperature of the gas remains constant during the process. Determine (a) the amount of heat transfer, (b) the final pressure in the cylinder, and (c) the distance that the piston is displaced.

4-141 A piston–cylinder device initially contains 0.35 kg of steam at 3.5 MPa, superheated by 7.4°C. Now the steam loses heat to the surroundings and the piston moves down, hitting a set of stops at which point the cylinder contains saturated liquid water. The cooling continues until the cylinder contains water at 200°C. Determine (a) the final pressure and the quality (if mixture), (b) the boundary work, (c) the amount of heat transfer when the piston first hits the stops, and (d) the total heat transfer.

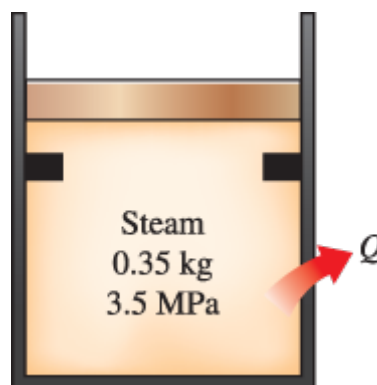


FIGURE P4-141

4-142E Two 10-ft³ adiabatic tanks are connected by a valve. Initially, one tank contains water at 450 psia with 10 percent quality, while the second contains water at 15 psia with 75 percent quality. The valve is now opened, allowing the water vapor from the high-pressure tank to move to the low-pressure tank until the pressure in the two becomes equal. Determine the final pressure and the final mass in each tank. *Answers: 313 psia, 41.6 lbm*

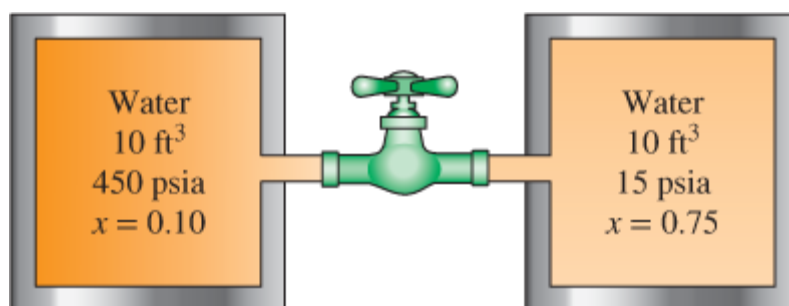


FIGURE P4-142E

4-143 An insulated rigid tank is divided into two compartments of different volumes. Initially, each compartment contains the same ideal gas at identical pressure but at different temperatures and masses. The wall separating the two compartments is removed and the two gases are allowed to mix. Assuming constant specific heats, find the simplest expression for the mixture temperature written in the form

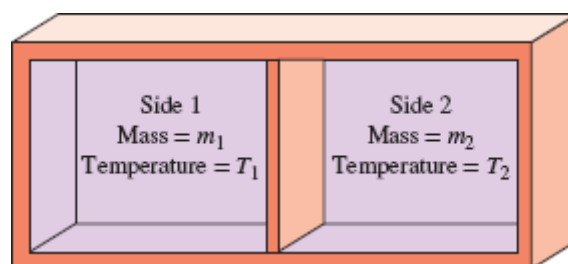


FIGURE P4-143

$$T_3 = f\left(\frac{m_1}{m_2}, \frac{m_2}{m_3}, T_1, T_2\right)$$

where m_3 and T_3 are the mass and temperature of the final mixture, respectively.

 page 207

4-144 In solar-heated buildings, energy is often stored as sensible heat in rocks, concrete, or water during the day for use at night. To minimize the storage space, it is desirable to use a material that can store a large amount of heat while experiencing a small temperature change. A large amount of heat can be stored essentially at constant temperature during a phase-change process, and thus materials that change phase at about room temperature such as glauber's salt (sodium sulfate decahydrate), which has a melting point of 32°C and a heat of fusion of 329 kJ/L, are very suitable for this purpose. Determine how much heat can be stored in a 5-m³ storage space using (a) glauber's salt undergoing a phase change, (b) granite rocks with a heat capacity of 2.32 kJ/kg·°C and a temperature change of 20°C, and (c) water with a heat capacity of 4.00 kJ/kg·°C and a temperature change of 20°C.

Fundamentals of Engineering (FE) Exam Problems

4-145 A 3-m³ rigid tank contains nitrogen gas at 500 kPa and 300 K. Now heat is transferred to the nitrogen in the tank and the pressure of nitrogen rises to 800 kPa. The work done during this process is

- (a) 500 kJ
- (b) 1500 kJ
- (c) 0 kJ

- (d)
900 kJ
- (e)
2400 kJ

4–146 A 0.5-m^3 rigid tank contains nitrogen gas at 600 kPa and 300 K. Now the gas is compressed isothermally to a volume of 0.2 m^3 . The work done on the gas during this compression process is

- (a)
82 kJ
- (b)
180 kJ
- (c)
240 kJ
- (d)
275 kJ
- (e)
315 kJ

4–147 A well-sealed room contains 60 kg of air at 200 kPa and 25°C . Now solar energy enters the room at an average rate of 0.8 kJ/s while a 120-W fan is turned on to circulate the air in the room. If heat transfer through the walls is negligible, the air temperature in the room in 30 min will be

- (a)
 25.6°C
- (b)
 49.8°C
- (c)
 53.4°C
- (d)
 52.5°C
- (e)
 63.4°C

4–148 A room contains 75 kg of air at 100 kPa and 15°C . The room has a 250-W refrigerator (the refrigerator consumes 250 W of electricity when running), a 120-W TV, a 1.8-kW electric resistance heater, and a 50-W fan. During a cold winter day, it is observed that the refrigerator, the TV, the fan, and the electric resistance heater are running continuously but the air temperature in the room remains constant. The rate of heat loss from the room that day is

- (a)
5832 kJ/h
- (b)
6192 kJ/h
- (c)
7560 kJ/h
- (d)
7632 kJ/h
- (e)
7992 kJ/h

4–149 A frictionless piston–cylinder device and a rigid tank contain 3 kmol of an ideal gas at the same temperature, pressure, and volume. Now heat is transferred, and the temperature of both systems is raised

by 10°C . The amount of extra heat that must be supplied to the gas in the cylinder that is maintained at constant pressure is

- (a) 0 kJ
- (b) 27 kJ
- (c) 83 kJ
- (d) 249 kJ
- (e) 300 kJ

4–150 A piston–cylinder device contains 5 kg of air at 400 kPa and 30°C . During a quasi-equilibrium isothermal expansion process, 15 kJ of boundary work is done by the system, and 3 kJ of paddle-wheel work is done on the system. The heat transfer during this process is

- (a) 12 kJ
- (b) 18 kJ
- (c) 2.4 kJ
- (d) 3.5 kJ
- (e) 60 kJ

4–151 A glass of water with a mass of 0.32 kg at 20°C is to be cooled to 0°C by dropping ice cubes at 0°C into it. The latent heat of fusion of ice is 334 kJ/kg, and the specific heat of water is $4.18 \text{ kJ/kg}\cdot^{\circ}\text{C}$. The amount of ice that needs to be added is

- (a) 32 g
- (b) 40 g
- (c) 80 g
- (d) 93 g
- (e) 110 g

4–152 A 2-kW electric resistance heater submerged in 5 kg of water is turned on and kept on for 10 min. During the process, 300 kJ of heat is lost from the water. The temperature rise of the water is

- (a) 0.4°C
- (b) 43.1°C
- (c) 57.4°C
- (d)

71.8°C

(e)

180°C

4–153 A 2-kW baseboard electric resistance heater in a vacant room is turned on and kept on for 15 min. The mass of the air in the room is 75 kg, and the room is tightly sealed so that no air can leak in or out. The temperature rise of air at the end of 15 min is

(a)

8.5°C

(b)

12.4°C

(c)

24.0°C

(d)

33.4°C

(e)

54.8°C

4–154 1.5 kg of liquid water initially at 12°C is to be heated to 95°C in a teapot equipped with an 800-W electric heating element inside. The specific heat of water can be taken to be 4.18 kJ/kg·°C, and the heat loss from the water during heating can be neglected. The time it takes to heat water to the desired temperature is

(a)

5.9 min

(b)

7.3 min

(c)

10.8 min

(d)

14.0 min

(e)

17.0 min

4–155 A container equipped with a resistance heater and a mixer is initially filled with 3.6 kg of saturated water vapor at 120°C. Now the heater and the mixer are turned on; the steam is compressed, and there is heat loss to the surrounding air. At the end of the process, the temperature and pressure of steam in the container are measured to be 300°C and 0.5 MPa. The net energy transfer to the steam during this process is

(a)

274 kJ

(b)

914 kJ

(c)

1213 kJ

(d)

988 kJ

(e)

1291 kJ

4–156 An ordinary egg with a mass of 0.1 kg and a specific heat of 3.32 kJ/kg·°C is dropped into boiling water at 95°C. If the initial temperature of the egg is 5°C, the maximum amount of heat transfer to the egg is

(a)

1291 kJ

12 kJ

(b)

30 kJ

(c)

24 kJ

(d)

18 kJ

(e)

infinity

4–157 An apple with an average mass of 0.18 kg and average specific heat of 3.65 kJ/kg·°C is cooled from 17°C to 5°C. The amount of heat transferred from the apple is

(a)

7.9 kJ

(b)

11.2 kJ

(c)

14.5 kJ

(d)

17.6 kJ

(e)

19.1 kJ

4–158 A 6-pack of canned drinks is to be cooled from 18°C to 3°C. The mass of each canned drink is 0.355 kg. The drinks can be treated as water, and the energy stored in the aluminum can itself is negligible. The amount of heat transfer from the six canned drinks is

(a)

22 kJ

(b)

32 kJ

(c)

134 kJ

(d)

187 kJ

(e)

223 kJ

4–159 A room is filled with saturated steam at 100°C. Now a 5-kg bowling ball at 25°C is brought to the room. Heat is transferred to the ball from the steam, and the temperature of the ball rises to 100°C while some steam condenses on the ball as it loses heat (but it still remains at 100°C). The specific heat of the ball can be taken to be 1.8 kJ/kg·°C. The mass of steam that condensed during this process is

(a)

80 g

(b)

128 g

(c)

299 g

(d)

351 g

(e)

405 g

4–160 An ideal gas has a gas constant $R = 0.3 \text{ kJ/kg}\cdot\text{K}$ and a constant-volume specific heat $c_v = 0.7 \text{ kJ/kg}\cdot\text{K}$. If the gas has a temperature change of 100°C , choose the correct answer for each of the following:

1. The change in enthalpy is, in kJ/kg ,

(a)

30

(b)

70

(c)

100

(d)

insufficient information to determine

2. The change in internal energy is, in kJ/kg ,

(a)

30

(b)

70

(c)

100

(d)

insufficient information to determine

3. The work done is, in kJ/kg ,

(a)

30

(b)

70

(c)

100

(d)

insufficient information to determine

4. The heat transfer is, in kJ/kg ,

(a)

30

(b)

70

(c)

100

(d)

insufficient information to determine

5. The change in the pressure-volume product is, in kJ/kg ,

(a)

30

(b)

70

(c)

100

(d)

insufficient information to determine

4–161 Saturated steam vapor is contained in a piston–cylinder device. While heat is added to the steam, the piston is held stationary, and the pressure and temperature become 1.2 MPa and 700°C, respectively. Additional heat is added to the steam until the temperature rises to 1200°C, and the piston moves to maintain a constant pressure.

1. The initial pressure of the steam is most nearly

(a)

250 kPa

(b)

500 kPa

(c)

750 kPa

(d)

1000 kPa

(e)

1250 kPa

2. The work done by the steam on the piston is most nearly

(a)

230 kJ/kg

(b)

1100 kJ/kg

(c)

2140 kJ/kg

(d)

2340 kJ/kg

(e)

840 kJ/kg

3. The total heat transferred to the steam is most nearly

(a)

230 kJ/kg

(b)

1100 kJ/kg

(c)

2140 kJ/kg

(d)

2340 kJ/kg

(e)

840 kJ/kg

4–162 A piston–cylinder device contains an ideal gas. The gas undergoes two successive cooling processes by rejecting heat to the surroundings. First the gas is cooled at constant pressure until $T_2 = \frac{3}{4}T_1$. Then the piston is held stationary while the gas is further cooled to $T_3 = \frac{1}{2}T_1$, where all temperatures are in K.

1. The ratio of the final volume to the initial volume of the gas is

- (a) 0.25
- (b) 0.50
- (c) 0.67
- (d) 0.75
- (e) 1.0

2. The work done on the gas by the piston is

- (a) $RT_1/4$
- (b) $\alpha T_1/2$
- (c) $c_p T_1/2$
- (d) $(\alpha + c_p)T_1/4$
- (e) $\alpha(T_1 + T_2)/2$

3. The total heat transferred from the gas is

- (a) $RT_1/4$
- (b) $\alpha T_1/2$
- (c) $c_p T_1/2$
- (d) $(\alpha + c_p)T_1/4$
- (e) $\alpha(T_1 + T_3)/2$

Design and Essay Problems

4-163 Find out how the specific heats of gases, liquids, and solids are determined in national laboratories. Describe the experimental apparatus and the procedures used.

4-164 You are asked to design a heating system for a swimming pool that is 2 m deep, 25 m long, and 25 m wide. Your client wants the heating system be large enough to raise the water temperature from 20 to 30°C in 3 h. The rate of heat loss from the water to the air at the outdoor design conditions is determined to be 960 W/m², and the heater must also be able to maintain the pool at 30°C at those conditions. Heat losses to the ground are expected to be small and can be disregarded. The heater considered is a natural gas furnace whose efficiency is 80 percent. What heater size (in kW input) would you recommend to your client?

4-165 Using a thermometer, measure the boiling temperature of water and calculate the corresponding saturation pressure. From this information, estimate the altitude of your town and compare it with the actual altitude value. page 209

4-166 Compressed gases and phase-changing liquids are used to store energy in rigid containers. What are the advantages and disadvantages of each substance as a means of storing energy?

4-167 A 1982 U.S. Department of Energy article (FS#204) states that a leak of one drip of hot water per second can cost \$1.00 per month. Making reasonable assumptions about the drop size and the unit cost of energy, determine if this claim is reasonable.

4-168 Design an experiment complete with instrumentation to determine the specific heats of a liquid using a resistance heater. Discuss how the experiment will be conducted, what measurements need to be taken, and how the specific heats will be determined. What are the sources of error in your system? How can you minimize the experimental error? How would you modify this system to determine the specific heat of a solid?

*Problems designated by a “C” are concept questions, and students are encouraged to answer them all. Problems designated by an “E” are in English units, and the SI users can ignore them. Problems with the  icon are comprehensive in nature and are intended to be solved with appropriate software.