




Forza™

TAPE | A FORCE TO BE RECKONED WITH

Construction

C-T564

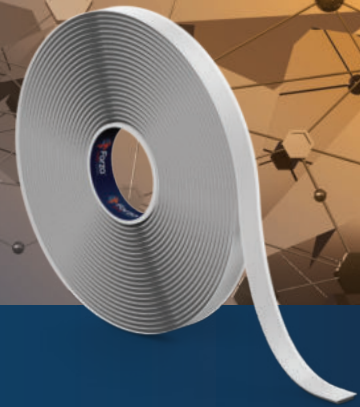

Double Coated PE Foam Tape

ForzaTAPE® C-T564 is a pressure-sensitive double coated foam mounting tape with a highly aggressive synthetic rubber adhesive.

Benefits

- Cross-linked EVA:PE copolymer foam
- Superior strength & durability
- Permanent bond
- Good initial tack
- High shear & peel strength
- Provides clean glue line

Product Application

- Ensure substrate is clean and dry, and free from dust, dirt, oil, wax, or silicone.
- Apply to the part to be bonded, ensuring that no air is trapped between the tape and the substrate.
- Apply with recommended application pressure of 15 pounds per inch of tape width.
- At the point of final assembly or lamination, remove the release liner and apply with care to avoid wrinkles or trapped air.
- Recommended application temperature to achieve best results is 65°F or above.

Applications

ForzaTAPE® C-T564 is used in various mounting applications in construction, including:

- Signage and display boards
- Mounting dispensers (soap, paper towel, and toilet paper) to drywall, glass, metal, and ceramic tile without the need for fasteners

Technical Data

White:	White
Adhesion Type:	Pressure Sensitive Synthetic Rubber
Peel Adhesion:	100+ oz/in
Shear Adhesion:	200+ hrs (@ 72°F, 1" x 1" x 100g)

Sizes

1/4" x 1/32" x 216 yds	1" x 1/32" x 216 yds
1/2" x 1/32" x 216 yds	2" x 1/32" x 216 yds
3/4" x 1/32" x 216 yds	

CREATING INDUSTRIAL ADHESIVE, TAPE AND SEALANT SOLUTIONS THAT OUTPERFORM

402.731.9300
info@forzabuilt.com
www.forzabuilt.com



3211 Nebraska Ave, Suite 300
Council Bluffs, Iowa 51501