




Necessary esp32 implementation components

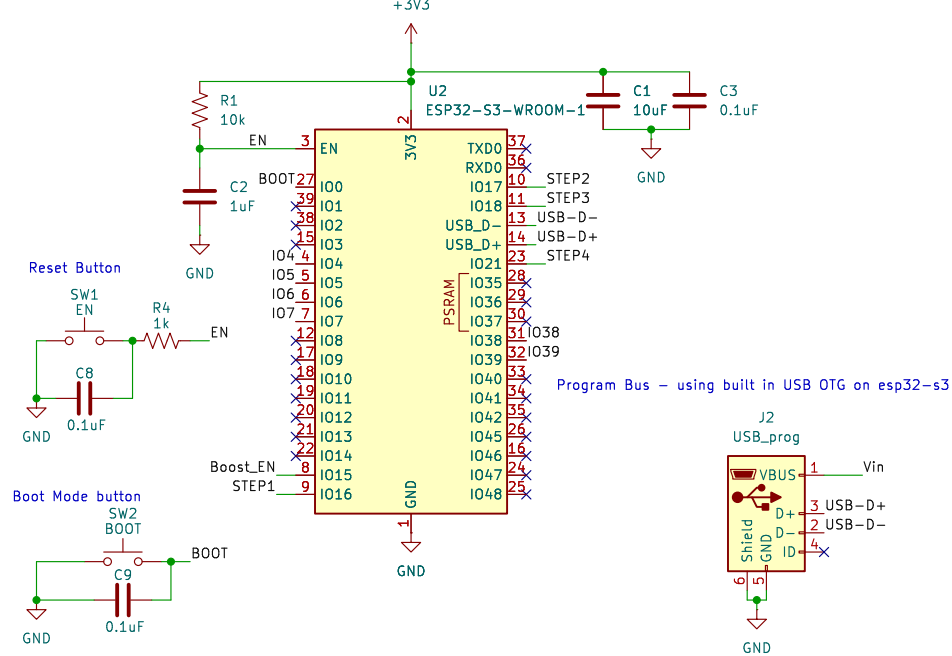


Battery Power Path Management/Charging

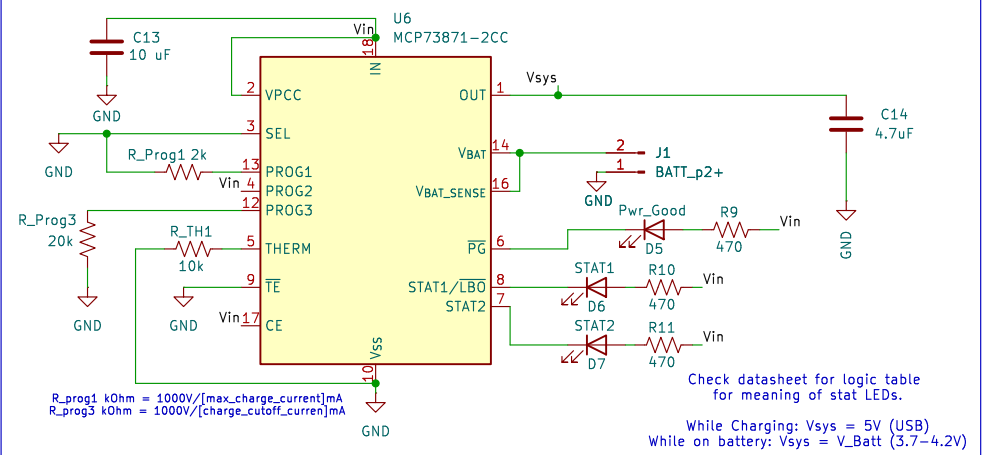


Main board mounting holes

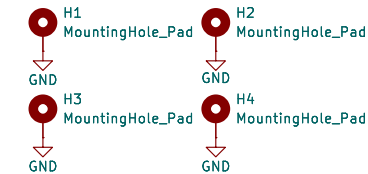

Button board mounting holes




GPIO and power pins




Power section – 3.7V Li-Ion battery


Linear Regulator – Vsys (from MCP) to 3.3V for esp32

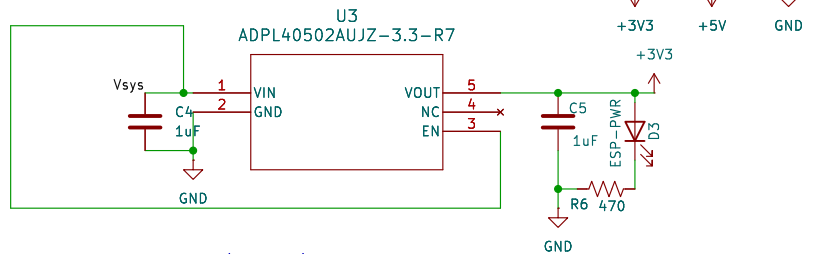

Buck-boost converter – Vsys (from MCP) to 5V for motor driver

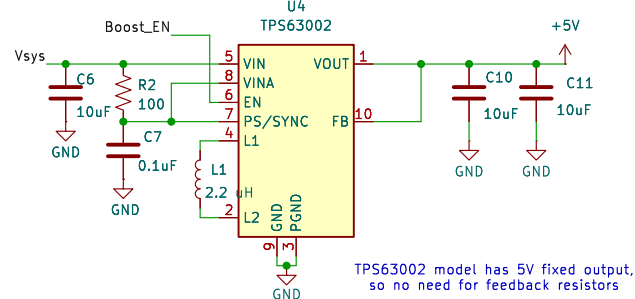


Stepper Motor + driver config

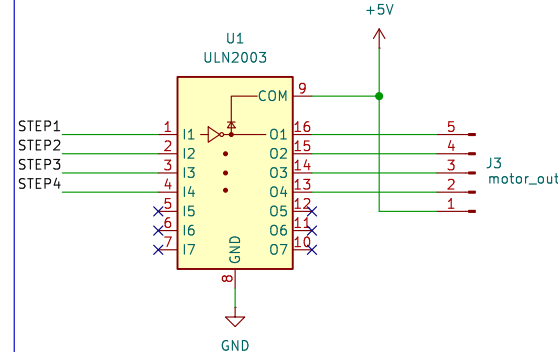

Wakeup button – separate module

Wakeup button on separate module board so it can be mounted to the side of the device casing

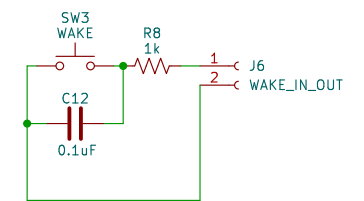

Sheet: /
File: RFID_bikelock.kicad_sch

Title:

Size: A4

KiCad E.D.A. 9.0.7

Date:

Rev:

Id: 1/1