


3-3-4 Allowable Radial Force/ Axial Force

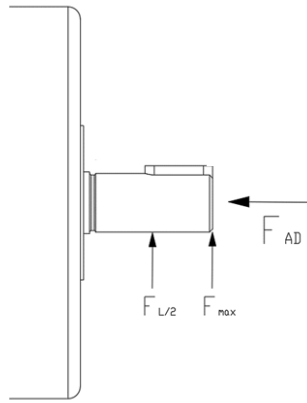

3000 rpm		Length of Shaft Extension L (mm)	L10≥20,000 Hours			L10≥40,000 Hours		
Frame	Power (kW)		$F_{L/2}$ (kN)	F_{max} (kN)	F_{AD} (kN)	$F_{L/2}$ (kN)	F_{max} (kN)	F_{AD} (kN)
80	0.75–2.2	42	0.55	0.50	0.65	0.43	0.40	0.53
90	3–4	46	0.60	0.55	0.72	0.47	0.43	0.57
100	5.5–7.5	62	0.80	0.72	1.00	0.64	0.57	0.80
112	11–15	61	1.13	1.04	1.37	0.90	0.82	1.08
132	18.5–22	82	1.66	1.49	2.07	1.31	1.17	1.64
160	30–37	121	2.15	1.91	2.70	1.69	1.50	2.13
180	45	116	2.79	2.52	3.62	2.18	1.97	2.85
200	55	115.5	3.31	3.00	4.15	2.59	2.35	3.27
225	75	153	3.40	3.01	4.65	2.65	2.35	3.66

1500 rpm		Length of Shaft Extension L (mm)	L10≥20,000 Hours			L10≥40,000 Hours		
Frame	Power (kW)		$F_{L/2}$ (kN)	F_{max} (kN)	F_{AD} (kN)	$F_{L/2}$ (kN)	F_{max} (kN)	F_{AD} (kN)
80	0.75–1.5	42	0.68	0.62	0.82	0.54	0.49	0.65
90	2.2–3	46	0.75	0.69	0.91	0.60	0.54	0.72
100	4	62	1.02	0.91	1.27	0.80	0.72	1.00
112	5.5–7.5	65	1.04	0.95	1.26	0.82	0.75	0.99
132	11–15	90	1.48	1.32	1.87	1.17	1.04	1.48
160	18.5–22	121	2.72	2.42	3.41	2.14	1.91	2.69
180	30–37	116	3.55	3.22	4.59	2.79	2.52	3.62
200	45	115.5	4.17	3.79	3.26	5.23	2.96	4.12
225	55	115.5	4.63	4.21	3.62	5.81	3.29	4.58

1500 rpm (Large Bearing)		Length of Shaft Extension L (mm)	L10≥20,000 Hours			L10≥40,000 Hours		
Frame	Power (kW)		$F_{L/2}$ (kN)	F_{max} (kN)	F_{AD} (kN)	$F_{L/2}$ (kN)	F_{max} (kN)	F_{AD} (kN)
90	2.2–3	42	1.48	1.33	1.75	1.15	1.05	1.38
100	4	46	1.40	1.25	1.74	1.11	0.99	1.38
112	5.5–7.5	62	2.90	2.64	3.46	2.29	2.10	2.74
132	11–15	65	3.24	2.88	4.04	2.56	2.27	3.19
160	18.5–22	90	4.26	3.80	5.32	3.36	3.00	4.21
180	30–37	121	4.64	4.20	5.97	3.65	3.31	4.72
200	45	116	5.36	4.86	6.68	4.20	3.82	5.27
225	55	115.5	5.96	5.40	7.42	4.67	4.24	5.86